



REMINGTON ARMS CO. INC.			
SCALE: 1" = 1" SUPERSEDED REFERENCE			
DESIGN: 52			
DES. BY DATE	DRN. BY DATE	CRK. BY DATE	APP. BY DATE
	11/24/61		12/28/61
FOR DETAILS, SEE PROCESS RECORD			
MODEL	PART USE	QUAN.	SEE
100	TRIGGER LINK PIN	2	

SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm 00^{\circ} 30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125 OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL... 08-20 C Steel
HEAT TREAT... Cyanide Harden
HARDNESS... File Hard
COLOR... Torch Draw... Front End
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

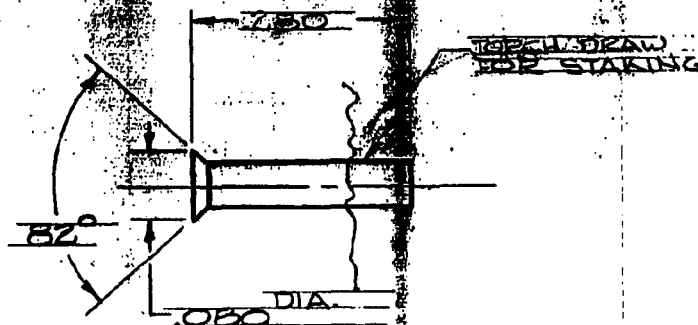

2	ADDED	11204	V B	51680
1	100	8543	E L	12-29-70
ALTERED BY	WAS	REFERENCE BY	DATE	
ALTERATIONS:				

② FOR BLANK DRAWING
SEE A-16505

THIS DRAWING IS INFORMATION
FOR THE REMINGTON ARMS COMPANY, INC.

A-15459