


NUMBER <i>A-15481</i>		REMINGTON ARMS CO. INC. RESEARCH & DEV. DEPT.	
SCALE <i>AK</i>		QUANTITY <i>6-17553</i>	
TITLE <i>SCREW</i>			
DES. BY DATE <i>12-21-51</i>	ORN. BY DATE <i>12-21-51</i>	CHK. BY DATE <i>12-21-51</i>	APP. BY DATE <i>12-21-51</i>
FOR DETAILS, SEE PROCESS RECORD			
MODEL	PART USE	QUAN.	SEE
<i>7010L</i>	<i>TRIG. STOP SCREW</i>	<i>1</i>	<i>D 26345</i>
<i>7020L</i>	<i>"</i>	<i>"</i>	<i>"</i>
<i>40XB LFR</i>	<i>TRIGGER SPRING SCREW</i>	<i>"</i>	<i>"</i>
<i>700 VAR</i>	<i>TRIG. STOP SCREW</i>	<i>1</i>	<i>PL</i>

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm 00^{\circ}30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125
V OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL *.08-20 CARBON*
HEAT TREAT *.003-.006 CASE*
HARDNESS
COLOR *NITRE BLACK*
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

①
⑥
②

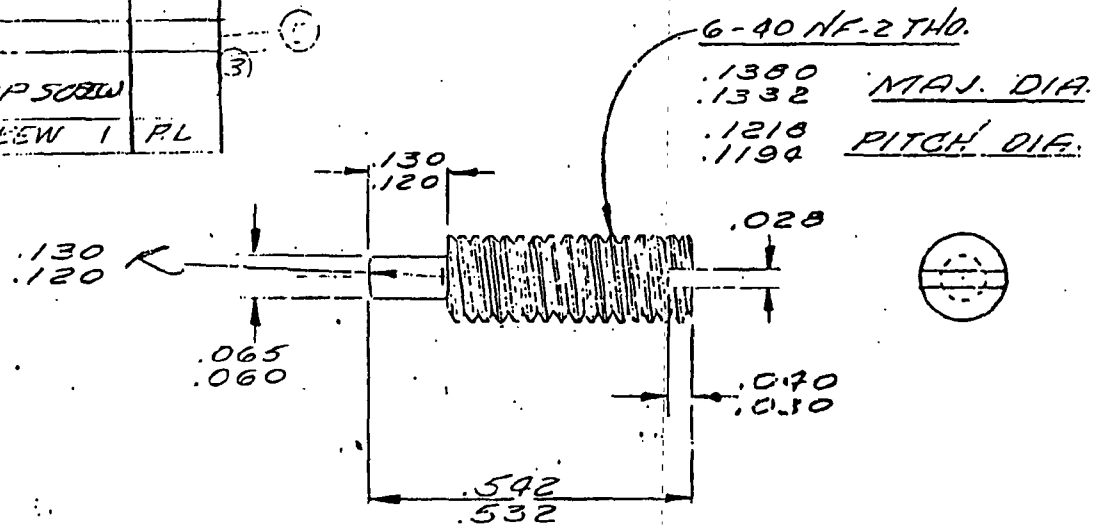

6	40XB	8179	JN	10-31-69
5	REFERENCE	7445	DD	11-11-69
4	ADDED USE	6479	DD	3-15-66
3	ADD USE	5123	DD	11-11-69
2	REF. USE	4532	DD	7-11-68
1	TRIG. STOP SCREW	4645	DD	11-11-68
ALT.	WAS	REFERENCE	BY	DATE
ALTERATIONS				

A-15481