

WORK TO FIGURES

RECOMMENDED MATERIAL AND HEAT TREAT

ONNS ARE:
 : .015
 : .010
 : .005
 1/64
 -30
 1/2 MEAN
 IGHNESS
 IGHNESS
 ECIFIED.
 BETTER.



MATERIAL _____
 HEAT TREAT _____
 HARDNESS _____
 COLOR _____
 HEAT TREAT AND COLOR TO BE DONE BY
 REMINGTON

ALTERATIONS				
ALT.	WAS	REF.	BY	DATE
21	REDRAWN	9/1684	Rsm	2/24/83

176
56

.048 BASIC
INCL. T.P.I.

.278
.277

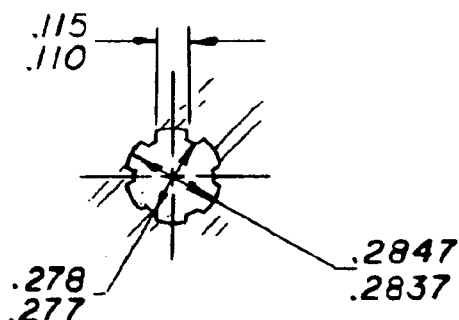

6 GROOVES
 TWIST- R.H.
 1 TURN IN
 9.0" TO 95"

742			
700LWT.		CHAMBER .280 REM.	
MODEL	PART NO.	PART USE	
DES. BY DATE	CHK. BY DATE	CHK. BY DATE	APP. BY DATE
	RSM 2-24-83	7M 2-24-83	JSm 2-24-83
TITLE CHAMBER .280 REM.			
NUMBER LB-207		SCALE 2:1	SUPERSEDES LA-207
		REFERENCE REV 20	
REMINGTON ARMS CO. INC. ILION RESEARCH DIV.			