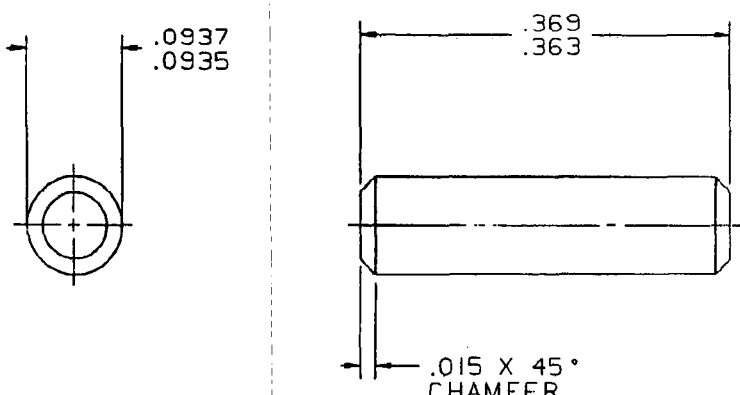


THIS DRAWING OR INFORMATION IS PROPRIETARY INFORMATION TO THE REMINGTON ARMS COMPANY INC.		DO NOT SCALE THIS DRAWING WORK TO FIGURES UNLESS OTHERWISE NOTED TOLERANCES ON ALL DIMENSIONS ARE 1 PLACE .100 TOLERANCE ± .015 2 PLACE .100 TOLERANCE ± .010 3 PLACE .100 TOLERANCE ± .005 4 ON RATIONAL DIMENSIONS ± .100 5 ON ANGULAR DIMENSIONS ± .00° 30' FINISHES ARE DESIGNATED BY ROOT MEAN SQUARE RMS 1 MICRO INCH ROUGHNESS VALUES AND ARE THE MAXIMUM ROUGHNESS ACCEPTABLE, UNLESS OTHERWISE SPECIFIED. FINISH ROUGHNESS TO BE $\sqrt{25}$ OR BETTER		RECOMMENDED MATERIAL AND HEAT TREAT MATERIAL AISI 52100 HEAT TREAT HARDNESS R45H 45-48 COLOR BLACK OXIDE HEAT TREAT AND COLOR TO BE DONE BY REMINGTON		ALTERATIONS				
						REV	DATE	BY	DATE	
B-1412										
CV FILENAME RES.DSF NBAR FIRING-PIN-CROSS-PIN										

NBAR		FIRING PIN CROSS PIN		
MODEL	PART NO.	PART USE		
QPS BY DATE	QPS BY DATE	CHK BY DATE	APP. BY DATE	
R.S.M. 11-7-84				
TITLE FIRING PIN CROSS PIN				
NUMBER B-1412	SCALE 10X	SUPERSIDES	REFERENCE	
REMINGTON ARMS CO. INC. 11100 RESEARCH DR				