

B-1466

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING WORK TO FIGURES
UNLESS OTHERWISE NOTED
TOLERANCES ON DECIMAL DIMENSIONS ARE
1 PLACE .111 TOLERANCE $\pm .015$
2 PLACE .1311 TOLERANCE $\pm .010$
3 PLACE .15011 TOLERANCE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm 1/64$
& ON ANGULAR DIMENSIONS $\pm 30'' 10'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE $\sqrt{125}$ OR BETTER.


RECOMMENDED MATERIAL AND HEAT TREAT
MATERIAL P.M. PLAIN IRON
HEAT TREAT
HARDNESS 71 MIN. DENSITY
COLOR
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

ALTERATIONS

NO.	DATE	BY	DATE

NOTES:

1. FOR BLANK DRAWING SEE B-91924.
2. RESIN IMPREGNATE

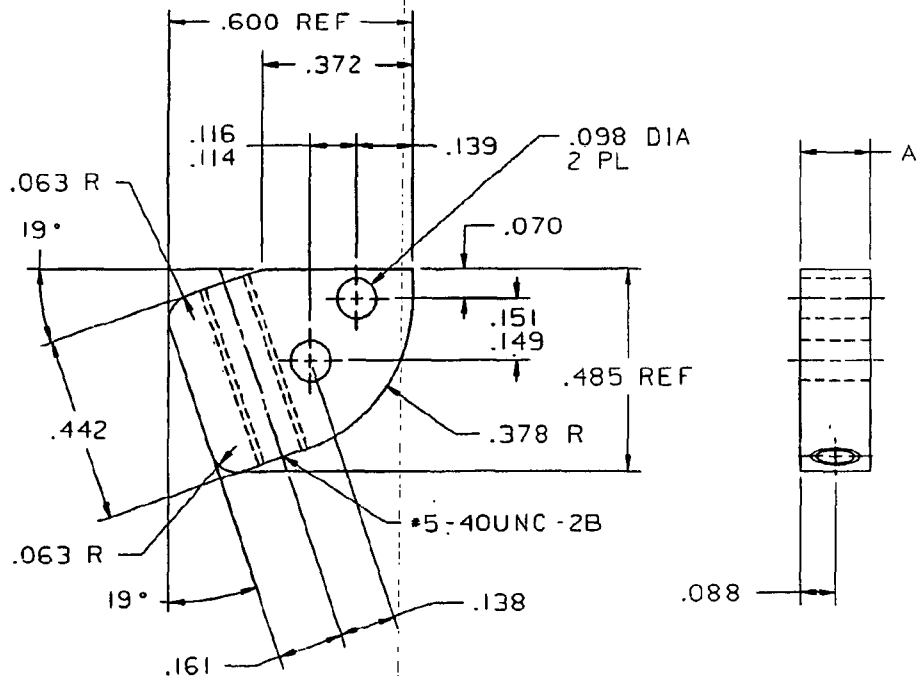

	DIM "A"
BLANK DIM	.182/.178
FINISH DIM	.176/.174

of Socete

NBAR	1466	SPACER, REAR
MODEL	PART NO	PART USE
DES BY DATE	OWN BY DATE	CHK BY DATE
	MBC 8-14-85	
TITLE		
SPACER, REAR		
NUMBER	SCALE	SUPPLEMENT
B-1466	1:1	
REFERENCE		
REMINGTON ARMS CO. INC.		
11174 RESEARCH DIV.		

FILENAME RES.5MM.NBAR REAR-SPACER