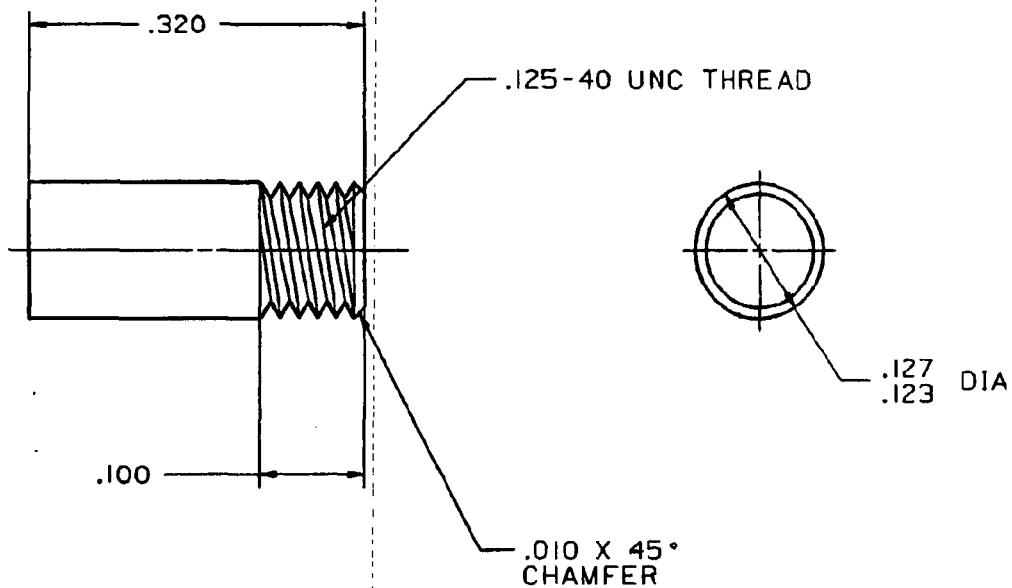


THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING; WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE .10 - TOLERANCE $\pm .015$
2 PLACE .00 - TOLERANCE $\pm .010$
3 PLACE .000 - TOLERANCE $\pm .005$
4 ON FRACTIONAL DIMENSIONS $\pm 1/64$
5 ON ANGULAR DIMENSIONS $\pm .00^\circ/30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED,
FINISH ROUGHNESS TO BE $\sqrt{V}$ OR BETTER.

MATERIAL 1095
HEAT TREAT SPRING TEMPER
HARDNESS RC 55-60
COLOR BLACK OXIDE
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

[illegible]

MBAR	MAGAZINE LATCH PIN		
MODEL	PART NO.	PART USE	
ISS. BY DATE FR GASTO J BOMBARDIER	ISS. BY DATE DSF 10-6-86	ISS. BY DATE	APP. BY DATE
TITLE PIN			
NUMBER B-1636		SCALE 10X	SUPERVISOR
		REFERENCE	
		REMINGTON ARMS CO. INC.	
		N. LOW RESEARCH DIV.	

CV FILENAME - REG.NBAR.EXP-1828.MAG-LATCH-PIN.FHS