


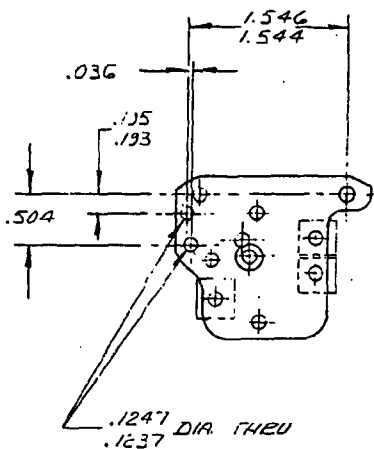

RECOMMENDED MATERIAL AND HEAT TREAT
MATERIAL SEE BLANK
HEAT TREAT
HARDNESS
COLOR BLACK OXIDE
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON
APPR. BY DATE

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{32}$
& ON ANGULAR DIMENSIONS $\pm .00430$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
YES OR, BETTER.

ALTERATIONS				
LET.	WAS	REFERENCE	BY	DATE

NOTE: MODIFY STANDARD M/700 TRIGGER HOUSING
PART N^o 26655. (BEFORE COLOR)

500 LOT

2.1.100 TRIGGER HOUSING 1		AL
MODEL	PART USE	QUAN. SEE
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE APPR. BY DATE
L.D. 30/10/10		
TITLE TRIGGER HOUSING		
NUMBER	SCALE	SUPERSIDES-REFERENCE
SLR-1643	FULL	REMINGTON ARMS CO. INC.
RESEARCH & DEV. DEPT		

1 REV. 2