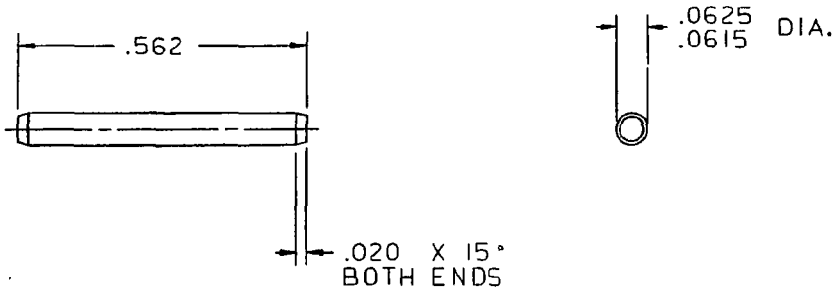


B-3554

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING. WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE : .11 TOLERANCE $\pm .015$
2 PLACE : .011 TOLERANCE $\pm .010$
3 PLACE : .0011 TOLERANCE $\pm .005$
ON FRACTIONAL DIMENSIONS $\pm 1/64$
ON ANGULAR DIMENSIONS $\pm 30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED,
FINISH ROUGHNESS TO BE $\sqrt{16}$ OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT
MATERIAL DRILL ROD
HEAT TREAT _____
HARDNESS _____
COLOR BLACK OXIDE
HEAT TREAT AND COLOR TO BE DONE BY
REWMINGTON

[illegible]

obsolete

[illegible]

:V FILENAME RES.DSF.NBAR.BOLT-LATCH-PIVOT-PIN

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON**

R2522643