



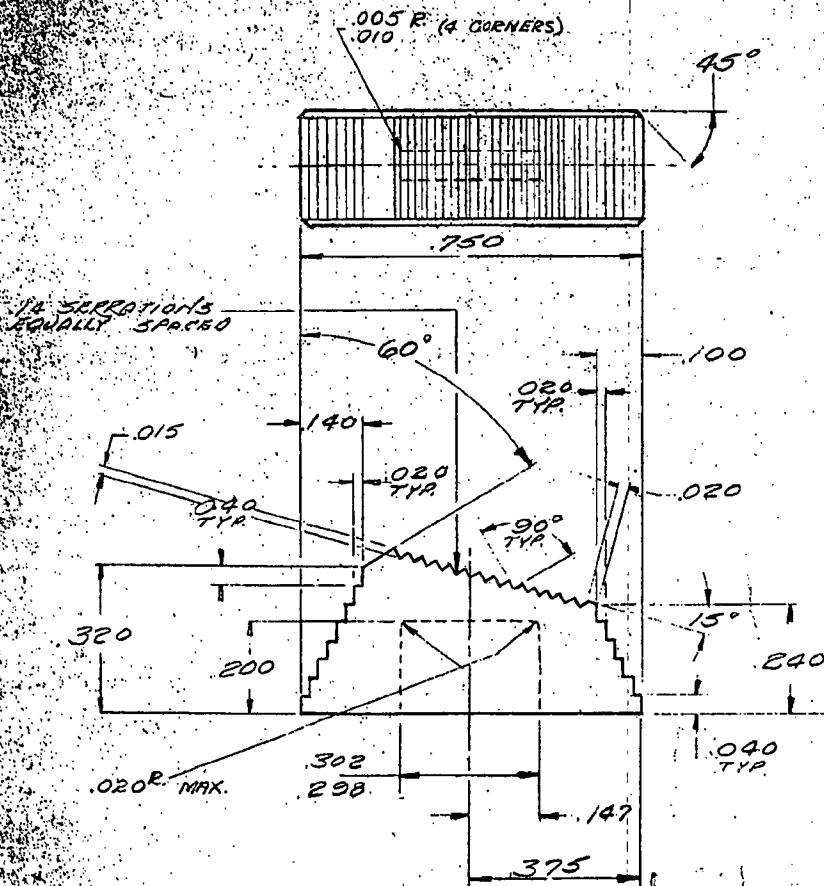

RECOMMENDED MAXIMUM AND MINIMUM TREATMENT: BLACK NYLON - BK 10. UNLESS OTHERWISE NOTED, TOLERANCES ON DECIMAL DIMENSIONS ARE $\pm .005$ ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$ ON ANGULAR DIMENSIONS ± 0.30 FINISHES ARE DESIGNATED BY ROOT MEAN SQUARE (R.M.S.) MICRO-INCH ROUGHNESS VALUES AND ARE THE MAXIMUM ROUGHNESS ACCEPTABLE, UNLESS OTHERWISE SPECIFIED. FINISH ROUGHNESS TO BE 125 OR BETTER.

ALTERATIONS				
LET.	WAS	REFERENCE	BY	DATE
6	REWORKED	6142	W.B.	9/1/65
7	UNCO .250	6279	"	7/13/65
8	" 1.0 DIA	6279	"	"
9	ADD USE TBB L.H.	7041	P.N.	7/13/65

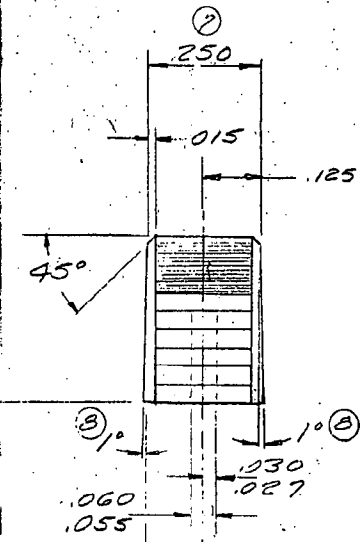

THIS DRAWING OR INFORMATION IS PROPRIETARY INFORMATION TO THE REMINGTON ARMS COMPANY, INC.

9	TBB L.H.	SAFETY BUTTON (A)
TBB	SAFETY BUTTON (A)	
MODEL	PART USE	QUAN.
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE
	6-2-65	7/13/65
TITLE	BUTTON	
NUMBER	SCALE	SUPERSEDED
14247	1:1	REWORKED
REMINGTON ARMS COMPANY		