

66261-8


RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL 1010
HEAT TREAT CYANIDE
HARDNESS FILE HARD
COLOR NONE
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON
APPR. BY DATE

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED, TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm 00^{\circ}30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125 OR BETTER.

ITERATIONS

LET.	WAR	REFERENCE	BY	DATE

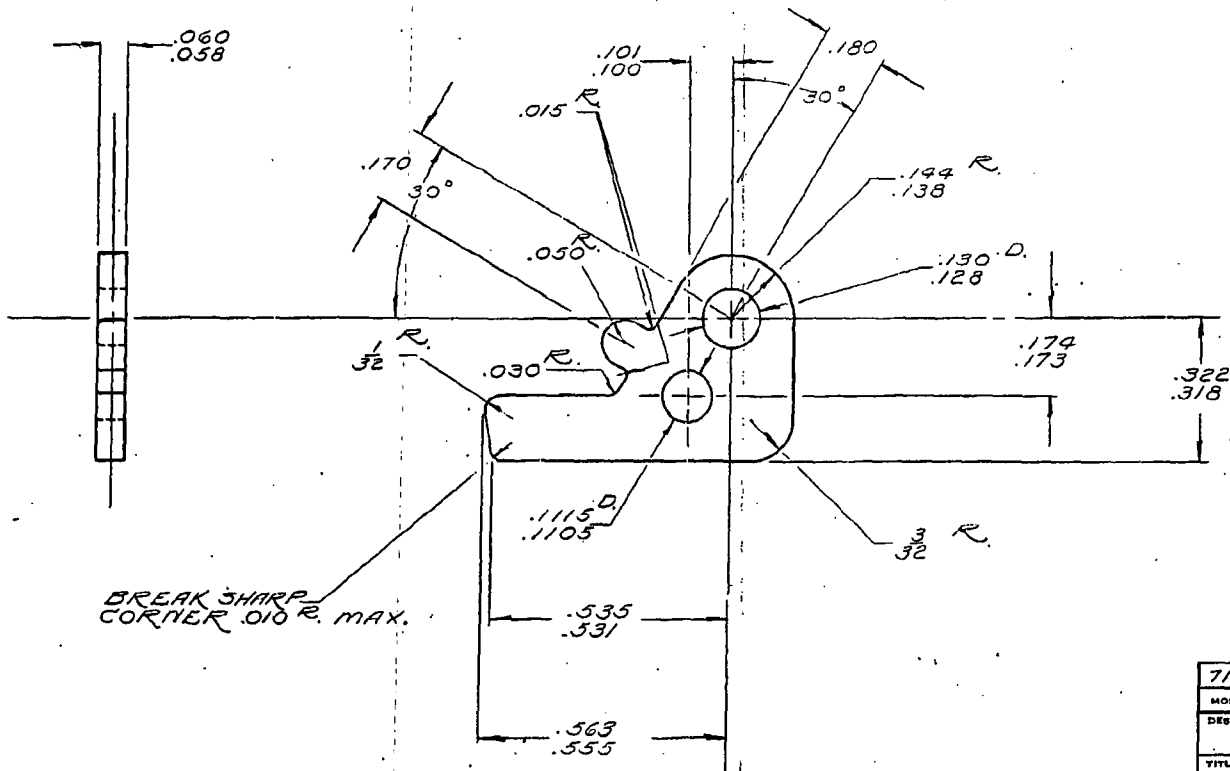

BREAK SHARP
CORNER .010 R. MAX.

7188	CONNECTOR RIGHT 1		PL.
MODEL	PART USE	QUAN.	SEE
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE
	MARTIN		
	3-12-66		
TITLE			
CONNECTOR RIGHT			
NUMBER	SCALE	SUPERSEDES-REFERENCE	
B-14249	9:1		
REMINGTON ARMS CO. INC.			
RESEARCH & DEV. DEPT.			

TFB-1 REV. 2

B-14249