

9541-2


RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL 1.010
HEAT TREAT CHARGE
HARDNESS FILE HARD
COLOR None STRIP DRAW 0.005 BET
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON
APPR. BY DATE

DO NOT SCALE THIS DRAWING. WORK TO FIGURES
UNLESS OTHERWISE NOTED, TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm 00^{\circ}30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125 OR BETTER.

ALTERATION

LET.	WAS	REFERENCE	BY	DATE

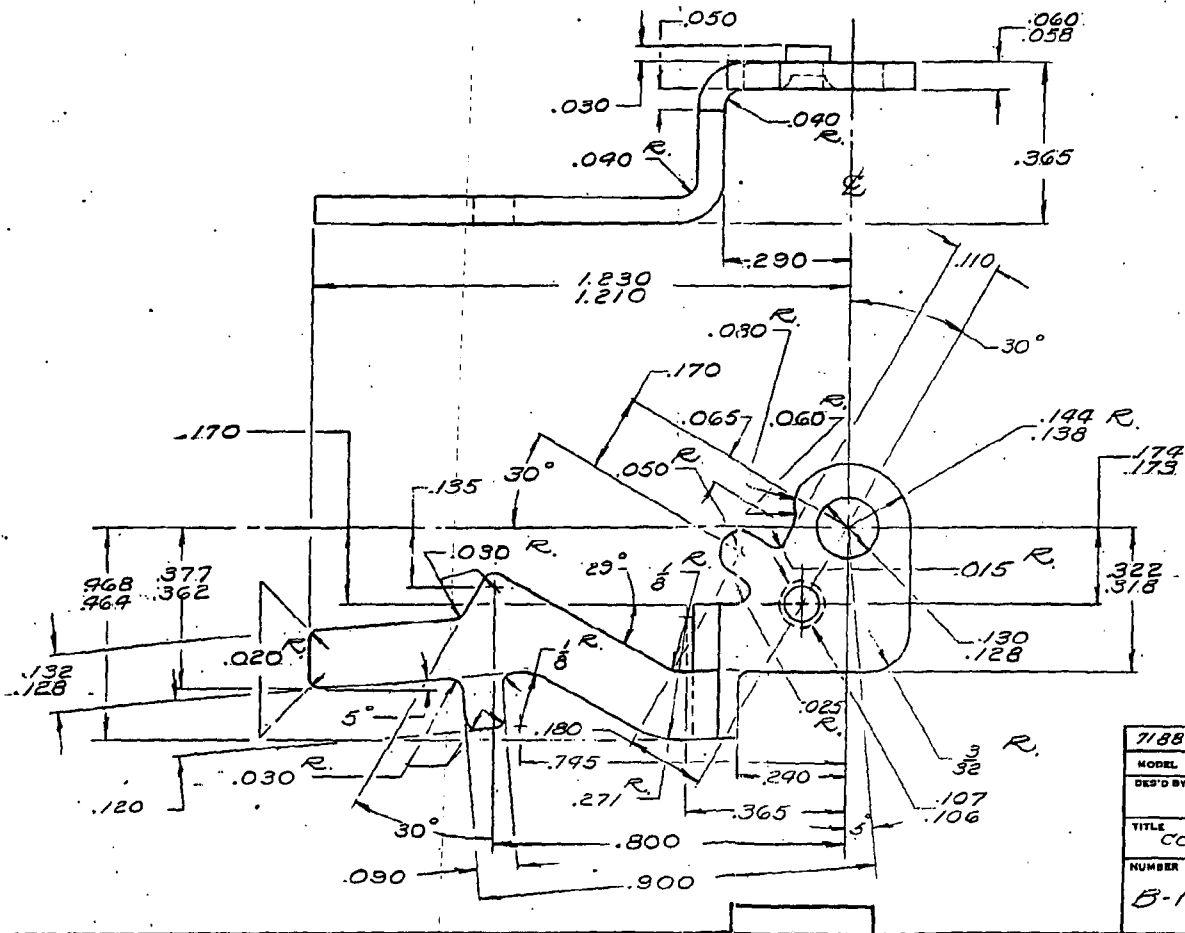

7188	CONNECTOR LEFT 1		PL.
MODEL	PART USE	QUAN.	SEE
DES'D BY DATE	DRAWN BY DATE	CHECKED BY DATE	APPR. BY DATE
	MARTIN 6-18-66	W. W. J. 9-13-66	
TITLE			
CONNECTOR (LEFT)			
NUMBER	SCALE	SUPERSEDES—REFERENCE	
B-14366	9:1	REMINGTON ARMS CO. INC.	
		RESEARCH & DEV. DEPT.	

1 REV. 2