

R2522660

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.


DO NOT SCALE THIS DRAWING; WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE TOLERANCE $\pm .015$
2 PLACE LDI TOLERANCE $\pm .005$
3 PLACE LDDI - TOLERANCE $\pm .005$
4 ON FRACTIONAL DIMENSIONS $\pm .003$
5 ON ANGULAR DIMENSIONS $\pm .0030^\circ$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE $\sqrt{32}$ OR BETTER.

MATERIAL STEEL - VENDOR SPEC.

HEAT TREAT _____
HARDNESS _____
COLOR _____
HEAT TREAT AND COLOR TO BE DONE BY
REWINGTON

[illegible]

RIVET : AMERICAN STANDARD SMALL SOLID
TYPE : PAN HEAD
NOTE : ALL RADII ARE APPROXIMATE

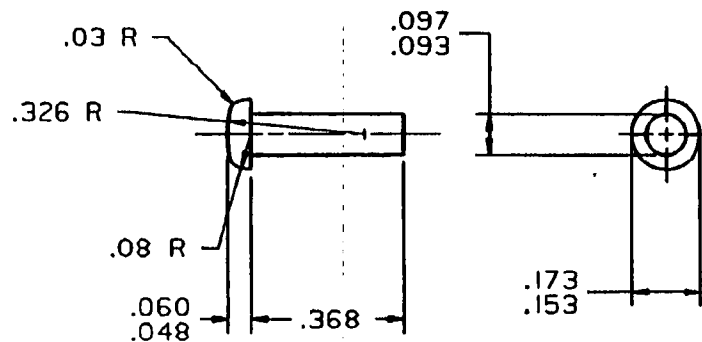

NRAR		TRIGGER HOUSING RIVET	
MODEL	PART NO.	PART USE	
DES. BY DATE	CHK. BY DATE LRS 8-22-85	CHK. BY DATE	APP. BY DATE
TITLE RIVET			
NUMBER B-14632	SCALE 4X	REFERENCE	REFERENCE
	REMINGTON ARMS CO. INC. ILLION RESEARCH DIV.		