


5-17043

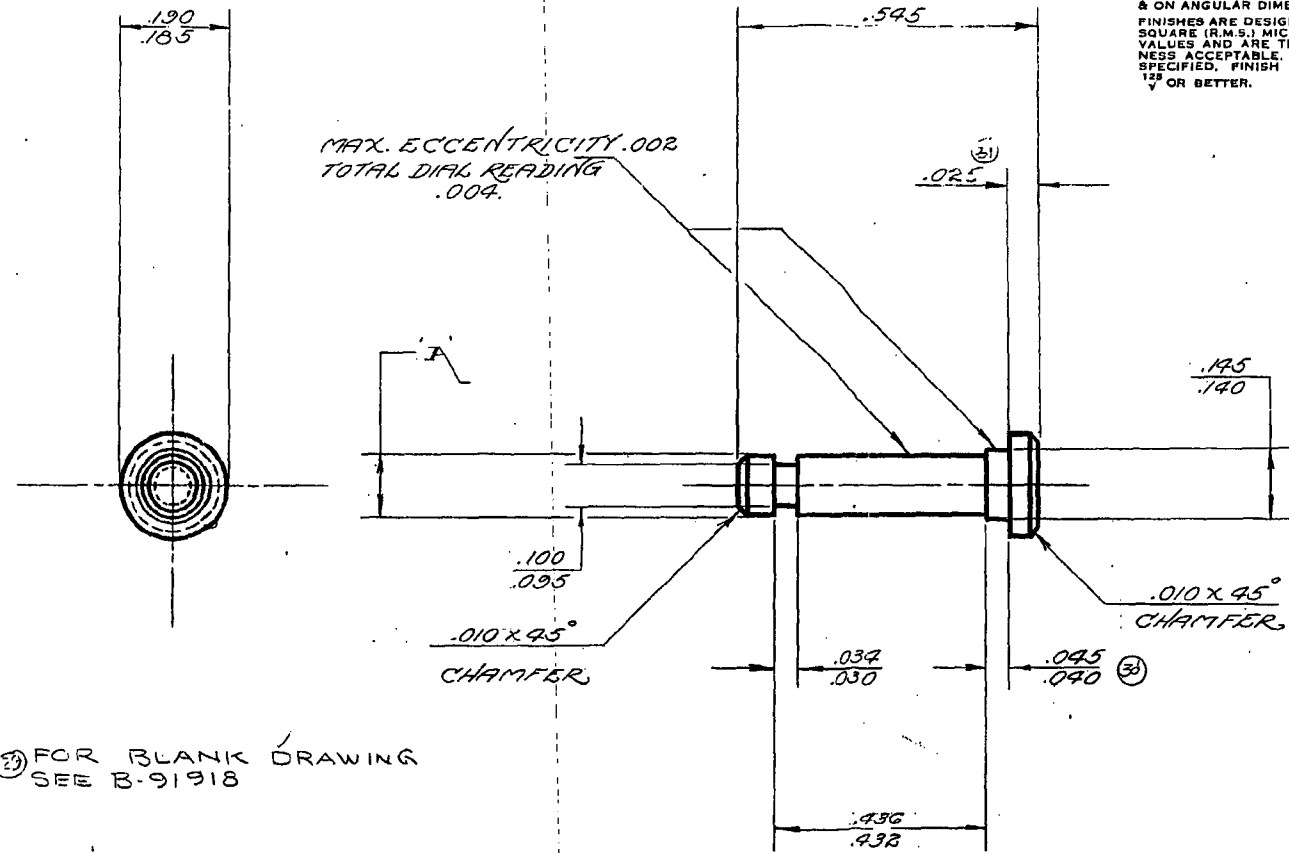

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm .001$ 30'
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125
V OR BETTER.

ALTERATIONS				
LET.	WAS	REFERENCE	BY	DATE
23	REDRAWN	4671	ER	5-3-62
24	A-17043	"	ER	5-3-62
25	ADD USE 40X-B	5129	ER	1-23-63
26	ADDED USE	6479	DD	3-14-66
27	ADD USE 660	6664	ER	9-14-66
28	ADD MOHAWK USE 600	8494	ER	9-11-70
29	ADDED	11204	VB	4-15-80
30	WAS .035-.090	11614	DB	8-17-82
31	WAS .030	"	"	"
32	ADD USE 74LWT	11667	"	7/8/82

32	74LWT	SAFETY PIVOT PIN	1	P.L.
28	MOHAWK 600	SAFETY PIVOT PIN	1	C-26795
27	660	SAFETY PIVOT PIN	1	
26	7404AE	SAFETY PIVOT PIN	1	D-26345
	40X-B	SAFETY PIVOT PIN	1	D-27565
25	40X-B	SAFETY PIVOT PIN	1	D-27530
	600	SAFETY PIVOT PIN		P.L.
	XP100	SAFETY PIVOT PIN		P.L.
	100BBL	SAFETY PIVOT PIN		D-26345
	100ADL	SAFETY PIVOT PIN		D-26345
	40X-B	SAFETY PIVOT PIN		P.L.
	Y25	SAFETY PIVOT PIN		D-24575
	40-X	SAFETY PIVOT PIN		P.L.
	722	SAFETY PIVOT PIN		D-17036Y
	721	SAFETY PIVOT PIN		D-17036Y
MODEL		PART USE		QUAN. SEE
DES'D BY DATE		DRAWN BY DATE		CHECK BY DATE
		E. REED 4-11-62		APPR. BY DATE W. 5/15/62
TITLE PIN				
NUMBER		SCALE		SUPERSEDES-REFERENCE
B-17043		5:1		A-17043
REMINGTON ARMS CO. INC. RESEARCH & DEV. DEPT.				

FOR BLANK DRAWING
SEE B-91918

DIM.	MANUFACTURING DIM.	DIM. AFTER HEAT TREAT
A	1.245 - 1.255	1.23 - 1.25*

*NOTE

THIS DIA. MUST PASS THRU
A .125 DIA. RING GAGE FREELY

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

RECOMMENDED MATERIAL AND HEAT TREAT
MATERIAL .08% R.P. CARBON STEEL
HEAT TREAT .003-.006 CASE
HARDNESS
COLOR NITRE BLACK
HEAT TREAT AND COLOR TO BE DONE BY REMINGTON
B-17043