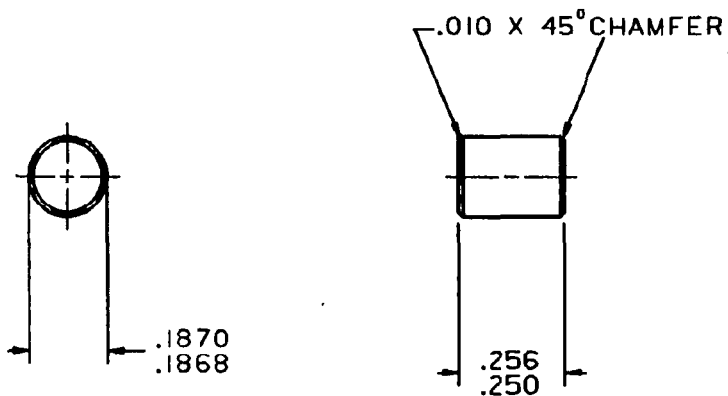


THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING; WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES AND DIMENSIONS ARE:
1 PLACE .10 - TOLERANCE $\pm .015$
2 PLACE .1011 - TOLERANCE $\pm .010$
3 PLACE .10011 - TOLERANCE $\pm .005$
4 ON FRACTIONAL DIMENSIONS $\pm 1/64$
5 ON ANGULAR DIMENSIONS $\pm .00^\circ$ 30'
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE $\sqrt{16}$ OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT
MATERIAL C-1137 OR 8640
HEAT TREAT NONE
HARDNESS _____
COLOR NONE
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

[illegible]

NBAR	18758	BOLT PIN	
SEVEN	18758	BOLT PIN	
700VAR	18758	BOLT PIN	
XP-100	18758	BOLT PIN	
700BDL	18758	BOLT PIN	
700ADL	18758	BOLT PIN	
40XCF	18758	BOLT PIN	
MODEL	PART NO.	PART USE	
DEL. BY DATE	DEL. BY DATE	DEL. BY DATE	APP. BY DATE
	W.P.2-22-85	FEM 12-3-85	
TITLE BOLT PIN			
NUMBER	SCALE	REFERENCE	REFERENCE
B-18758	4X	A-18758	
	REWINING ARMS CO. INC. RESEARCH DIV.		

CV FILENAME - RES.SMM.NBAR.BOLT-PIN

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON**

R2522706