
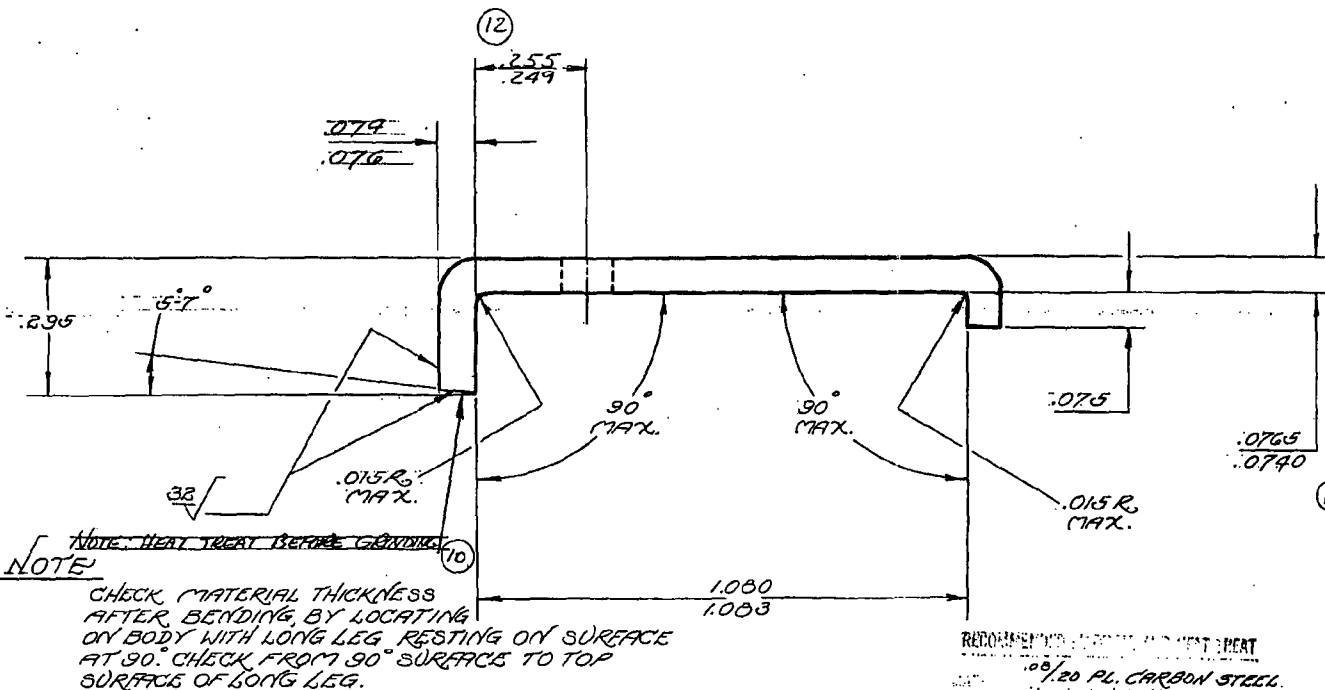


B-19

DO NOT SCALE THIS DRAWING; WORK TO FIGURES
UNLESS OTHERWISE NOTED. TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm .005$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125 OR BETTER.

ALTERATIONS

LET.	WAS	REFERENCE	BY	DATE
7	REDRAWN	4652	PL	3-8-62
8	A-19461			
9	FILE MARK	5109	PL	3/24/63
10	ADDED NOTE	5716	PL	4/16/64
11	ADDED USE	6473	DD	3-11-66
12	WAS. 325-329	10245		1 MAY 77

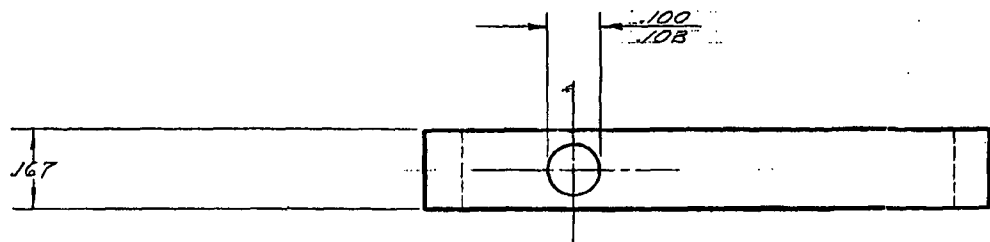

REVISED

REDRAWN
PER DEC 14 1952
DATE 14 OCT 77
J. C. WINTER

(11)	700VAP	TRIGGER CONNECTOR	P.L.	
	700 ADL	TRIGGER CONNECTOR		
	700 ADL	TRIGGER CONNECTOR		
	725	TRIGGER CONNECTOR		
	728	TRIGGER CONNECTOR		
	731	TRIGGER CONNECTOR		
MODEL		PART USE	QUAN.	SEE
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE	
	2-8-62	2-9-62	VL 4/16/62	
TITLE				
CONNECTOR				
NUMBER		SCALE	SUPERSEDES - REFERENCE	
B-19461		4:1	A-13461	
REMINGTON ARMS CO. INC.				
RESEARCH & DEV. DEPT.				

RECOMMENDED MATERIAL AND HEAT TREAT
100 PL. CARBON STEEL
CYN. 200,000 CASE
RISH - 89-92
TREATMENT AND WORKING
REMINGTON

B-19461

TPB-1 REV. 2

10 12