

226-2


FORM 170 REV. 200 R.M.S. 10 853

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE (.1) — TOLERANCE ± .015
2 PLACE (.01) — TOLERANCE ± .010
3 PLACE (.001) — TOLERANCE ± .005
4 ON FRACTIONAL DIMENSIONS ± 1/64
5 ON ANGULAR DIMENSIONS ± 30° - 30'
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE 125 OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT
MATERIAL CARBIDE
HEAT TREAT RTN PP-92
HARDNESS RTN PP-92
COLOR BLACK OXIDE
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON R5 J 2/15/82

ALTERATIONS				
ALT.	WAS	REF.	BY	DATE
1	C-14578	11783	Jay	9-1-83
2	ADD USE	"	"	"

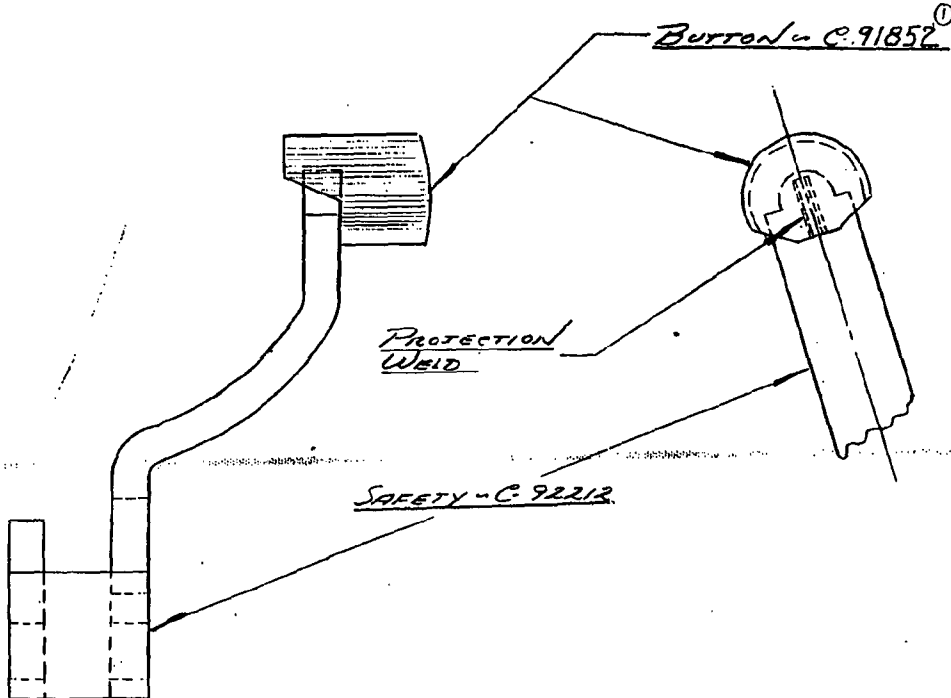

40XR	92297	SAFETY ASSEMBLY	
40XC	"	"	"
40XBR	"	"	"
700 VAR	92297	SAFETY ASSEMBLY	
40XB-CA	92297	"	"
40X-B	92297	"	"
700 BDL	92297	"	"
700 RDL	92297	"	"
MODEL PART NO.		PART USE	
DES. BY DATE	DRN. BY DATE	CHK. BY DATE	APP. BY DATE
	11/15/82 2-15-82		10 2/15/82
TITLE			
ASSEMBLY			
NUMBER		SCALE	SUPERSEDES
B-92297		A:1	8-16-58 2/15/82
		REFERENCE	DCR 40 11534
REMINGTON ARMS CO. INC.			
ILION RESEARCH DIV.			

