

SE9E6-B

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

NOTE:
RESIN IMPREGNATE


DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED.
TOLERANCES ON DECIMAL DIMENSIONS ARE:
1 PLACE .01 - TOLERANCE $\pm .015$
2 PLACE .001 - TOLERANCE $\pm .010$
3 PLACE .0001 - TOLERANCE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm 1/64$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGHNESS
ACCEPTABLE, UNLESS OTHERWISE SPECIFIED.
FINISH ROUGHNESS TO BE $\sqrt{100}$ OR BETTER.

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL HD-1000
HEAT TREAT _____
HARDNESS 7.1 GM/CC MIN. DENSITY
COLOR _____
HEAT TREAT AND COLOR TO BE DONE BY
REMINGTON

ALTERATIONS

ALT.	DATE	REF.	BY	DATE

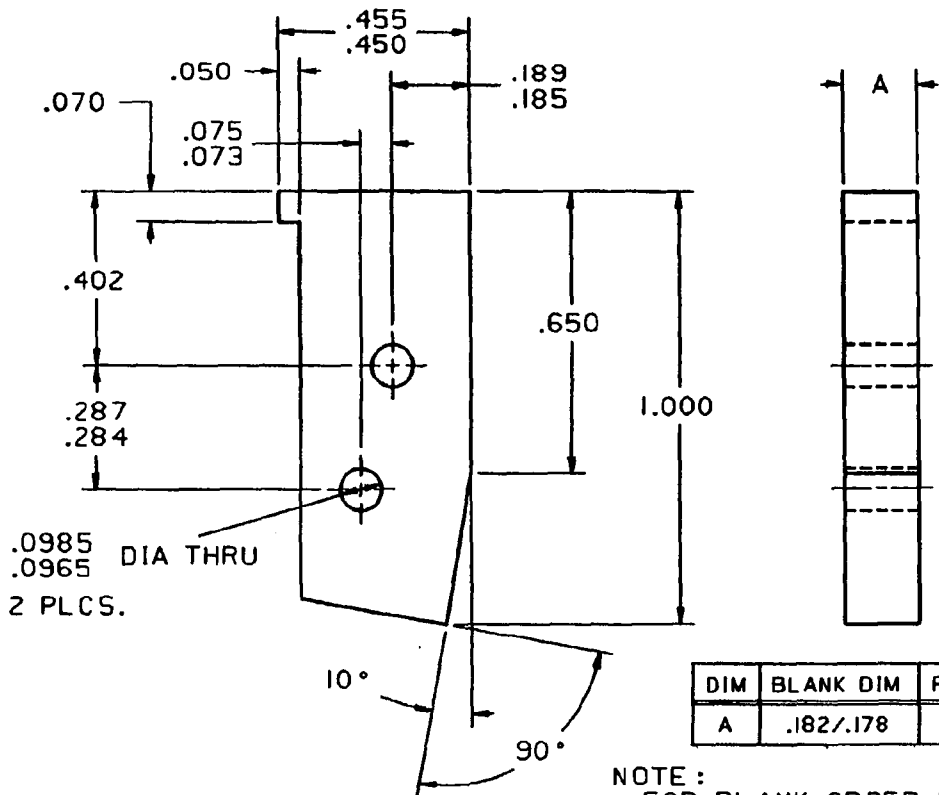

DIM	BLANK DIM	FINISH DIM
A	.182/.178	.176/.174

NOTE:
FOR BLANK ORDER PART NO. 93634

CV FILENAME - RES.NBAR.FRONT-SPACER

NBAR		93635		TRIGGER HOUSING FRONT SPACER	
MODEL		PART NO.		PART USE	
DES. BY DATE		CHK. BY DATE		ENL. BY DATE	
MC 8-15-85		FEM 12-3-85			
TITLE SPACER, FRONT					
NUMBER		SCALE		REFERENCE	
B-93635		4/1		EXP-8-1983	
REMINGTON ARMS CO. INC. LION RESEARCH DIV.					