

C-EXP1457


THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

DO NOT SCALE THIS BEARING: USE TO FARNES
MOUNTING STRUTTING BUTTER.
TOLERANCES ON CRITICAL DIMENSIONS ARE:
1 PLACE .01 - TOLERANCE ± .005
2 PLACE .005 - TOLERANCE ± .002
3 PLACE .005 - TOLERANCE ± .002
4 AND 5 FRACTIONAL INCHES ON WHEELS
6 ON FRACTIONAL INCHES ON WHEELS
FARNES AND THE DIMENSIONS ON WHEELS
SHOULD BE AS SMALL AS POSSIBLE
THESE ARE THE DIMENSIONS ON WHEELS
ACCEPTABLE. MOUNTING STRUTTING BUTTER.

RECOMMENDED MATERIAL AND HEAT TREAT
MATERIAL: 2024-T3
HEAT TREAT:
HARDNESS:
COLOR:
HEAT TREAT AND COLOR TO BE DONE BY
IDENTITY:

[illegible]

**FOR FINISH DRAWING
SEE EXP1458**

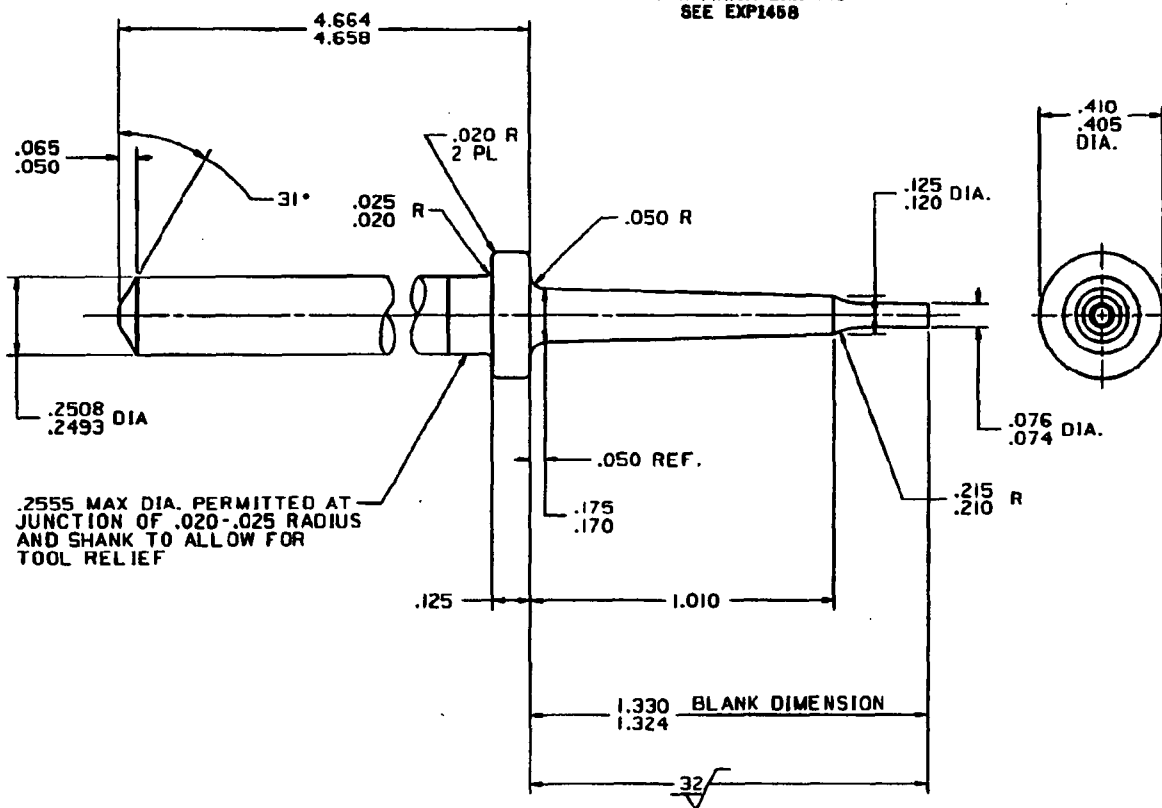

NOTE :

MAX. ECCENTRICITY OF POINT AND SHANK .003 (.006 T.I.R.)

MAX. ECCENTRICITY OF .410-.405 DIA. AND SHANK .003 (0.006 T.I.R.)

RES. RAJ. NBAR. FIRING-PIN- SA

NBAR		FIRING PIN-SHORT ACTION			
MODEL	PART NO.	PART NAME			
SERIAL OF GUN	SERIAL OF BARREL	SERIAL OF CASE	SERIAL OF MOUNT	SERIAL OF HOPE	
	R.A.S-5-00				
TYPE FIRING PIN BLANK SHORT ACTION					
NUMBER	QUANTITY	REMARKS	REMARKS	REMARKS	
C-EXP1457					
REMINGTON ARMS CO. INC. MILWAUKEE WIS.					

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

R2522816

R2522817

