

1481-D



NOTES:  
1. SURFACE FINISH TO BE  $\sqrt{32}$   
OR BETTER

THIS DRAWING OR INFORMATION IS  
PROPERTY OF REMINGTON-UMC COMPANY, INC.


DO NOT SCALE THIS DRAWING. DIMENSIONS  
TO BE USED FOR CONSTRUCTION OF  
THE PARTS. THE FOLLOWING DIMENSIONS  
ARE IN INCHES. FRACTIONS ARE  
TO BE USED. DECIMALS ARE TO BE  
TO THREE PLACES. DIMENSIONS  
ARE TO BE USED FOR CONSTRUCTION  
OF THE PARTS. THE FOLLOWING  
DIMENSIONS ARE IN INCHES.  
FRACTIONS ARE TO BE USED.  
DECIMALS ARE TO BE TO THREE  
PLACES.

RECOMMENDED MATERIAL AND HEAT TREAT  
MATERIAL: 4140  
HEAT TREAT: OIL QUENCHED  
AND TEMPERED AT 150°F  
COLOR: OIL TEMPERED  
HEAT TREAT AND COLOR TO BE DONE BY  
REMANUFACTURER



| DATE | BY | CHKD | APP'D |
|------|----|------|-------|
|      |    |      |       |
|      |    |      |       |
|      |    |      |       |
|      |    |      |       |
|      |    |      |       |
|      |    |      |       |
|      |    |      |       |
|      |    |      |       |
|      |    |      |       |

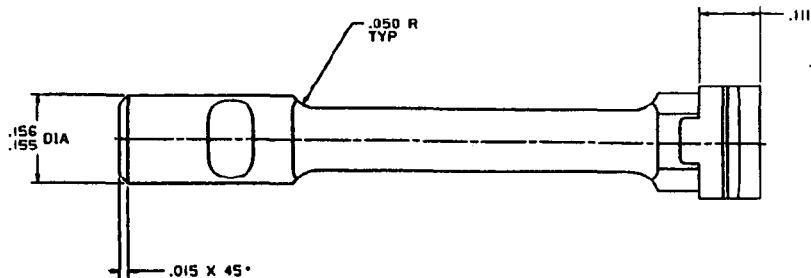

SECTION A-A



SECTION B-B

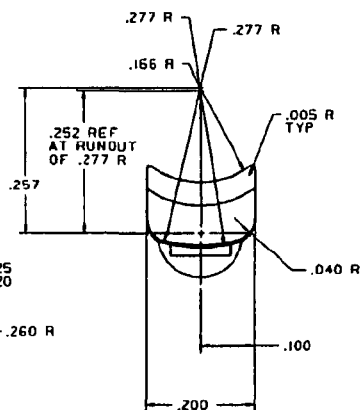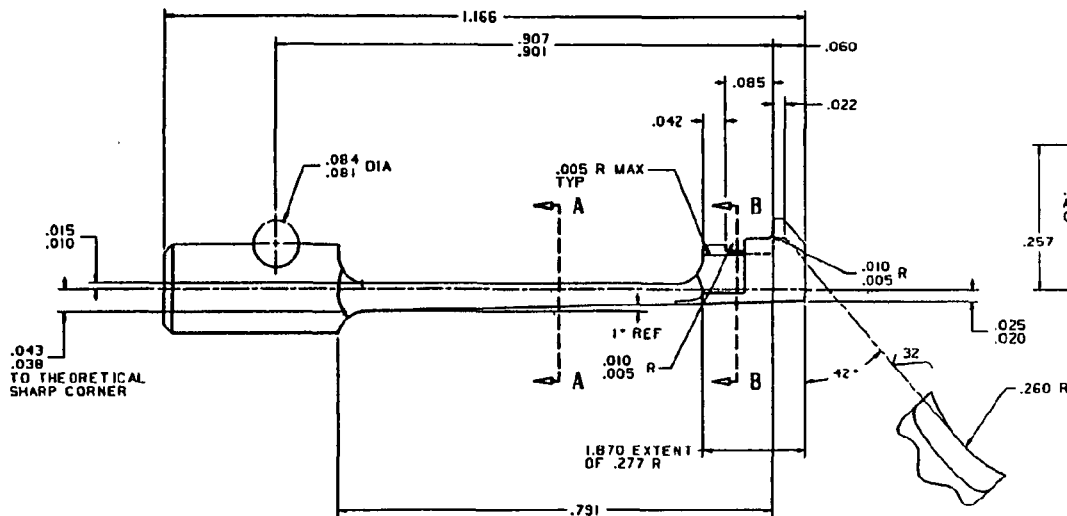

| REVISION | DATE | BY  | CHKD | APP'D |
|----------|------|-----|------|-------|
| 1        | 10/1 | EXP |      |       |
| 2        |      |     |      |       |
| 3        |      |     |      |       |
| 4        |      |     |      |       |
| 5        |      |     |      |       |
| 6        |      |     |      |       |
| 7        |      |     |      |       |
| 8        |      |     |      |       |
| 9        |      |     |      |       |
| 10       |      |     |      |       |

EXP

D-1481