


ALTERATIONS			
LET.	WAS	REFERENCE BY	DATE

DO NOT SCALE THIS DRAWING. WORK TO FIGURES
 UNLESS OTHERWISE NOTED. TOLERANCES
 ON DECIMAL DIMENSIONS ARE $\pm .005$
 & ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
 & ON ANGULAR DIMENSIONS $\pm .00^\circ$ TO $\pm .30^\circ$
 FINISHES ARE DESIGNATED BY ROOT MEAN
 SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
 VALUES AND ARE THE MAXIMUM ROUGH-
 NESS ACCEPTABLE. UNLESS OTHERWISE
 SPECIFIED, FINISH ROUGHNESS TO BE
 .75 OR BETTER.

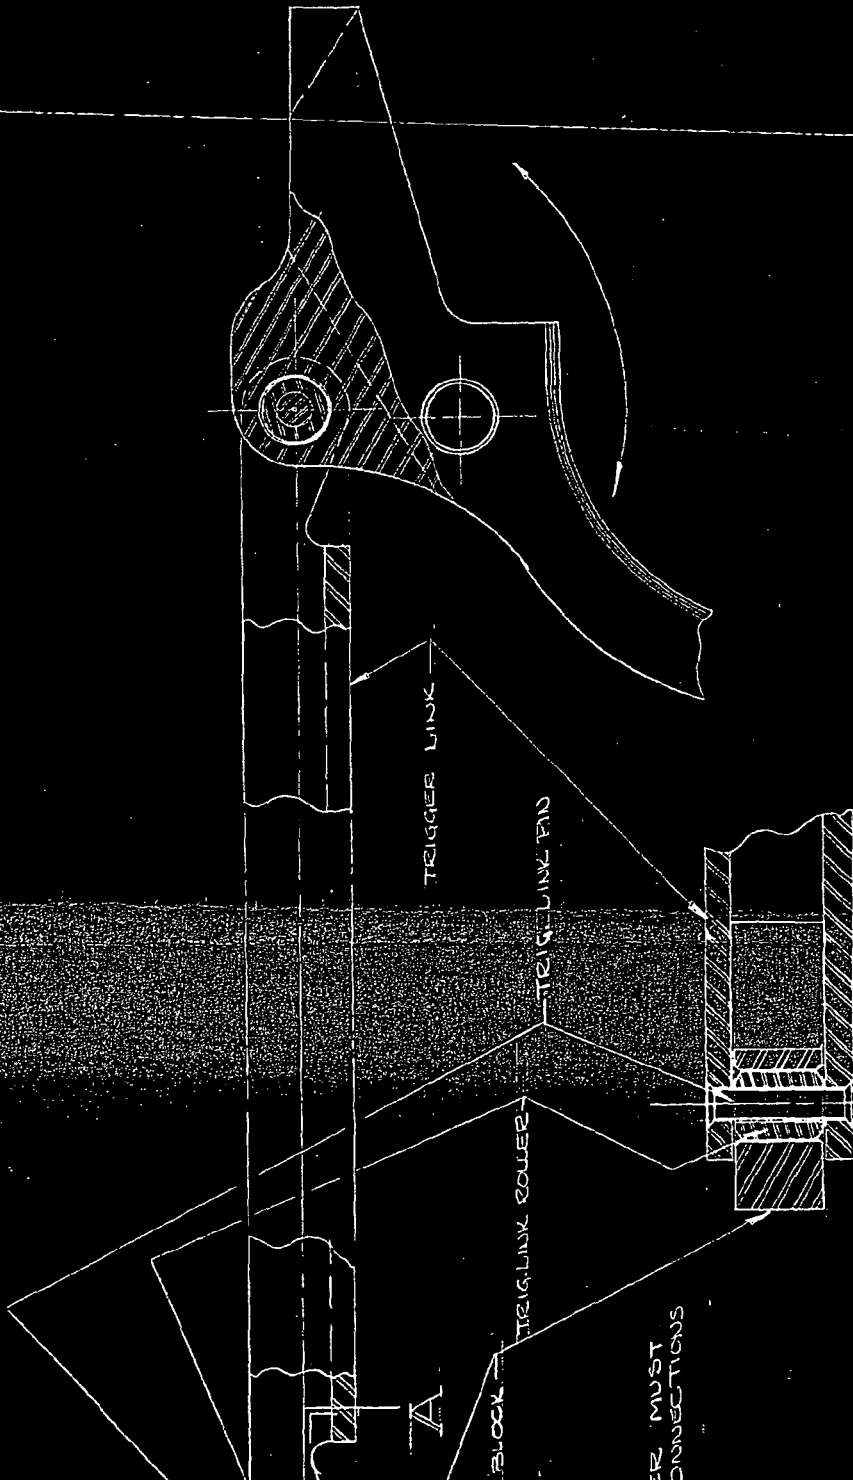

XP700	TRIGGER LINK ASSEMBLY	MODEL	PART USE	QUAN.	SEE
DES'D BY DATE	DRAWN BY DATE	CHECK BY DATE	APPR. BY DATE		
2-10-62					
TITLE			SCALE		
TRIG. LINK ASSEMBLY			4 X		
NUMBER			SUPERSEDES - REFERENCE		
E1318					
REMINGTON ARMS CO. INC.					
RESEARCH & DEV. DEPT.					