

RECEIVED MEASUREMENTS  
222 CALIBER MONFL 700, MODEL 7  
821321

RECEIVER MEASUREMENTS

821221

MODEL 700 BDL

4-22-83

FLS

		1	2	3	4	5	6	
		B6256201	B6256200	B6293064	B6256269	B6256832	B6256163	
1	1	1.750	1.775	1.672	1.770	1.740	1.760	1
2	2	.015	.015	.013	.013	.013	.014	2
3	3	13°	13°	13°	13°	13°	13°	3
4	4	.320	.297	.418	.310	.340	.320	4
5	5	2.070	2.072	2.090	2.080	2.080	2.080	5
6	6							6
7	7	.825	.810	.833	.830	.855	.820	7
8	8	.005	.005	.005	.005	.005	.005	8
9	9	<del>.63</del>	<del>.63</del>	<del>.63</del>	<del>.63</del>	<del>.63</del>	<del>.63</del>	9
10	10	.060	.061	.093	.070	.068	.060	10
11	11	30°	30°	30°	30°	30°	30°	11
12	12	.281	.281	.281	.281	.281	.281	12
13	13	.161	.169	.166	.159	.170	.162	13
14	13a	.161	.169	.166	.159	.170	.162	14
15	14	4.536	4.532	4.533	4.532	4.527	4.532	15
16								16
17	15	NONE	NONE	NONE	NONE	NONE	NONE	17
18	16	.544	.532	.540	.543	.540	.547	18
19	17	.976	.976	.965	.978	.975	.980	19
20	18	.195	.180	.180	.180	.190	.190	20
21	19	.072	.072	.072	.072	.072	.072	21
22	20	2.943	2.942	2.938	2.940	2.940	2.944	22
23	21	.195	.180	.180	.180	.190	.190	23
24	22	.856	.855	.845	.850	.850	.850	24
25	23	4.536	4.532	4.533	4.532	4.527	4.532	25
26	24	37°	37°	37°	37°	37°	37°	26
27	25	.284	.287	.286	.296	.288	.300	27
28	25a	.284	.287	.286	.296	.288	.300	28
29	26	.062	.062	.061	.061	.063	.061	29
30	27	.280	.280	.280	.280	.280	.280	30
31	28	.702	.702	.702	.702	.702	.702	31
32	29	.451	.451	.450	.451	.450	.450	32
33	30	.030	.030	.010	.030	.025	.030	33
34	31	20°	20°	20°	20°	20°	20°	34
35	32	.005	.005	.005	.005	.005	.005	35
36	33	SHARP	SHARP	SHARP	SHARP	SHARP	SHARP	36
37	34	OK	OK	OK	OK	OK	OK	37
38	35							38
39	36	+ .000	+ .001	+ .000	- .006	+ .002	+ .003	39
40		+ .003	- .005	+ .002	+ .005	- .003	- .004	40

.222 CALIBER M/7, M/700 ADL, M/700 BDL

RECEIVER MEASUREMENTS

MODEL 700

(9 ADL RIFLES, 23 BDL RIFLES)

SERIAL NO.	DWG. DIMENSION			MEAN					
	MIN	MAX	MEAN						
MEASUREMENT No.									
1									
2									
3									
4									
5									
6									
7									
8									
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									
21									
22									
23									
24									
25									
26									
27									
28									
29									
30									
31									
32									
33									
34									
35									
36									
37									
38									
39									
40									

D-33580

FRONT  
BACK



45-606 EYE-EASE  
45-706 20/20 BUFF  
MADE IN U.S.A.

.222 CALIBER M/7, M/700 ADL, M/700 BDL

# RECEIVER MEASUREMENTS

MODEL 7

(11 RIFLES)

SERIAL NO.	DWG. DIMENSION			MEAN					
	MIN.	MAX							
MEASUREMENT No.	↓	↓		↓					
1									
2	1	.1640	.1670	.1655					
3	2	.015	.018	.0165					
4	3	13° REF L							
5	4	.245	.255	.250					
6	5	1.985	1.995	1.990					
7	6	.015	.018	.0165					
8	7	.755	.765	.760					
9	8	.020 R.							
10	9	<del>.020 R.</del>							
11	10	.055	.065	.060					
12	11	30°							
13	12								
14	13								
15	14	4.415	4.420	4.4175					
16	15	7/16 R. TYP.							
17	16	.535	.545	.540					
18	17	.968	.978	.973					
19	18	150 R. TYP.							
20	19	.072 GAUGE							
21	20	2.936	2.944	2.940					
22	21	1/8 R							
23	21a	.030 R. MAX.							
24	22	.835	.845	.840					
25	23								
26	24	37°							
27	25	.282	.288	.285					
28	25a	.282	.288	.285					
29	26	.116	.124	.120					
30	27	.263	.265	.264					
31	28	.700	.703	.7015					
32	29	.449	.452	.4505					
33	30	.015	.025	.020					
34	31	30°							
35	32	.025 R							
36	33	ROUND OFF SHARP CORNERS							
37	34	45°							
38	35	.624	.634	.629					
39	36	.004	.004	±.004					
40	37	46° 18'							
	38	23° 9'							

mpoo Follow-up Spring Evaluation

GUN TYPE	AMMO TYPE	# GUNS SHOT	
BDL	A	12	3-4-83
BDL	B	12	1 <sup>st</sup> RUN
ADL	A	12	
7/LWT	B	12	
7/LWT	A	12	3-7-83
ADL	B	12	2 <sup>nd</sup> RUN
BDL	A	12	
BDL	B	12	
BDL	A	12	3-8-83
BDL	B	12	3 <sup>rd</sup>
ADL	A	12	
7/LWT	B	12	
7/LWT	A	12	3-9-83
ADL	B	12	4 <sup>th</sup>
BDL	A	12	
BDL	B	12	

192  
3  
195



45-608 EYE-GLASS  
45-706 30/20 SUPP  
MAY 1914

.222 CALIBER MODEL 7, MODEL 700 ADL & BDL

821321

RECEIVER MEASUREMENTS

MODEL 7 (11 RIFLES)

DWG. NO	↓ SERIAL No. ↓ MEASUREMENT No. ↓	DWG. DIMENSIONS			ACTUAL DIMENSIONS		
		MIN.	MAX	MEAN			
		↓	↓	↓			
C-91877	1.	.1640	.1670	.1655			
	2.	.015	.018	.0165			
	3	13° REF. L					
	4	.245	.255	.250			
	5	1.985	1.995	1.990			
	6	.015	.018	.0165			
	7	.755	.765	.760			
	8	.020 R					
	9	32					
	10	.055	.065	.060			
	11	30°					
D-91876	12						
	13						
	14						
	15	4.415	4.420	4.4175			
	16	7/16 R. TYP.					
	17	.535	.545	.540			
	18	.968	.978	.973			
	19	.150 R TYP.					
	20	.072 GAGE					
	21	2.936	2.944	2.940			
	22	1/8 R					
	23	.030 R MAX					
	24	.835	.845	.840			
	25						
	26						
	27	.282	.288	.285			
	28	.282	.288	.285			
	29	.116	.124	.120			
	30	.263	.265	.264			
	31	.700	.703	.7015			
	32	.449	.452	.4505			
	33	.015	.025	.020			
	34						
	35						
	36	30°					
	37	.025 R					
	38	ROUND OFF SHARP CORNERS					
	39						
	40						
	41						
	42						
	43						
	44						
	45						
	46						
	47						
	48						
	49						
	50						
	51						
	52						
	53						
	54						
	55						
	56						
	57						
	58						
	59						
	60						
	61						
	62						
	63						
	64						
	65						
	66						
	67						
	68						
	69						
	70						
	71						
	72						
	73						
	74						
	75						
	76						
	77						
	78						
	79						
	80						
	81						
	82						
	83						
	84						
	85						
	86						
	87						
	88						
	89						
	90						
	91						
	92						
	93						
	94						
	95						
	96						
	97						
	98						
	99						
	100						
	101						
	102						
	103						
	104						
	105						
	106						
	107						
	108						
	109						
	110						
	111						
	112						
	113						
	114						
	115						
	116						
	117						
	118						
	119						
	120						
	121						
	122						
	123						
	124						
	125						
	126						
	127						
	128						
	129						
	130						
	131						
	132						
	133						
	134						
	135						
	136						
	137						
	138						
	139						
	140						
	141						
	142						
	143						
	144						
	145						
	146						
	147						
	148						
	149						
	150						
	151						
	152						
	153						
	154						
	155						
	156						
	157						
	158						
	159						
	160						
	161						
	162						
	163						
	164						
	165						
	166						
	167						
	168						
	169						
	170						
	171						
	172						
	173						
	174						
	175						
	176						
	177						
	178						
	179						
	180						
	181						
	182						
	183						
	184						
	185						
	186						
	187						
	188						
	189						
	190						
	191						
	192						
	193						
	194						
	195						
	196						
	197						
	198						
	199						
	200						
	201						
	202						
	203						
	204						
	205						
	206						
	207						
	208						
	209						
	210						
	211						
	212						
	213						
	214						
	215						
	216						
	217						
	218						
	219						
	220						
	221						
	222						
	223						
	224						
	225						
	226						
	227						
	228						
	229						
	230						
	231						
	232						
	233						
	234						
	235						
	236						
	237						
	238						
	239						
	240						
	241						
	242						
	243						
	244						
	245						
	246						
	247						
	248						
	249						
	250						
	251						
	252						
	253						
	254						
	255						
	256						
	257						
	258						

RECEIVER MEASUREMENTS

MODEL 7 (11 RIFLES)

DWG. NO.	SERIAL No.	DWG. DIMENSIONS			ACTUAL DIMENSIONS
	MEASUREMENT No.	MIN	MAX	MEAN	
C-91877	1.	.1640	.1670	.1655	
	2.	.015	.018	.0165	
	3.	13° REF. L			
	4.	.245	.255	.250	
	5.	1.985	1.995	1.990	
	6.	.015	.018	.0165	
	7.	.755	.765	.760	
	8.	.020 R			
	9.	32°			
	10.	.055	.065	.060	
	11.	30°			
D-91876	12.				
	13.				
	14.	4.415	4.420	4.4175	
	15.	7/16 R. TYP.			
	16.	.535	.545	.540	
	17.	.968	.978	.973	
	18.	.150 R TYP.			
	19.	.072 GAGE			
	20.	2.936	2.944	2.940	
	21.	1/8 R			
	21a.	.030 R MAX			
	22.	.835	.845	.840	
	23.				
	24.	37°			
	25.	.282	.288	.285	
	25a.	.282	.288	.285	
	26.	.116	.124	.120	
	27.	.263	.265	.264	
	28.	.700	.703	.7015	
	29.	.449	.452	.4505	
	30.	.015	.025	.020	
	31.	30°			
	32.	.025 R			
	33.	ROUND OFF SHARP CORNERS			
	34.	45°			
	35.	.624	.634	.629	
	36.	.004	.004	±.004	
	37.	46° 18'			
	38.	23° 9'			

RECEIVER MEASUREMENTS

MODEL 7 (11 RIFLES)

DWG. NO.	SERIAL No.	DWG. DIMENSIONS			ACTUAL DIMENSIONS
	MEASUREMENT No.	MIN	MAX	MEAN	
C-91877	1.	.1640	.1670	.1655	
	2.	.015	.018	.0165	
	3.	13° REF. L			
	4.	.245	.255	.250	
	5.	1.995	1.995	1.990	
	6.	.015	.018	.0165	
	7.	.755	.765	.760	
	8.	.020 R			
	9.	32			
	10.	.055	.065	.060	
	11.	30°			
D-91876	12.				
	13.				
	14.	4.415	4.420	4.4175	
	15.	7/16 R. TYP.			
	16.	.535	.545	.540	
	17.	.968	.978	.973	
	18.	.150 R TYP.			
	19.	.072 GAGE			
	20.	2.936	2.944	2.940	
	21.	1/8 R			
	21a.	.030 R MAX			
	22.	.835	.845	.840	
	23.				
	24.	37°			
	25.	.282	.288	.285	
	25a.	.282	.288	.285	
	26.	.116	.124	.120	
	27.	.263	.265	.264	
	28.	.700	.703	.7015	
	29.	.449	.452	.4505	
	30.	.015	.025	.020	
	31.	30°			
	32.	.025 R			
	33.	ROUND OFF SHARP CORNERS			
	34.	45°			
	35.	.624	.634	.629	
	36.	.004	.004	±.004	
	37.	46° 18'			
	38.	23° 9'			



RECEIVER MEASUREMENTS

MODEL 7

(11 RIFLES)

DWG.	SERIAL No.	DWG. DIMENSIONS			ACTUAL
NA		MIN	MAX	MEAN	DIMENSIONS
	MEASUREMENT No.				
C-91877	1.	.1640	.1670	.1655	
	2.	.015	.018	.0165	
	3.	13° REF. L			
	4.	.245	.255	.250	
	5.	1.995	1.995	1.990	
	6.	.015	.018	.0165	
	7.	.755	.765	.760	
	8.	.020 R			
	9.	32			
	10.	.055	.065	.060	
	11.	30°			
D-91876	12.				
	13.				
	14.	4.415	4.420	4.4175	
	15.	7/16 R. TYP.			
	16.	.535	.545	.540	
	17.	.968	.978	.973	
	18.	.150 R TYP.			
	19.	.072 GAGE			
	20.	2.936	2.944	2.940	
	21.	1/8 R			
	21a.	.030 R MAX			
	22.	.835	.845	.840	
	23.				
	24.	37°			
	25.	.282	.288	.285	
	25a.	.282	.288	.285	
	26.	.116	.124	.120	
	27.	.263	.265	.264	
	28.	.700	.703	.7015	
	29.	.449	.452	.4505	
Y	30.	.015	.025	.020	
	31.	30°			
	32.	.025 R			
	33.	ROUND OFF SHARP CORNERS			
	34.	45°			
	35.	.624	.634	.629	
	36.	.004	.004	±.004	
	37.	46° 18'			
	38.	23° 9'			

MODEL 7 (11 RIFLES)

DWG.	SERIAL No.	DWG. DIMENSIONS			ACTUAL
NA		MIN.	MAX	MEAN	DIMENSIONS
	MEASUREMENT No.				
C-91877	1.	.1640	.1670	.1655	
	2.	.015	.018	.0165	
	3.	13° REF. L			
	4.	.245	.255	.250	
	5.	1.995	1.995	1.990	
	6.	.015	.018	.0165	
	7.	.755	.765	.760	
	8.	.020 R			
	9.	32			
	10.	.055	.065	.060	
	11.	30°			
D-91876	12.				
	13.				
	14.	4.415	4.420	4.4175	
	15.	7/16 R. TYP.			
	16.	.535	.545	.540	
	17.	.968	.978	.973	
	18.	.150 R TYP.			
	19.	.072 GAGE			
	20.	2.936	2.944	2.940	
	21.	1/8 R			
	21a.	.030 R MAX			
	22.	.835	.845	.840	
	23.				
	24.	37°			
	25.	.282	.288	.285	
	25a.	.282	.288	.285	
	26.	.116	.124	.120	
	27.	.263	.265	.264	
	28.	.700	.703	.7015	
	29.	.449	.452	.4505	
	30.	.015	.025	.020	
	31.	30°			
	32.	.025 R			
	33.	ROUND OFF SHARP CORNERS			
	34.	45°			
	35.	.624	.634	.629	
	36.	.004	.004	±.004	
	37.	46° 18'			
	38.	23° 9'			



RECEIVER MEASUREMENTS

MODEL 700

(9 ADL, 23 BDL RIFLES)

DWG. NO.	↓ SERIAL NO. ↓	DWG. DIMENSIONS			ACTUAL DIMENSIONS		
		MIN.	MAX.	MEAN			
	MEASUREMENT NO. ↓	↓	↓	↓	↓		
1	1	1.700	1.730	1.715			1
2	2	.015	.018	.0165			2
3	3	13°	REF. L.				3
4	4	.245	.255	.250			4
5	5	2.045	2.055	2.050			5
6	6						6
7	7	.695	.705	.700			7
8	8	.020 R					8
9	9	33°					9
10	10	.055	.065	.060			10
11	11	30°					11
12	12	.281	TYP				12
13	13	.163	.173	.168			13
14	13a	.163	.173	.168			14
15	14	4.4075	4.4175	4.4125			15
16							16
17	15	7/16 R	TYP				17
18	16	.535	.545	.540			18
19	17	.968	.978	.973			19
20	18	.180 R	.205 R	.1925 R			20
21	19	.072	GAGE				21
22	20	2.936	2.944	2.940			22
23	21	.180 R	.205 R	.1925 R			23
24	22	.835	.845	.840			24
25	23	4.530	4.535	4.5325			25
26	24	37°					26
27	25	.282	.288	.285			27
28	25a	.282	.288	.285			28
29	26	.055	.063	.059			29
30	27	.278 R	.280 R	.279 R			30
31	28	.700	.703	.7015			31
32	29	.449	.452	.4505			32
33	30	.015	.025	.020			33
34	31	20°					34
35	32	.025 R					35
36	33	ROUND OFF SHARP CORNERS					36
37	34	STRAIGHT & PARALLEL					37
38	35						38
39	36	.004	.004	±.004			39
40							40

RECEIVER MEASUREMENTS

MODEL 700

(9 AGL, 23 BDL RIFLES)

DWG.	SERIAL NO.	DWG. DIMENSIONS			ACTUAL
NO.		MIN.	MAX.	MEAN	DIMENSIONS
	MEASUREMENT NO.				
D-33580	1	1.700	1.730	1.715	
	2	.015	.018	.0165	
	3	13° REF. L.			
	4	.245	.255	.250	
	5	2.045	2.055	2.050	
	6				
	7	.695	.705	.700	
	8	.020 R			
	9	33°			
	10	.055	.065	.060	
	11	30°			
	12	.281 TYP.			
	13	.163	.173	.168	
	13a	.163	.173	.168	
E-33225	14	4.4075	4.4175	4.4125	
	15	7/16 R TYP.			
	16	.535	.545	.540	
	17	.968	.978	.973	
	18	.180 R	.205 R	.1925 R	
	19	.072 GAGE			
	20	2.936	2.944	2.940	
	21	.180 R	.205 R	.1925 R	
	22	.835	.845	.840	
	23	4.530	4.535	4.5325	
	24	37°			
	25	.282	.288	.285	
	25a	.282	.288	.285	
	26	.055	.063	.059	
	27	.278 R	.280 R	.279 R	
	28	.700	.703	.7015	
	29	.449	.452	.4505	
	30	.015	.025	.020	
Y	31	20°			
	32	.025 R			
	33	ROUND OFF SHARP CORNERS			
	34	STRAIGHT & PARALLEL			
	35				
	36	.004	.004	±.004	

RECEIVER MEASUREMENTS

MODEL 700

(9 ADL, 23 BDL RIFLES)

DWG. NO.	SERIAL NO.	DWG. DIMENSIONS			ACTUAL DIMENSIONS
	MEASUREMENT NO.	MIN.	MAX.	MEAN	
D-33580	1	1.700	1.730	1.715	
	2	.015	.018	.0165	
	3	13° REF. L.			
	4	.245	.255	.250	
	5	2.045	2.055	2.050	
	6				
	7	.695	.705	.700	
	8	.020 R			
	9	32°			
	10	.055	.065	.060	
	11	30°			
	12	.281 TYP.			
	13	.163	.173	.168	
	13a	.163	.173	.168	
E-33225	14	4.4075	4.4175	4.4125	
	15	7/16 R TYP.			
	16	.535	.545	.540	
	17	.968	.978	.973	
	18	.180 R	.205 R	.1925 R	
	19	.072 BAGE			
	20	2.936	2.944	2.940	
	21	.180 R	.205 R	.1925 R	
	22	.835	.845	.840	
	23	4.530	4.535	4.5325	
	24	37°			
	25	.282	.288	.285	
	25a	.282	.288	.285	
	26	.055	.063	.059	
	27	.278 R	.280 R	.279 R	
	28	.700	.703	.7015	
	29	.449	.452	.4505	
	30	.015	.025	.020	
	31	20°			
	32	.025 R			
	33	ROUND OFF SHARP CORNERS			
	34	STRAIGHT & PARALLEL			
	35				
	36	.004	.004	±.004	

RECEIVER MEASUREMENTS

MODEL 700

(2 A0L, 23 B0L RIFLES)

DWG. NO.	SERIAL NO.	DWG. DIMENSIONS			ACTUAL DIMENSIONS
		MIN.	MAX.	MEAN	
	MEASUREMENT NO.				
D-33580	1	1.700	1.730	1.715	
	2	.015	.018	.0165	
	3	13° REF. L.			
	4	.245	.255	.250	
	5	2.045	2.055	2.050	
	6				
	7	.695	.705	.700	
	8	.020 R			
	9	33°			
	10	.055	.065	.060	
	11	30°			
	12	.281 TYP			
	13	.163	.173	.168	
	13a	.163	.173	.168	
	14	4.4075	4.4175	4.4125	
E-33225	15	7/16 R TYP			
	16	.535	.545	.540	
	17	.968	.978	.973	
	18	.180 R	.205 R	.1925 R	
	19	.072 BAGE			
	20	2.936	2.944	2.940	
	21	.180 R	.205 R	.1925 R	
	22	.835	.845	.840	
	23	4.530	4.535	4.5325	
	24	37°			
	25	.282	.288	.285	
	25a	.282	.288	.285	
	26	.055	.063	.059	
	27	.278 R	.280 R	.279 R	
	28	.700	.703	.7015	
	29	.449	.452	.4505	
	30	.015	.025	.020	
	31	20°			
	32	.025 R			
	33	ROUND OFF SHARP CORNERS			
	34	STRAIGHT & PARALLEL			
	35				
	36	.004	.004	±.004	

RECEIVER MEASUREMENTS

MODEL 700

(1 RCL, 23 BDL R.F.L.S)

DWG. NO.	SERIAL NO.	DWG. DIMENSIONS			ACTUAL DIMENSIONS
	MEASUREMENT NO.	MIN.	MAX.	MEAN	
D-33580	1	1.700	1.730	1.715	
	2	.015	.018	.0165	
	3	13° REF L.			
	4	.245	.255	.250	
	5	2.045	2.055	2.050	
	6				
	7	.695	.705	.700	
	8	.020 R			
	9	32			
	10	.055	.065	.060	
	11	30°			
	12	.281 TYP			
	13	.163	.173	.168	
	13a	.163	.173	.168	
E-33225	14	4.4075	4.4175	4.4125	
	15	7/16 R TYP			
	16	.535	.545	.540	
	17	.968	.978	.973	
	18	.180 R	.205 R	.1925 R	
	19	.072 GAGE			
	20	2.936	2.944	2.940	
	21	.180 R	.205 R	.1925 R	
	22	.835	.845	.840	
	23	4.530	4.535	4.5325	
	24	37°			
	25	.282	.288	.285	
	25a	.282	.288	.285	
	26	.055	.063	.059	
	27	.278 R	.280 R	.279 R	
	28	.700	.703	.7015	
	29	.449	.452	.4505	
	30	.015	.025	.020	
	31	20°			
	32	.025 R			
	33	ROUND OFF SHARP CORNERS			
	34	STRAIGHT & PARALLEL			
	35				
	36	.004	.004	±.004	



RECEIVER MEASUREMENTS

.222 CALIBER

MODEL 7

MODEL 700 ADL &amp; 3DL

321321

## RECEIVER MEASUREMENTS

MODEL 700


(19 ADL, 23 3DL RIFLES)

DWG. NO.	SERIAL NO.	DWG. DIMENSIONS			ACTUAL DIMENSIONS
		MIN.	MAX.	MEAN	
	MEASUREMENT NO.				
D-33580	1	1.700	1.730	1.715	
	2	.015	.018	.0165	
	3	13° REF. L.			
	4	.245	.255	.250	
	5	2.045	2.055	2.050	
	6				
	7	.695	.705	.700	
	8	.020 R			
	9	32°			
	10	.055	.065	.060	
	11	30°			
	12	.281 TYP.			
	13	.163	.173	.168	
	13a	.163	.173	.168	
E-33225	14	4.4075	4.4175	4.4125	
	15	7/16 R TYP.			
	16	.535	.545	.540	
	17	.968	.978	.973	
	18	.180 R	.205 R	.1925 R	
	19	.072 GAGE			
	20	2.936	2.944	2.940	
	21	.180 R	.205 R	.1925 R	
	22	.835	.845	.840	
	23	4.530	4.535	4.5325	
	24	37°			
	25	.282	.288	.285	
	25a	.282	.288	.285	
	26	.055	.063	.059	
	27	.278 R	.280 R	.279 R	
	28	.700	.703	.7015	
	29	.449	.452	.4505	
	30	.015	.025	.020	
	31	20°			
	32	.025 R			
	33	ROUND OFF SHARP CORNERS			
	34	STRAIGHT & PARALLEL			
	35				
	36	.004	.004	±.004	



BY \_\_\_\_\_ DATE \_\_\_\_\_ SUBJECT BDL SHEET NO. \_\_\_\_\_ OF \_\_\_\_\_  
 CHKD. BY \_\_\_\_\_ DATE \_\_\_\_\_ Dimension 4 JOB NO. \_\_\_\_\_

TOL. RANGE = .010  
 MEASURED RANGE = .195

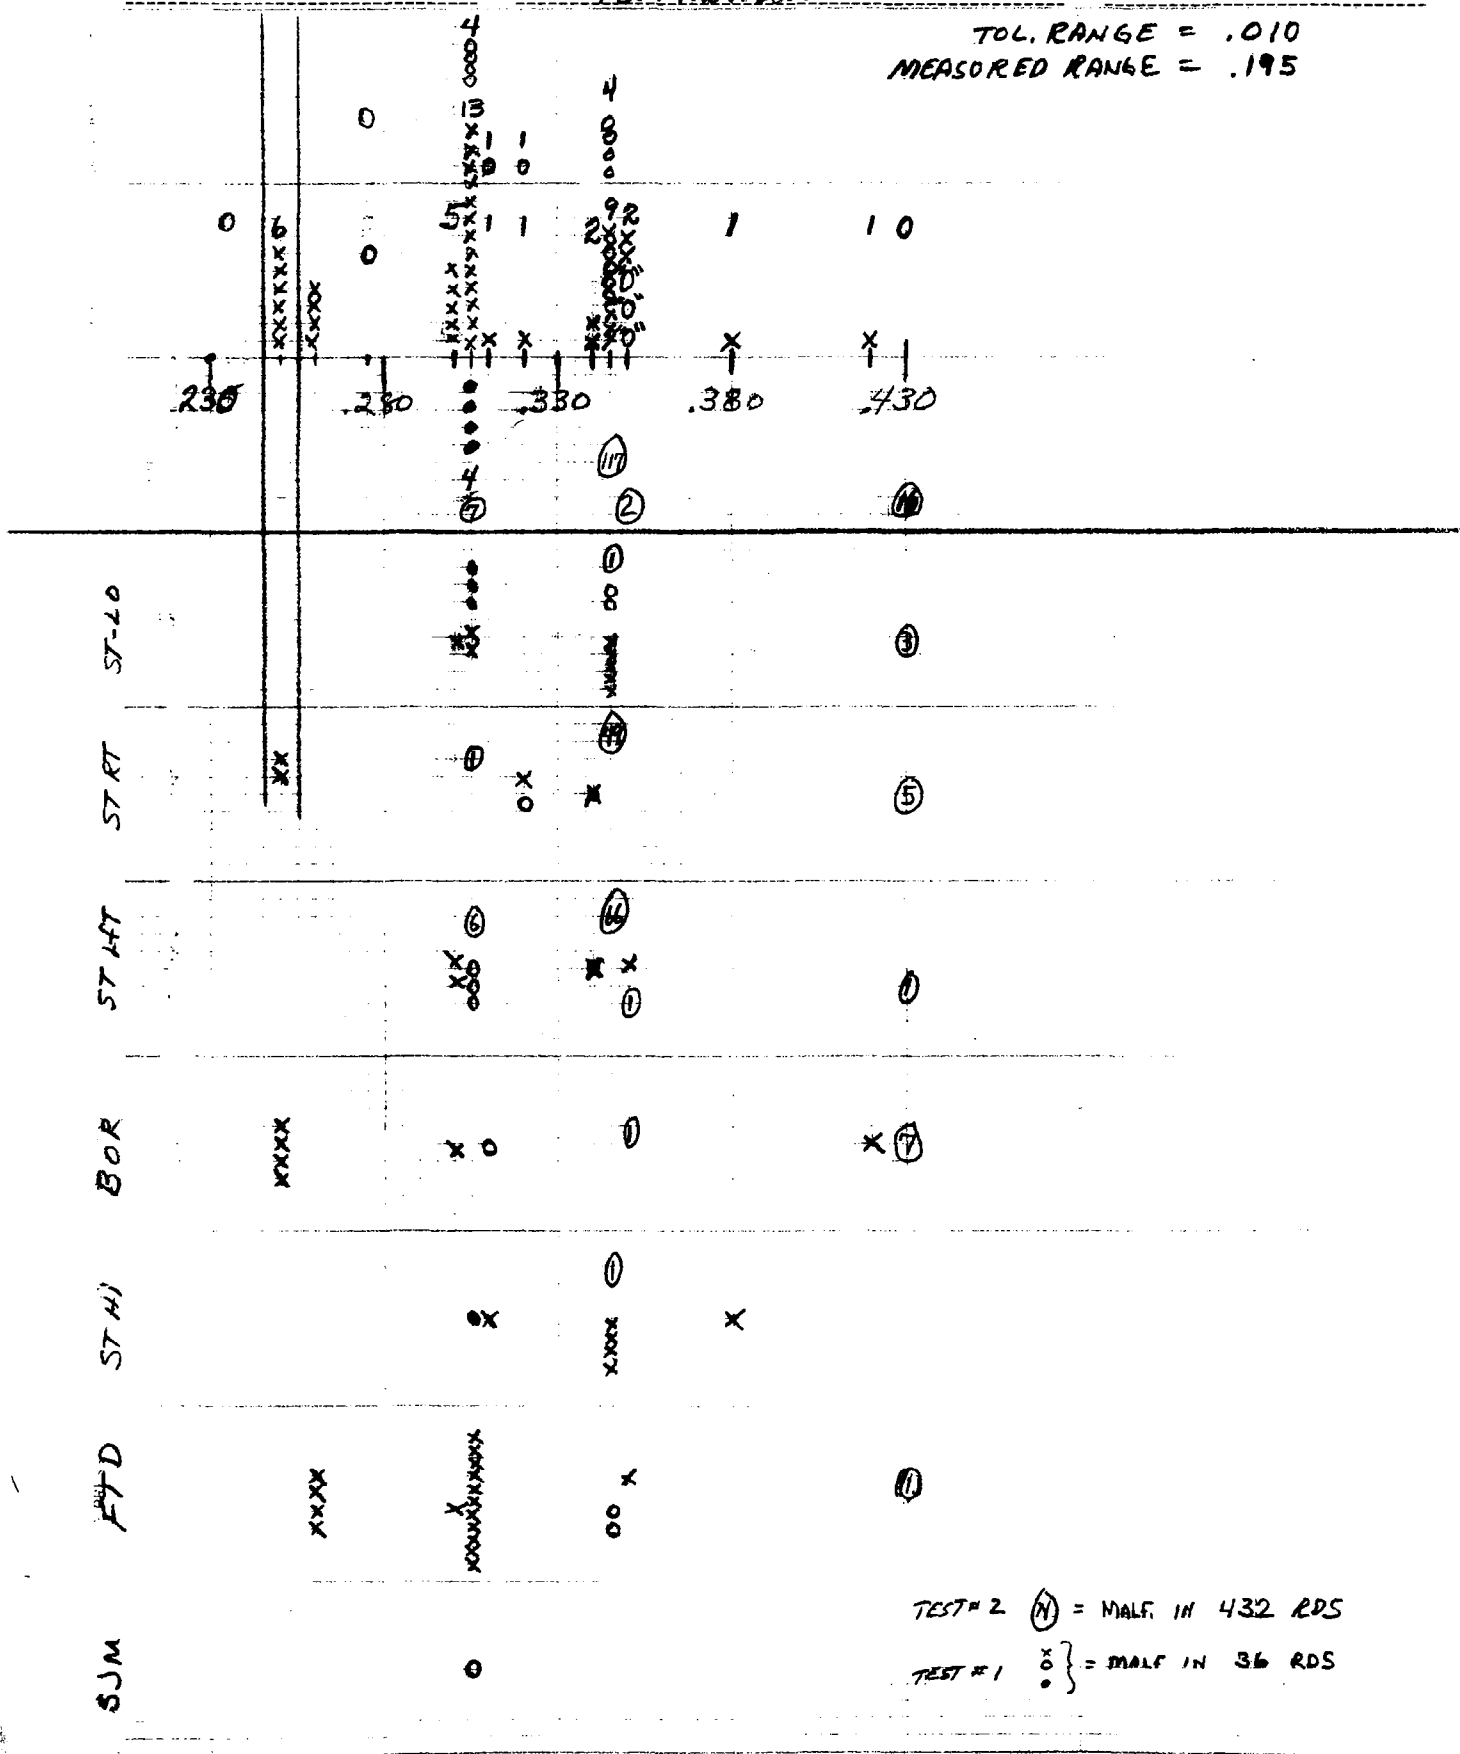

CC: S. Darling

TO: W. STEVENS

## ILION RESEARCH DIVISION

## FIREARMS WITHDRAWAL OR RETURN

DATE 3/17/83QUANTITY 22LETTER NO. 2020MODEL 700

CAL./GA. \_\_\_\_\_

WORK ORDER Q-0126-000SERIAL NOS. 9 ADL's - RAMAC 03760  
23 BDL's - RAMAC 03781

ADL's

B6287841B6283294B6287822B6287369B6287173B6287087B6288042B6293191B6289667

REMARKS:

BDL's - B6286163B6286807B6293864B6293853B6286269B6287234B6284840B6287240B6284832B6288104B6361420B6284822B6286201B6286402B6287066B6287093B6292982B6294947B6288642B6284208B6288390B6288118B6288212Approval

CRitchie:js

M/660,700,742,760 - Barrel  
Assembly

PROCESS ENGINEERING ASSIGNMENTS			
<b>Job Description:</b>  <b>Oper. - Drill and Tap Ramp Screw Holes</b>  <b>Objective:</b> Reduce tool cost; improve quality.		<b>Area Engineer:</b> Payne	
		<b>Sheet No.:</b> 1	<b>Job No.</b> 3915-P2
		<b>Job Priority:</b> C-2	
		<b>Job Code:</b> 13	
		<b>Model:</b> 660, 700, 742, 760	
		<b>Part Name:</b> Bbl. Assembly	
		<b>Oper. No.:</b> 125	
		<b>Dept. No.:</b> 58	
		<b>Est. Comp. Mo/Yr:</b>	
<b>Est. Comp. Hours:</b>			
<b>Assigned By:</b>		<b>Date:</b>	<b>Est. Savings:</b>
<b>Report Date</b>	<b>Elapsed Hrs.</b>	<b>Accomplishments</b>	
11/18/68		<p>Requested change of vendor on Spec. Drill A-87479. Due to approx. 80% of National drills were cutting oversize.</p> <p>Have specified Cleveland or Morse. Cleveland drills in use at present time are very satisfactory as to size and wearing quality. Purchase price is the same.</p> <p>Ordered six dozen Reiff and Nester Thread Formers with std. Nitrite finish and six dozen chrom shield. Comparison test showed Nitrite equal to chrome finish.</p> <p>Both are superior to Beasley roll taps as none have sluffed off leaving stripped or straight or tight threads in Barrel. They also meet our gages better and leave less burr backing out.</p> <p>Purchase price on original order of twelve dozen was approx.. .90¢ per tap less.</p> <p>Have sent marked print to vendor requesting less threaded area for strength. This may also reduce purchase price.</p>	

RD - 6566 2/1/63

PROCESS ENGINEERING ASSIGNMENTS		
Job Description:  Investigate target reject causes		Area Engineer: Payne
		Sheet No.: <sup>1</sup> / <sub>2</sub> of <sup>2</sup> / <sub>2</sub> Job No.: 3916-P2
		Job Priority: B-3
		Job Code: 10
		Model: 660, 700
		Part Name: Bbl. Assem.
		Oper. No.:
		Dept. No.:
		Est. Comp. Mo/Yr:
		Est. Comp. Hours:
Assigned By:		Date:
Est. Savings:		
Report Date	Elapsed Hrs.	Accomplishments
11/18/68		<p>24 Model 700 7mm Cal. Barrels which were rejected for point of impact were inspected and found to be out on angularity reading in direction and smount shown on rejection ticket.</p> <p>These 24 were angular straightened. Four were scrapped due to excessive bends believed caused by jack straightening. The remaining twenty targeted very well.</p> <p>Produced 100 M/700 7mm Cal. omitting concentricity check and jack straightening. Angularity and concentricity readings were taken before and after angular straighten. These readings showed:</p> <p style="padding-left: 40px;">Before: 11 - Did not require adjustment.  75 - Were in the .003/.008 range which would require sight toggling.  14 - Were above .008 which would result in rejection.</p> <p>All were brought into angularity specs. (.000 to .002) without any significant concentricity changes.</p> <p>This lot of Barrels passed 100% versus an average of 11% rejects for previous nine days.</p> <p>Recommended putting temporary oper. in to angular straighten until improvement of product indicates it will not be required. This proposal was rejected by Production.</p> <p>When any quantity of high or low shooters appear on report wrong sights can be suspected.</p>

RD - 6566 2/1/63

PROCESS ENGINEERING ASSIGNMENTS		
Job Description:  Investigate target reject causes		Area Engineer: Payne
		Sheet No.: 2 of 2 Job No.: 3916-P2
		Job Priority: B-3
		Job Code: 10
		Model: 660, 700
		Part Name: Bbl. Assem.
		Oper. No.:
		Dept. No.:
		Est. Comp. Mo/Yr:
		Est. Comp. Hours:
Assigned By:		Date:
Est. Savings:		
Report Date	Elapsed Hrs.	Accomplishments
11/18/68		<p>cont'd.</p> <p>Observed 63 guns at target having wrong front sight in one day. This was brought to attention of Assembly Supervision who promised to correct this condition.</p> <p>Correct sights for all models and calibers are posted by Assembly Eng. on all benches involved.</p> <p>A bad condition was noted at turn oper. breech end being egg shaped in bore. This condition was brought to attention of ream oper. foreman. He stated if correct equipment were used on set up, this would not happen and promised correction.</p> <p>Fifty Model 700 - 308 Cal. no turn Barrels and control lot of 50 turn Barrels were checked for concentricity after assembly to Receiver.</p> <p>3 No turn required straightening versus 26 turn Barrels. Have requested target results on these lots.</p>

RD - 6566 2/1/63

Cost -  
600/700

M/600-700 COMPONENTS COST REVIEW

-4-

	<u>Savings</u>	<u>Completion Date</u>	<u>Responsibility</u>	<u>Code</u>
1. <u>RECEIVER</u>				
A. Substitute hot rolled steel for cold rolled.	\$ 7,000	May, '66	E.R. Carr	PB-108
2. <u>BARREL ASSEMBLY</u>				
A. Material savings. Cut off on Do-All Saw and conveyerize to Wheelabrator.	\$ 1,740	Not Scheduled	F.H. Byrnes	PB-27
B. Review need for hand chamber operation on stainless steel Barrels.	\$ 715	Mar., '66	G.J. Hill	PB-68
C. Stainless steel bars. Proposed 132" vs. present 147". OD changed to 1 1/16".	\$ 3,520	Mar., '66	E.R. Carr	PB-124
3. <u>FIRING PIN HEAD</u>				
A. Discontinue Oper. #28 "Polish Sand End". Combine with Oper. #9-1. (Remington made parts only). Vendor deburr @ \$.55/C. Remington belt sand at Oper. #18 @ \$.98/C. Remington Deburr at Oper. #9-1A @ \$.66/C/	\$ 440	Mar., '66	G.J. Hill	PR-53
4. <u>FINAL ASSEMBLY</u>				
A. Use power screw driver for assembly of Receiver Plug Screws. Trial run is being made with larger hole size and tap size to compensate for Heat Treat shrinkage.	\$ 1,000	Mar., '66	E.R. Carr V.G. DeReus	A-59
5. <u>BOLT HEAD</u>				
A. Discontinue Oper. #23 "Drill Ejector Retaining Pin Hole", as a separate oper.	\$ 1,800	Not Scheduled	V.G. DeReus	PB-77
B. Review operation of Special Machine. M/788 machine to be tried out and evaluated for use of machine with same design for M/700 Bolt Heads.	\$ 1,000	Mar., '66	G.J. Hill F.H. Byrnes	PB-47
6. <u>STOCK ASSEMBLY</u>				
A. Purchase drill press to assemble threaded pins. Machine now being used.	\$ 300	Mar., '66	C.W. Weschrob	FW-19
B. Use Hycar Butt Plates on M/700 Stocks. A model drawing revision may be necessary. The die mold is being changed.	\$ 5,300	Not Scheduled	M.H. Walker R.P. Kelly	FW-18
C. Revise tooling on Richardson Copy Lathes to reduce change-over costs.	\$ 335	Mar., '66	M. Sweeney	FW-42
D. Purchase special Richardson Mill & Drill Machine for Long Stocks.	\$ 810	Aug., '66	R.B. Hurley	FW-52
• <u>FIRING PIN</u>				
A. Buy machine to form point.	\$ 550	Mar., '66	F.H. Byrnes	PB-39



1/600-700 COMPONENTS COST REVIEW

-5-

	<u>Savings</u>	<u>Completion Date</u>	<u>Responsibility</u>	<u>Code</u>
8. <u>TRIGGER HOUSING</u>				
A. Proposed Rivet Process. Drawings being made and a project has been approved.	\$ 8,550	Aug., '66	P.B. Croop	PB-138
B. Build Special Machine to Drill and Tap Housing Assembly.	\$ 2,500	Not Scheduled	P.B. Croop	PB-36
9. <u>SAFETY ASSEMBLY - M/600</u>				
A. Eliminate Oper. #35 "Mill Radius, Bottom of Thumb Piece", and Oper. #40 "Buff Radius".	\$ 1,050	Not Scheduled	V.G. DeReus	PA-34
B. Investigate possibilities of making the Safety Assembly common with the Model 700.	\$ 3,100	Not Scheduled	R.P. Kelly	PR-123
10. <u>SEAR SAFETY CAM ASSEMBLY</u>				
A. Powdered Metal unitized construction. Process not released yet.	\$ 9,000	Mar., '66	K.R. Chadwick	PA-29
11. <u>BOLT BODY</u>				
A. Review Special Machine performance.	\$ 410	Mar., '66	G.J. Hill F.H. Byrnes	A-84
12. Manufacture Telescope Mounts vs. Purchasing. Project started for proposed powder metal manufacture.	\$ 6,870	Not Scheduled	V.G. DeReus	PR-109

3-10-66  
FGC:sm

cc: L.J. Boyle  
H.J. Hackman) In  
V.G. DeRous ) turn  
F.H. Byrnes  
J.W. Blair  
J.H. Carter  
Estimate File #2441

July 24, 1964

E. R. CARR

MODEL 600 & 700 SAFETY ASSEMBLY

A revised cost comparison for the present method of processing the above model Safety Assemblies to the proposed method of molding a Nylon Thumb Piece or Safety Button directly to the Safety, has been completed.

The M/700 proposed Molded Process indicates a gross annual savings of approximately \$3,800 and will pay for itself in less than one year, plus a 10% return on an expenditure of \$2,900, of which \$1,950 is for a two cavity mold and \$950 for vendor tooling changes and Mini-jector Press alterations.

The M/600 proposed Molded Process indicates a gross annual savings of approximately \$650 and will pay for itself in slightly over seven years, plus a 10% return on an expenditure of \$2,800, of which \$1,350 is for a two cavity mold and \$950 for vendor tooling changes and Mini-jector Press alterations.

This comparison was based on the following conditions:

1. The #3-1964 Production Forecast adjusted for spares and scrap.
  - a. M/600 - 27,400; b. M/700 - 38,500
2. Latest process and tooling costs by Chem. & Met. Dept.
3. An estimated increase of \$1.00/C in the piece price of the Safety.

C. W. Weschrob  
Methods & Standards Section

*R. H. Brown*

R. H. Brown

RHB:sz

11 x 14 1/2 - 14 columns  
With description column

7-2-64 J.P.

Cost Improvement Potential - Final Assembly  
Model 600 Center Fire Rifle

Super. No.	Extra Work Elements	Frequency in Standard	Allowed Time / Per Minutes	Weighted Time / Per Minutes	Factor To Convert Min/A to %	Cost / 100 Guns Incl. Ind. Rel. 33%	Volume 3-1964 Forecast	Est. Annual Potential Savings
10	Assemble Trigger Assembly							
1.	File trigger slot inside housing	100%	090	090	4.63	417	25940	108.00
2.	File detent ball hole in safety lever	100%	063	063	"	292	"	76.00
3.	Emery tap end of trigger connector	100%	032	032	"	148	"	38.00
4.	Spread housing to free trigger	47%	112	052	"	241	"	63.00
5.	Spread housing - (saw-cam binds)	50%	150	050	"	232	"	60.00
6.	Safe lever binds - remove - file detent ball hole	6%	632	039	"	176	"	46.00
7.	Ream safe lever retaining pin hole	20%	195	037	"	181	"	47.00
	Sub Total							438.00
175	Final Assembly							
1.	Ream bolt - (Firing pin binds)	25%	250	233	5.12	1,219	"	312.00
2.	Remove bolt & file cam cut (F.P. binds)	10%	510	050	"	256	"	66.00
3.	Retap scope screw hole (Can't start screw)	20%	461	092	"	471	"	122.00
4.	Bolt closes hard - scrape bolt face	10%	400	070	"	205	"	53.00
5.	Bolt closes hard - change boltassy complete	22%	7,520	140	"	717	"	186.00
6.	Remove safe lever - sawage cam (Safe lever binds)	5%	1,650	065	"	333	"	86.00
7.	Sawage receiver rail - (Follower jumps mag knx)	20%	200	040	"	205	"	53.00
8.	Reject stock - (Visual for finish, marks, etc.)	25%	543	136	"	696	"	181.00
9.	Replace rib screw - (Rib screw can't start)	25%	650	070	"	358	"	93.00
10.	Retap hole in bb stud - (Can't start rib screw)	35%	400	140	"	717	"	186.00
11.	Tag gun for wood repair man - (Bolt hits stock)	15%	337	051	"	261	"	68.00
12.	File bolt at lug (Smooth up for more firmness)	100%	220	220	"	1,126	"	292.00
	Sub Total							1702.00
	Grand Total							2140.00

11 x 16 1/2 - 14 columns  
With description column

Cost Improvement - Total - Final Assembly  
Model 700 - 1st Fire Engine

L.  
R.  
N.  
R.

7-2-64 - J.P.

Oper. No.	Extra Work Elements	Frequency in Standard	Allowed Time / Minutes	Weighted Time / Minutes	Factor To Convert Min/Per to %	Cost / 100 Guns Incl. Ind Rel - 33%	Volume - 1964 Forecast	Est. Annual Potential Savings
10	Assemble Trigger Assembly							
1.	File Trigger housing (for trigger clearance)	100%	1.05	1.05	4.63	486	36772	150.00
2.	Spread safety lever arm	100%	0.56	0.56	"	259	"	95.00
	Sub Total							275.00
17	Final Assembly							
1.	Tap out Bolt Threads - (Don't Assm. F.P. Assy)	6%	4.21	0.25	5.12	154	"	57.00
2.	Ream out Bolt Head (F.P. Assy)	25%	1.25	0.32	"	420	"	154.00
3.	Bend Bar of Bolt Release & Tap - (To Adj. To Bolt stop)	100%	1.43	1.43	"	1,344	"	457.00
4.	Adjust Stop - (Visual for Min. F.P. Assy)	25%	1.43	0.36	"	696	"	256.00
5.	Adjust Stop - (Trigger Guard Tight)	8%	7.01	0.56	"	237	"	106.00
6.	Get screw difficult to screw - Try a 1/2 inch	12%	1.63	0.45	"	246	"	90.00
7.	File run in Rec. - (Shell doesn't feed properly)	16%	2.22	0.42	"	205	"	75.00
8.	Try Gun - no need Repairman - (Bolt hits stop)	32%	3.7	1.03	"	553	"	203.00
9.	Remove Stop, Mag Box - File Mag Box - Remount	4%	1.50	0.60	"	397	"	113.00
	(Bolt hits mag box)							
10.	Safe Bins - Remove & Bend Lever	3%	2.21	0.60	"	397	"	113.00
11.	Remove Bolt - To Subassy & Repeat Rec. (Don't close up)	4%	3.52	1.40	"	717	"	264.00
12.	Dead Safe - Change & Adjust	4%	1.75	0.70	"	355	"	132.00
13.	Dead Safe - Change Trigger Housing Assy	1%	3.00	0.30	"	154	"	57.00
14.	Bolt opens Hard - Change Bolt Assy Complete	2%	7.00	1.40	"	717	"	264.00
15.	Bolt opens Hard - Try Another F.P. Assy - File & Adjust	2%	1.50	0.30	"	154	"	57.00
	Sub Total							2398.00
	Grand Total							2673.00

f 700 Cost  
cut under Hill

834  
7/16/64

Model 700, 600, XP100, 40XB Receivers

alignment of Bolt Hole to O.D.  
alignment of Bolt Hole to Front Face

Problem: obtain best alignment between O.D., Bolt Hole  
and Front Face.

Process

Problems:

- A- By following process as set up on receivers cylindrical ground on O.D. after heat treat the Remington Roll and serial number are removed by the grind. At present cylindrical grind is done before heat treat. This does not allow correction for heat treat warpage
- B- when receivers are ground (O.D.) before heat treat and face of receivers ground after heat treat - misalignment occurs between I.D. and front face

Solution: Grind O.D. and Face from I.D. at the same time after heat treat.

Ways of Achieving:

Solution

- A. Try special "Remington" roll for M/700 due in plant 7/21/64 from Sawyer Stamping Co roll mark after heat treat.

534  
7/16/64

Estimated  
Completion

Tests will be conducted for  
endurance of roll

9/15/64

B. When test results are satisfactory  
we will have to order a serial  
numbering head, similar in composition  
to "Remington" roll. Also order  
Remington rolls for models 600-100  
& 40XB. Tests will have to be made  
on endurance of Serial Number roll.

11/1/64

C- Alter Cinn. cylindrical grinder  
to add Toaf post grinder to grind  
face during or after O.D. is  
being ground.

12/1/64

FIRE CONTROL 11200-600  
SAFETY 6560047110000

SAFETY; a locking device on a fire arm

designed to provide protection against accidental or unintentional discharge under normal usage when properly engaged.



## DON'T SAY IT—WRITE IT

TO C. B. WORKMANDATE September 12, 1978FROM J. W. BROOKS

*H*  
BOB NAGEL's ARTICLE ON HUNTING RIFLE SAFETIES. - In March-April 1978  
Rifle Magazine

The part of the above mentioned article that covers the M/700 Safety is incorrect. He uses the word "lock" which Webster defines in the following way:

"To hold fast or inactive: Fix"

Using this terminology the M/700 firing pin (or striker) is locked when the safety is "ON".

He states that the safety does not lock the firing pin (or striker) but blocks the trigger.

The M/700 firing pin (or striker) is locked back by the sear safety cam assembly. The sear safety cam assembly is in turn locked up by the safety. The trigger can be moved and nothing will happen.

He states that if the safety device should malfunction, the firing pin (or striker) is free to fall with the safety in the "ON" position. This infers that the safety is a required part of the fire control (firing mechanism) to operate the firing pin. This is incorrect because if the safety is completely removed the firing pin can still be cocked and safely activated.

The M/700 safety operates as follows:

With the bolt closed and when the safety is moved to the "ON" position, the sear safety cam is moved or cammed up off the trigger connector by the safety. The sear safety cam is in contact with the firing pin head and moves it slightly to the rear. The firing pin cannot move forward. It is locked to the rear. The trigger is free to be moved within limits. In its normal position the trigger is spring loaded to the rear where it remains under the sear safety cam. Therefore, if the sear safety cam was suddenly allowed to drop down it would come in contact with the trigger connector and stop. This would prevent the firing pin from falling until the trigger was activated.

JWB:T



cc: E.G. Larson  
R.B. Sperling  
J.H. Chisnall

RD-49-B

# REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY"

August 14, 1978

TO: C.B. WORKMAN  
J.P. LINDE

FROM: E.F. SIENKIEWICZ

*John Brooks -*  
*Please see me*  
*Clark*

SUBJECT: HUNTING RIFLE SAFETIES - ARTICLE IN RIFLE MAGAZINE

Enclosed is a copy of the subject article in which the author, Bob Nagel, attacks our design of the Model 700 safety.

I do not believe that his information is entirely correct and we should prepare a letter of rebuttal pointing out the errors and how our trigger mechanism really functions. We can then have Earl Larson and Bob Sperling advise us on how to handle this situation.

Please contact me on this matter.

*E.F. Sienkiewicz*

EFS:tp  
encl.

REMINGTON ARMS CO.  
RECEIVED

AUG 15 1978

ILION RESEARCH DIVISION



# TROPHY POINTERS

By BOB HAGEL

RE

AUG - 9 1978

## Hunting Rifle Safeties

**E. F. ONKIEWICZ** OPINIONS OF WHICH type of a hunting rifle are as varied as the designs themselves. Many opinions are based on use of a certain type of safety and the fact that the hunter is familiar with it. Long association with a rifle and its safety may blind the owner to any drawbacks it may have. If it has performed well, and he is used to operating it, he may never become aware of faults it may have under some severe weather conditions, or other rigorous use to which it has never been subjected.

If you use a rifle long enough, a poorly located safety becomes so familiar that you never give a thought to the fact that other locations may be handier and faster. And if it has never malfunctioned or given you any other mechanical problem, you may never realize how much trouble it can give under certain hunting conditions, or that it is far from safe.

I won't attempt to cover the mechanical function of the intricate parts of some modern safety systems, because space does not permit. So we'll stick to convenience and reliability under various hunting conditions.

In thinking of reliability and looking back at some of the older safety designs found on both military and sporting rifles made up to 85 years ago, I'm not convinced that we have made much progress as far as safe safeties are concerned. Starting with the original Mauser-type safety found on foreign-made military rifles, and also on our own Krag and Springfield, you'll find a safety that was safe when in the ON position. When the activating lever was rolled over it placed about a quarter-inch of steel through a notch in the striker, at the same time pulling it back so that the sear was disengaged — leaving the trigger free of contact with the striker. There was no way the rifle could fire unless the striker rod broke forward of the safety — something somewhat less likely than winning the Irish Sweepstakes.

While the old Mauser-type military safety, which was also used on a number of Mauser sporter actions as well as the Model 54 Winchester was as safe as a safety could be made, it was neither handy

nor fast. Neither was it practical when a scope sight was mounted low over the bridge. FN solved this problem by extending the finger lever out and curving it down under the scope eyepiece, and some U.S. rifle accessory makers followed suit.

These replacement safeties had a number of disadvantages; they had only two positions, ON and OFF, so in order to open the bolt the safety was completely off (even though it did lock the bolt in the ON position). But the biggest problem arose from the fact that the lever movement between ON and OFF was very short. If the rifle was carried on a sling with the safety lever toward the hunter, it was probable that it would soon be moved to the OFF position by rubbing against the clothing. (Some were on the left, some on the right side.)

When Winchester replaced the Model

54 with the Model 70, the safety was changed for the better. The Model 70 safety has been revamped since that day, and has evolved into what is perhaps the most reliable safety used on a modern bolt action rifle. Often called the "wing" safety, it is in a handy location on the right side of the cocking piece. It is a three-position safety that blocks the striker and locks the bolt in the full ON position, but when pushed to the center position it allows the bolt to be opened, while still locking the striker — an excellent feature.

Another very reliable military safety that was adapted to low scope mounting, along with a handy, fast location just behind the bolt handle, was found on the Model 1917 Enfield. That safety rocked forward to FIRE position by a simple push of the thumb, and when it was rocked back to the OFF position a hook grabbed a notch in the side of the cocking piece on the striker rod and pulled it to the rear to disengage the sear and leave the trigger free. Remington carried this design over to the Model 30 sporter based on the Enfield action. Few modern safeties are as fast and reliable.

The modern version as found on the newer Model 700 Remington has the same handy location and is fast to operate, but it does not lock the striker; it simply blocks release of the trigger. Should something happen within the trigger

(Continued on page 63)

### ADVERTISERS INDEX

Atkinson Gun Company	47	MTM Molded Products	40
Birchwood Casey	42	Marquart Precision Company	52
E.C. Bishop & Son, Inc.	46	McGowen Rifle Barrels	45
John Bivins Gunstocker	41	Frank Mittermeier, Inc.	41
Brown Precision Company	60	Numrich Arms	62
Lenard M. Brownell Custom Rifles	44	Oehler Research	6
Bushnell Optical Company	53	Omark Industries	7, 67
C-H Tool & Die Corporation	47	Pacific Tool Company	9
Canjar Manufacturing Company	42	Padco Enterprises	44
Complete Gunsmithing Service	45	Paul's Precision Gun Works	42
Conetrol	45	Bob Pease Accuracy	47
Corbin Mfg. & Supply Co., Inc.	14	Peterson's Labels	56
Custom Chronograph	57	Pyrodex Corporation	61
Data-Targ (Rocky Mtn. Target Co.)	60	Ranging, Inc.	52
Clarence N. Davis (fiberglass stocks)	62	Remington Arms	10, 11
Bill Dowtin Custom Rifles	42	Ray Riling Arms Books	47
Electronic Trigger Systems	51	Rifle Back Issues	58
Geo. Brothers	41	Binders	50
Golden Eagle Firearms	17	Brassards	46
The Gun Shop	60	Bumper Stickers	59
Handloader Press	48	Subscriptions	63
H-S Engineering Company	43	Schmidt-Weston Company	40
Hodgdon Powder Company	6	R.G. Sherer/Schutz Bros., Inc.	51
Hornady Mfg. Company	15	Stoeger Industries	5
Hudson Sporting Optics	16	Sturm, Ruger & Co., Inc.	3
Huntington's Sportsman's Shop	49	Weatherby, Inc.	2
Hulton Rifle Ranch	43	W.R. Weaver Company	13
Indian Ridge Traders	62	Cecil Weems Custom Gunbuilder	45
Jet-Aer Corporation	41, 45	Frank R. Wells Custom Guns, Inc.	62
J. Korzinek, Riflesmith	47	Whitney Sales, Inc.	51
Lazy-X Reloader's Notebook	57	Wichita Engineering & Supply, Inc.	43

Winchester-Western

63

the bedding the next time around? Not doing so would allow pulling down on a part of the action that has no support directly under it and would seem to impart bending stresses on the action detrimental to accuracy.

Dr. James J. Venier  
Southfield, Michigan

*The Sako Vixen is nothing but a baby Mauser, and the bedding should be approached in the same manner as any Mauser action. Dave Hull, a pioneer bench rest shooter, and holder of many world records and National Championships, once told me that there are two ways to bed a Mauser so it would shoot. One is to bed it loose everywhere except at the normal bearing points, and the other is to bed it so tight that it can't move at all (he also said he hadn't been able to figure out how to get one that tight).*

*I would bed the Sako exactly as the Ruger bedding described in the article in Rifle No. 55; that is, contact should be allowed only on the back side of the recoil lug, the flat back of the recoil lug, and the bottom of the rear tang. Also, the back one inch or so of the barrel should be bedded for about one-third of its diameter. All other areas should be taped to allow clearance so the guard screw tension is applied only to the bedding points. I have a Sako Vixen with a fairly heavy match grade barrel that was bedded in this manner several years ago. I used it for a couple of years as a bench rest rifle, and it still shoots very well.*

*You mentioned the possibility of stressing the action with the front guard screw if the bedding is relieved under the recoil lug. This doesn't seem to happen, but it is important that this relief be provided. I've seen this proven too many times to be a doubter any longer.*

*Finally, even the short, stiff rear tang on the Vixen can be warped if the guard screws are used to horse the action down into the bedding compound. Leave enough room around the edges so the compound can squeeze out and the action can be pressed into place without a lot of pressure. If a Sako is properly bedded in this manner, and it still won't shoot, then I'd start looking for some other cause.*

Bob Brackney

### ANSWERS POLICY

We will be pleased to ask the members of the staff to answer your questions. However, due to their heavy volume of correspondence we must ask that you enclose two dollars and a stamped, self-addressed envelope to partially defray the cost of researching and writing each answer. Please limit each letter to one specific question, for many general questions require a lengthy article to answer adequately, and cannot possibly be answered in a letter. Questions should be addressed to Aiming for Answers, Rifle Magazine, P.O. Box 3030, Prescott, Arizona 86302.

## Trophy Pointers

(Continued from page 66)

mechanism to cause the safety device to malfunction, the striker is free to fall with the safety in the ON position. Nearly all of the adjustable triggers found on Mauser-type actions, as well as most of the custom-adjustable triggers, function on the same principle. They are handy, they are fast, they are quite reliable and cause few accidental discharges — but they do not lock the striker.

Trigger guard safeties, either at the front or rear of the guard, become handy with a little practice and use, but completely safe they are not. I prefer the button be located at the front of the guard because there is less danger the trigger finger will accidentally push it to the release position when holding the gun at "ready" position. But even if this does not occur, there is a fair chance that the button will be pushed to OFF by pressure from the arm, clothing or what have you. It is also possible that if the gun is accidentally dropped solidly onto the butt, the jar will cause the safety to release and activate the trigger at the same time, causing an accidental discharge. This will not happen with all actions, either rifle or shotgun with trigger guard safeties, but it will happen with some, especially after extended use. This is not just theory; I've experimented with unloaded guns and found that at least some will release the striker when banged down hard on the butt with the safety on.

As far as speed of operation is concerned, many hunters prefer the shotgun-type tang safety to all others. I agree that they are fast, but to me no faster than the location on the right side just to the rear of the bolt handle. They really shine for the left-handed hunter, regardless of the type of action used. But there are a couple of disadvantages to the tang safety that are not always apparent under certain conditions. To be quick and sure, the tang safety should have a release button that is rough and high enough to afford a sure grip even during cold weather with heavy gloves. But if this feature is present, as on the Model 77 Ruger, and the rifle is chambered for a magnum cartridge, the recoil can tear hell out of your bare thumb if you wrap it around the grip. Some tang safeties are located far enough forward that this does not happen, the Savage Model 99 for example, but that safety button is low and quite smooth, not easy to release with gloves on.

Then there is the safety on the Savage Model 110 that snuggles down in the grooved tang. No danger of bumping your thumb on that one, but there is a great deal of danger you will not be able

to release it when wet snow or rain forms ice on and around it, or with gloves on even if there is no ice.

There is also the type of safety found on a few bolt actions that do not lock the bolt. This can put you in a bad position if the bolt is raised fully or partially when you are hunting with a chambered cartridge. You release the safety, pull the trigger and nothing happens, except that the game may vanish before you figure out what's wrong. It could also prove fatal when hunting dangerous game!

There are other types of safeties not covered here, but most work along the same lines. This does shed some light on the good and bad features of those that are most commonly used, and why they are or are not reliable under certain conditions.

There are some rather startling ideas advanced by various hunters concerning the use of rifle safeties — some hunters apparently have no use for one, while others depend on them when they shouldn't. And after you spend enough time watching hunters in the hunting country, some of their ideas on rifle safety, as well as safeties, make you a little nervous. Some of them can lead them, and you, into plenty of trouble. We'll look at these in another column.

## DON'T MISS AN ISSUE

If your magazine stand is getting out of Handloader or Rifle copies before you get yours, a subscription will assure that you receive each valuable edition. (Each magazine is a bi-monthly). Be sure to check term of subscription and send a check payable in U.S. currency.

(Rates in bold are U.S. & Possessions and Canada. All other subscriptions are "Foreign")

### HANDLOADER

- ☐ 3 years \$17.00 (Foreign \$20.00)
- ☐ 2 years \$13.00 (Foreign \$15.00)
- ☐ 1 year \$7.75 (Foreign \$9.00)

### RIFLE

- ☐ 3 years \$17.00 (Foreign \$20.00)
- ☐ 2 years \$13.00 (Foreign \$15.00)
- ☐ 1 year \$7.75 (Foreign \$9.00)

Name \_\_\_\_\_

Street \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip \_\_\_\_\_

Country \_\_\_\_\_

Check enclosed for \$ \_\_\_\_\_ U.S. Currency payable to

**Wolfe Publishing Co., Inc.**  
P.O. Box 30-30  
Prescott, Arizona 86302 USA

WE APPRECIATE ANY HELP YOU CAN GIVE US "CW"

cc: R. L. Hall  
F. Millener  
M. Walker/J. Brooks  
✓ F. E. Morgan

May 18, 1973

P. Velasco

Model 700 and Model 541 Firearms  
AUSTRALIA

In respect to the above models, the present trigger assembly is not suitable for the Australian market.

Modifications have been made to these products held in the Customs warehouse in Australia. Therefore, you are requested to initiate a procedure whereby our orders for Australia for these models indicate that modifications must be made to these firearms prior to shipment.

By copy of this letter we are requesting that a procedure be set up at Ilion to handle this correction. John Brooks at Ilion is familiar with the requirements and initiated the instructions for making this repair.

I believe this can be handled in the same manner as we installed the orifice control screw for the Model 1100.

Your comments will be appreciated.

E.S.Cipcer/ajf

*E.S. Cipcer*

cc: M. H. Walker/J. Brooks ✓  
F. Millener

May 21, 1973

TO: E. S. CIP CER  
FROM: F. E. MORGAN

10 11 31 AM 6:38

It will be the International Department's responsibility as of this date, to mark all Australian M/700 and M/541 orders forwarded to Ilion " See M. H. Walker, as guns must be modified before shipping."

*F. E. Morgan*  
F. E. Morgan

FEM/bc

WE APPRECIATE ANY HELP YOU CAN GIVE US

cc: R. L. Hall  
F. Millener  
M. Walker/J. Brooks  
✓ P. E. Morgan

May 18, 1973

P. Velasco

Model 700 and Model 541 Firearms  
AUSTRALIA

In respect to the above models, the present trigger assembly is not suitable for the Australian market.

Modifications have been made to these products held in the Customs warehouse in Australia. Therefore, you are requested to initiate a procedure whereby our orders for Australia for these models indicate that modifications must be made to these firearms prior to shipment.

By copy of this letter we are requesting that a procedure be set up at Ilion to handle this correction. John Brooks at Ilion is familiar with the requirements and initiated the instructions for making this repair.

I believe this can be handled in the same manner as we installed the orifice control screw for the Model 1100.

Your comments will be appreciated.

E.S.Cipcer/ajf

*E.S. Cipcer*

cc: M. H. Walker/J. Brooks  
F. Millener

May 21, 1973

TO: E. S. CIP CER  
FROM: F. E. MORGAN

10 11 31 AM 6:33

It will be the International Department's responsibility as of this date, to mark all Australian M/700 and M/541 orders forwarded to Ilion " See M. H. Walker, as guns must be modified before shipping."

*F. E. Morgan*  
F. E. Morgan

FEM/bc

cc: R. L. Hall  
F. Millener  
✓ M. Walker/J. Brooks  
F. E. Morgan

May 18, 1973

P. Velasco

**Model 700 and Model 541 Firearms**  
**AUSTRALIA**

In respect to the above models, the present trigger assembly is not suitable for the Australian market.

Modifications have been made to these products held in the Customs warehouse in Australia. Therefore, you are requested to initiate a procedure whereby our orders for Australia for these models indicate that modifications must be made to these firearms prior to shipment.

By copy of this letter we are requesting that a procedure be set up at Ilion to handle this correction. John Brooks at Ilion is familiar with the requirements and initiated the instructions for making this repair.

I believe this can be handled in the same manner as we installed the orifice control screw for the Model 1100.

Your comments will be appreciated.

E.S.Cipser/aif



cc: E. S. Clpcer ←  
H. D. Albaugh  
W. E. Leek

RECEIVED  
APR 25 1973  
INTERNATIONAL SALES

*LETTER  
TO M. WALKER*

Ilion, New York  
April 24, 1973

F. E. MORGAN  
Bridgeport

AUSTRALIAN 700 and 541 TRIGGER ADJUSTMENTS

John Brooks has worked out a method of using two screws, one behind the other, for locking the engagement and trigger adjusting screws in the 700. We can supply the parts to Australia if they will accept the method. We need to know how many parts are needed, if the method is acceptable to them, and will they take on the job of installing the screws and making the trigger adjustments required.

On the 541 a longer screw can be supplied with a lock nut for the engagement, but no good method has been generated for locking the trigger adjusting screw due to the interference of the bolt stop release mechanism. A lock nut on the front of the 541 trigger housing would require a redesign of the bolt stop release member to allow room for a nut. The trigger adjusting screw hole in the trigger housing is too shallow for the double screw system. The same is true for the engagement screw at the rear.

We are planning a permanent sealant over the screws in the 700 for regular production. One method was suggested by one of the adhesive manufacturers but the material, an epoxy, only has a 5-minute pot life. A second sealant is on order, which is a single solution type, that may be more acceptable to production.

*MHW*  
M. H. Walker  
Ilion Research Division

MHW/nl



REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

cc: E. Hooton, Jr.  
E. F. Barrett

*Remington*



Bridgeport, Connecticut  
April 27, 1977

~~D. W. BUNNING~~

~~(2) H. K. Boyle~~

D. W. BUNNING  
C. W. DOERTER  
A. J. HERMANDORFER  
J. O. PRESTON, JR.  
(3) R. L. HALL - F/c  
G. E. PUCKETT

PRODUCT RECALLS

The enclosed Conference Board booklet on product recalls is furnished for your information and use.

Of course, Remington already has a product recall procedure, which is set forth in How Book, Part 4, Item 2102. Furthermore, as indicated in that procedure, firearms and ammunition are exempt from the reporting requirements of the Consumer Product Safety Act. Nevertheless, this booklet contains some good articles on the subject of product liability which might interest you.

*R A Partnoy*

R. A. Partnoy

RAP:CK  
Enclosure

## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

Remington



cc: J. G. Williams

Bridgeport, Connecticut  
July 16, 1976

TO: E. F. BARRETT ✓  
W. E. LEEK ✓  
J. D. MITCHELL  
F. E. MORGAN  
H. D. ALBAUGH

FROM: L. J. SCOTT *LJS*

SUBJECT: VISIT WITH JIM CARMICHAEL

This is to confirm arrangements that have been made with Jim Carmichael to visit with us at Ilion on Monday, July 26. The purpose of Jim's visit will be to review our Bolt Action Center Fire Rifle line and to hear what Jim has to say concerning design features and styling for these rifles in general and our Model 700 in particular.

There will be time following our session to give Jim a brief tour of the plant, as well as a visit to Wayne Leek's range.

Our schedule will be as follows:

Leave Bridgeport Airport in Company plane at 7:30 A.M.

Meeting at Ilion Plant	- 9:15 - 12:00 Noon
12:00 - 1:00 P.M.	- Lunch
1:00 - 2:00 P.M.	- Plant Tour
2:00 - 3:30 P.M.	- Wayne Leek's Shooting Range
4:30 P.M.	- Leave Utica airport for return trip.

LJS/mcj

REMINGTON ARMS CO.  
RECEIVED

JUL 19 1976

ILION RESEARCH DIVISION



# REMINGTON ARMS COMPANY, INC.



MANUFACTURERS OF  
SPORTING FIREARMS, AMMUNITION

SPORTING FIREARMS, TRAPS, LION, NEW YORK

TRAPS

TARGETS

AMMUNITION, BRIDGEPORT, CONNECTICUT

LONOKE, ARKANSAS

BRIDGEPORT, CONNECTICUT 06602

CABLE—HARTLEY, BRIDGEPORT

PETERS CARTRIDGE DIVISION

BRIDGEPORT, CONNECTICUT

TARGETS, FINDLAY, OHIO

ADA, OKLAHOMA

ATHENS, GEORGIA

TELEX: 964-201 STRATFORD, CONN.

September 13, 1976

*4/7/78  
Sketch of stock is OK.  
ing in the design*

REMINGTON ARMS CO.  
RECEIVED

SEP 15 1976

LION RESEARCH DIVISION

Mr. Jim Carmichel  
P. O. Box 1697  
Prescott, Arizona 86301

Dear Jim:

Many thanks for sending us your sketch of a stock for the Model 700. I have passed copies along to Wayne Leek so that he and his staff can take a close look at what you are suggesting.

We all appreciate the time and interest you have put into this review and we will be back in touch with you after our Research staff has had an opportunity to progress further with their thinking.

Sincerely,

*L. J. Scott*

L. J. Scott, Director  
Product & Market Planning

LJS:lcy

bcc: E. F. Barrett  
W. E. Leek  
J. D. Mitchell  
F. E. Morgan  
H. D. Albaugh

Note: Design sketch copies have been sent to  
F. E. Morgan and W. E. Leek.

## DON'T SAY IT — WRITE IT

To E. HOOTON, JR.Date November 17, 1978From R. L. HALL LATEST COUNTS ON TRICK TESTS

	<u>Total</u>	<u>Failed Test</u>	
		<u>No.</u>	<u>%</u>
<u>M/600</u> Wholesaler's guns returned from Texas in 1975	615	342	56%
<u>M/700</u> Returns to Arms Service 6/13/78 to 11/16/78	625	6	1%
<u>XP-100</u> In Ilion Warehouse-Nov. 1978 (Warehouse has been cleared)	243	1	0.4%


RLH:ah

SAFETY IS A WISE INVESTMENT

R. L. Hall

Ilion

# NEWS

**Remington**  REMINGTON ARMS COMPANY, INC. • PUBLIC RELATIONS • BRIDGEPORT, CONNECTICUT 06602

RELEASE

FOR RELEASE IMMEDIATELY

Bridgeport, CT, September 9, 1980--Remington Arms Company, Inc., has found that a quantity of 7mm Express Remington cartridges, manufactured in August, 1979, may produce higher than normal pressures that could cause damage to some firearms. It is also possible that fired cases from this ammunition could be adversely affected, and, therefore, should not be reloaded.

Accordingly, the Company is recalling all 7mm Express Remington cartridges that were manufactured during August, 1979. These cartridges may be identified by the following markings on the package:

Caliber: 7mm Express Remington  
Bullet: 150-gr. Pointed Soft Point "Core-Lokt"  
Index No.: R7M061 (on outside of end flap)  
Lot Nos.: M02I or M03I or M06I or M07I or M08I  
or M09I or M13I

Lot numbers are printed on the inside of the package's end flap. Consumers who have purchased any 7mm Express Remington ammunition since August, 1979, marked with these lot numbers are cautioned not to use it, and to return unused cartridges and fired cases to:

Remington Arms Company, Inc.  
Attention: J. H. Chisnall  
939 Barnum Avenue  
Bridgeport, Connecticut 06602

- MORE -

for prompt, no-charge replacement. Shipment should be made "collect" via United Parcel Service.

Wholesalers and dealers are being asked to put an immediate hold on all 7mm Express Remington cartridges with these lot numbers in their inventories. Remington representatives will be in contact with them to arrange for return of this product.

###

Contact: E. S. McCawley, Jr. - (203) 386-3072  
R. F. Dietz - (203) 386-3026

9/9/80

## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

Remington  
STOCKcc: J. G. Williams  
J. E. Preiser  
W. H. Forson  
T. W. Rawson  
D. J. Sanita ✓Copies to RL Hall  
H.K. Boyle

1-16-81

Bridgeport, Connecticut  
January 14, 1981

TO: J. P. GLAS

FROM: P. H. HOLMBERG

SUBJECT: STATUS OF RECALL  
MODEL 3200: INSUFFICIENT HEAT TREATMENT OF HAMMERS

This Model 3200 recall involved a total of 305 guns and a quantity of replacement hammers purchased as parts.

As of 1/13/81 the status is as follows:

- All replacement hammers purchased as parts have been accounted for and have been either replaced or credit has been issued.
- 104 guns have been returned for our correction. Thus we have received for correction 34% of the recall guns. The corrective action being taken by Arms Service has resulted in an average repair time of less than one week. We are therefore, well within our timing commitment of "as soon as possible but not later than three weeks after it is received."

To date the recall has been highly successful. Our percentage return is high considering that initial contact was made only two months ago and that this time period included the holiday/vacation season. Returns are being received on a regular basis; three guns were received yesterday. Because of our continuing success of the recall, no extraordinary efforts will be taken until a significant lapse in gun returns are noted or six additional weeks have passed (3/1/81). At that time a second contact will be made via registered mail. This contact will be appropriately cleared prior to release.

Status reports will be issued on a monthly basis until the conclusion of the recall.

PHH:daf



RLH  
~~Harvey~~  
C-98 DON'T SAY IT-WRITE IT  
To J. H. [unclear] Date 1/9/81  
From [unclear]

m/3200 Hammer Seal Returns to date

98

"SAFETY RULES ARE PERFECT TOOLS"



SALES  
DEPARTMENT

# Remington Rem-O-Gram

Quick Facts About  
REMINGTON  
PRODUCTS

E. Hooton, Jr.

Adm. Bldg.

cc: House Force

Bridgeport, Connecticut  
November 20, 1980

*1. FFA  
2. RCH*  
TO THE FIELD FORCE

LIMITED MODEL 3200 RECALL

We have been notified by Ilion that a quantity of hammers that lacked sufficient heat treatment have been installed in some Model 3200 shotguns. Without proper heat treatment, the hammers will eventually wear and cause a safety related problem. We are asking that the guns not be used and that they be returned for our correction.

The Model 3200's that are suspect include:

- New guns produced from 6/1/80 - 9/30/80, including the Four Barrel Sets.
- Old guns returned to Ilion for repair from 3/1/80 - 9/30/80.
- Guns that received new hammers from the Remington gunsmiths at the Ohio, Pennsylvania, and the Grand (Trap guns only).
- Replacement hammers purchased as parts from 3/1/80 - 9/30/80.

Region managers were notified of the specific distributor shipments made to their region.

We felt you should be aware of this recall. Questions pertaining to the recall can be directed to Earl Larson.

Sincerely,

*E. J. Conroy*

E. J. Conroy  
Director of Sales

RECEIVED

NOV 25 1980

E. HOOTON, JR.

EJC:PHH:daf

**REMINGTON ARMS COMPANY, INC., BRIDGEPORT 2, CONN.**

SALES  
DEPARTMENT

*Remington*  
***Rem-O-Gram***

Quick Facts About  
REMINGTON  
PRODUCTS

Bridgeport, Connecticut  
May 6, 1981

TO THE FIELD FORCE:

R38S12 RECALL

Attached is a copy of a Public Relations' release concerning the recall of the above ammunition. This is being supplied to you so that you will be able to properly answer any inquiries you receive from customers, distributors, or dealers.

Sincerely,



E. J. Conroy  
Director of Sales

EJC/ds

Att.

**REMINGTON ARMS COMPANY, INC., BRIDGEPORT 2, CONN.**

IMMEDIATELY

Bridgeport, Ct., May 6, 1981 - Remington Arms Company, Inc., has found that the cases of a quantity of 38 special cartridges, manufactured in July, 1980, may separate at the case cannellure with the result that a part of the case could lodge between the cylinder and the barrel of a revolver. This could damage the gun or cause it to malfunction. While the possibility of a personal injury is unlikely, any obstruction in a gun barrel should be considered potentially dangerous.

Accordingly, the Company is recalling those 38 special cartridges which have the following identification markings on the packages:

Caliber: 38 Special  
Bullet: 158 grain lead hollow point +P  
Index No.: R38S12 (on outside of end flap)  
Lot Nos.: P28A and P29A

Lot numbers are printed on the inside of the end flap on the package. Those who have purchased any 38 special ammunition since July, 1980, marked with these lot numbers, are cautioned not to use it, and to return any unused cartridges to:

Remington Arms Company, Inc.  
Attention: J. H. Chisnall  
939 Barnum Avenue  
P. O. Box #1939  
Bridgeport, Conn., 06601

Shipment should be made "collect" via United Parcel Service. The returned cartridges will be replaced promptly at no charge.

Wholesalers and dealers are being asked to put an immediate hold on all 38 special cartridges with these lot numbers in their inventories. Remington representatives will be in contact with them to arrange for return of this product.

# # #

Contact: E. S. McCawley, Jr. (203) 386-3072  
R. F. Dietz (203) 386-3026

5/81

**REMINGTON ARMS COMPANY, INC.**

INTER-DEPARTMENTAL CORRESPONDENCE

Bridgeport, Connecticut  
May 14, 1981

cc: House Force

TO: Area Managers  
Regional Managers  
Field Force

FROM: E. J. Conroy

SUBJECT: 38 SPECIAL R38S12 RECALL

Attached is a copy of a Mailgram sent to all customers who have received shipments of this product.

In addition, Bridgeport is contacting by telephone each customer involved, and we have learned that some of the ammunition is in the hands of dealers and, possibly, consumers. We also asked the distributors to contact these dealers, and have them hold all of their stock.

As a necessary follow-up, will each of you call on your distributors immediately, and be sure their stock is returned at our expense to:

Remington Arms Company, Inc.  
Attn: J. H. Chisnall, Sr.  
939 Barnum Avenue  
Bridgeport, Connecticut 06601

Secondly, wherever possible, obtain a listing of all dealers who have received shipments from that wholesaler. Include name, address, telephone number, and quantity. Immediately call these dealer lists in to J. H. Chisnall.

We may need your assistance in notifying dealers. You will be advised if this is necessary at the time the list is called in to J. H. Chisnall.

Your fullest cooperation is requested.

A handwritten signature in cursive script that reads "E. J. Conroy".

E. J. Conroy

EJC:fms  
Attach.

MAILGRAM CUSTOMERS

URGENT

We have found that the cartridge case of a quantity of 38 Special cartridges, Index Number R38S12, manufactured in July, 1980, may separate at the case cannellure with the result that a part of the case could lodge between the cylinder and the barrel of a revolver. This could damage the gun or cause it to malfunction.

While the possibility of a personal injury is unlikely, any obstruction in a gun barrel should be considered potentially dangerous.

We are recalling this ammunition, and ask that you place an immediate hold on all 38 Special 158 grain Lead Hollow Point +P, our Index Number R38S12, in your stock bearing the following lot numbers that are printed on the inside of the end flap or the outside of the shipping case:

P28A

P29A

Our representatives will contact those customers our records show received shipment of this product.

REMINGTON ARMS CO., INC.  
E. J. Conroy - Director of Sales  
May 14, 1981

# NEWS RELEASE

FOR RELEASE IMMEDIATELY

Bridgeport, Conn., October 13 -- Remington Arms Company, Inc., today announced the recall of defective 7mm Express Remington cartridges which were manufactured in September and October of 1979.

Remington said the defective cartridges may produce higher than normal pressures which could damage some firearms, and which, under some circumstances might cause personal injury. The company also recommended that fired cases from the ammunition not be reloaded because of possible adverse effects.

The 7mm Express Remington cartridges covered by the recall have the following markings on the packages:

Caliber: 7mm Express Remington  
Bullet: 150 gr. Pointed Soft Point "Core Lokt"  
Index No.: R7M061 (on outside of end flap)  
Lot Nos.: M20F through M29F and  
M010 through M110  
(on inside of end flap).

Remington said it recalled several other lots of 7mm Express Remington cartridges in September 1980 because of a similar problem. The lots, which were manufactured in August 1979, were: M02I, M03I, M06I, M07I, M08I, M09I, and M13I.

The company said it is informing wholesalers and dealers to withhold from sale all 7mm Express Remington cartridges in their inventories which bear lot numbers from both recalls. Remington representatives will make arrangements for return of the cartridges.

Consumers who have purchased 7mm Express Remington ammunition since October 1979, bearing any of the lot numbers, should return the unused cartridges and fired cases for free replacement. They should be sent collect via United Parcel Service to:

Remington Arms Company, Inc.  
Attention: J. H. Chisnall  
939 Barnum Avenue  
P. O. Box #1939  
Bridgeport, Conn., 06601

# # # #

Editorial Contact: E. S. McCawley, Jr. - (203) 386-3072  
R. F. Dietz - (203) 386-3026

10/13/81



R. L. Hall

Ilion

**REMINGTON ARMS COMPANY, INC.**

INTER-DEPARTMENTAL CORRESPONDENCE

cc: House Force



Bridgeport, Connecticut  
October 12, 1981

TO: Area Managers  
Regional Managers  
Field Force

FROM: E. J. Conroy

SUBJECT: 7MM EXPRESS REMINGTON RECALL

Attached is a copy of a Mailgram sent to all customers who have received shipments of this product.

In addition, Bridgeport is contacting by telephone each customer involved, and we have learned that some of the ammunition is in the hands of dealers and, possibly, consumers. We also asked the distributors to contact these dealers, and have them hold all of their stock.


As a necessary follow-up, will each of you call on your distributors immediately, and be sure their stock is returned at our expense to:

Remington Arms Company, Inc.  
Attn: J. H. Chisnall, Sr.  
939 Barnum Avenue  
Bridgeport, Connecticut 06601

Secondly, wherever possible, obtain a listing of all dealers who have received shipments from that wholesaler. Include name, address, telephone number, and quantity. Immediately call these dealer lists in to J. H. Chisnall.

We may need your assistance in notifying dealers. You will be advised if this is necessary at the time the list is called in to J. H. Chisnall.

Your fullest cooperation is requested.

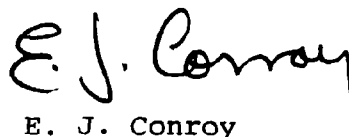  
E. J. Conroy

EJC:fms  
Att.

MAILGRAM CUSTOMERS

URGENT

We have found that a quantity of 7mm Express Remington cartridges, Index Number R7M061, produced in September and October of 1979, may produce higher than normal pressures that could damage a firearm. In addition, fired cases may be adversely affected, and they should not be reloaded.

We are recalling this ammunition, and ask that you place an immediate hold on all 7mm Express Remington ammunition in your warehouse bearing the following lot numbers that are printed on the inside of the end flap, or the outside of the shipping case:

M20F, M21F, M22F, M23F, M24F, M25F, M26F, M27F, M28F, M29F,  
M010, M020, M030, M040, M050, M060, M070, M080, M090, M100,

M110

In September, 1980, we recalled several lots of 7mm Express Remington cartridges due to a similar problem. These lots bear the following lot numbers:

M02I, M03I, M06I, M07I, M08I, M09I, M13I

Our representatives will contact those customers which our records show received shipment of this product.

Remington Arms Company, Inc.  
E. J. Conroy, Director of Sales  
October 12, 1981

EJC:fms

## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

Remington



*file*

cc: J. G. Williams  
J. E. Preiser  
E. J. Conroy  
~~R. L. Hall~~ *[initials]*  
R. B. Sperling  
E. J. Giner

Bridgeport, Connecticut  
January 31, 1980

TO: E. F. BARRETT  
FROM: P. H. HOLMBERG  
SUBJECT: LIMITED MODEL 700 RECALL

Per our discussion, immediate action was taken to recover the 348 Model 700 rifles suspected of having an improperly plated sear safety cam.

Initial contacts have been made to regional offices or managers as was appropriate. Distributors are being advised to return the product for replacement product or to supply us with information pertaining to the sale of this product from their inventory. Since the product was shipped during the period January 7-11, we are optimistic of recovering the guns prior to any actual shooter exposure. A status report will be issued within two weeks.

The distributors and guns involved are:

Remington Arms (GmbH)  
20-#5760 M/700 ADL .222 Rem.

Remington Arms (Ltd.)  
30-#5791 M/700 BDL .270 Win.

Bob Ward & Sons, Inc.  
5-#5791 M/700 BDL .270 Win.

Bonitz Brothers  
5-#5770 M/700 ADL .270 Win.

Jerry's Sport Center (PA)  
145-#5791 M/700 BDL .270 Win.      5-#5770 M/700 ADL .270 Win.

E. F. BARRETT

JANUARY 31, 1980

-2-

Walter Craig, Inc.

10-#5791 M/700 BDL .270 Win.

5-#5762 M/700 ADL .22-250 Rem.

Whitney Sporting Goods Co.

45-#5791 M/700 BDL .270 Win.

5-#5770 M/700 ADL .270 Win.

Maurice Sporting Goods

10-#5770 M/700 ADL .270 Win.

Western Hoegee Company

5-#5827 M/700 VAR 6mm Rem.

10-#5791 M/700 BDL .270 Win.

Monroe Hardware Company

10-#5791 M/700 BDL .270 Win.

10-#5864 M/700 CLASSIC .270 Win.

Goudeau, Inc.

5-#5770 M/700 ADL .270 Win.

Graf & Sons, Inc.

5-#5770 M/700 ADL .270 Win.

5-#5760 M/700 ADL .222 Rem.

Central Sales Corp.

10-#5791 M/700 BDL .270 Win.

Don Tate

1-#5770 M/700 ADL .270 Win.

Gopher Shooters Supply

1-M/700 D Grade 25/06

Maritz, Inc.

1-#5791 M/700 BDL .270 Win.

PHH:daf



## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

Remington



~~E. HOOTON, JR.~~  
WDy 1. WJ  
2. PLH.

Bridgeport, Connecticut  
January 28, 1980

TO: E. F. BARRETT  
FROM: T. W. RAWSON  
SUBJECT: M700 SEAR SAFETY CAM

Reference our phone conversation on the above subject. Production has determined that a quantity (350) of M700 rifles has been shipped with defective sear safety cam plating.

The plating defect, when combined with all metal parts of the fire control and bolt assembly in a non-lubricated condition can cause the striker to hang up when the trigger is pulled. Because enough movement of the internal trigger parts does occur a subsequent blow or knock to the firearm will cause it to fire.

Even though the odds of such a combination are slight, we are instituting, with Marketing's assistance, a recall on these firearms.

The approximate 350 rifles were shipped in early January and it is felt the odds are good that most or all will be retrievable. We will advise of progress.

TWR/kw

**RECEIVED**

JAN 29 1980

E. HOOTON, JR.

*ilison - pls file (Recall file)*

M/700 SEAR SAFETY CAM  
POOR CHROME PLATE  
FAILS TO FIRE--JARS OFF

CONDITION:

Poor chrome plating on the Sear Safety Cam (Sear). If the chrome is missing from the Firing Pin Head Contact angle on the Sear a fails-to-fire condition is present, i.e. the Trigger is pulled but the Sear will not drop to release the Firing Pin. The Trigger and Connector cannot relatch under the Sear and when the Bolt Handle is touched or the gun jarred, it fires.

CAUSE:

Lack of chrome on the contact area raises the coefficient of friction between the two parts. The fails-to-fire condition has only been demonstrated in dry cycle testing when the Sear and Firing Pin Head are degreased and oxide (so called red rust) is formed which further increases the coefficient of friction. When only small amounts of lubrication are applied the condition is cured.

NOTE: R&D tests of chromed (good) Sear, degreased and dry cycled, indicates the condition exists in the as-designed condition.

CHECK:

The parts are checked with cold blue - if they color they are considered defective.

WHEN DISCOVERED:

The initial condition was discovered on January 10, at the sub-assembly operation.

CORRECTIVE ACTION:

1. Held warehouse for January 4, 5, 6, 7, 8, 9, 10 & 11. Guns have been shipped.
2. Marked screened guns with "S" on label.
3. Assembly, test. Pack areas screened

4. Warehouse being screened
5. Quackenbush - the plater, is being contacted.
6. Controls of plate are being reviewed.
7. 347 questionable guns shipped.

Ilion, New York  
January 15, 1980

M/700 SEAR SAFETY CAM  
POOR CHROME PLATE

CONDITION:

When the Trigger is pulled, the Firing Pin will not always fall if red rust exists on the Sear Safety Cam surface which contacts the Firing Pin Head. This condition would not happen until the rifle has been cycled a number of times.

CAUSE:

*Parts stopped for repair*

Parts missed chrome plate operation, and/or had a poor plate. The chrome plate reduces the coefficient of friction and plates the part to stop rusting.

CHECK:

The parts are checked with cold blue - if they color they are considered defective.

WHEN DISCOVERED:

The initial condition was discovered on January 10, at the sub-assembly operation.

CORRECTIVE ACTION:

1. Held warehouse for January 4, 5, 6, 7, 8, 9, 10, & 11. Guns have been shipped.
2. Marked screened guns with "S" on label.
3. Assembly, test. Pack areas screened.
4. Warehouse being screened.
5. Quackenbush - the plater, is being contacted.
6. Controls of plate are being reviewed.

1702 were checked. Still have 351. 538 were bad.

JPL:hlf

*R+D for 5 samples which they are testing  
control of parts going to Quackenbush.  
Investigate alternate sources of supply.*



G-38

Robert

DON'T SAY IT-WRITE IT

To

*J. H. Carter*

Date

*4/7/80*

From

*D. J. Smith*

*m/700 Real remains moved to dett*

*327*

*Outstanding - 21*

"SAFETY RULES ARE PERFECT TOOLS"

**REMINGTON ARMS COMPANY, INC.**

INTER-DEPARTMENTAL CORRESPONDENCE

**"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_**Ilion, New York  
October 26, 1978RECALL OF MOHAWK 600 RIFLESUPDATED STATUSTrigger Assembly

The main consideration on the Trigger Assembly is that they are assembled, and safety checks are performed to insure that a safe reliable Trigger Assembly is shipped to the gunsmith. Presently, the Trigger Assembly is a separate operation and the unit is transferred to the Final Assembly area, where the final assembler assembles it to the Barrel Action.

A series of safety checks are performed at this step and the Stock is installed. Another set of checks are made - the rifle is then taken into the Gallery where the gun is tested and the safety is again checked. At the final inspection, the safety procedure is rechecked and a certain percent are audited, again checking the safety function.

In the recall of the Mohawk 600 guns, the Trigger Assemblies will be shipped directly to the gunsmiths and the subsequent safety operations that we perform at present, will have to be incorporated into our sub-assembly operation.

The Process Record and Industrial Engineering sheets have been reviewed, operation by operation. This review was performed with representatives of Research and Process Engineering who are familiar with this model. The Process Record was also clarified. Any statements in the Process Record which could be misread or misinterpreted are being rewritten and pictures and illustrations are being included.

There were a number of areas where answers were not known in the meeting on Wednesday, October 25. By today, October 26, a number of considerations have been resolved and there are very few items which have yet to be answered.

Items Covered in the Discussion:

The fit of the Connector to the Trigger was analyzed in great detail. Specifications were determined on the correct fit, with a tentative .005" max. clearance established between the Connector and the Trigger. Fitting procedure was also analyzed and the correct method to fit the Connector was determined.

Two gages (one to be made and one now being made) will check the straightness and squareness of the Connector to insure that is correct before being assembled to the Trigger.

A fixture designed and built to measure the clearance between the Sear and Connector is going to be utilized on the job, such that the clearance can be analyzed when the Safety is put in the middle or null position. In this way, every Trigger Assembly shipped to a gunsmith, will be checked for the null position, to make sure that it is on Safe and cannot be tricked. The amount of clearance when the Safety lever is in the null position, is being determined and should be completed later this afternoon.

The assembler, as with the common Trigger Plate Assembly, will identify his work with a stamp. The Trigger Assemblies will be marked with a stamp (alpha or numerical) on the back of the Trigger. In this way, any Model 600 or XP-100, can readily be checked without disassembly, to verify that it has the new Trigger Assembly.

The comparator check wasn't analyzed and the Trigger pull section of it will be revised. The correlation will be determined between what the operator gets on the assembly bench as far as Trigger pull, and what the sub-assembler gets in adjusting the Trigger pull screw. This correlation will be done so that the sub-assemblies should require no adjusting by the gunsmith.

Process for Retrofitting Customer Guns in the Field by  
Recommended Remington Gunsmiths:

To make sure that the new Trigger Assemblies are assembled to the rifle in the correct procedure, a complete Process Record is being developed to give the gunsmiths step-by-step instructions on the proper disassembly and assembly procedures.

Trigger Assemblies of the revised process including additional safety inspections, will be taken to Customer Repair and fitted to Model 600's, to verify the revised process.

The following considerations have come to light and answers are being determined:

On the original Trial and Pilot, the Stock reinforcing screw was interfering with the redesigned Trigger Assembly. Research is digging out all records on the Trial and Pilot on the interference, and have stated that the situation can be corrected by adjusting the soft brass screw. They are working up the process that the individual using the gun would use, that is, upsetting the screw slightly, to give the additional clearance required. They will also take pictures of the operations so that we can include them in the write-up that goes to the gunsmiths.

The Safety lever on the original Trial and Pilot also had an interference with the wood on the Stock. The levers now have been redesigned to give more clearance with the wood, but there is a potential for wood interference. Research is checking to make sure that there is an interference on a number of models, and if there is, the gunsmith will be instructed on how to rout out or clean out the area where there is an interference. It is an easily executed operation, which should not affect the program.

It should also be noted that the Mohawk 600's for a period of years, were fitted with a gold Trigger - the replacement assemblies will have the black Triggers. The original Remington 600 and 660's did not have gold Triggers, however, so the gold Triggers are definitely in the minority. This should not be a problem.

When the gunsmiths repair the recalled rifles, we will insist that they send all of the Trigger Assemblies back which are replaced. We do not want these assemblies left out in the field where the parts can be scavanged off these and cause the old Safety levers and incorrect Sears to be put into rifles which can cause problems in the future. The assemblies will be scrapped and accounted for when they are returned to Ilion.

The gunsmiths will be requested to stamp a letter or alphabetical character on the Receiver externally, where it can be seen, to identify without Stock disassembly, that the rifle has been converted to the new Trigger Assembly. Also, it would be our recommendation that the gunsmith put another stamp on the rifle, indicating at what repair station or what repairman actually modified the rifle.

To insure that all the rifles of this type in the plant, meet the required specifications, all the final assemblers, Gallery personnel, inspectors, Customer Repair checkers, Customer Repair gunsmiths, Customer Repair final inspector, 40XR or Custom Shop assemblers and XP-100 assemblers are being reinstructed on the trick test.

JPLinde:eb

## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

*Remington*  
OUTPORT*PETERS*  
OUTPORTXc: C.B. Workman  
R.L. Hall  
J. R. Ayers


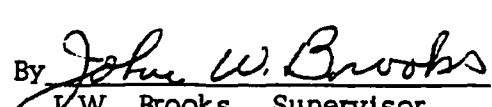
"CONFINE YOUR LETTER TO ONE SUBJECT ONLY"

Ilion, New York  
November 1, 1978EARL LARSON  
Bridgeport

## M/600 - 660 TRIGGER ASSEMBLY PARTS

We recommend sales of all Trigger Assembly components in the Models 600, 660, and Mohawk 600 be discontinued until further notice. A complete Trigger Housing Assembly should be sold or the rifle returned to Ilion where proper checks can be made if parts are replaced.

When a complete assembly is sold it should be accompanied by a note stating that no alterations or replacements should be made to the assembly.

  
C.B. Workman, Manager  
Ilion Research DivisionBy   
J.W. Brooks, Supervisor  
Manual Firearms Design

JWB:T

REMINGTON ARMS COMPANY, INC.  
Bridgeport, Connecticut

c: E.B. Beattie  
A.W. Bell  
H.K. Boyle  
E.G. Larson  
J.E. Preisner  
R.B. Sperling

*file*  
*cc to RCH*  
*10/31*  
October 30, 1978

TO: J.G. WILLIAMS  
E. HOOTON  
R.A. PARTNOY  
FROM: E.F. BARRETT  
SUBJECT: MODEL 600 RECALL - STATUS REPORT

1. Owner Notification

• Toll free message center - about 2500 calls have been received through Friday, October 27. Approximately 50% of the calls have been from Texas.

Owners and dealers have been confused by the serial number listing for the Mohawk 600 and XP-100. This is because the number series on some post 1975 guns is the same as on guns involved in the recall. Where this occurs, the letter A or B is used as a serial number prefix on post 1975 guns.

This situation will be clarified in subsequent recall advertisements and customer mailing.

Some owners have expressed concern about the timing of the gun repair and the remoteness of approved gunsmiths. It was decided to handle these complaints by setting up WATS lines in Bridgeport and Ilion, rather than expanding the information now being given by the Atlanta operators.

• Advertisements - Ads have been prepared for Hawaii and Alaska which are not covered by the Atlanta information service. We have three gunsmiths in Alaska and one in Hawaii.

Ads have been prepared for the follow-on owner notification program. Media will be selected early this week.

RECEIVED

OCT 31 1978

E. HOOTON, JR.

A dealer mailing which will include a counter poster announcing the recall and listing the guns involved is being prepared.

- Internally Developed Owner Data -

A listing by wholesaler of serial numbers for the guns involved will be complete in mid-November. This listing will cover the period 1968 to 1975. Records exist for the period 1963 to 1967 but are in such a form that their utility is questionable.

Consideration is being given to paralleling this approach by beginning to search the records of major dealers now for owner information.

## 2. Gunsmiths

Essentially all of the gunsmiths on the recommended list have agreed to participate in the recall program. Initial phone contacts were confirmed by telegram. Cooperation has generally been excellent. Among the gunsmith comments have been concerns about future product liability claims arising from this program, their ability to provide adequate service at this point in the hunting season and the adequacy of the \$5.00 bench charge.

Forms to document the receipt of customer guns and serve as an invoice have been prepared and are being distributed.

An installation procedure for the replacement trigger assemblies is being prepared in Ilion. It appears this will be more complicated than anticipated because some fitting is required in older guns. We will review the proposed procedure and if necessary run a pilot evaluation with selected gunsmiths before making a general mailing.

Arrangement have been made to hand carry the available trigger assemblies to the 10 Texas gunsmiths today. Installation procedures will be discussed. We estimate each Texas gunsmith will receive a minimum of 50 trigger assemblies.

Ilion will be established as a repair station for customers requiring special handling. The gunsmith's reporting procedures will be used to maintain a common input to the record control system being developed by Business Services.

3. Replacement Parts- Mohawk rifle assembly has been suspended to increase trigger housing assembly availability. Production estimates they can start supplying at the rate of 75 per day and reach a rate of 325 per day by the end of November. It was decided to remove the trigger assemblies from approximately 3500 Mohawk 600s now in the warehouse in order to expedite initial shipments.



4. Export and Canada - Giner, Droge and Millhofer have been notified. Millhofer estimates there are 15,000 of the subject guns in Canada. He will visit Bridgeport Tuesday to review the program established for the domestic market.

NOTE: Attached are copies of press releases, gunsmith correspondence and other materials related to the recall.

EFB:jl  
Attach.

- A. General Press Release
- B. Financial Press Release
- C. Telephone Request to Gunsmiths
- D. Telegram Confirming Gunsmith Participation
- E. Format for Atlanta Information Center
- F. Gunsmith Receipt and Repair Form
- G. Telegram Informing Gunsmiths about Customer Complaint Numbers
- H. Sales Data For 600 Series Rifles
- I. Serial Number Clarification

Customers should give the operator the model and serial numbers of their gun when calling.

Serial numbers involved in the recall are as follows:

Remington Model 600s -From Serial #0001 to 131,552

Remington Model 660s -From Serial #0001 to 131,552

Mohawk 600s -From Serial #6,200,000 to 6,899,999

Remington Model 660s -From Serial #6,200,000 to 6,899,999

Remington XP-100 -From Serial #0001 to 7,508,983

A

# NEWS RELEASE

FOR RELEASE IMMEDIATELY

BRIDGEPORT, Ct., October 25, 1978 -- Remington Arms Company, Inc., announced today that under certain unusual circumstances on some of its center fire bolt action firearms, the safety selector and trigger could be manipulated in such a way that subsequently moving the selector to the fire position could result in accidental discharge. Remington firearms involved are Model 600, 660 and Mohawk 600 rifles and XP-100 pistols manufactured prior to February 1975.

The difficulty can be corrected by installation of a new trigger assembly. In view of the potential safety hazard, the Company is recalling all of these guns produced prior to February 1975 for inspection and modification as required.

Efforts are being made to contact owners of these guns. Individuals who have Model 600, 660 and Mohawk 600 rifles or XP-100 pistols involved in the recall should write to Remington Arms Company, Inc., Bridgeport, CT 06602, or call the following toll free number for information on procedures:


In all states except Georgia:

800-241-8444 - Ask for Operator 61

In Georgia:

800-282-1333 - Ask for Operator 61

- MORE -

Remington. 

REMINGTON ARMS COMPANY, INC. • PUBLIC RELATIONS • BRIDGEPORT, CONNECTICUT 06602

IN RE: KINZER V. REMINGTON  
RELEASE

FOR RELEASE IMMEDIATELY

BRIDGEPORT, Ct., October 25, 1978 -- On October 23, 1978, a product liability case against Remington Arms Company, Inc., and one of its dealers was settled for \$6,800,000 by Remington's insurance carriers. The case involved an alleged accidental discharge of a Mohawk Model 600 rifle manufactured by Remington. Injuries to the plaintiff were extremely serious, leaving him partially paralyzed. The plaintiff alleged that at the time the gun fired the trigger was not pulled. Remington's investigation indicated that this was unlikely but possible due to the fact that under certain unusual circumstances the safety selector and trigger could be manipulated in such a way that subsequently moving the selector to the fire position could result in accidental discharge. Settlement costs are substantially covered by the Company's liability insurance.

A recall program has been initiated in connection with Mohawk Model 600 rifles and Remington Model 600 and 660 rifles and XP-100 pistols manufactured prior to February 1975.

###

B

*via telephone call*

October 24, 1978

Today, the Remington Arms Company, Inc., announced the recall of Models 600, 660, Mohawk 600, ~~and 600~~ <sup>KP-100</sup> bolt action guns, produced prior to February, 1975, because of a possible safety problem.

As a Remington Recommended Gunsmith, your shop has been listed with an 800 Enterprise message receiving center in Atlanta, Georgia. Upon receipt of a call from an owner of one of the guns involved, the message receiving center will direct him to the Remington Recommended Gunsmith located geographically nearest to him, for repair of the gun. We estimate you may receive up to 200 of these guns for repair.

To provide the simplest and most positive repair, you will be supplied with new trigger assemblies for replacement of the original. The repair will be done at no charge to the gun owner.

Our Arms Service section reports that the replacement of the trigger assembly can be made in 7-1/2 to 10 minutes. Based on this, we plan to allow you a \$5.00 bench charge for this work. Where transportation or other special handling costs are involved, we will reimburse you.

While full details have not been developed, we did want to give you this advance notice, and we will contact you in the very near future, covering all details.

Meanwhile, should any guns be returned to you, please record the date, name, address, zip code, and serial number and caliber of the gun, and hold until you have our instructions.

*C.*

*This went to participating Jew Smith.*

TELEGRAM

Thank you for agreeing to assist us in the installation of a new trigger assembly in Remington 600, Model 660 and Mohawk 600, and XP-100 pistols, covered by our recall.

Our toll free Message Center is advising customers in your area of your availability to make this installation.

We are sending you under separate cover special repair and information forms, plus an initial supply of replacement trigger assemblies.

For your information, Remington will assume full and complete responsibility for any and all claims that may arise out of the design or manufacture of the trigger assembly provided to you by Remington for this modification.

The <sup>only</sup> guns included in the recall are all Remington Model 600 and 660 rifles, and all Mohawk Model 600 rifles, except those with a serial number starting with an "A". Also included in the recall are any XP-100 pistols with a serial number between 0001 and 7,507,983.

If you have any questions, please call Ed Sienkiewicz collect at (315) 894-9961.

REMINGTON ARMS COMPANY, INC.

*10/27/78*

*D.*

Person calls in on 800 numbers, asks for Operator 61 or Remington recall information.

Operator asks for Model No. \_\_\_\_\_ & Serial Number \_\_\_\_\_.

Checks Model and Serial Number blocks for recalled guns -

if gun is not involved, inform caller  
and thank him.

if gun is part of recall, operator will ask for

Name \_\_\_\_\_

Address \_\_\_\_\_

Phone Number \_\_\_\_\_

The operator will say:

"Remington recommends prior to any further usage of your gun that you bring it directly to a selected gunsmith in your area for inspection and modification which will be done free of charge. If you have a pencil and paper handy, the closest gunsmith is\* \_\_\_\_\_."

If you have any further questions you should write to:

Remington Arms Company, Inc.

Box EGL

Bridgeport, Ct. 06602"

\*The phone number will be used to determine the nearest Remington gunsmith (out of 179).

If there is more than one gunsmith in the area, the caller will be given a name and address. The gunsmiths will be rotated after each call to assure a balance of customers per gunsmith.

E.



REMINGTON ARMS COMPANY, INC.  
**Trigger Assembly**  
**Special Replacement Program**

**(A) GUNSMITH**

Name \_\_\_\_\_

Street \_\_\_\_\_

City, State, Zip \_\_\_\_\_

Telephone \_\_\_\_\_  
(Area Code)Control No. 

--	--	--	--	--	--

  
(For Rem. Use Only)**GUN OWNER**

Name \_\_\_\_\_

Street \_\_\_\_\_

City, State, Zip \_\_\_\_\_

Telephone \_\_\_\_\_  
(Area Code)Control No. 

--	--	--	--	--	--

  
(For Rem. Use Only)**(B) FIREARMS INFORMATION****Model (Check One)**

- ☐ 1. Rem 600  
☐ 2. Rem 660  
☐ 3. Mohawk 600  
☐ 4. XP-100

**Caliber (Check One)**

- ☐ 1. 222 Rem.  
☐ 2. 6mm Rem.  
☐ 3. 243 Win.  
☐ 4. 308 Win.  
☐ 5. 6.5mm Rem. Mag.

**Caliber (Check One)**

- ☐ 6. 350 Rem. Mag.  
☐ 7. 35 Rem.  
☐ 8. 223 Rem.  
☐ 9. 221 Rem. "Fireball"  
☐ 10. Rechambered

**Serial No.**

--	--	--	--	--	--	--	--

**(C) MODIFICATION INFORMATION**

Method Gun Received From Owner:

(Check One)

- ☐ Hand Delivered  
☐ UPS  
☐ U.S. Mail  
☐ Other \_\_\_\_\_  
(Specify)

Date Gun Received From Owner

Estimated Completion Date

Month      Day      Year

--	--	--	--	--	--

--	--	--	--	--	--

**IMPORTANT — This Copy Must Be Completed and Mailed Immediately Upon Receipt of Gun.**

**PARTS CONTROL COPY**

(completed form to be mailed immediately upon receipt of gun)

We have set up toll free numbers to handle gun owner complaints. These numbers will be in operation beginning Saturday, October 28:

In Connecticut 800-972-9379

Outside Connecticut 800-243-9275

We are doing everything possible to expedite shipment of replacement trigger assemblies; however, the initial supply will be limited. Because these trigger assemblies are the only ones approved for this replacement program, please do not use trigger assemblies you may have in stock.

If you have Model 600 series trigger assemblies in inventory, return them to us freight collect and we will credit your account.

G.

	<u>Rem. M/600</u>	<u>Rem. M/660</u>	<u>Mohawk 600</u>	<u>Total</u>
1963	100	--	--	100
1964	25,279	--	--	25,279
1965	24,851	--	--	24,851
1966	22,307	--	--	22,307
1967	19,061	87	--	19,148
1968	2,488	24,373	--	26,861
1969	--	14,196	--	14,196
1970	2	7,694	--	7,696
1971	--	3,993	4,979	8,972
1972	--	193	4,961	5,154
1973	--	--	8,739	8,739
1974	--	--	12,110	12,110
1975	--	--	13,120	13,120
1976	--	--	13,318	13,318
1977	--	--	17,631	17,631
1978	--	--	16,927	16,927
			(as of 10/18)	
TOTAL	94,088	50,536	91,785	236,409

HDA/ap  
10/23/78

H.

**Remington**



**REMINGTON ARMS COMPANY, INC.**

TELEX  
964-201  
STRATFORD, CT

SPORTING ARMS-AMMUNITION-TARGETS-TRAPS  
BRIDGEPORT, CONNECTICUT 06602

TELEPHONE  
203-333-1112

February 8, 1979

TO OUR FIREARMS DISTRIBUTORS

SUBJECT: BULLETIN - RIFLE RECALL

Gentlemen:

In our letter of November 3, 1978 on this subject, we mentioned that we would be sending you information on shipments we have made to you of models covered by our recall (certain Model 600, 660 and Mohawk 600 rifles and XP-100 pistols).

As an expediency, we have, instead, elected to take a more direct approach ... furnishing full information on the recall to firearms dealers.

Enclosed is a copy of a letter now being mailed to our dealer list, together with a laminated message for use as a display in bringing information on the recall to the attention of retail customers. Also enclosed is a copy of a form for dealers to use in sending customer data back to us. In addition, we plan a similar mailing to the full list of Federal Firearms License holders in the near future.

We appreciate your cooperation in working with us on this recall, and while it may be necessary to request your assistance from time to time, every attempt will be made to spare you as much inconvenience as possible.

Sincerely,

A handwritten signature in dark ink, appearing to read "E. J. Conroy". The signature is fluid and cursive, with the first letters of the first and last names being capitalized and prominent.

E. J. Conroy  
Director of Sales

EJC/ecc  
Attachments

*Remington*



REMINGTON ARMS COMPANY, INC.

TELEX  
964-201  
STRATFORD, CT

SPORTING ARMS-AMMUNITION-TARGETS-TRAPS  
BRIDGEPORT, CONNECTICUT 06602

TELEPHONE  
203-333-1112

February 8, 1979

TO REMINGTON FIREARMS DEALERS:

BULLETIN: PRODUCT RECALL

As you are undoubtedly aware, we are recalling certain of our Model 600 series of center fire rifles and our XP-100 target pistol. We are trying to reach all of the owners who may have these recalled models and you can be of invaluable assistance to us in this effort. To date, we have alerted the public to our recall through radio and television coverage as well as by newspaper and magazine articles and advertisements. In order to help us reach the individual shooter directly, we ask that you look through your files to determine the customers to whom the following recalled guns were sold:

MODELS BEING RECALLED

All Remington Model 600 and 660 rifles, and all Mohawk Model 600 rifles EXCEPT THOSE WITH A SERIAL NUMBER STARTING WITH AN "A".

Any XP-100 pistol with a serial number below 7507984, EXCEPT THOSE WITH THE PREFIX "A" OR "B" BEFORE THE NUMBER.

DATES OF MANUFACTURE

Prior to February, 1975

\* \* \*

Please send the customers' names and addresses to us at:

Remington Arms Company, Inc.  
Box AWB  
Bridgeport, CT 06602

and we will contact them.

Enclosed for your convenience is a form to be used in sending us the above information.

We also urge you to check your own firearms inventories to be absolutely sure none of these recalled guns remain in your stock. If you find that you do have either a new or used gun covered by the recall, call the appropriate toll-free number listed below to find the name of the nearest participating gunsmith who will, at no charge, inspect and modify the gun as required.

All states except Georgia - 1-800-241-8444 (Operator 61)


Georgia only - 1-800-282-1333 (Operator 61)

Inquiring customers who may have guns covered by the recall should be told that Remington recommends that prior to any further usage of their guns that they be inspected and modified as required. This will be done at no charge by participating gunsmiths around the country. Customers may call one of the above toll-free phone numbers for the name of the nearest participating gunsmith. If the location is not convenient to personally deliver the gun, the customer may send the gun collect to the gunsmith and have it returned prepaid.

For convenient in-store use and display purposes we are also attaching a laminated message form that shows information pertaining to the recall.

We thank you for your cooperation in assisting us in this recall and regret any inconvenience caused you or your customers.

Sincerely,



E. J. Conroy  
Director of Sales

EJC/ecc  
Attachments

# **IMPORTANT MESSAGE TO OWNERS OF REMINGTON MODEL 600 AND 660 RIFLES, MOHAWK 600 RIFLES, AND XP-100 PISTOLS.**

Under certain unusual circumstances, the safety selector and trigger of these firearms could be manipulated in a way that could result in accidental discharge.

The installation of a new trigger assembly will remedy this situation. Remington is, therefore, recalling all Remington Model 600 and 660 rifles, and all Mohawk Model 600 rifles—**except those with a serial number starting with an "A."**

Also included in the recall are any XP-100 pistols with a serial number below 7507984, **except those with the prefix "A" or "B" before the number.**

Remington recommends that prior to any further usage of guns included in the recall, they be inspected—and modified if necessary. To obtain the name and address of the nearest Remington Recommended Gunsmith (who will perform the inspection and modification service free of charge), phone one of the following numbers:

In all states except Georgia (toll free):

**1-800-241-8444—ask for operator 61**

In Georgia (toll free):

**1-800-282-1333—ask for operator 61**

In Canada (collect):

**519-621-7271**

\*\*\*\*\*

## **Another important message to all gun owners.**

Much has been written on firearms safety in general, and gun safeties, in particular, but we feel that a most incisive statement is contained in the NRA Hunter/Safety Handbook: "No hunter should depend wholly on the safety to prevent accidental firing. The safety is meant only to supplement proper gun handling."

Remington Arms Company, Inc.

**Remington.** 

REMINGTON ARMS COMPANY, INC. • PUBLIC RELATIONS • BRIDGEPORT, CONNECTICUT 06602

# NEWS RELEASE

FOR RELEASE IMMEDIATELY

BRIDGEPORT, Ct., October 25, 1978 -- On October 23, 1978, a product liability case against Remington Arms Company, Inc., and one of its dealers was settled for \$6,800,000 by Remington's insurance carriers. The case involved an alleged accidental discharge of a Mohawk Model 600 rifle manufactured by Remington. Injuries to the plaintiff were extremely serious, leaving him partially paralyzed. The plaintiff alleged that at the time the gun fired the trigger was not pulled. Remington's investigation indicated that this was unlikely but possible due to the fact that under certain unusual circumstances the safety selector and trigger could be manipulated in such a way that subsequently moving the selector to the fire position could result in accidental discharge. Settlement costs are substantially covered by the Company's liability insurance.

A recall program has been initiated in connection with Mohawk Model 600 rifles and Remington Model 600 and 660 rifles and XP-100 pistols manufactured prior to February 1975.

###



*Remington*



REMINGTON ARMS COMPANY, INC.

SPORTING ARMS-AMMUNITION-TARGETS-TRAPS  
BRIDGEPORT, CONNECTICUT 06602

TELEPHONE  
203-333-1112

November 3, 1978

TO OUR FIREARMS DISTRIBUTORS

SUBJECT: BULLETIN - RIFLE RECALL

Gentlemen:

Attached is a copy of a News Release related to the Recall of one model of our center fire rifles, and our one handgun.

Model Being Recalled

All Remington-Brand Model 600 Bolt Action Center Fire Rifles

All Remington-Brand Model 660 Bolt Action Center Fire Rifles

Any Mohawk-Brand Model 600 Bolt Action Center Fire Rifle  
except those with a serial number starting with an "A"

Any Remington-Brand XP-100 Center Fire handgun with a serial number less than #7,507,984, except those with the prefix "A" or "B" before the number.

Dates of Manufacture

Prior to February, 1975.

How Recall is Being Handled

Consumers having guns covered by the recall should be told that Remington recommends that prior to any further usage of their guns they be inspected and modified as required. This will be done at no charge by participating gunsmiths around the country. Consumers may call one of the following numbers for the name of the nearest participating gunsmith.

All States Except Georgia      1-800-241-8444 - Operator 61

Georgia Only      1-800-282-1333 - Operator 61

November 3, 1978

If the location is not convenient to personally deliver the gun, the consumer may send the gun collect to the gunsmith and have it returned prepaid.

What Distributors Can Do

We suggest you check your gun inventories to be absolutely sure none of these recall rifles remain in your stock. Also, in a short time we will be giving you further information which will help you to determine the dealers to whom you may have shipped some of these rifles.

What Your Dealers Can Do

Dealers should look through their files to determine shooters to whom the guns were sold. Shooters should then be contacted and told to call the toll-free number for procedures. Also, dealers should check their inventories to be absolutely sure they don't have any of the rifles remaining.

Presently we are combing our files to send you information we will have available on shipments we have made to you of this model. Retrieval of this information in such large quantities is time consuming. If you have any questions for us, please call our Mr. Jack Chisnall at our special WATS ACTION LINE 1-800-243-9275 (inside Connecticut 1-800-972-9379) or write him at the address shown on page 1 of this letter.

Thanks again for your cooperation in handling this recall. Additional information will be sent to you as available, together with a copy of a letter to the dealers which is now being prepared.

Sincerely,

*E. J. Conroy*  
E. J. Conroy  
Director of Sales

EJC/o

attachment

FOLD HERE

FROM:

NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

**BUSINESS REPLY MAIL**

FIRST CLASS

PERMIT NO. 420

BRIDGEPORT, CONN.

POSTAGE WILL BE PAID BY —

**REMINGTON ARMS COMPANY, INC.  
P.O. BOX AWB  
BRIDGEPORT, CONN.  
06602**



FOLD HERE

FORM #  
RA1897

REF. No 224442

DEALER: NAME \_\_\_\_\_

STREET \_\_\_\_\_

CITY, STATE, ZIP \_\_\_\_\_

TELEPHONE \_\_\_\_\_  
Area \_\_\_\_\_ Number \_\_\_\_\_

FEDERAL FIREARMS LICENSE NO. \_\_\_\_\_

**REMINGTON ARMS COMPANY, INC.**  
**PRODUCT RECALL**

### MODELS BEING RECALLED

All Remington Model 600 and 660 Rifles, and All Mohawk Model 600 Rifles  
EXCEPT THOSE WITH A SERIAL NUMBER STARTING WITH AN "A".

**Any XP-100 Pistol With a Serial Number Below 7507984**

EXCEPT THOSE WITH THE PREFIX "A" OR "B" BEFORE THE NUMBER.

[illegible]

NOTE: IF YOU NEED ADDITIONAL COPIES OF THIS FORM CHECK THIS BOX ☐ HOW MANY?

WHEN YOU HAVE COMPLETED THIS FORM PLEASE REFOLD AND MAIL.

POSTAGE WILL BE PAID BY REMINGTON ARMS CO., INC.

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

**R2530529**

## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

May 23, 1979

TO: ~~R.L. HALL~~ PH 5/25  
FROM: J.H. CARTER  
SUBJECT: MODEL 788

We have received all 46 Model 788, 22-250 caliber rifles that were subject to recall to check barrel thread dimensions.

JH Carter  
J.H. Carter  
Superintendent-Planning

JHC:jr

**DON'T SAY IT-WRITE IT**

c: E. Hooton, Jr.

To ~~R. L. HALL~~  
J. R. AYERS Location \_\_\_\_\_  
From H. K. BOYLE *HKB* Location \_\_\_\_\_ Phone No. \_\_\_\_\_  
Subject MODEL 600 TRIGGER ASSEMBLIES Date 11/30/78

In talking with Red Sherman about the Model 600 recall status, Red gave me the following statistics and opinions:

- 1) 5,000 forms have been turned in by gunsmiths to indicate receipt of guns in their shops.
- 2) 1,441 requests for payment to gunsmiths have been paid, averaging \$7.39/gun.
- 3) Red was of the opinion that about 10,000 guns would be repaired through the end of January 1979, and an adequate bank of Trigger Housings at Ilion would be 5,000, excluding plant needs for warehouse M/600 Trigger Housing replacement.
- 4) Red said that in talking with Les Freer in Dallas, Texas, Les had received 33 calls on M/700 accidental discharges and Red, himself, had received 18 letters on this subject. Les expressed concern about what appears to be growing public concern over bolt action rifle safety in general.

HKB:iw

RD 779

STOP, LOOK, AND LIVE

**REMINGTON ARMS COMPANY, INC.**

INTER-DEPARTMENTAL CORRESPONDENCE

**"CONFINE YOUR LETTER TO ONE SUBJECT ONLY"** \_\_\_\_\_Ilion, New York  
February 12, 1979

R. L. HALL

STATUS OF XP-100 PISTOL

Monday, Feb. 5: Meeting held to organize actions to be taken to start production and conversion of customer repair pistols.

Tuesday, Feb. 6: All pistols on production disassembled and parts separated. Production to latest design initiated.

Wednesday, Feb. 7: Pistols from production and customer repair ready for R & D. A hold was put on production until R & D could determine what engagement requirements were necessary to meet drop test specifications - Process Record called for .020 engagement with no creep - which was impossible to hold. Samples delivered to R & D had .010 - .016 engagement, with no creep.

Thursday, Feb. 8: Production and Customer Repair continued to assemble pistols up to the adjustment of engagement, which is a screw adjustment, and one of the last assembly steps.

Friday, Feb. 9: R & D after testing, stated they want .015 min. engagement and will accept some creep.

Monday, Feb. 12: R & D to supply specification for how many revolutions screw should be turned to obtain proper adjustment. Production to start; R & D testing complete.

JPL:eb

J. P. Linde, Supt.  
P E & C Section

## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

Ilion, New York  
January 26, 1979

R. L. HALL

MODEL XP-100 SEQUENCE OF EVENTS

Model XP-100 sequence of events in modifying customer return guns and insuring integrity of production Trigger Assemblies is listed chronologically below:

<u>Date</u>	<u>Event</u>
10-24-78	Remington announced recall of M/600 and XP-100 pistol.
11-78	Engineering and Production effort concentrated on M/600. Gunsmith write-up - assemblies for gunsmith - establishing process for Trigger Assemblies to be shipped.
11-17-78	Present process reviewed - trick test for XP-100 reviewed with assemblers - shim test added (check for clearance between Sear and Sear Block with shim Stock, with Safety in null position).
12-1-78	Initial work on defining situation for customer repair XP-100's started - process reviewed, additions and clarifications were made.
12-15-78	Process developed for customer repair pistols; Engineers tried sample run. Customer repair gunsmith trained.
12-18-78	Initial lot of 25 customer guns modified to repair process. Lot rejected, two guns failed test. (1) shim test and (1) trick test.



<u>Date</u>	<u>Event</u>
12-18-79 Contd.	The trick test was re-evaluated and it was found that the engineer and gunsmith were using different techniques - standardized test. The shim test was also re-evaluated for consistent and easier operation.  It was also found that some customers had made alterations to the Sear Housing Assemblies and they had to be readjusted to standards.
12-28-78	A second lot of 25 was modified to revised process. A large percent of pistols would not pass shim test and the new gaging technique was questioned - parts measured.
1-4-79	Engineering analysis showed second lot of pistols was using a new shipment of Safety Assemblies which had .006" less lift on Sear. R & D altered drawing to increase lift - parts were ordered with higher lift. Shim test results were analyzed by using dial gage which fits into back of Receiver. Results were correlated.
1-10-79	New lot of 25 pistols started to process for modification - high lift Sear were used and pistols were audited - process verified.
1-12-79	Repair verified on customer pistols - pistols started being returned to customers.  Production started using low lift Safety levers; reject rate increased dramatically $\approx$ 50%.
1-19-79	New Safety levers delivered to Ilion - found to have too much Sear lift, .002" over max. model drawing.
1-22-79	New Safety levers in Assemblies - mechanism would lock up when put on Safe. Safety levers ground down to max. model drawing. Mechanism worked but rear of Sear interferes with Sear Housing Pin.
1-23-79	Safety levers ground to mean model drawing - still binding. Drawing change made to grind clearance on Sear - parts tried, mechanism worked.

January 26, 1979

<u>Date</u>	<u>Event</u>
1-24-79	Parts modified, Assemblies put together. Safety worked hard. Lubrication technique developed - parts delivered to Final Assembly - pistols put up.
1-25-79	Pistols tested satisfactorily. More parts were modified. Pistols which had been rejected were refitted with new Sear and lever.
1-26-79	More parts being modified - permanent process for part modification being developed.
1-29-79	Parts delivered to Customer Repair - to continue modifying guns - 147 shipped to date.



J. P. Linde, Superintendent  
P E & C Section

JPL:eb

## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE



"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

Ilion, New York  
January 26, 1979

R. L. HALL

MODEL XP-100 SEQUENCE OF EVENTS

Model XP-100 sequence of events in modifying customer return guns and insuring integrity of production Trigger Assemblies is listed chronologically below:

<u>Date</u>	<u>Event</u>
10-24-78	Remington announced recall of M/600 and XP-100 pistol.
11-78	Engineering and Production effort concentrated on M/600. Gunsmith write-up - assemblies for gunsmith - establishing process for Trigger Assemblies to be shipped.
11-17-78	Present process reviewed - trick test for XP-100 reviewed with assemblers - shim test added (check for clearance between Sear and Sear Block with shim Stock, with Safety in null position).
12-1-78	Initial work on defining situation for customer repair XP-100's started - process reviewed, additions and clarifications were made.
12-15-78	Process developed for customer repair pistols; Engineers tried sample run. Customer repair gunsmith trained.
12-18-78	Initial lot of 25 customer guns modified to repair process. Lot rejected, two guns failed test. (1) shim test and (1) trick test.

January 26, 1979

<u>Date</u>	<u>Event</u>
12-18-79 Contd.	The trick test was re-evaluated and it was found that the engineer and gunsmith were using different techniques - standardized test. The shim test was also re-evaluated for consistent and easier operation.  It was also found that some customers had made alterations to the Sear Housing Assemblies and they had to be readjusted to standards.
12-28-78	A second lot of 25 was modified to revised process. A large percent of pistols wound not pass shim test and the new gaging technique was questioned - parts measured.
1-4-79	Engineering analysis showed second lot of pistols was using a new shipment of Safety Assemblies which had .006" less lift on Sear. R & D altered drawing to increase lift - parts were ordered with higher lift. Shim test results were analyzed by using dial gage which fits into back of Receiver. Results were correlated.
1-10-79	New lot of 25 pistols started to process for modification - high lift Sear were used and pistols were audited - process verified.
1-12-79	Repair verified on customer pistols - pistols started being returned to customers.  Production started using low lift Safety levers; reject rate increased dramatically $\approx$ 50%.
1-19-79	New Safety levers delivered to Ilion - found to have too much Sear lift, .002" over max. model drawing.
1-22-79	New Safety levers in Assemblies - mechanism would lock up when put on Safe. Safety levers ground down to max. model drawing. Mechanism worked but rear of Sear interferes with Sear Housing Pin.
1-23-79	Safety levers ground to mean model drawing - still binding. Drawing change made to grind clearance on Sear - parts tried, mechanism worked.

January 26, 1979

<u>Date</u>	<u>Event</u>
1-24-79	Parts modified, Assemblies put together. Safety worked hard. Lubrication technique developed - parts delivered to Final Assembly - pistols put up.
1-25-79	Pistols tested satisfactorily. More parts were modified. Pistols which had been rejected were refitted with new Sear and lever.
1-26-79	More parts being modified - permanent process for part modification being developed.
1-29-79	Parts delivered to Customer Repair - to continue modifying guns - 147 shipped to date.



J. P. Linde, Superintendent  
P E & C Section

JPL:eb

~~J. R. L. HALL~~  
R. L. HALL

CC: E.G. Larson  
J.P. Linde ✓  
W.A. Warren

**REMINGTON ARMS COMPANY, INC.**

INTER-DEPARTMENTAL CORRESPONDENCE

**Remington**  
DUPONT

**PETERS**  
DUPONT

"CONFINE YOUR LETTER TO ONE SUBJECT ONLY" \_\_\_\_\_

November 16, 1978

TO: G.J. HILL  
FROM: E.F. SIENKIEWICZ  
SUBJECT: MODEL 600 REPLACEMENT TRIGGERS

Reports of four (4) Model 600 replacement trigger assembly triggers breaking at the pivot pin hole have been received.

Sporting Goods, Inc., Houston, Texas, reported three (3) triggers broken in a recently received shipment and, Frank's Gun Shop, Yuma, Arizona, reported one (1) breakage.

It appears we may have a problem requiring immediate attention.

EFS:TPP

*E.A.L.*

NOTE: Discovered problem Thursday, November 16. Preliminary investigation reveals parts coming cracked from Powder Metal.

Powder Metal has been contacted and made aware of problem. Production has initiated magnaflux operation ahead of assembly.

All parts starting today, November 17, will be magnafluxed; Research was contacted to determine if a safety problem existed. Their answer was negative.

JPLinde:eb  
11-17-78

**DON'T SAY IT — WRITE IT**

To R. L. HALL

Date 11-6-78

From J. P. LINDE

This is the information that you requested. . .

JPL:eb

**SAFETY IS A WISE INVESTMENT**

11/2/78

COMMON PARTS -  
M/700-600 FIRE CONTROLS

	<u>M/700</u>		<u>M/600</u>
Trigger Assembly	26345	Separate	91469
Bolt Stop Release	15478	Separate	None
Safety Assembly ( <i>safety lever</i> )	26585	Separate	91468
Safety	15370	Separate	91467
Safety Button	14578	Separate	
Safety Thumbpiece		Separate	15453
Safety Detent Ball	23222	Same	23222
Safety Detent Spring	15368	Same	15368
Safety Pivot Pin	17043	Same	17043
Safety Snap Washer	17044	Same	17044
Sear Safety Cam	15666	Process Common	91470
Sear Spring	17047	Same	17047
Trigger	15280	Process Common	15435
Trigger Adjusting Screw	17053	Same	17053
Trigger Engagement Screw	91128	Same	91128
Trigger Connector	19461	Process Common	15436
Trigger Housing Assembly	26655	Same	26655
Trigger Housing Rivet )			
Trigger Housing Spacer Front)			
Trigger Housing Spacer Rear )			
Trigger Side Plate Left )		<u>S A M E</u>	
Trigger Side Plate Right }			
Trigger Pin }			
Trigger Spring			
Trigger Stop Screw			

GJH/bdm




9/28  
11/1/78

# SAFETY

M/700


M/600

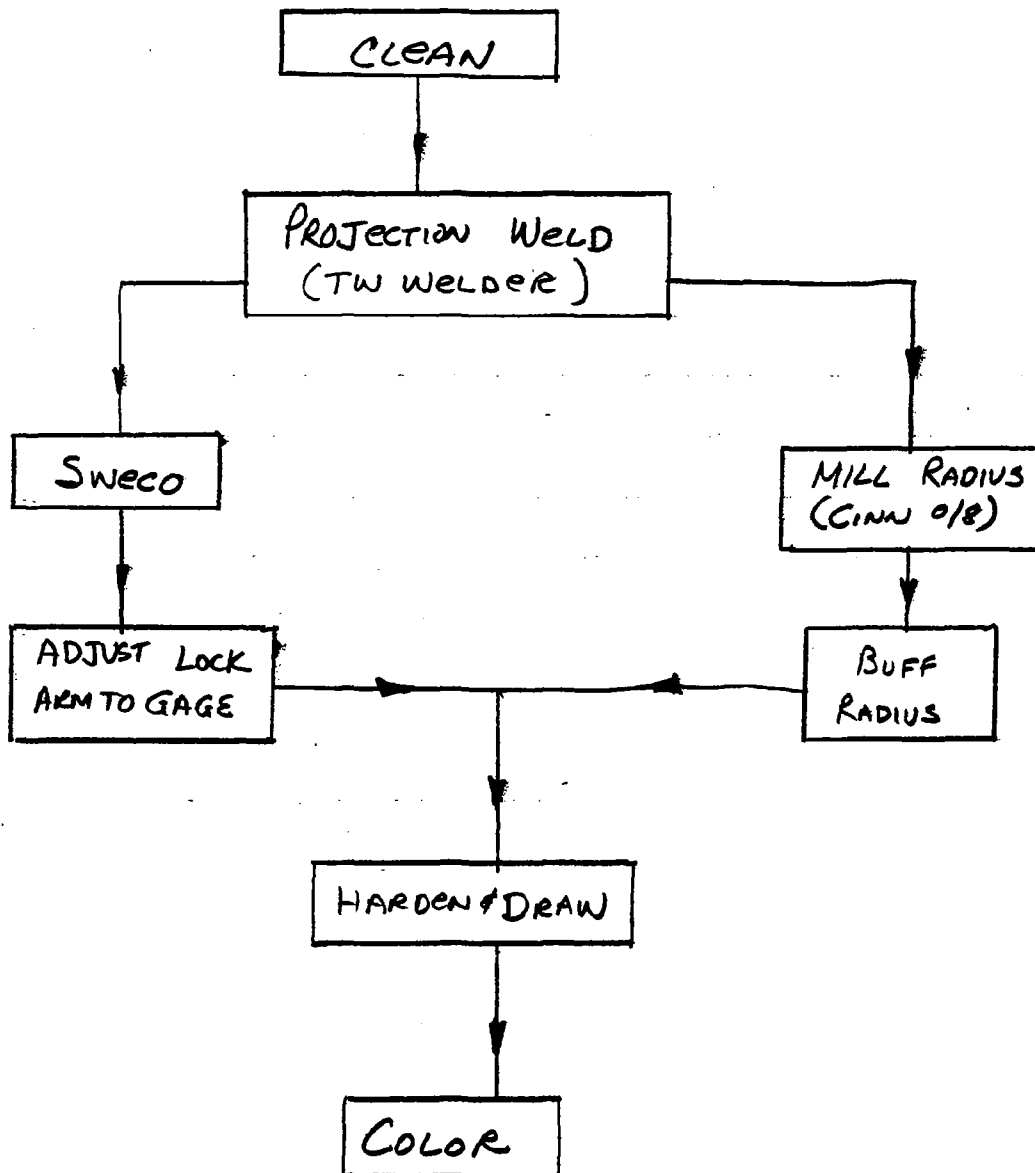

9/11/78


# SEAR SAFETY CAM

SAME PROCESS -  
DIFFERENT BLANK

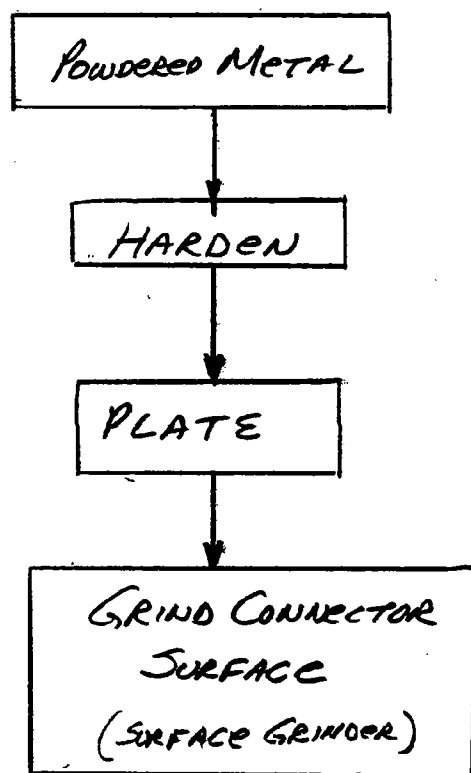

9/11  
11-1-78


TRIGGER

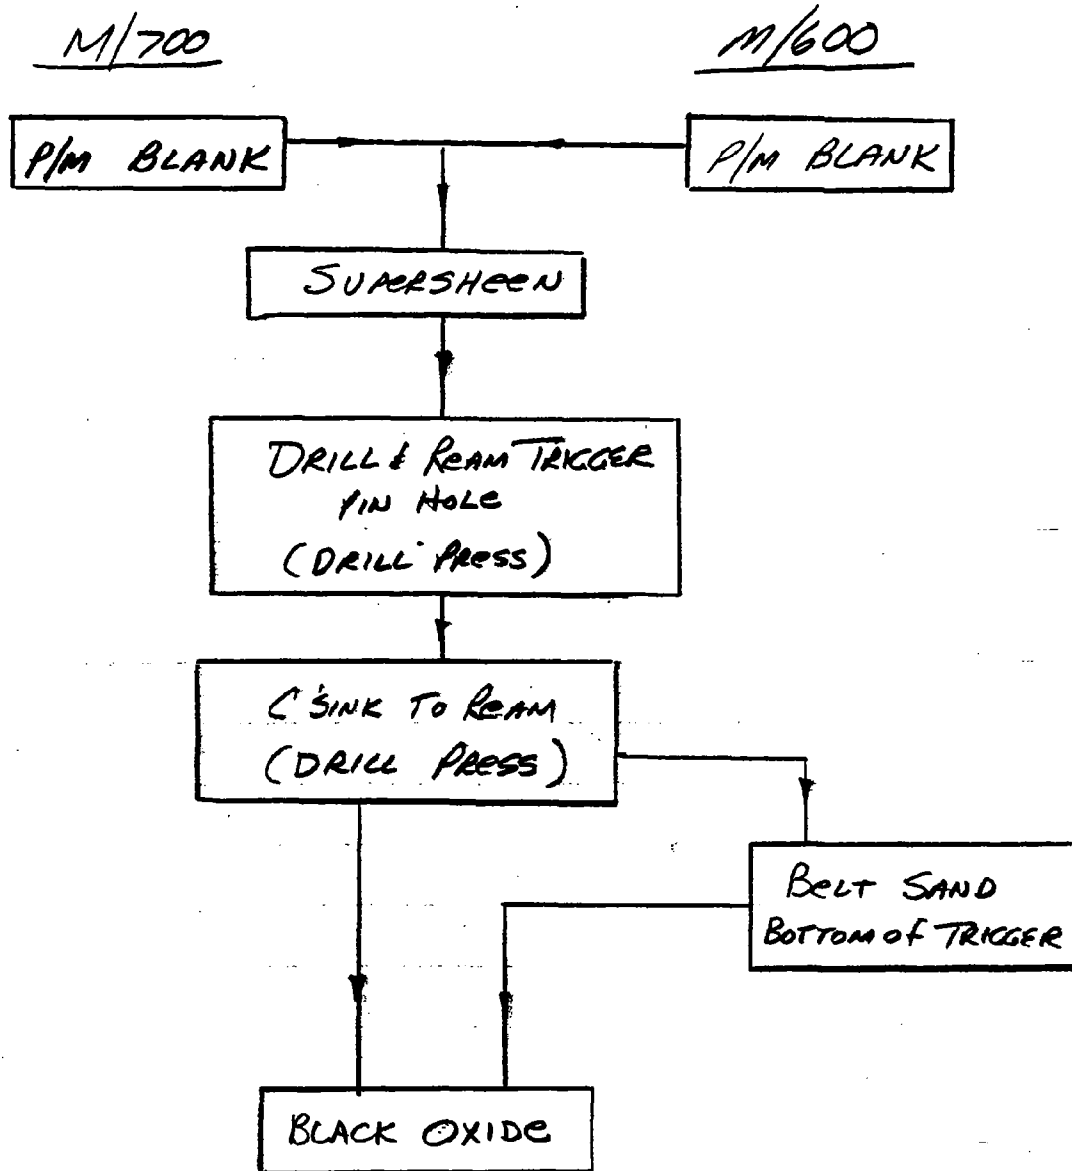

*JPH*  
11/21/78

TRIGGER CONNECTOR

SAME PROCESS  
DIFFERENT BLANKS

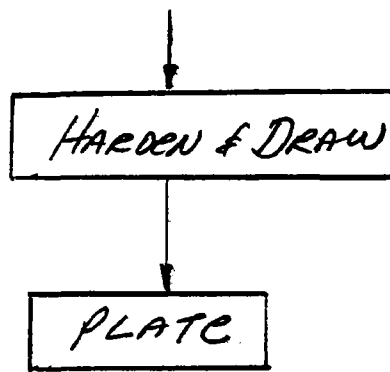

DATE		MOHAWK 600						
4-10-78		Bolt Action - Center Fire Rifle						
6-29-76								
SHEET OF	3 4	Dotted line ( - - - - ) indicates same part number.						
DWG. NO.		PART NUMBER	308 Win.	6mm Rem.	243 Win.	222 Rem.		
PART NUMBERS								
A-14694		SLING STRAP ASSEM. & MTGS. COMP. 7/8"						
		(Accessory - added cost)	14694	----	----	----		
A-15356		Front Swivel Screw	15356	----	----	----		
A-15358		Rear Swivel Screw	15358	----	----	----		
C-30855		Sling Strap Assembly 7/8"	30855	----	----	----		
A-15376		Fastener	15376	----	----	----		
A-15377		Keeper Front	15377	----	----	----		
B-14655		Sling Strap	14655	----	----	----		
A-14664		Sling Strap Buckle	14664	----	----	----		
A-26555		Swivel Assembly (2) O.D.	26555	----	----	----		
A-31440		STOCK ASSEMBLY (Birch)	31440	----	----	----		
A-32445		STOCK ASSEMBLY (Walnut)	32445	----	----	----		
D-32465		Stock (Walnut)	32466	----	----	----		
D-15844		(Checkering Pattern)						
D-15741		Batt Plate	15741	----	----	----		
C-25410		Batt Plate Screw (2)	25410	----	----	----		
A-14883		(Alternate Screw)	14883	----	----	----		
B-15651		Reinforcing Screw (2)	15651	----	----	----		
A-90511		Stock (Birch)	90511	----	----	----		
C-91469		TRIGGER ASSEMBLY ✓	91469	----	----	----		
C-91468		Safety Assembly ✓	91468	----	----	----		
C-91467		Safety ✓	91467	----	----	----		
C-15453		Safety Thumbpiece ✓	15453	----	----	----		
B-23220		Safety Detent Ball ✓	23222	----	----	----		
A-15368		Safety Detent Spring ✓	15368	----	----	----		
B-17043		Safety Pivot Pin ✓	17043	----	----	----		
A-17044		Safety Snap Washer ✓	17044	----	----	----		
C-91470		Sear Safety Cam ✓	91470	----	----	----		
A-17047		Sear Spring ✓	17047	----	----	----		
C-15435		Trigger ✓	15435	----	----	----		
B-91128		Trigger Engagement Screw ✓	91128	----	----	----		
C-26655		TRIGGER HOUSING ASSEMBLY ✓	26655	----	----	----		
A-14632		Trigger Housing Rivet ✓	14632	----	----	----		
B-14630		Trigger Housing Spacer, Front ✓	14630	----	----	----		
B-14631		Trigger Housing Spacer, Rear ✓	14631	----	----	----		
C-30780		Trigger Side Plate, Right ✓	30780	----	----	----		
C-30780		Trigger Side Plate, Left ✓	30781	----	----	----		
B-17053		Trigger Adjusting Screw ✓	17053	----	----	----		

[illegible]

R2530548

R2530549



R. L. HALL

STANDARD TIME

MOH. 600

CHANGE FIRE CONTROL & DRY FIRE.

RW FARRINGTON'S (EST.)

7.5 - 10.0 MINS.

H.L. HENDRIX (EST.)

7.0 - 10.0 " .

OUTSIDE GUNSMITH 50% LONGER

H. BOYLE SAID HE WOULD USE 15 MINS.

R. H. Brown

10/24/78

# NEWS RELEASE

FOR RELEASE IMMEDIATELY

BRIDGEPORT, Ct., October 25, 1978 -- On October 23, 1978, a product liability case against Remington Arms Company, Inc., and one of its dealers was settled for \$6,800,000 by Remington's insurance carriers. The case involved an alleged accidental discharge of a Mohawk Model 600 rifle manufactured by Remington. Injuries to the plaintiff were extremely serious, leaving him partially paralyzed. The plaintiff alleged that at the time the gun fired the trigger was not pulled. Remington's investigation indicated that this was unlikely but possible due to the fact that under certain unusual circumstances the safety selector and trigger could be manipulated in such a way that subsequently moving the selector to the fire position could result in accidental discharge. Settlement costs are substantially covered by the Company's liability insurance.

A recall program has been initiated in connection with Mohawk Model 600 rifles and Remington Model 600 and 660 rifles and XP-100 pistols manufactured prior to February 1975.

###

## REMINGTON ARMS COMPANY, INC.

INTER-DEPARTMENTAL CORRESPONDENCE

Remington  
QUICK

TO: R. W. STEELE  
FROM: W. J. THRESHER, SR.

cc: E. F. Barrett ~~R. L. Hall~~  
E. B. Beattie L. S. Judd  
D. C. Brooks J. E. Preiser  
W. L. Flaherty E. G. Tyler

J. H. CARTER  
R. J. CHESEBROUGH  
J. P. LINDE

November 14, 1978

Accounting Procedures for the Center Fire Recall Program

To accumulate costs associated with the Center Fire Recall Program, Ilion Work Order No. 51073 has been issued for Bridgeport payments and No. 51075 for in-house Ilion charges and Arms Service repairs.

Special invoicing forms and trigger assemblies are being shipped to recommended gunsmiths for repairs. Firearms shipped to the factory will be repaired by Arms Service.

Bridgeport payments are for gunsmith repairs, recall advertising, consumer notification, wholesaler and retailer services, incoming wide area telephone service and special invoicing forms. Copies of accounts payable vouchers covering these payments, which will be charged to 5300-51073, are to be forwarded to Ilion Plant Accounting, attention D. C. Brooks. E. G. Larson and R. G. Sherman have been authorized to approve gunsmith invoices for payment.

Costs associated with trigger assemblies, freight, Ilion telephone lines, Arms Service and travel by Ilion personnel will be charged to 5300-51075.

Ilion Plant Accounting will clear these work orders monthly to center fire manufacturing overhead work-in-process accounts and subsequently to finished goods by model based upon quantities of center fire rifles produced to the warehouse. They also will issue monthly and to-date reports similar to the examples listed below:


	<u>Bridgeport</u>	<u>Amount</u>	<u>Ilion</u>	<u>Amount</u>
Gunsmith Repairs*	51073		-	
Trigger Assemblies	-		51075	
Recall Advertising	51073		-	
Consumer Notification	51073		-	
Wholesaler and Dealer Service	51073		-	
Telephone (WATS)	51073		51075	
Special Invoicing Forms	51073		-	
Freight	-		51075	
Miscellaneous (Travel)	-		51075	
Arms Service*	-		51075	
Total				

\*Number of Firearms Repaired  
Gunsmiths           xxx  
Arms Service       xxx  
Total               xxx

WJT:mrp

*W. J. Thresher, Sr.*  
W. J. Thresher, Sr.

# NEWS

Remington.  REMINGTON ARMS COMPANY, INC. • PUBLIC RELATIONS • BRIDGEPORT, CONNECTICUT 06602

## RELEASE

FOR RELEASE IMMEDIATELY

BRIDGEPORT, Ct., October 25, 1978 -- Remington Arms Company, Inc., announced today that under certain unusual circumstances on some of its center fire bolt action firearms, the safety selector and trigger could be manipulated in such a way that subsequently moving the selector to the fire position could result in accidental discharge. Remington firearms involved are Model 600, 660 and Mohawk 600 rifles and XP-100 pistols manufactured prior to February 1975.

The difficulty can be corrected by installation of a new trigger assembly. In view of the potential safety hazard, the Company is recalling all of these guns produced prior to February 1975 for inspection and modification as required.

Efforts are being made to contact owners of these guns. Individuals who have Model 600, 660 and Mohawk 600 rifles or XP-100 pistols involved in the recall should write to Remington Arms Company, Inc., Bridgeport, CT 06602, or call the following toll-free number for information on procedures:

In all states except Georgia:

800-241-8444 - Ask for Operator 61

In Georgia:

800-282-1333 - Ask for Operator 61

- MORE -

Customers should give the operator the model and serial numbers of their gun when calling.

Serial numbers involved in the recall are as follows:

Remington Model 600s -From Serial #0001 to 131,552

Remington Model 660s -From Serial #0001 to 131,552

Mohawk 600s -From Serial #6,200,000 to 6,899,999

Remington Model 660s -From Serial #6,200,000 to 6,899,999

Remington XP-100 -From Serial #0001 to 11,000

-From Serial #7,500,000 to 7,507,983

600-7004221

292104

*Margaret Spring*

PROCESS RECORD AND  
DATA BASE/ENGINEERING  
CHANGE NOTICE AUTHORIZATION

PROCESS CHANGE NO. 292104

ENG. CHANGE NO. \_\_\_\_\_

TO BE RETURNED BY \_\_\_\_\_

INITIATED DATE 7-30-91

ROUTE TO	NAME	APPROVAL	DATE
PE&C SUPERVISOR	R. A. JACKSON	<i>R. Jackson</i>	<u>8-3-91</u>
PRODUCTION SUP'R			
PROD. FOREMAN			
	Shirley Willoughby		
ACCOUNTING			
PLANNING			
PURCHASING			
			<i>SW</i> <u>9-10-91</u>

MODEL NO. 600 700 7LWTENGINEER L. B. FanningPART NAME MAGAZINE SPRINGREQUESTED BY H. W. DUNCKELPART NUMBER 17891

ECR NO. \_\_\_\_\_

DCR (IF ANY) \_\_\_\_\_

COST REDUCTION/INCREASE

DESCRIPTION OF CHANGE AND REASON ~~Delete Dim: .250/min.~~ Dim: .030  
was .020.

## CLASSIFICATION OF CHANGE

EFFECTIVITY DATE \_\_\_\_\_ ( ) PHASE OUT ( ) REGULAR

DATA COORDINATOR \_\_\_\_\_

DATE \_\_\_\_\_

Harvey

## Process Header

## PURCHASED PARTS INSPECTION

Material : C-1095 C.R. Steel  
Heat Treatment At : Vendor  
Component Condition : Finished X Semi-Fin  
Model : 600 700 7LWT  
Part Number : 17891  
Blank Drawing Number: C-17891  
Part Name : Magazine Spring  
Department : 9291  
A. Q. L. : 3 %  
Origination Date : 26-Sep-1980  
Effective Date : 28-Jun-1991-08:00:00

Final Appearance : Parts to be clean, free of rust, oiled with light rust-proofing oil (SAE #20 or equivalent).

Packaging : The gross weight of any container must not exceed 50 pounds.

Acceptance Testing: Inspection will be based on statistical sampling according to the Sampling Tables of Mil Std 105D for M/24 and according to Mil Std 105D Modified for all other models. Shipments will be accepted if the quality on each of the gages is sufficient to keep within the Average Outgoing Quality Limit listed.

## Process History

Status	Date/Time	Status Set	Responsible User
Submitted	15-JUL-1991 12:36:57.24		Shirley Willoughby
Comment:			
Fully Approved	17-JUL-1991 11:15:11.15		R.A.Jackson
Comment:			
Normal Release	17-JUL-1991 11:15:40.90		R.A.Jackson
Comment:			

## Process Revision Reasons

Date:	Reason For Revision:	Eng Log #:
18-Jun-1991	Retyped old paper process last Log 288109	SLW 291844

## Process Approval List

Approved By:	Badge #:	Date:	Designation:
R.A.Jackson	00000	17-JUL-1991	Technical Supervisor

Document Number: 17891

Rev:

VAXcamps V2.1 Hardcopy Utility

Page: 1 OF 2



TITLE: Magazine Spring

Process Tools

Type	Number	Use	Max	Min
		Set 24 hours for inspection only.		
Snap Gage	B-80024-R	Width	.510	.500
Mics.	Std.	Material thickness	.018	.017
Position Gage	B-53637	Contour		
		With Spring compressed:		
Scale	Std.	Length	2.687	2.657
Mics.	Std.	Height	.250	<del>.250</del>
Scale	Std.	1. No leaf to be out of alignment more than .030 with any other leaf	<del>.030</del> <del>.020</del>	
		2. No leaf to be longer than compressed length	2.657	2.687

Document Number: 17891

Rev:


VAXcamps V2.1 Hardcopy Utility

Page: 2

OF 2

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

R2530558

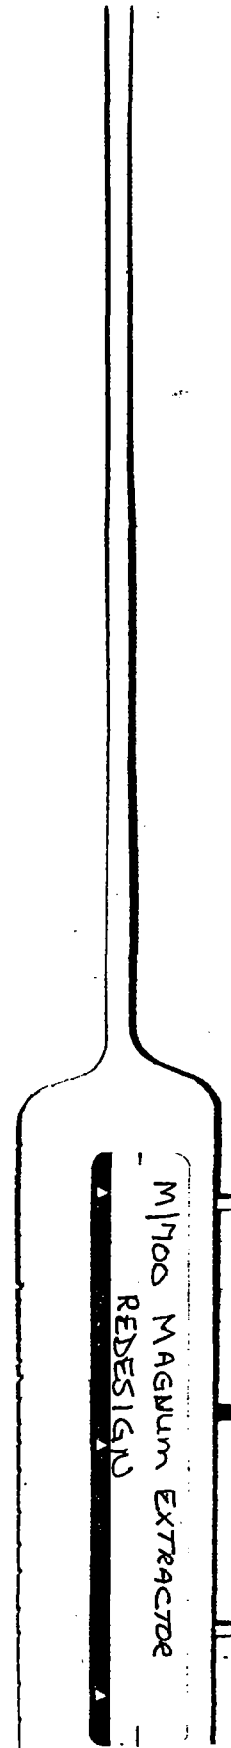


7mm WEATHERBY MAG. PROJECT

122508 CAP.  
122509 OPER.

# 1

# 3

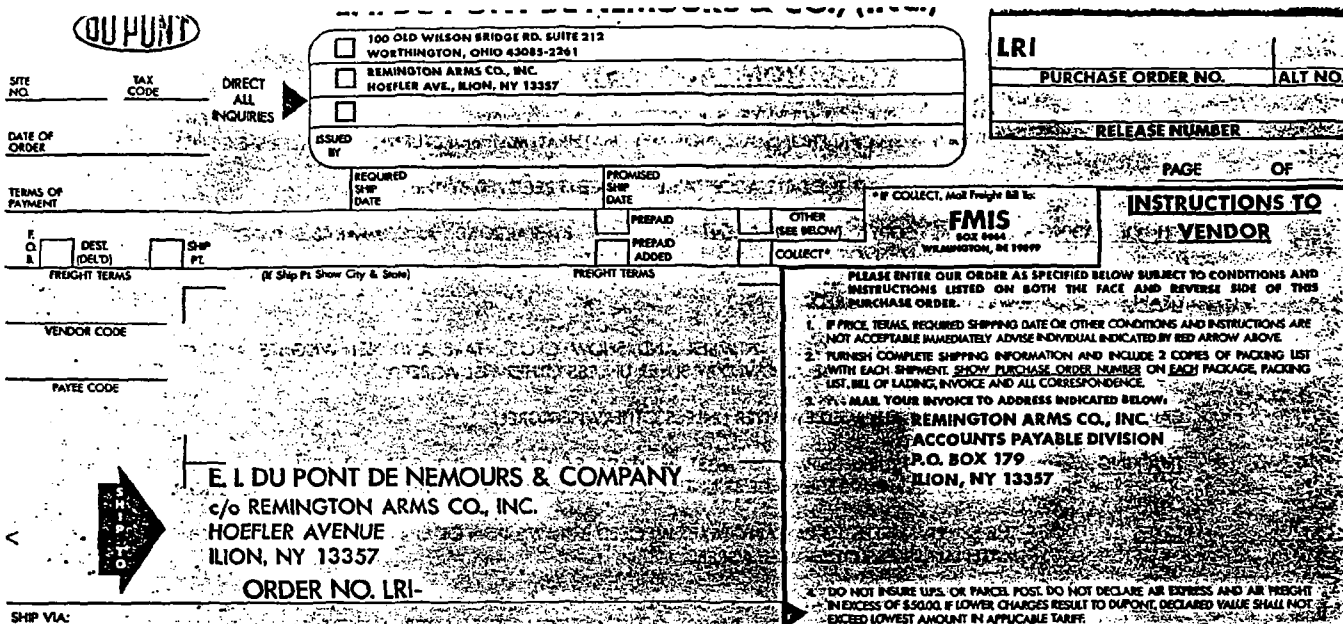[illegible]

CONFIRMING TO <i>REC</i>		BY:		DATE:	
REQUISITIONED BY <i>Dwain Ford</i>		EXTENSION <i>481</i>		REQUISITION APPROVED BY	
DATE		AUTH. LEVEL		DATE DELIVERY REQ'D <i>5/24/91</i>	
ESTIMATED WEIGHT		ESTIMATED COST			
ITEM NO.	GENERAL LEDGER ACCOUNT/SUB ACCOUNTS		DETAIL ACCOUNTING		AMOUNT
REASON VENDOR SELECTED <input type="checkbox"/> LOWEST PRICE <input type="checkbox"/> BETTER QUALITY <input type="checkbox"/> REQUIRED DESIGN					ONLY KNOWN SOURCE <input type="checkbox"/> CONTRACT/PA.
ORDER APPROVED BY				ORDER EXECUTED BY	
					<b>D222228</b>

COPY 2- ☐ WILM. ACCT'S. PAY. ☐ LOCAL ACCT. SECT.

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**  
**KINZER V. REMINGTON**

R2530561

QUOTATION



THE



DIE & STAMPING COMPANY

DIV. OF UNITED SCREW AND BOLT CORP.

Engineering • Development • Tools • Dies • Stampings

Sub-Assemblies • Bus Supplies

4650 Tiedeman Road • Cleveland, Ohio 44144-2395

216-671-0000  
216-671-8000

To REMINGTON ARMS CO.  
P.O. BOX 179  
MILTON, NEW YORK 13357

Attention: Mr. Fred Martin

Date December 19, 1990

Terms 1% 10 days-30 days NET

F.O.B. Our Plant-Cleveland, Ohio

Replying to your inquiry of.....we take pleasure in quoting as follows:

Quantity	Description	Price
	Part Number 15709 M700 MAGNUM EXTRACTOR	
	PRICE TO PERMANENTLY MODIFY EXISTING TOOLING TO MAKE PART NUMBER 15709 TO NEW DIMENSIONS:	
	MODIFY 1st. FORM DIE	\$1,750.00
	MODIFY FINAL FORM DIE	\$2,250.00
	CONTACT : GEORGE HABEN	
	REQ. NO. : I 006417	
	\$500 \$700 TO CONVERT BACK. IF NECESSARY	

The above Quotation is subject to acceptance within 30 days from date hereof; thereafter, prices are subject to change without notice, according to fluctuation of market prices of material, over which we have no control. We are not responsible for delays in deliveries due to strikes and conditions beyond our control.

Very truly yours,

H & P DIE & STAMPING CO.

By Ronald Stevens

DESIGN CHANGE REQUEST (DCR)

OR

TRANSMITTAL OF DRAWINGS/~~PARTS LIST~~

OR

PARTS LIST CHANGE NOTICE (PLCN)

Requested By <i>Edward Ford</i>	Changed By <i>F.E.M.</i>	Date
Originating Date <i>3-11-91</i>	Transmittal Date <i>3-11-91</i>	

Model	PART NAME/LIST	Drawing No.	Part No.
700 MAG	EXTRACTOR	C-15709	15709
700 MAG	EXTRACTOR	C-97322	97322

Dwg. NO.	Rev. No.	DESIGN CHANGE
C-15709	-	Obscure Superseded By Dwg. C-97322
C-97322	-	INITIAL TRANSMITTAL

## Classification of Change

- ☐ Initial Transmittal  
☐ Functional Change  
☐ Safety Mechanism Revision  
☐ Appearance

NOTE: Any or all of the above changes require approval of DCR by  
Lab Director - New Products Research

☒ Other

*Martin*  
DESIGNER SIGNATURE

Reason for Change: *HAVE VENDOR PROVIDE FINAL FORM, THEREBY  
ELIMINATING SECONDARY OPERATIONS HERE AT REMINGTON.*

Disposition of Parts on Hand: (Check Below)

☐ Scrap    ☐ Alter    ☒ Use Inventory    ☐ RD 6589 Attached

(P.E.&amp;C: If Part is either scrapped or altered)

APPROVED:

*[Signature]*

RD 6739

DCR # 12616Sheet 2 of 2

## PARTS LIST CHANGE NOTICE (PLCN)

## TRANSMITTAL OF DRAWINGS / PARTS LIST

Requested By <i>Edward Bond</i>	Changed By	Date
Originating Date	Transmittal Date	

(PLCN) Use form below if part number is changed / add - used, or superseded.

	Drawing No.	Part No.	Part Name	Qty.
Current Listing	<i>C-15709</i>	<i>15709</i>	<i>EXTRACTOR</i>	<i>1</i>
New Listing	<i>C-97332</i>	<i>97332</i>	<i>"</i>	<i>1</i>
Current Listing	<i>—</i>	<i>97447</i>	<i>EXTRACTOR BLANK</i>	<i>1</i>
New Listing	<i>—</i>	<i>97331</i>	<i>" "</i>	
Current Listing				
New Listing				
Current Listing				
New Listing				
Current Listing				
New Listing				
Current Listing				
New Listing				
Current Listing				
New Listing				
Current Listing				
New Listing				
Current Listing				
New Listing				
Current Listing				
New Listing				
Current Listing				
New Listing				

NOTE: Please mark your Parts List to agree.

( ) Superseded Part is Obsolete (check disposition below)

( ) Use Up ( ) Scrap ( ) Service Repair ( ) Other Model Use

( ) New Part is: ( ) Steel ( ) Powder Metal ( ) Assembly ( ) Wood ( ) Purchased ( ) Other

APPROVED: \_\_\_\_\_

9-28-88

TERRY

IS THE FACT THAT EACH  
ONE DONE ON ASSY.  
INDIVIDUALLY ENOUGH TO  
ACCEPT - A TEST WITH  
EXTRACTORS ALTERED TO  
A SPECIFIC NOT APPROXIMATE  
DIM. WOULD GIVE US A  
BETTER PICTURE OF  
PERFORMANCE - ALSO CAN  
VANDER GIVE US THE  
EXTRACTOR NEEDED



~~1-4-10~~ Across  
~~1-4-10~~ down

700 Mag Left & Right  
neg. Ejector compar to  
print and assembl in  
guns 20-25

100 Extractor from 1 lot

Fixture in Lab and my  
drawings

REMINGTON ARMS COMPANY, INC. — ILION WORKS

Investigator's Copy of Suggestion

NAME James B. Willoughby SUGGESTION NO.: PEC-17775  
CLOCK NO. 9281 - 29460 DATE RECEIVED: 4/12/88

Purchase M/700 Mag. riveted extractor from vendor with free end clipped approx.  
.150 to .200. (See Attached!)

Suggestors Supervisor - J. R. Balio

---

**SUPERVISION —**

This Suggestor is a member of your area. PLEASE GIVE THIS YOUR PROMPT ATTENTION AND COMMENTS.

If the Suggestion should not be adopted, please write your detailed reasons, as the Suggestor deserves every consideration possible.

If it is adaptable, you are expected to expedite its installation or contact the respective Section (Engineering, Production, Safety, PE&C, etc.) for approval or assistance.

When it is in effect, return all answers to the Suggestion Committee Secretary.

---

T. C. Douglas  
I. E.

RD-6562

---

Secretary, Suggestion Committee

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

R2530567

REMINGTON ARMS COMPANY, INC.

AN OPPORTUNITY  
TO PUT YOUR  
IDEAS TO WORK

# SUGGESTION BLANK

ACCEPTED IDEAS  
CAN EARN  
CASH AWARDS

New and original ideas are needed that will improve our products, equipment and methods; that will promote safety and improve our working conditions; that will reduce costs and eliminate waste.

To earn awards suggestions must be specific. It is not ordinarily enough to say that something ought to be done. Tell us what to do and how to do it and how our Company will benefit. Give complete information.

The Company may make full use of any suggestion submitted.

MY SUGGESTION:

RE: M/700 MAGNUM RWEETED EXTRACTOR  
PART # C-15709. ALL MAG. EXTS. BEFORE USE AT  
SUB-ASSY. HAVE TO HAVE THE FREE END CLIPPED  
APPROX. 150 TO 200, ALSO THE CURVED SECTION FROM THE  
CLAW TO THE HOLE IS STRAIGHTENED SEVERELY (SEE ATTACH. SKETCH)

IT CAN BE ACCOMPLISHED BY:

CHANGE THE M/D TO REFLECT THE  
ALTERATIONS & MAKE THEM RIGHT AT THE  
VENDORS PLANT.

THIS IDEA WILL ACCOMPLISH:

RECEIVING PARTS AT SUB-ASSY. THAT  
WILL NOT NEED TO BE ALTERED. THERE IS A HIGH  
DEGREE OF SCRAP FROM ALTERING AT SUB-ASSY.  
EX: (ENDS CLIPPED TOO SHORT, WRONG BEND [PART TAKES A SET],  
PARTS BREAK WHEN BEING ADJUSTED). WILL HELP  
ELIMINATE GUNS WITH DAMAGED EXTRACTORS FROM  
GETTING TO GALLERY & BEING REJECTED FOR D.X.

THIS WILL ELIMINATE TWO UNNECESSARY  
OPERATIONS.

Name

James B. Wilcox

Dept. & No.

9281-29460

Date

4-12-88

Please make a sketch (on separate sheet) if that will help explain your idea.

The receipt of this suggestion will be acknowledged by the Suggestion Committee.

17775

TITLE OF PROJ. OR STUDY M/70 MAGNUM EXT. PROJ. OR STUDY NO. \_\_\_\_\_

SUBJECT \_\_\_\_\_ WORKS \_\_\_\_\_

COMPUTER \_\_\_\_\_

DATE 4-12 19 88

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32


33

34


35

36

37

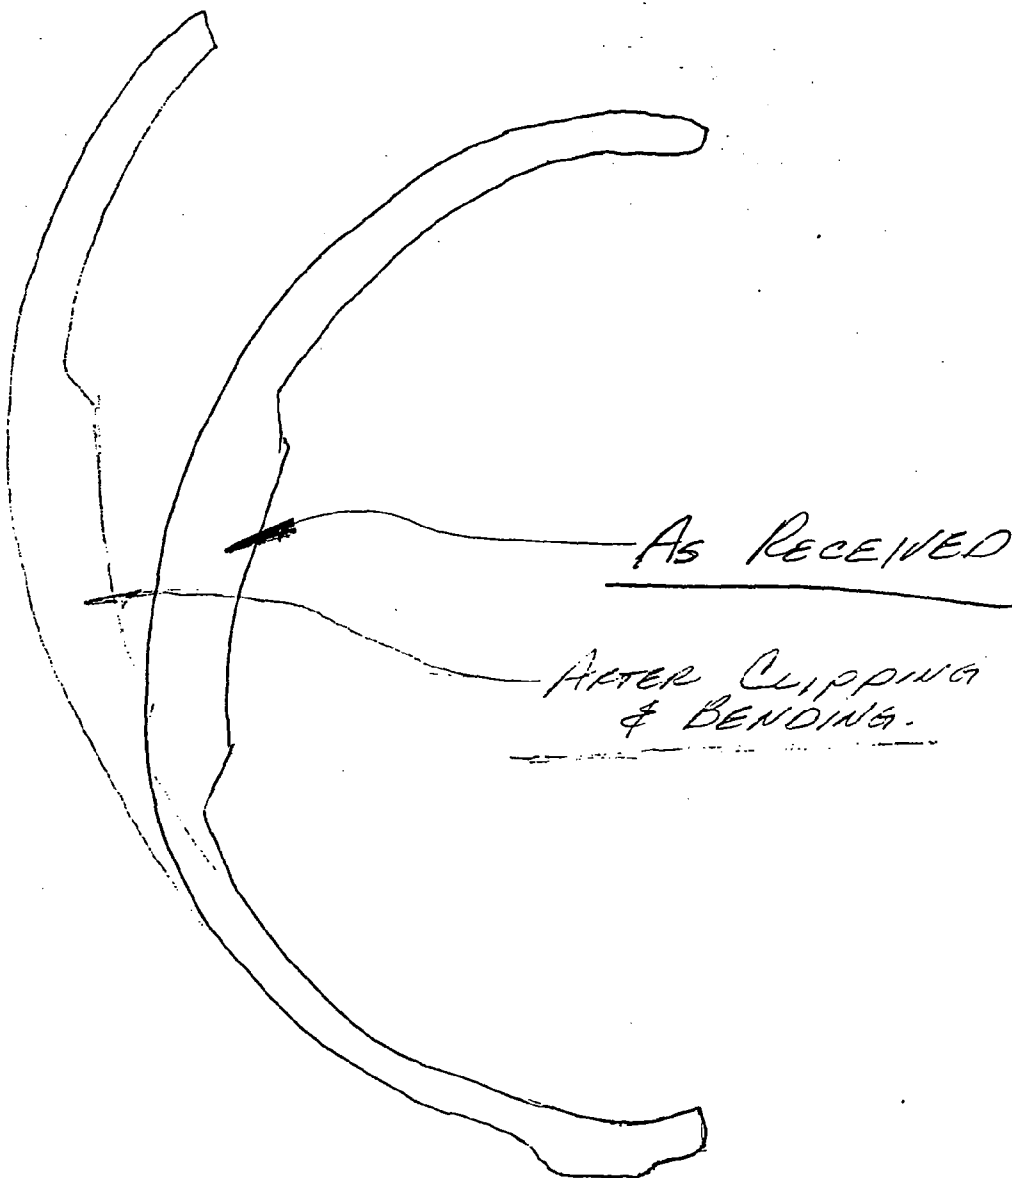
CONTOUR PROJECTION  
10X

USE STANDARDS FOR MINIMUM ESSENTIAL INSTALLATIONS

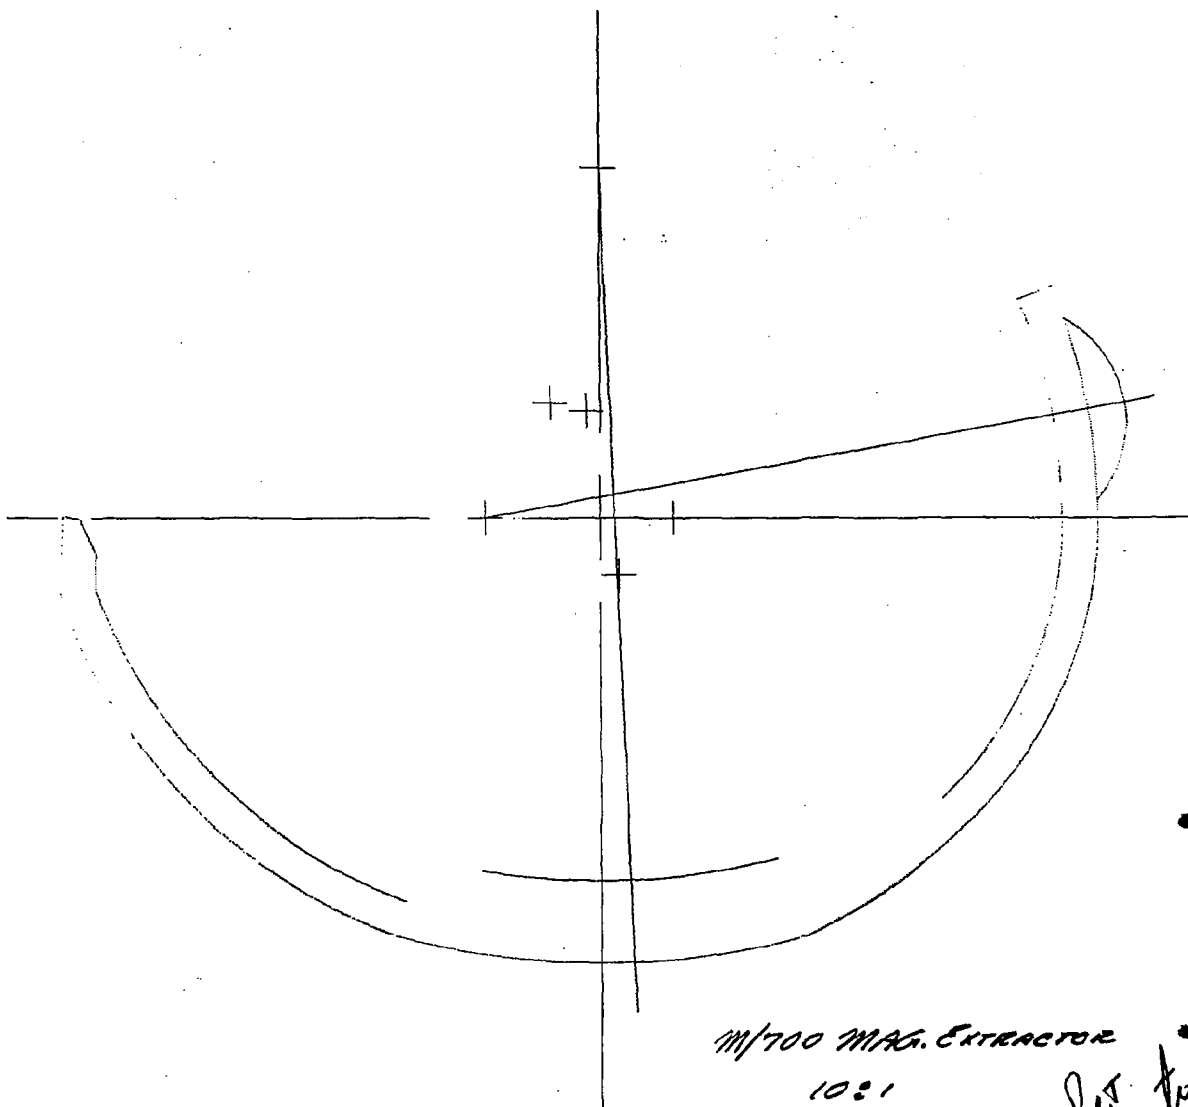

M/700 MAG. EXTRACTOR  
10:1

Ret.  
Mantle

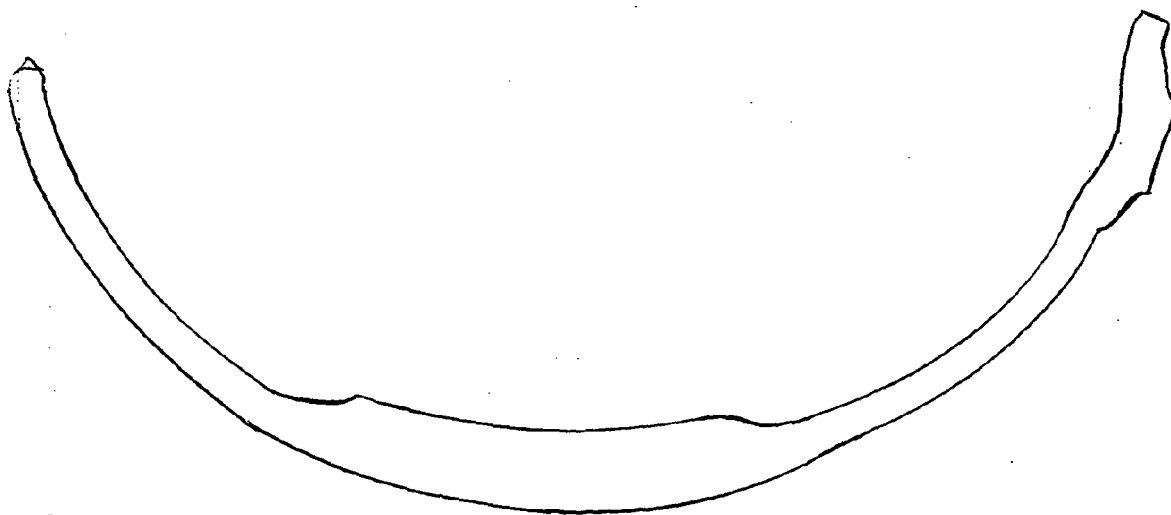

EXTRACTOR AS TRACED FROM COMPARITOR  
10:1

MAG. EXT. ALTERED AT ASSY  
(BENT ANT TAIL CUT OFF)

Ret  
Monte

9/11/89

AFTER HEAT TREAT  
M/700 EXTRACTORS SPREAD ON A .705 DIA. PIN

	.663	.666	.664	.662
	.664	.663	.665	.666
	.667	.657	.666	.668
	.661	.663	.655	.660
	.664	.663	.670	.667
	.660	.663	.667	.669
	.665	.663	.65E	.662
	.665	.666	.663	.663
	.657	.658	.664	.661
	.666	.670	.662	.666
	.662	.668	.666	.665
	.667	.664	.667	.662
	.661	.663	.660	.663
	.662	.663	.664	.667
	.660	.666	.666	.668
	.665	.665	.666	.661
	.662	.665	.665	
	.663	.660	.656	
	.660	.664	.666	
	.662	.662	.666	$\bar{x} = .66375$
	.665	.662	.664	$\sigma_{n-1} = .003110$
	.662	.667	.668	$n = 91$
	.663	.66E	.667	Low .655
	.657	.665	.663	High .670
	.662	.665	.662	

9/11/59

AFTER HEAT TREAT  
M/700 EXTRACTORS SPREAD ON A .725 DIA. PIN

	.667	.671	.683	
	.674	.671	.675	
	.674	.673	.673	
	.673	.663 Low	.676	
	.670	.672	.671	
	.675	.673	.671	
	.672	.677	.665	
HIGH	.676	.673	.674	
	.669	.671	.675	
	.671	.672	.673	
	.676	.666	.677	
	.670	.670	.673	
	.671	.677	.674	
	.665	.669	.675	
	.673	.670	.673	
	.668	.675		
	.673	.671		
	.670	.669		
	.677	.672		
	.676	.675		
	.678	.676		
	.674	.670		
	.671	.683		
	.673	.664		
	.667	.673		
	.672	.668		



## M/700 EXTRACTOR

1. Spreading Fixture

2. 250 Extractors Part # 91929 crib # 21

3. .725 and .705 Roll

Spread 125 Extractors on each roll

Record outside dia. after spreading

### Before Heat Treat

.705 H.O.H. • .663

Low • .650

X • .65779

S.D. • .002739

.725 H.O.H. • .676

Low • .664

X •

S.D. •

Before Heat treat

8-8-89

M/200 Extractors spread on a .205 Pin

.656	.658	.656	.659	.660
.658	.658	.655	.654	.661
.659	.659	.657	.657	.661
.660	.656	.656	.661	.662
.661	.650	.658	.657	.660
.658	.657	.652	.658	.659
.658	.658	.657	.659	.662
.660	.657	.659	.658	.663
.656	.659	.660	.659	.661
.659	.652	.660	.658	.660
.658	.658	.656	.658	.654
.660	.657	.658	.658	.662
.658	.656	.657	.657	.661
.657	.656	.655	.659	.660
.651	.655	.653	.655	.660
.652	.659	.657	.654	.661
.653	.657	.656	.662	.659
.655	.651	.658	.658	.660
.657	.657	.659	.659	.662
.652	.654	.656	.661	.662
.660	.654	.658	.657	.661
.657	.656	.660	.660	.662
.656	.654	.656	.661	.659
.659	.656	.659	.661	.661
.657	.652	.657	.660	.661

Before Heat treat

M/700 Extractors Spread on a .725 Pin

.671	.671	.671	.670	.669
.666	.672	.670	.668	.671
.668	.670	.671	.670	.671
.670	.672	.671	.672	.673
.670	.668	.670	.668	.668
.671	.672	.672	.673	.669
.669	.669	.676	.669	.671
.668	.672	.672	.669	.665
.669	.670	.672	.670	.671
.669	.672	.668	.672	.670
.672	.671	.670	.672	.672
.667	.668	.668	.668	.671
.667	.671	.674	.672	.672
.666	.670	.668	.670	.672
.668	.667	.670	.671	.673
.666	.672	.672	.672	.666
.668	.674	.664	.670	.670
.673	.672	.670	.671	.672
.672	.672	.668	.672	.670
.670	.668	.672	.669	.668
.672	.669	.671	.671	.672
.670	.667	.664	.668	.672
.671	.669	.672	.670	.671
.671	.670	.670	.670	.667
.673	.670	.672	.674	.668

— M 700 IMPROVEMENT —

United States Patent [19]  
Houghton

[11] Patent Number: 5,020,260  
[45] Date of Patent: Jun. 4, 1991

- [54] TAKE-DOWN RIFLE  
[75] Inventor: Thomas M. Houghton, Prescott, Ariz.  
[73] Assignee: H-S Precision, Inc., Rapid City, S. Dak.  
[21] Appl. No.: 458,777  
[22] Filed: Dec. 29, 1989  
[51] Int. Cl.<sup>3</sup> ..... F41A 11/00; F41A 21/48  
[52] U.S. Cl. .... 42/75.02; 42/75.01  
[58] Field of Search ..... 42/75.02, 75.01  
[56] References Cited

U.S. PATENT DOCUMENTS

529,455	11/1894	Marlin	42/75.02
534,691	2/1895	Hepburn	42/75.02
605,111	6/1898	Mason	42/75.02
605,734	6/1898	Mason	42/75.02
616,719	12/1898	Mason	200/196
755,660	3/1904	Hepburn	42/75.02
855,181	5/1907	Johnson	42/75.02
1,065,341	6/1913	Browning	42/75.02
1,370,836	3/1921	Nelson	42/75.02
2,789,478	4/1957	McColl	42/75.02


3,877,167	4/1975	Keppeler	42/75.02
4,310,982	1/1982	Kast et al.	42/75.02
4,402,152	9/1983	Casull	42/75.02


Primary Examiner—David H. Brown  
Attorney, Agent, or Firm—Richard G. Harrer; Charles E. Cates


[57] ABSTRACT

A take-down rifle which permits easy removal and reassembly of the barrel to the receiver portion of the rifle and incorporating a system for effectively accommodating for wear in the mating parts thus providing for proper alignment between the rifle's two main components. The system includes a barrel bracket secured to the forearm, an adjustable collar threaded on the receiver end of the barrel and in contact with the barrel bracket, and the bonding of the barrel to the forearm by means of a low durometer elastomeric adhesive. Adjustment for wear can be made by turning the adjusting collar in a direction to cause the barrel to move in a direction away from the barrel bracket which accommodates for any thread wear between the receiver and the barrel.

13 Claims, 2 Drawing Sheets

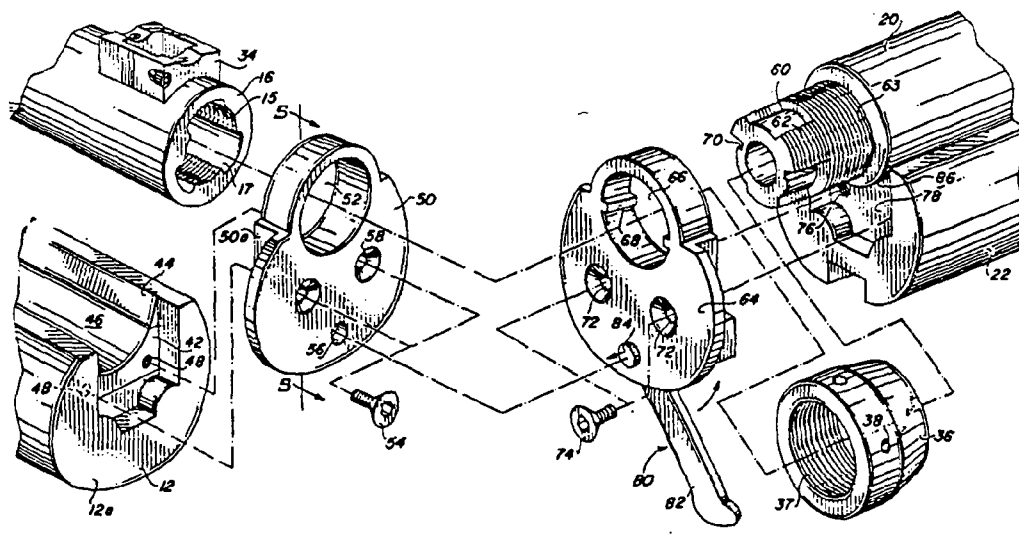

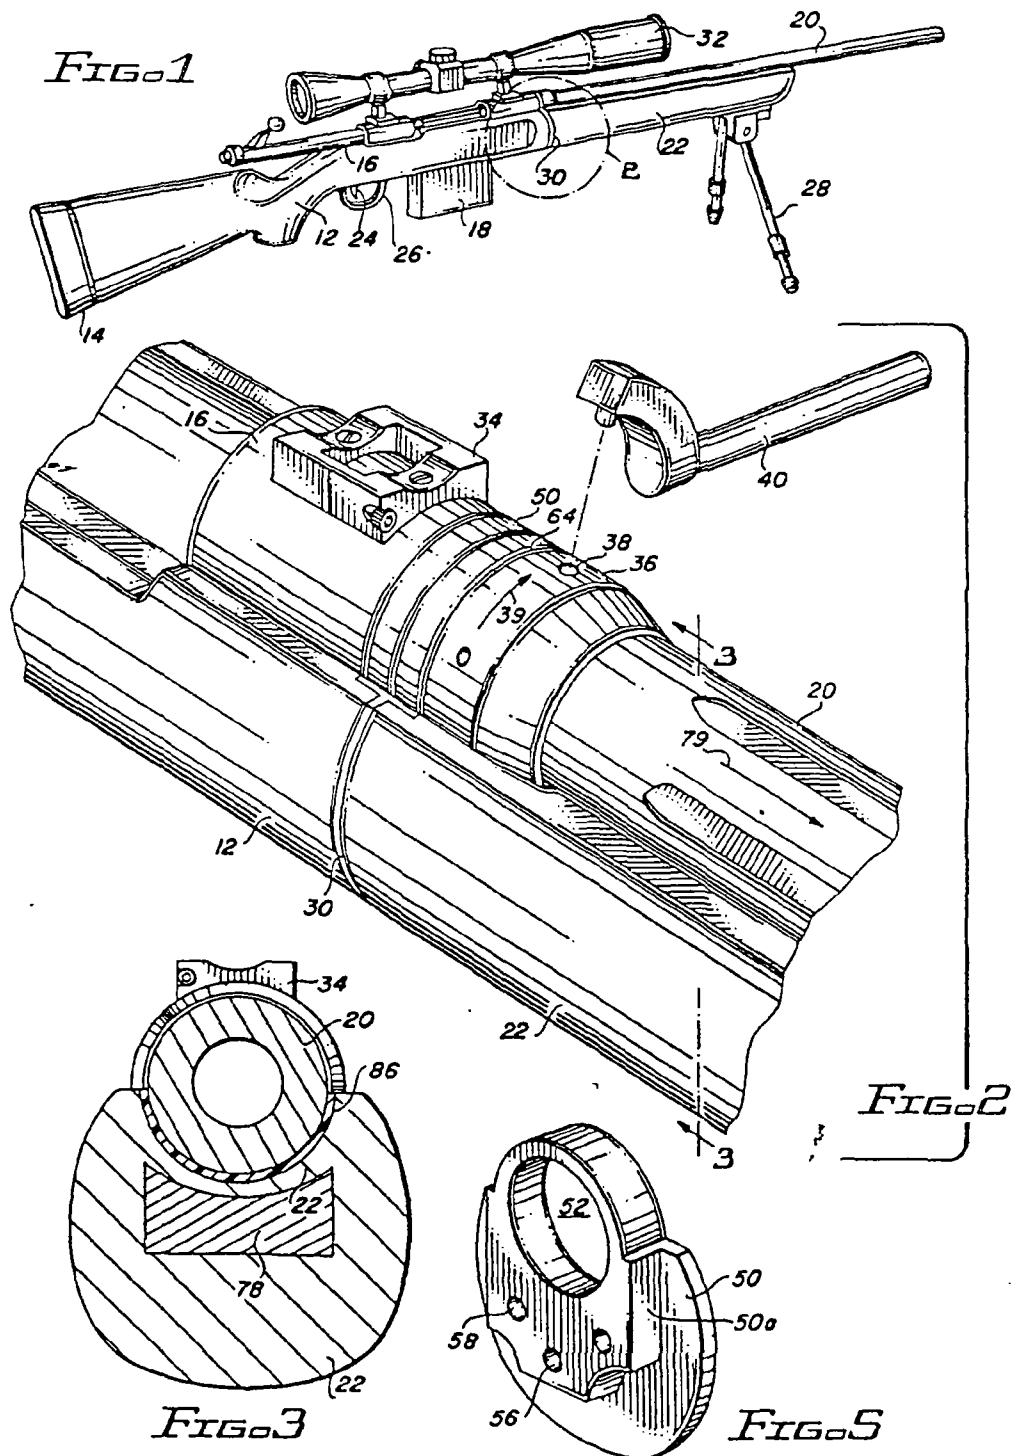

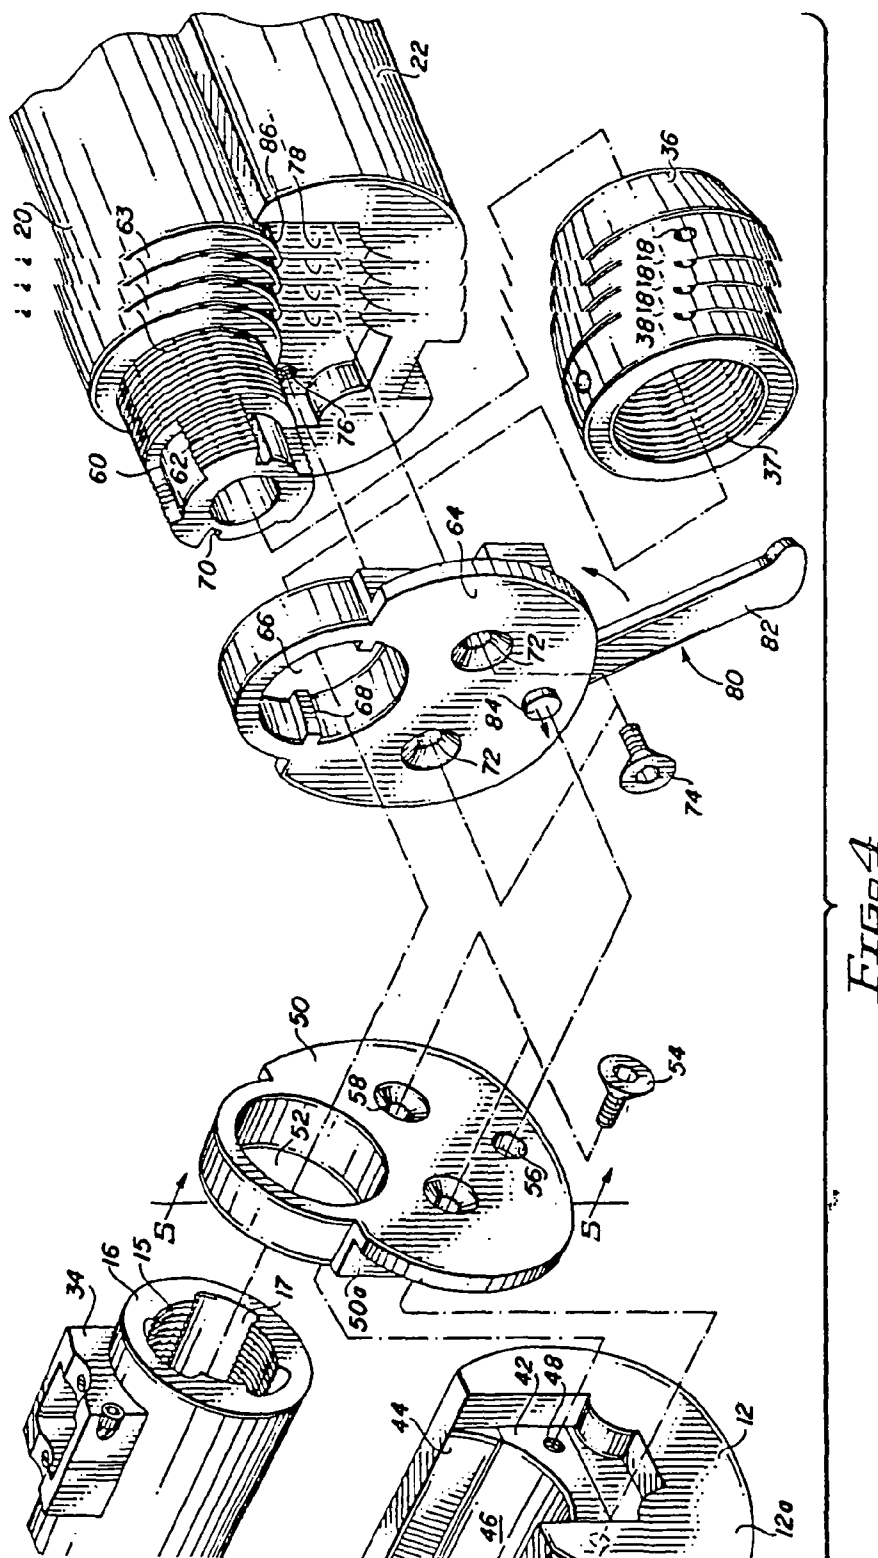

## TAKE-DOWN RIFLE

## FIELD OF THE INVENTION

This invention relates to rifles and more particularly to take-down rifles of exceptional accuracy.

## BACKGROUND OF THE INVENTION

So-called take-down rifles have been available for many years. The term "take-down rifle" describes a rifle in which the barrel and forearm are readily connected with and detached from stock and receiver frame so as to permit the rifle to be more easily packed. During World War II, the Japanese developed such a rifle for issue to airborne units. A standard bolt action rifle was modified to accommodate a special barrel with interrupted threads at its chamber end that mated with threads on a sleeve provided at the front end of the receiver. Such a rifle proved to be unsuccessful. Thereafter, another version was developed which featured a barrel locked in place by means of a tapered wedge but its accuracy at best was mediocre.

Rifles utilizing a take-down feature are shown in U.S. Pat. Nos. 529,455; 534,691; 605,111; 605,734; 616,719; 755,660; 855,181; 1,065,341 and 1,370,836. In spite of numerous developments in the art of take-down rifles, virtually all such rifles suffer from the inability to hold zero, or repeat the point of aim after the barrel has been removed and reinstalled. Although deviation is probably acceptable for 50 yard plinking rifles, it is not acceptable for long range precision shooting such as may be required for target use or sniper use by the military and law enforcement organizations. In order to obtain the degree of accuracy considered acceptable for sniper or target shooting, all components of any rifle and particularly a take-down rifle must fit together in an extremely tight manner with very close tolerances. Without the means to compensate for wear in mating parts, particularly threadwear, any rifle that is constantly taken apart and reassembled will lose its accuracy resulting in a change in point of impact of the bullet. Consequently, there is a need to provide a take-down rifle that can be taken apart repeatedly and reassembled with provision for maintaining its accuracy.

## SUMMARY OF THE INVENTION

Based on the prior art construction of take-down rifles, there then exists a need for means in a take-down rifle which will not only allow for easy removal and reassembly of the barrel to the rifle, but will effectively accommodate for wear in mating parts and particularly thread wear and provide for a perfect or near perfect alignment between the rifle's two main components.

Accordingly, I have invented a system for accommodating such wear. The system includes the use of an adjustable collar which is threaded on and surrounds the barrel at the receiver end of the barrel; the mounting of the barrel to the forearm in such a way that the barrel, although permanently secured to the forearm, is able through operation of the adjustable collar to move a slight distance with respect to the forearm; and provision in the forearm of a special reinforcing member. In a preferred embodiment the barrel is not mounted to the forearm by screws or other types of mechanical fasteners, but is bonded to the forearm by means of a special adhesive, preferably a low durometer elastomeric adhesive. Additionally, and in a preferred embodiment the forearm is made of a non-wood material such as hybrid

composites incorporating synthetic fibers of Kevlar, unidirectional graphite, and fiberglass or structural polyurethane foams and utilizing epoxy or polyester based resins as the bonding agents with the reinforcing member incorporated into the forearm to which other mechanical parts of the rifle, such as a barrel bracket are attached.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a bolt action take-down rifle;

FIG. 2 is an enlarged perspective view of the area designated "2" of FIG. 1;

FIG. 3 is a section taken on the line 3—3 of FIG. 2;

FIG. 4 is an exploded perspective view of the area designated "2" of FIG. 1; and

FIG. 5 is a view taken on the line 5—5 of FIG. 4 and showing the receiver bracket.

## DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 is a perspective view of a take-down bolt action rifle 10 which incorporates the unique system for mating the take-down barrel with the receiver. As shown, the rifle includes a stock 12 with an adjustable butt plate 14, forearm 22, barrel 20, bolt action receiver 16, detachable box magazine 18, and scope 32 which is appropriately mounted to the receiver by scope mounts 34. The rifle is of course provided with trigger 24 and trigger guard 26. Optionally, the rifle as shown is fitted with a bipod mounted at the front end of the forearm. The area of the rifle where the barrel end and receiver end mate is designated 30.

As shown best in FIG. 4, which is an exploded perspective view of the area of the rifle designated by the numeral 2 of FIG. 1 and shown in enlarged perspective view in FIG. 2, the stock 12 is hollowed out and this hollowed out portion is provided with a bedding block 42 mounted into the hollowed out portion of the stock. Bedding block 42 is preferably fabricated from metal such as aluminum and is machined to provide a curved surface 46 with upper sides 44 being relatively flat and angled. Surfaces 46 and 44 of the bedding block are designed to receive a portion of the barrel action or receiver 16. In mounting the receiver into the bedding block it is preferred that the receiver contact the bedding block basically at three points—in the center of the curved surface 46 and at each angles side 44. Although not shown, the receiver is securely fastened to the bedding block by means of mechanical fasteners such as screws as is well known. In a most preferred embodiment, stock 12 is fabricated from a non-wood material such as a molded composite employing synthetic fibers of Kevlar, graphite and fiberglass or structural polyurethane foams and utilizing epoxy or polyester based resins as the bonding agent. In such an embodiment, the bedding block can be molded directly into the stock.

The forward end of stock 12 is designed to receive metal receiver bracket 50 which bracket is also shown in FIG. 5. The outer edges of receiver bracket 50 are shaped or machined to conform to the exterior shape of the forward end of stock 12 and receiver 16. Receiver bracket 50 is provided with opening 52 which is in alignment with opening 17 at the front end of the receiver. Receiver bracket 50 is also provided with openings 58 in alignment with threaded holes 48 of the bedding block. As shown, the forward end of bedding



block 42 is positioned a small distance back of the front surface 12a of the stock so that the stock may accommodate the portion 50a of the receiver bracket 50.

The receiver bracket is secured to the front end of stock 12 and specifically to the bedding block by means of fasteners 54 which are screwed into threaded holes 48 of the bedding block.

As best shown in FIGS. 3 and 4, forearm 22 is provided with a reinforcing and mounting member 78 which can be secured into the forearm in much the same manner as is done with bedding block 42 in the stock. Reinforcing member 78 is made of metal, preferably aluminum to save weight and extends throughout substantially the entire length of the forearm. Member 78 should be securely mounted in the forearm and although mechanical fasteners may be used, it is preferable that the forearm be formed of a molded composite of the type as used in the stock with reinforcing member 78 molded into the forearm to give maximum stiffness and strength. As shown, reinforcing member 78 is provided with threaded openings 76 for attachment of barrel bracket 64 and the member is recessed into the forearm a distance to accommodate the barrel bracket 64.

Barrel 20 is mounted into the forearm 22, and, as shown in FIGS. 3 and 4 the barrel is not mechanically fastened to the forearm but is adhesively secured to the forearm. As is shown best in FIG. 3, a layer of flexible elastomeric adhesive 86 is provided between the upper surface of the forearm and the barrel which secures the barrel to the forearm. The type of flexible elastomeric adhesive employed is critical in that the adhesive must be a type that will not only bond the barrel to the forearm in a permanent manner, but will also allow for very slight movement of the barrel of perhaps up to about 0.005 inches during the adjusting process and also be noncorrosive. Thus, the elastomeric adhesive should have a durometer reading ranging from H<sub>4</sub>15-H<sub>4</sub>90 according to the ASTM (American Society for Testing and Materials) durometer hardness test designated D2240-86 utilizing a type A durometer. Preferably, the durometer reading of the adhesive should range from about H<sub>4</sub>30-H<sub>4</sub>50 where H<sub>4</sub> designates the hardness reading on a type A durometer. Examples of such elastomeric adhesives include those formed from silicones, polyurethanes, polysulphones or flexible epoxy resins. An example of a specific adhesive which works well is a silicone based adhesive available from Dow Corning Company and called Dow Corning 3145 RTV, a non corrosive room temperature curing silicone rubber.

In adhesively securing the barrel to the forearm the following steps should be observed.

1. The mating surfaces of both the barrel and forearm should be clean and dry.
2. A primer\* is applied to both surfaces and allowed to dry for a period of about 2 hours.
3. Adhesive is applied to both surfaces and barrel is assembled to the forearm.
4. The entire rifle is then completely assembled prior to curing of the adhesive.
5. The adhesive is tack free at about 2 hours and fully cured at 72 hours.

Barrel bracket 64 is quite similar in construction to receiver bracket 50 and the outer edges of the barrel bracket are shaped or machined to generally conform to the exterior shape of the barrel/forearm portion of the rifle. Barrel bracket 64 is provided with opening 66 which receives a portion of threaded tenon 60 of the

barrel 20. To prevent undesirable movement between the barrel and forearm during assembly or disassembly of the rifle, the opening 66 of the barrel bracket is also provided with keys 68 which align with keyways 70 of the threaded barrel tenon. This type of construction insures that the barrel and forearm turn as a unit during assembly or disassembly of the rifle. Barrel bracket 64 is secured to reinforcing member 78 of the forearm by means of threaded fasteners 74 which are inserted through openings 72 in the bracket and into the threaded openings 76 of member 78.

Bracket 78 is also provided with a locking lever system 80 having a lever arm 82 and alignment pin 84. Moving lever arm 82 in a direction either towards or away from the forearm 22 causes alignment pin 84 to move in a direction to or away from the forearm. In an assembled rifle, alignment pin 84 fits into opening 56 of the receiver bracket.

As previously noted, the system for accommodating for thread wear includes an adjusting collar which is threaded on the receiver end of the barrel. As shown in FIGS. 2 and 4, adjusting collar 36 is provided with continuous threads 37 which allows collar 36 to be screwed onto threaded portion 63 of barrel tenon 60. Collar 36 is also provided with depressions 38 on its outer surface to accommodate spanner wrench 40.

Assembly of the barrel end of the rifle including forearm to the receiver end of the rifle is as follows. The receiver bracket 50 has been previously secured to bedding block 42 and barrel bracket 64 has been previously secured to reinforcing member 78 and forearm 22, and collar 36 has been screwed on to threaded portions 63 of barrel tenon 60. As shown in FIG. 4, the end portion of barrel tenon 60 is provided with interrupted threads 62 and, as shown, there are three such sets of interrupted threads. Interior 17 of receiver 16 also has three sets of interrupted threads 15. The portion of barrel tenon 60 with the interrupted threads is placed into the interior 17 of receiver 16 and then the forearm and barrel assembly is turned until the end of the barrel tenon is fully inserted into the receiver 16. At this point the adjacent surfaces of the barrel and receiver brackets will be in contact.

Locking lever 82 is then closed by moving it toward the forearm which causes alignment pin 84 to move into opening 56 of receiver bracket and securely lock and align the rifle's two major components together.

The need to adjust for thread wear will be apparent when the two sections of the rifle are screwed together. If one is able to turn the forearm section of the rifle beyond the point where the alignment pin goes into the receiver bracket, then it is likely that adjustment for wear is in order.

Adjustment is accomplished as follows. The two major components are taken apart and adjusting collar 36 is turned in a clockwise direction as shown by the arrow 39 in FIG. 2 by use of spanner wrench 40. Adjusting collar 36 of course bears on barrel bracket 64 which is rigidly secured to reinforcing member 78 of the forearm 22. The barrel bracket therefore does not move so that any force which is brought to bear by turning the adjusting collar against the barrel bracket causes the barrel to move in a direction away from the barrel bracket 64 as shown by the directional arrow 79 in FIG. 2. This movement of the barrel with respect to the forearm is possible because the barrel is adhesively secured to the forearm as previously described.

The need for adjustment depends primarily on the number of times that the rifle has been assembled and reassembled which bears on the amount of thread wear. Certainly, adjustment is not necessary every time the rifle is disassembled and reassembled. It has been found that the amount of barrel movement required for proper adjustment is ordinarily in the range of 0.001 or 0.002 inches. However, it has also been found that barrel movement of up to 0.005 inches is possible.

What is claimed is:

1. A take-down rifle having a stock and receiver secured together as a first unit and a forearm and barrel secured together as a second unit, with the receiver end of said barrel provided with means which engage with said receiver for securing said first and second units together as an assembled rifle, a reinforcing member mounted in said forearm, with said barrel being bonded to said forearm by means of an elastomeric adhesive, a barrel bracket mounted to the receiver end of said forearm and secured to said reinforcing member in said forearm with a portion of said bracket surrounding the receiver end of said barrel, and an adjusting collar positioned about the receiver end of said barrel and in contact with said barrel bracket and said barrel, whereby moving said adjusting collar in a direction toward said barrel bracket will cause said barrel to move in a direction away from said barrel bracket and said receiver end of said rifle to thereby compensate for wear in said means for securing said first and second units together as an assembled rifle.

2. The rifle of claim 1 wherein said elastomeric adhesive has a durometer reading ranging from about H<sub>41</sub>-5-H<sub>490</sub> utilizing a type A durometer.

3. The rifle of claim 2 wherein said reinforcing member is metal.

4. The rifle of claim 3 wherein said forearm is made of a non-wood material.

5. The rifle of claim 4 wherein said forearm is made of a molded composite employing synthetic fibers.

6. The rifle of claim 5 wherein said elastomeric adhesive is a flexible elastomeric adhesive having a durometer reading ranging from about H<sub>430</sub>-H<sub>450</sub> utilizing a type A durometer.

7. The rifle of claim 6 wherein said elastomeric adhesive includes those formed of silicones, polyurethanes, polysulfones and epoxy resins.

8. The rifle of claim 6 wherein said means which engage with said receiver for securing said first and second units together as an assembled rifle includes a threaded tenon on the receiver end of said barrel, a portion of which engages with a threaded opening in said receiver.

9. The rifle of claim 8 wherein said adjusting collar is positioned on said threaded tenon of said barrel.

10. The rifle of claim 9 wherein a receiver bracket is mounted to said barrel end of said stock and engages the barrel end of said receiver and wherein in an assembled rifle said receiver bracket and said barrel bracket are in contact.

11. The rifle of claim 10 wherein locking and alignment means are provided in said barrel bracket which engage with said receiver bracket.

12. The rifle of claim 11 wherein said stock is provided with a bedding block and wherein said receiver is secured to said bedding block.

13. The rifle of claim 12 wherein said receiver bracket is secured to said bedding block.

\* \* \* \* \*

EM-6795

## COPY DISTRIBUTION:

1. SHIP W/ITEM (PACKING LIST)
2. A/P (LOCAL)
3. STORES
4. REGIONAL PUR.
5. SITE SUSPENSE

E. I. DUPONT DE NEMOURS &amp; COMPANY

## MATERIAL EXCEPTIONS &amp; RETURNS

(Covered by P. O. No.)

LOCAL CONTROL #

M.O. # 22668

ROM/ROC #

PKG. LIST #

FREIGHT/B #

DATE RECD.

DATE:

5-13-91

REC'D FROM/RETURN TO (VENDOR)

REASON FOR RETURN ☐ DAMAGED ☐ OVERAGE ☐ SHORTAGE ☐ NOT AS ORDERED ☐ PACKING LIST DISCREPANCY ☐ OFF-PLAN SHIPMENT  
☐ OTHER

## MATERIAL ORDERED

ITEM/STORES #	QUANTITY	DESCRIPTION	UNIT PRICE (FROM P.O.)

## MATERIAL RECEIVED AND/OR MATERIAL TO BE RETURNED — OR MATERIAL TO BE SHIPPED OFF SITE

BY PURCHG

ITEM/STORES #	QUANTITY	DESCRIPTION	QTY. TO SHIP	UNIT PRICE FOR ROM

MATERIAL ACCEPTABLE  
(Is — Is Not)

☐ AS SUBSTITUTE☐ ORIGINAL ITEM☐ AS OVERAGE☐ AS ADDITIONAL ITEM

REQUIRED

REQUISITIONER OR REC'D. SUPERVISOR

SITE APPROVAL

## DISPOSITION

Basis

☐ RETURN FOR CREDIT ONLY

(SITE ROM REQUIRED)

☐ RETURN FOR REPLACEMENT ONLY

(SITE ROM REQUIRED)

☐ RETURN FOR CREDIT AND REPLACEMENT

(SITE ROM REQUIRED)

☒ OFF PLANT SHIPMENT☐ REPAIR AND RETURN☐ OTHER

Date: 5-13-91

SHIP TO Endicott Machine & Tool Co. Inc.

CHARGE TO

STREET AND NO. 101 DELAWARE AVE

STREET AND NO.

CITY AND STATE ENDICOTT NY 13760

CITY AND STATE

ATTENTION OF TOM CULLEN

AUTHORIZED BY:

LETTER/VERBAL, DATE:

MARK PACKAGE

ROUTE VIA

PPD. CHGS.

F.O.B.

CASH TERMS

☐ PREPAID☐ COLLECT☒ CHARGE TRANSPORTATION TO

1118-481152-

REMARKS: (If applicable, show restocking charge here)

(SIGNATURE OF CARRIER/VENDOR REPR. IF MATERIAL PICKED UP AT SITE W/O B/L)

☐ FORMAL ALTERATION WILL BE ISSUED☐ CONSIDER THIS DOCUMENT AS AN INFORMAL ALTERATION

CHARGE CODE

WEIGHT

B/L #

PP/CHARGE


(PURCHASING AUTHORIZATION)

(REVIEWED) PLANT PURCHASING

SITE ACCOUNTING

THE JEWELL TRIGGER  
(Patent No. 4671005)

CUSTOM BENCHREST &  
REMINGTON 700

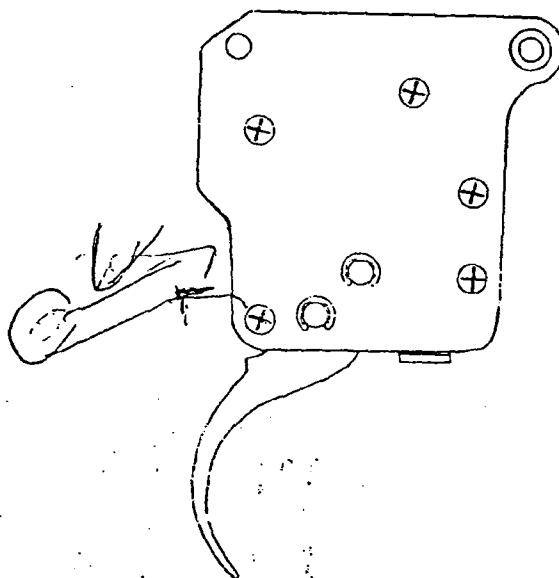

JEWELL TRIGGERS

1922 Lou Ann Drive  
New Braunfels, TX 78130  
(512) 620-0971

## I. GENERAL INFORMATION

Covered by 17 claims in Patent No. 4671005, the unique geometry was designed to allow minimum load at the sear engagement point and to provide maximum adjustability in pull force, sear engagement, and overtravel without removing the action from the stock or the trigger from the action.

## II. MATERIALS

- A. Internal parts are 3/16" 440C stainless steel, heat treated and tempered throughout to 58 Rockwell C scale.
- B. Side plates are .050" aircraft grade 300 series stainless sheet steel.
- C. All hardware, including through pins, main spring, spacers, and screws, are stainless steel.

PRICE LIST

- |    |   |          |
|----|---|----------|
| 1. | BR Trigger (1.5 oz. to 5.0 oz.)         | \$125.00 |
| 2. | HVR Trigger (1.5 oz to 4.5 lb. or more) | 140.00   |

OPTIONS

- |    |                                    |       |
|----|------------------------------------|-------|
| 1. | Bottom Lever Safety, R/H           | 25.00 |
| 2. | Bottom Lever Safety, L/H           | 35.00 |
| 3. | Top Lever Safety, R/H              | 35.00 |
| 4. | Top Lever Safety, L/H              | 45.00 |
| 5. | Bolt Release Lever (Rem. 700 Type) | 10.00 |

JEWELL TRIGGERS  
1922 Lou Ann Drive  
New Braunfels, TX 78130  
(512) 620-0971

### III. FEATURES

- A. Modular design allows total disassembly for maintenance and cleaning.
- B. The forward mounting spacer and a pin in the firing pin stop that operates in a hole in the left side plate allows the trigger to stay together as a single assembly when not installed.
- C. The light load at the sear enables short, crisp, creep-free, and repeatable operation.
- D. Installation: The mounting hold pattern allows use in most actions that utilize the Remington 700 type trigger.
- E. Range of Adjustment:
  - 1. BR (Light Pull Competition Model): 1.5 oz. to 5.0 oz.
  - 2. HVR (Hunting/Varmint Model) with:
    - a. Spring A: 8.0 oz. to 72.0 oz. (4.5 lb.) or more.
    - b. Spring B: 2.5 oz. to 16.0 oz.
    - c. Spring C: 1.5 oz. to 5.0 oz.

*Note: Settings below those stated is not recommended.*

### F. OPTIONS

- 1. Positive Cam Safety (BR or HVR).
  - a. Bottom mounted lever, left or right.
  - b. Top mounted lever (Rem. 700 type) left or right.
- 2. Bolt release lever, (Rem. 700 type) left or right.
- 3. Two-stage operation (HVR only).

## BR TRIGGER

The firing pin block (11) is held in the cocked position by the vertical alignment of upper lever (6) and lower lever (7) which is captured in the locked position by sear (5).

Rotation of the trigger shoe (4) releases sear (5) from the upper lever (6) allowing the upper lever (6) and lower lever (7) to collapse to a folded position (See Figure 2), allowing block (11) to fall, thus releasing the firing pin.

The levers (6) and (7) will stay in the collapsed position until the bolt is open, at which time spring (10) forces the levers (6) and (7) back to cocked position. Sear (5) is reset by compression of spring (9).

FIG. 1. (COCKED)


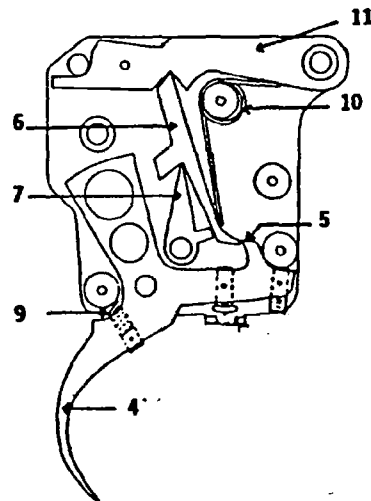


FIG. 2. (FIRED)



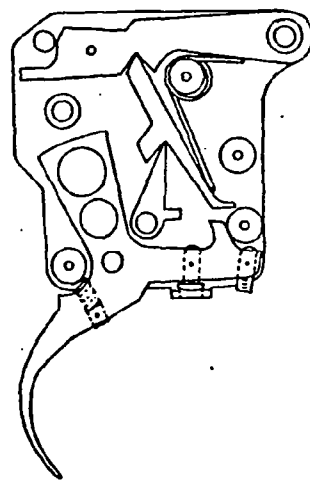

## HVR TRIGGER

The firing pin block (11) is held in the cocked position by the vertical alignment of upper lever (6) and lower lever (7) which is captured in the locked position by sear (5).

Rotation of the trigger shoe (4) releases sear (5) from the upper lever sear (8) allowing the upper lever (6) and lower lever (7) to collapse to a folded position (see Figure 2), allowing block (11) to fall, thus releasing the firing pin.

The levers (6) and (7) will stay in the collapsed position until the bolt is open, at which time spring (10) forces levers (6) and (7) back to cocked position. Sear (5) is reset by rotation of upper lever sear (8) on its pivot pin (13). It is maintained in a down loaded position by the end of spring (10).

FIG. 3. (COCKED)


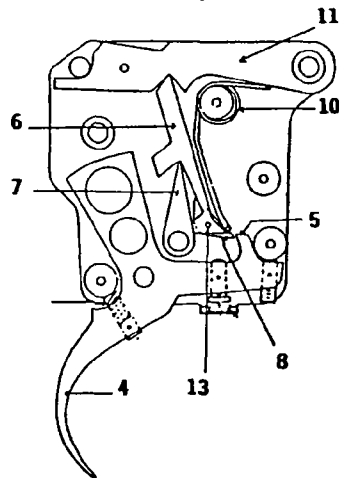


FIG. 2. (FIRED)

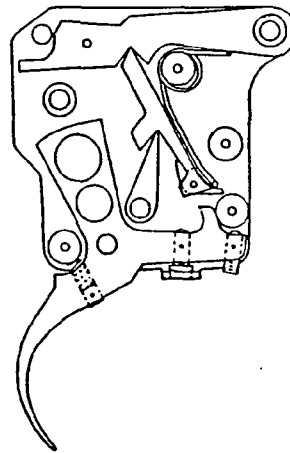

## ADJUSTMENT PROCEDURES (BR and HVR)

The trigger has been adjusted for most applications when shipped. Personal preference, however, may require adjustment on one or more settings.

All adjustment screws are fitted with Nylon inserts to maintain their set positions. The use of external locking compounds is not necessary.


Screw (1) sets sear engagement (in = less sear engagement).  
Screw (2) sets overtravel (in = more overtravel).  
Screw (3) sets pull force (in = more pull force).

### Initial Adjustment Procedure:

1. Ensure that rifle is *unloaded* ! ! !
2. Cock action, turn screw (1) inward until action fires. Back screw out approximately 3/4 turn.
3. Recock action, turn screw (2) out until it contacts tab (12). While applying pull on the trigger shoe, turn screw inward until action fires. Turn screw inward another 1/4 turn.
4. Recock action and measure pull force. Turn screw (3) in for more pull force or out for less pull force. Do not exceed specifications for pull settings.
5. Operate action for your particular method of shooting and adjust as needed.

**Note:** *Rapid firing practices may require slightly more sear engagement or pull force to prevent unwanted firing.*

**Cleaning:** Flush occasionally with lighter fluid. The use of lubricants is not recommended.

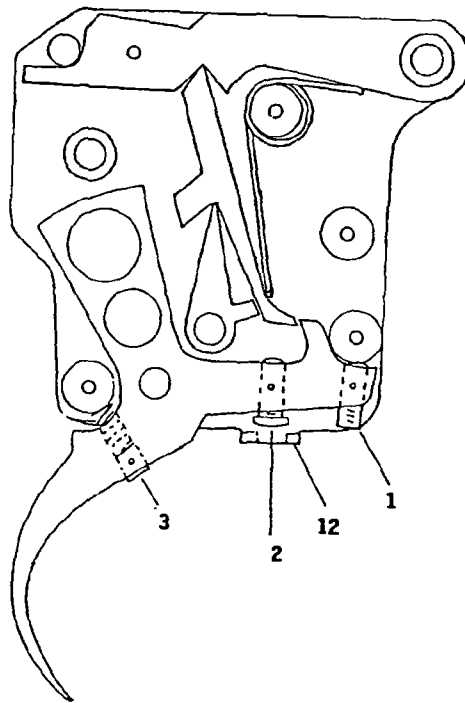

BOORUM & PEASE "NOTAR" ®

BOORUM & PEASE "NOTAR"

M/700

Rev. 1-14-80

REVISED 8-7-79

REMINGTON STANDARDS - ARMS

SHEET 1 of 1

MODEL 700	1974 Version	5-Shot Group Size	Test Ammo.						
BOLT ACTION REPEATER		(C to C)	(Gr.)						
CALIBERS (Center Fire)									
(3) 7mm Mauser		3.5"	175 SP						
222 Rem.		2.2"	50 HPPL						
22-250 Rem.		2.2"	55 HDPL						
17 Rem.		2.2"	25 HPPL						
6mm Rem.		2.2"	80 HPPL						
243 Win.		2.2"	100 SP						
308 Win.		3.5"	180 PSP						
30-06		3.5"	220 SP						
270 Win.		3.5"	150 SP						
25-06 Rem.		2.2"	87 HPPL						
7mm Rem. Mag.		2.7"	175 PSP						
264 Win. Mag.		2.2"	140 SP						
300 Win. Mag.		3.5"	180 SP						
375 H. H. Mag.		3.5"	270 SP						
458 Win. Mag.		3.5"	510 SP						
(1) 8mm Rem. Mag.		3.5"	220 PSP						
(2) 7 mm Exp. Rem.		3.5"	165 SP						
CALIBERS (Varmint)*									
(4) 7mm-08 Rem.		1.5"	140 PSP						
222 Rem.		1.5	50 PL						
223 Rem.		1.5	50 PL						
22-250 Rem.		1.5	55 PL						
6mm Rem.		1.5	80 PL						
243 Win.		1.5	80 PL						
25-06		1.5	87 PL						
308 Win.		1.5	168						
CALIBER (SNIPER)									
7.62 NATO		2.0	168						
* Current production lists 1.5' (inside to inside) for all Varmint calibers.									
(1) Added									
(2) Added 7 mm Exp. Rem.									
(3) Added 7mm Mauser									
(4) Added									

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

KINZER V. REMINGTON

R2530594

Rev. 1-14-80  
REVISED 8-7-79

## REMINGTON STANDARDS - ARMS

SHEET 1 of 1

[illegible]

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

**R2530595**

REVISED 8-7-79

REMINGTON STANDARDS - ARMS

SHEET 1 of 1

MODEL 700	1974 Version	5-Shot Group Size	Test Ammo.						
BOLT ACTION REPEATER		(C to C)	(Gr.)						
CALIBERS (Center Fire)									
(3) 7mm Mauser		3.5"	175 SP						
222 Rem.		2.2"	50 HPPL						
22-250 Rem.		2.2"	55 HDPL						
17 Rem.		2.2"	25 HPPL						
6mm Rem.		2.2"	80 HPPL						
243 Win.		2.2"	100 SP						
308 Win.		3.5"	180 PSP						
30-06		3.5"	220 SP						
270 Win.		3.5"	150 SP						
25-06 Rem.		2.2"	87 HPPL						
7mm Rem. Mag.		2.7"	175 PSP						
264 Win. Mag.		2.2"	140 SP						
300 Win. Mag.		3.5"	180 SP						
375 H. H. Mag.		3.5"	270 SP						
458 Win. Mag.		3.5"	510 SP						
(1) 8mm Rem. Mag.		3.5"	220 PSP						
(2) 7 mm Exp. Rem.		3.5"	165 SP						
CALIBERS (Varmint)*									
222 Rem.		1.5	50 PL						
223 Rem.		1.5	50 PL						
22-250 Rem.		1.5	55 PL						
6mm Rem.		1.5	80 PL						
243 Win.		1.5	80 PL						
25-06		1.5	87 PL						
308 Win.		1.5	168						
CALIBER (SNIPER)									
7.62 NATO		2.0	168						
* Current production lists 1.5" (inside to inside) for all Varmint calibers.									
(1) Added									
(2) Added 7 mm Exp. Rem.									
(3) Added 7mm Mauser									

SHEET 1 of 1

REVISÉ 8-7-79

**REMINGTON STANDARDS - ARMS**[illegible]

RD-6489

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

# KINZER V. REMINGTON

R2530597



MODEL 700	1974 Version	ADL Grade	BDL Grade
<b>BOLT ACTION REPEATER</b>			
<b>ACCURACY</b>	Use open sights, fore-end and elbow rest. Set rear sight eyepiece on fourth mark from rear on ramp and centered.		
Test Ammunition:	See Accuracy Index.		
Group Size:	See Accuracy Index.		
Center of Impact:	Not more than 6 inches below, or 6 inches above, or 6 inches either side of point of aim.		
Point of Aim:	6 o'clock on target.		
Range:	100 yds.		
<b>ACTION</b>	Bolt action, center fire, hand operated repeater. Solid frame with take-down stock. Fixed magazine. Bolt cocks as handle lifts. Rifle cocks as bolt handle is lowered to lock action closed. Extracts and ejects as bolt is "opened". Direct action trigger. 2 stop safety. FIRE position - forward SAFE position - rearward. Rear position on safety locks bolt closed.		
(4) Short Action Calibers		222, 308 243, 6mm 22-250	222, 308, 7mm-08 Rem. 243, 6mm 22-250, 17 Rem.
(2) Long Action Calibers:		30-06, 25-06 270, 7mm 7mm Exp. Rem.	30-06, 25-06, 7 mm Exp. Rem. 270, 7mm 264, 300 Mag.
(1) (3)		7mm Mauser	8mm Rem. Mag.
	Action must feed, fire, extract and eject (include extraction and ejection without firing), satisfactorily with all varieties of ammunition listed as standard for listed calibers in Technical Committee Manual of the Sporting Arms and Ammunition Manufacturers' Institute (SAAMI)		
(1) Added 8mm Rem. Mag.			
(2) Added 7 mm Exp. Rem.			
(3) Added 7mm Mauser			
(4) Added 7mm-08			

Rev. 1-14-80

REVISED 8-7-79

REMINGTON STANDARDS - ARMS

SHEET 2 of 8

MODEL	1974 Version	ADL Grade	BDL Grade
ANNOUNCEMENT		(Discontinued)	
(3) 7mm Mauser	1980		
30-06	1962		
270 Win.	1962		
222 Rem.	1962		
7mm Rem. Mag.	1962		
264 Win. Mag.	1962		
300 Win. Mag.	1964		
308 Win.	1962		
243 Win.	1962		
25-06 Rem.	1970		
6mm Rem.	1963		
22-250 Rem.	1965		
17 Rem.	1971		
6.5 Rem. Mag.	1969	1972	
350 Rem. Mag.	1969	1972	
(1) 8mm Rem. Mag.	1977		*
(2) 7 mm Exp. Rem.	1979		
(4) 7mm-8 Rem.	1980		
BARREL	Round, tapered to breech, crowned, Black color, Medium lustre.		
Material:	Remington specified alloy steel. Stainless steel for 17 Rem. only.		
Bore - Groove:	See Rifling Index.		
Optional Barrel:		w/o Sights	w/o Sights.
Markings:	See Marking - Barrel.		
BOLT ASSEMBLY:	3 piece brazed assembly - Bolt body, Bolt head, Bolt handle		
Bolt Plug:	Cover firing pin head. Black color		
Bolt Handle:	Swept back oval shape ball. Checker on upper and lower face of ball. Black color		
Bolt Body:	Bright Steel - damascene finish.		
Bolt Head	Black color.		
Feature	Anti-bind design		
Markings:	See Markings - Bolt		
Size:			
Short	222, 17 Rem.		
(4) Short Std.	243, 6mm, 308, 22-250, 7mm-08 Rem.		
(2) (3) Standard	30-06, 270, 25-06, 7 mm Exp. Rem., 7mm Mauser		
(1) Magnum	7mm, 264, 300 Mag., 8mm Rem. Mag.		
(1) Added 8mm Rem. Mag.	(2) Added 7 mm Exp. Rem.	(3) Added 7mm Mauser	(4) Added 7mm-08 Rem.

**MODEL 700** 1974  
Version

ADL Grade

BDL Grade

[illegible]

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

**R2530600**

MODEL 700 Version	ADL Grade			BDL Grade		
1974						
<b>GUN LENGTH &amp; WEIGHT:</b>					See below	
	<u>Barrel</u>	<u>Receiver</u>	<u>Overall</u>	<u>Weight</u>	<u>Weight</u>	
243 Win.	22"	Short	41 5/8"	7 lbs.	Add 4 oz.	
308 Win.	22"	"	"	"	Sling, etc.	
6mm Rem.	22"	"	"	"		
(2) 7 mm Exp. Rem.	22"	Long	42 1/2"	"		
30-06	22"	Long	42 1/2"	7 lbs.	Sling, etc.	
270 Win.	22"	"	"	"		
(3) 7mm Mauser	22"	"	"			
17 Rem.	24"	Short	43 5/8"	7 lbs. 4 oz.	Sling, etc.	
222 Rem.	24"	"	"	"		
22-250	24"	"	"	"		
(4) 7mm-08 Rem.	24"	"	"	8 lbs. 15 oz.	(Max.) Sling, etc.	
7mm Rem. Mag.	24"	Long	44 1/2"	7 lbs. 8 oz.	Sling, Etc.	
25-06 Rem.	24"	"	"	"		
264 Win. Mag.	24"	"	"	"		
300 Win. Mag.	24"	"	"	"		
(1) 8mm Rem. Mag.	24"	"	"	"	Sling, Etc.	
<b>MAGAZINE</b>	Fixed box. Stagger column loading.					
Capacity:	(Add one (1) for Gun Capacity)					
5 ctgs.	222, 17 Rem					
(2)(4) 4"	22-250, 243, 308, 6mm, 270			30-06, 25-06	7 mm Exp. Rem., 7mm-08	
3"	7mm, 264, 300 Mag.					
Floor Plate	(hinged with latch)			None	Yes	
Follower:	* Polished Stainless Steel					
Loads: (or unloads)			Top only		Top & Bottom	
* Finish corrected. Was bright nickel.						
(1) Added						
(2) Added 7 mm Exp. Rem.						
(3) Added						
(4) Added						

Rev. 1-14-80

REVISED 3-12-73

REMINGTON STANDARDS - ARMS

SHEET 8 of 8

MODEL 700	1974 Version	ADL Grade		BDL Grade	
STOCK (Continued)					
Dimensions (Nominal – 30-06		See Below		See ADL Grade	
Drop at Heel (from $\bar{Q}_L$ of barrel)		1 5/16"		"	
Drop at Comb & Monte Carlo (From $\bar{Q}_L$ of bbl.)		11/16"		"	
Length of Pull		13 3/8"		"	
Length of Grip		3 3/8"		"	
Pitch (from $\bar{Q}_L$ of barrel )		2 7/8"		"	
Fore-end Cap (black plastic)		No		Yes	
Spacer (white plastic)		---		Yes	
Grip Cap (black plastic)		No		Yes	
Spacer (white plastic)		---		Yes	
Swivels (2) 7/8" Q. D. (Quick Detachable)		No		Yes	
(1) Weight (7mm-08 Varmint)				2 lbs. - 7oz. Max.	
TRIGGER					
		Direct action, black metal, wide serrated finger piece, full radius.			
Pull (Wt.)		3 lbs. Min. – 5 lbs. Max. (with wt. sealed at factory).			
Engagement		Adjustment sealed at factory.			
TRIGGER GUARD					
Type		Aluminum alloy, black color. Anodized – High Lustre		Long (with floor plate)	
		Short			
WEIGHT					
		(See Gun Length & Weight)			
(1) Added					

3-3-76

REVISED 9-19-75

## REMINGTON STANDARDS - ARMS

SHEET 1 of 3

MODEL	700 BDL VARMINT	222 Rem.	223 Rem.	22/250 Rem.	6MM Rem.	243 Win	(2) 25-06 Rem.	308 (3) Win.
Note: All specifications same as M/700 BDL.		EXCEPT AS LISTED HEREIN						
ACCURACY (C to C)								
Max. Group Size (5 Shots) E. S.		1.5"	1.5"	1.5"	1.5"	1.5"	1.5"	1.5"
All Rifles Must Pass A 5-Shot Specification								
Range	100 yards. Use Accuracy Device.							
Ammunition	(Power-Lock) 50gr. or equiv.	55gr.	55gr.	55gr.	80gr.	80gr.	87 gr	162gr. or 168gr. Match
ACTION		Short	Short	Short	Short	Short	Long	Short
Bolt action, handle operated repeater, Solid frame with long stock. Fixed magazine, latched floorplate for bottom unloading, if desired, 2-stop safety, forward to FIRE position rearward to SAFE position.								
Action must feed, fire, extract, eject (include extraction and ejection without firing), satisfactorily with all varieties of ammunition listed as standard for listed calibers in Technical Committee Manual of the Sporting Arms and Ammunition Manufacturers' Institute (SAAMI).								
ANNOUNCEMENT:								
Varmint Model								
Release to Production:	General Management Approval March 16, 1966. See letter V. G. DeReus to Management dated March 18, 1966.							
(2) Ref: Intro. 1971. See OP	Comm Min No 7-1970 Dated 4-3-70.							
(3) Added Ref. Operations Committee Development Schedule for 1976.								
(4) Changed 308 Cal. bullet grain from 150 to 162 or 168 Match.								

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

[illegible]

9-19-75

SHEET 3 of 3

MODEL	700 BDL VARMINT	222 Rem.	223 Rem.	22/250 Rem.	6MM Rem.	243 Win.	25-06 Rem.	308 (1) Win.
GUN LENGTH: (Inches)		43 5/8	43 5/8	43 5/8	43 5/8	43 5/8	44 1/2	43 5/8
SCOPE BASES:	Front & Rear	(40X-B type).						
* PACKING: Same as standard Grade except (Shipping)								
Weight - 1 Gun	11 lbs.							
Weight - 2 Gun	20 lbs.							
Weight - 3 Gun	30 lbs.							
Weight - 5 Gun	49 lbs.							
STOCK:	Same as M/700 BDL Except:	modified barrel	radius.					
Receiver Cut		Short	Short	Short	Short	Short	Long	Short
WEIGHT:	(with sling) 9 lbs. (dependent upon caliber).							
(2) TRIGGER PULL:								2-4 lbs.
(Weight)								
* Shipping weight revised per	W. W. Fenton (warehouse)							
(1) Added. Reference Operations Committee Development Schedule for 1976.								
(2) Added Trigger pull for 308 Win. Cal.								

FD-346a

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

**R2530605**



3/23/77  
REVISED

SHEET 1 of 2

**C Grade**

Same as BDL Grade Specifications Except as indicated below:

**Specially Selected at gallery**

## Smooth Working

## Custom Assemble

**Not Qualified**

**Std. 700**

20", 22", 24" Depending on Caliber

### Customer Option

All Calibers in BDL Grade except 17 Rem., 223 Rem., 375 H&H Mag. and 458 Win. Mag.

**Black except as shown below:**

## Special Polish

“ ”

” ”

” ”

### Standard

11

”

**Satin Chrome**

## Damascene

## Special Polish

” ”

” ”

(2) Added

(3) Addcd

[illegible]

RD-6489

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

**R2530606**

5/23/77

3-14-78

REVISED

## REMINGTON STANDARDS - ARMS

SHEET 2 of 2

MODEL	700 Custom	C Grade						
MARKINGS (C-15360)								
Barrel		Std. 700						
Proof. Etc.		Visible						
Receiver		Std. 700						
OPEN SIGHTS		See Packing						
PACKING		Cloth Case						
Outer Carton		Standard						
		Sights packed in cloth bag						
STOCK								
Bedding		Hand						
Finish		RK-W or Satin Finish						
Grain		Fancy						
Checker		Cut						
(2) Pattern (See Photos)		Full or Skipline						
Pitch		20						
Grip Cap		Rosewood (India)						
(3) White Spacer		Optional						
Recoil Pad	Use Pachmayr	Presentation type						
Brown Spacer								
Reinforcing Screw		Rosewood Plug (2)						
Fore-End Tip		Rosewood (India)						
(3) White Spacer		Optional						
(1) Fore-End Length (from Bbl. Bracket)		11" or 10" (Dep. on Bbl. Length)						
Studs		Yes						
Left Hand Cheekpiece		Optional (Added cost)						
SLING STRAP		No						
TEST		Rigid						
(1) Error on previous transmittal. was 1" or 10"								
(2) Was BDL								
(3) Was Standard								

2-18-66  
REVISED 6-21-67

REMINGTON STANDARDS - ARMS

Caliber: 7.62 NATO  
SHEET 1 of 8

MODEL 700 Sniper

BDL  
Grade

7.62 NATO - MILITARY SNIPER RIFLE STANDARDS

**ACCURACY:**

Range:

100 yards - Accuracy:

300 yards - Point of Impact

Point of Aim:

Center on Target

Center of Impact:

Not more than 2 inches below, or 2 inches above, and 2 inches either side point of aim.

Group Size:- 100 yds.

(E.S. - Extreme Spread)

5 shot 2" Center to Center - Remington Accuracy Device

5 shot 1-1/2" center to Center - Bench Rest Retest Option

Ammunition:

168 Grain International Match handloads or equivalent (Lake City Match)

**ACTION:**

Bolt action, hand operated repeater, Solid frame with takedown stock, Fixed Magazine, Bolt cocks as bolt handle lifts, Rifle cocks as bolt handle is lowered to lock action closed. Extracts and ejects as bolt is "opened", Direct action trigger, 2-stop Safety; FIRE position on forward - SAFE position rearward.

Action must feed, fire, extract and eject (include extraction and ejection without firing), satisfactorily with all varieties of ammunition listed as standard length for listed calibers in Technical Committee Manual of the Sporting Arms and Ammunition Manufacturers' Institute (SAAMI).

**ANNOUNCEMENT:**

Date 2-18-66  
REVISED 6-15-66

REMINGTON STANDARDS - ARMS

Caliber: 7.62 NATO  
SHEET 2 of 8

BDL  
Grade

MODEL 700 Sniper

BARREL	Round tapered to breech and crowned. Parkerized. (BDL Grade). Remington specification alloy steel.						
Chamber	Basic - 7.62 NATO						
Length	24 inches						
Diameter (O.D.)	Varmint Weight (with tapers) (40XB Standard + .060" inch)						
Bore	.300 Min. - .301 Max.						
Groove (6)	.308 Min. - .3085 Max.						
Twist	1 in 10 inches - R.H.						
Markings	See MARKINGS - Barrel						
BARREL ASSEMBLY							
Sights							Redfield 3-9X Accurange (Furnished by Marine Corps)
Mounting Holes							In Receiver only.
BOLT							
Handle	Swept back with oval shaped ball with checker on top and bottom face.						
Color	Bolt Plug, Handle - Black Body - Black Firing Pin Head - Bright						
Markings	Serial Number on bottom of bolt.						
BOLT RELEASE	Located at front of Trigger. Black color.						

Date 2-18-66 6-21-67  
REVISED 6-15-66

REMINGTON STANDARDS - ARMS

Caliber: 7.62 NATO  
SHEET 3 of 8

MODEL 700 Sniper		BDL Grade	
BUTT PLATE	Screw (2) fitted to stock. All black color, corrugated metal.		
EJECTOR	Plunger type, spring loaded and pin assembled in bolt head.		
EXTRACTOR	Circular, clip type assembled inside bolt rim with rivet.		
FIRING PIN	Fixed, protrusion of bolt.		
Protrusion	.045" Min. .075" Max.		
Indent	.018" Min. .026" Max. (using copper crusher)		
FLOOR PLATE		Hinged with finger latch.	
Color		Black	
Material		Aluminum	
Latch (corrugated - in trigger guard)		Black	
FORE-END (Cap)		None	
GRIP CAP		None	
GUN:			
Capacity (Gigs.)		6 (5 in Magazine).	
Length (overall)		44 1/2"	
MAGAZINE	"Fixed" box type. Stagger column loading. Clip slot in top of receiver.		
Floor Plate (Hinged - with Latch)		Yes	
Loads		Top & bottom shot clip.	
Capacity		5 cigs.	
Follower (color)		Black Metal.	

# KINZER V. REMINGTON

6-15-66

REMINGTON STANDARDS - ARMS

SHEET 4 of 8

BDL  
Grade

MARKINGS - Barrel (Dwg. No. C-15360)

Assembly	Left rear
Code (Mfg. Date)	Left rear
Inspection	Left rear
Proof (REP)	Right rear
Target	Right rear
Test (function)	Right rear
Test (Magna-flux)	Right rear

**MARKINGS - Receiver (Dwg. No. C-15360)**

Grade	None
Model Script	None
Model Number	Below Remington Script
Remington Script	Left Side
Serial No.	Left Side, front
U.S.	Centered above serial no.

**MARKINGS** - Bolt (Prick-punch mark)      Ref: Current Practice

<b>Magnaflux</b>	Right Lug (Center)	Serial No.	Under Side (rear).
<b>Bolt Head Braze</b>	Left Lug (Center)		
<b>Bolt Handle Braze</b>	Rear Handle (Center)		
<b>Proof</b>	Bottom Handle (Center)		

<b>METAL FINISH:</b>	Parkerized on all exposed metal parts except as otherwise tabulated.
----------------------	--

R2530611

Caliber: 7.62 NATO  
SHEET 5 OF 8

Date 2-18-66  
 REVISED 6-15-66

REMINGTON STANDARDS - ARMS

MODEL 700 Sniper

BDL  
Grade

PACKING - Level "C":	Full length in Protecto case with outer single wall carton. Exposed metal parts coated with rust preventive.
----------------------	---

PROOF TEST (REP)	Fire one (1) standard proof cartridge in each rifle. For location of marking (REP), see MARKINGS - Barrel.
------------------	--

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

**R2530612**

Date, 2-18-66  
REVISED

REMINGTON STANDARDS - ARMS

Caliber: 7.62 NATO  
SHEET 6 of 8

MODEL	700 Sniper		BDL Grade				
RECEIVER	Cylindrical, alloy steel.						
Finish			Parkerized				
Sighting	(6 holes)	Drilled and tapped for popular scope mount and receiver sight.					
Gas Escape	(1) Right hand side.						
Length (type)			Short				
Clip Slots			Yes				
Markings	See MARKINGS - Receiver						
RECOIL PAD			None				
SAFETY	2 stop position, thumb operated - forward and back.	Corrugated, black surface.					
Location	Right rear of receiver.						
"FIRE" position	Forward stop position						
"SAFE" position	Rearward stop position (bolt lock position also)						
SERIAL NUMBER			Yes				
Location	See MARKINGS - Receiver See BOLT - Markings						
SLING STRAP			Govt. Furnished				
Type 1-1/4"							
SLING SWIVEL	See STOCK						



Date 2-18-66  
REVISED 6-15-66

REMINGTON STANDARDS - ARMS

Caliber: 7.62 NATO  
SHEET 7 of 8

MODEL 700 Sniper				BDL Grade				
SIGHTS				Redfield 3-9X Accurange furnished by gov't.				
STOCK (Assembly)	American Walnut.	Monte Carlo	with cheek piece.	Pistol Grip with comb cuts.				
Finish				Oil				
Dimensions (Nominal)				See Below				
Drop at Heel (from C/L of barrel)				1 5/16"				
Drop at Comb & Monte Carlo (from C/L of barrel)				11/16"				
Length of Pull				13 3/8"				
Length of Grip				3 3/8"				
Pitch (from C/L of barrel)				2 7/8"				
Butt Plate				Yes				
Swivels (2) 1-1/4" Non-detachable				Yes				
LENGTH (Overall) Stock (Approx.)				30-5/8"				

Date 2-18-66  
REVISED 6-15-66

REMINGTON STANDARDS - ARMS

Caliber: 7.62 NATO

MODEL 700 Sniper

**BDL**  
**Grade**

TRIGGER	Direct action, black metal. Wide serrated finger piece, full radius.
Pull (wt.)	3 lbs. Min. - 3 1/2 lbs. Max. (with wgt. sealed at factory).
Engagement	(Adjustment sealed at factory).
TRIGGER GUARD	Aluminum alloy, black color.
Type	Short (with floor plate)
WEIGHT	9 lbs.

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

R2530615

M/700 Mil. Sniper

M/700 D & F Gr.

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

R2530617

5-24-77

REVISED 11-11-70

REMINGTON STANDARDS - ARMS

SHEET 1 of 2

MODEL 700	D Grade	F Grade				
	Same as Standard Grade Specifications Except as indicated below:					
ASSEMBLY - Action		Smooth Working		Special Polish		
All Parts (Selection)		Custom Assemble		Custom Assemble		
All Screws		Qualify		Qualify		
BARREL	Select (No Stainless Steel)	Select (No Stainless Steel)				
Length	20", 22", 24"	20", 22", 24"				
ENGRAVE						
Barrel		Simple Scroll		App. "F" Scroll		
Receiver		Simple Scroll		App. "F" Scroll		
Trigger Guard		Simple Scroll		Bear or Deer Head		
Trigger Guard Screw	Simple Scroll (head on screw)	Simple scroll				
Floor Plate (BDL)		Simple Scroll		Simple Scroll		
Bolt Handle - Plug		Simple Scroll		Simple Scroll		
Bolt Body		Damascene		Damascene		
FINISH (Exterior)	Black except as shown below:					
Barrel		Special Polish		Special Polish		
Receiver		Special Polish		Special Polish		
Trigger Guard		Special Polish		Special Polish		
Floor Plate		Special Polish		Special Polish		
Trigger Guard Screw		Special Polish		Special Polish		
Butt Plate Screw		Special Polish		Special Polish		
Safety		Special Polish		Special Polish		
Firing Pin Head		Satin Chrome		Satin Chrome		
Bolt Body		Damascene		Damascene		
Bolt Head		Special Polish		Special Polish		
Bolt Handle		Special Polish		Special Polish		
Bolt Plug		Special Polish		Special Polish		

MODEL 700	D Grade	F Grade
<b>MARKINGS (C-15360)</b>		
Barrel	Cal. Stamp only	Cal. Stamp only
Proof, Etc.	Not visible	Not visible
Receiver	Standard 700	Standard 700
<b>OPEN SIGHTS</b>	Optional	Optional
<b>PARKING</b>		
Outer Carton	Cloth Case Standard	Protector-Caddy Special
<b>STOCK (Floor Plate)</b>		
Bedding	Blind Mag. Opt.	Blind Mag. Opt.
Finish (Rubbed)	Hand	Hand
Oil - Optional	RK-W	RK-W
Grain	No Charge	No Charge
Checker	Fancy No. 4	Full Fancy No. 6.
Pattern (See Photos)	Hand	Hand
Pitch	"D"	"F"
Grip Cap	22	22
White Spacer	Rosewood (India)	Rosewood (India)
Butt Plate (Plastic)	Yes (Opt. w/6)	Yes (Opt. w/6)
White Spacer	Black	Black
Nameplate	Yes (Opt. w/6)	Yes (Opt. w/6)
Recoil Pad	None	Gold
Reinforcing Bolt	Use Pachmayr - Presentation type for Magnum orders	
Fore-End Tip	Rosewood Plug (2)	Rosewood Plug (2)
White Spacer	Rosewood (India) (Opt. w/6)	Rosewood (India) (Opt. w/6)
Fore-End Length (From bbl. Bracket) 11" or 10" (Dep. on bbl. length)	Yes (Opt. w/0)	Yes (Opt. w/0)
Swivels (7/8") Q.D.	Yes	Yes
Left Hand Cheekpiece	Optional	Optional
<b>SLING STRAP</b>	No	No
<b>TEST</b>	Rigid	Rigid

**BDL**  
**Grade**

Date 2-18-66  
REVISED 6-15-66

REMINGTON STANDARDS - ARMS

Caliber: 7.62 NATO  
SHEET 2 of 8

MODEL 700 Sniper		BDL Grade			
BARREL	Round tapered to breech and crowned. Parkerized, (BDL Grade). Remington specification alloy steel.				
Chamber	Basic - 7.62 NATO				
Length	24 inches				
Diameter (O.D.)	Varmint Weight (with tapers) (40XB Standard + .060" inch)				
Bore	.300 Min. - .301 Max.				
Groove (6)	.308 Min. - .3085 Max.				
Twist	1 in 10 inches - R.H.				
Markings	See MARKINGS - Barrel				
BARREL ASSEMBLY					
Sights	Redfield 8-9X Accurange (Furnished by Marine Corps)				
Mounting Holes	In Receiver only.				
BOLT					
Handle	Swept back with oval shaped ball with checker on top and bottom face.				
Color	Bolt Plug, Handle - Black Body - Black Firing Pin Head - Bright				
Markings	Serial Number on bottom of bolt.				
BOLT RELEASE					
	Located at front of Trigger. Black color.				



Date 2-18-66 6-21-67  
 REVISED 6-15-66

REMINGTON STANDARDS - ARMS

Caliber: 7.62 NATO  
 SHEET 3 of 8

MODEL 700 Sniper				BDL Grade			
BUTT PLATE	Screw (2) fitted to stock. All black color, corrugated metal.						
EJECTOR	Plunger type, spring loaded and pin assembled in bolt head.						
EXTRACTOR	Circular, clip type assembled inside bolt rim with rivet.						
FIRING PIN	Cocks on opening of bolt.						
Protrusion	.045" Min.	.075" Max.					
Indent	.018" Min.	.026" Max.	(using copper crusher)				
FLOOR PLATE				Hinged with finger latch.			
Color				Black			
Material				Aluminum			
Latch (corrugated - in trigger guard)				Black			
FORE-END (Cap)				None			
GRIP CAP				None			
GUN:							
Capacity (Ctgs.)				6 (5 in Magazine).			
Length (overall)				44 1/2"			
MAGAZINE	"Fixed" box type. Stagger column loading. Clip slot in top of receiver.						
Floor Plate (Hinged - with Latch)				Yes			
Loads				Top & with 5 shot clip.			
Capacity				5 ctgs.			
Follower (color)				Bright Nickel.			

Date 2-18-66  
REVISED 6-15-66

**REMINGTON STANDARDS - ARMS**

Caliber: 7.62 NATO  
SHEET 4 of 8

## MODEL 700 Sniper

**BDL**  
**Grade**

MARKINGS - Barrel (Dwg. No. C-15360)

Assembly	Left rear
----------	-----------

Code (Mfg. Date)	Left rear
------------------	-----------

Inspection	Left rear
------------	-----------

Proof (REP)	Right rear
-------------	------------

Target	Right rear
--------	------------

7 Test (function)	Right rear
-------------------	------------

Test (Magna-flux)	Right rear
-------------------	------------

**MARKINGS - Receiver (Dwg. No. C-15360)**

Grade	None
-------	------

Model Script	None
--------------	------

Model Number	Below Remington Script
--------------	------------------------

Remington Script	Left Side
------------------	-----------

Serial No.	Left Side, front
------------	------------------

U.S.	Centered above serial no.
------	---------------------------

<b>MARKINGS</b> - Bolt (Prick-punch mark)	Ref: Current Practice
---	-----------------------

Magnaflux	Right Lug (Center)
-----------	--------------------

**Serial No, Under Side (rear).**

Bolt Head Braze	Left Lug (Center)
-----------------	-------------------

Bolt Handle Braze	Rear Handle (Center)
-------------------	----------------------

Proof	Bottom Handle (Center)
-------	------------------------

**METAL FINISH:**

Parkerized on all exposed metal parts except as otherwise tabulated.

Caliber: 7.62 NATO  
SHEET 5 of 8

**Date** 2-18-66  
**REVISED** 6-15-66

**REMINGTON STANDARDS - ARMS**

**MODEL 700 Sniper**

BDL  
Grade[illegible]

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

R2530624

Date, 2-18-66  
REVISED

REMINGTON STANDARDS - ARMS

Caliber: 7.62 NATO  
SHEET 6 of 8

MODEL 700 Sniper			BDL Grade				
RECEIVER	Cylindrical, alloy steel.						
Finish				Parkerized			
Sighting	(6 holes)	Drilled and	tapped for popular scope mount and receiver sight,				
Gas Escape	(1) Right hand side.						
Length (type)				Short			
Clip Slots				Yes			
Markings	See MARKINGS - Receiver						
RECOIL PAD				None			
SAFETY	2 stop position, thumb operated - forward and back,			Corrugated, black surface.			
Location	Right rear of receiver,						
"FIRE" position	Forward stop position						
"SAFE" position	Rearward stop position (bolt lock position also)						
SERIAL NUMBER				Yes			
Location	See MARKINGS - Receiver						
	See BOLT - Markings						
SLING STRAP				Govt, Furnished			
Type 1 1/4"							
SLING SWIVEL	See STOCK						

Date 2-18-66  
REVISED 6-15-66

**REMINGTON STANDARDS - ARMS**

Caliber: 7.62 NATO  
SHEET 7 of 8

MODEL 700 Sniper				BDL Grade			
SIGHTS				Redfield 3-9X	Accuracy furnished by gov't.		
STOCK (Assembly)	American Walnut.	Monte Carlo	with cheek piece.	Pistol Grip	with comb cuts.		
Finish				Oil			
Dimensions (Nominal)				See Below			
Drop at Heel (from C/L of barrel)				1 5/16"			
Drop at Comb & Monte Carlo (from C/L of barrel)				11/16"			
Length of Pull				13 3/8"			
Length of Grip				3 3/8"			
Pitch (from C/L of barrel)				2 7/8"			
Butt Plate				Yes			
Swivels (2) 1-1/4"	Non-detachable			Yes			
LENGTH (Overall) Stock (Approx.)				30-5/8"			

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

R2530626

Date 2-18-66  
REVISED 6-15-66

**REMINGTON STANDARDS - ARMS**

Caliber: 7.62 NATO  
SHEET 8 of 8

[illegible]

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

**R2530627**

MODEL 700C

5-7-81

REVISED 7-24-79

## REMINGTON STANDARDS - ARMS

SHEET 1 of 1

MODEL 700 Classic

(1) Same as BDL Grade Except:

BARREL No Sight Holes

CALIBERS 22-250

6mm

243

30-06

270

7mm Rem. Mag.

(3) 7mm Mauser (7 x 57)

RECOIL PAD

(Std. Calibers)

(7mm Rem. Mag.)

Presentation Type - Brown with black backer

Same as used on Std. 700 except Brown with black backer.

STOCK (Assembly)

Butt Plate No

Cheekpiece No

Checkering Machine cut -20 lines / in

Fore-end Tip No

Finish Vinyl

Grip Cap No

Recoil Pad Yes (See Recoil Pad)

Swivel Studs No

(2) Drop at Comb 1 - 5/8"

(2) Drop at Heel 2"

(1) Added Barrel

(2) Added Drops

(3) Added



Same as BDL Grade Except:

## No Sight Holes

22-250

243

30-0

270

7mm Rem. Mag.

(Std. Calibers)

(7mm Rem. Mag.)

Presentation Type – Brown with black backer
---

Same as used on Std. 700 except Brown with black backer.

### Butt Plate

No

## Cheekpiece

No

## Checkering

Machine cut — 20 lines / in

### Fore-end Tip

No

## Finish

## Vinyl

Grip Cap

No

## Recoil Pad

Yes (See Recoil Pad)

## Swivel Studs

No

(2) Drop at Comb

1 - 5/8"

(2) Drop at Heel

2''

(1) Added Barrel

(2) Added Drops

**MODEL 700 Custom**

### C Grade

Same as BDL Grade Specifications Except as indicated below:
---

## ACCURACY

**Specially Selected at gallery**

**ASSEMBLY – Action**

## Smooth Working

### All Parts (Selection)

## Custom Assemble

### All Screws

Not Qualified

## BARREL

**Std. 700**

### Length

22" . 24" Depending on Caliber

## CALIBERS

**All Calibers in BDL Grade except 17 Rem. and 264 Win.**

### FINISH (Exterior)

Black except as shown below:

Barrel

## Special Polish

Receiver

” ”

### Trigger Guard

11 11

**Floor Plate**

” ”

### Trigger Guard Screw

### Standard

### Recoil Pad Screw

”

## Safety

11

### Firing Pin Head

## Satin Chrome

### Bolt Body

## Damascene

### Bolt Head

### Special Polish

### Bolt Handle

19 19

### Bolt Plug

11 11

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

**R2530631**

5/23/77  
3/23/77  
REVISED

REMINGTON STANDARDS - ARMS

SHEET 2 of 2

MODEL	700 Custom	C Grade						
<b>MARKINGS (C-15360)</b>								
	Barrel	Std. 700						
	Proof. Etc.	Visible						
	Receiver	Std. 700						
<b>OPEN SIGHTS</b>								
		See Packing						
<b>PACKING</b>								
	Outer Carton	Cloth Case Standard						
		Sights packed in cloth bag						
<b>STOCK</b>								
	Bedding	Hand						
	Finish	RK-W or Satin Finish						
	Grain	Fancy						
	Checker	Cut						
	Pattern (See Photos)	BDL						
	Pitch	20						
	Grip Cap	Rosewood (India)						
	White Spacer	Yes						
	Recoil Pad	Use Pachmayr - Presentation type						
	Brown Spacer							
	Reinforcing Screw	Rosewood Plug (2)						
	Fore-End Tip	Rosewood (India)						
	White Spacer	Yes						
(1)	Fore-End Length (from Bbl. Bracket)	11" or 10" (Dep. on Bbl. Length)						
	Studs	Yes						
	Left Hand Cheekpiece	Optional (Added cost)						
<b>SLING STRAP</b>								
		No						
<b>TEST</b>								
		Rigid						
(1)	Error on previous transmittal. was 1" or 10"							

**REVISED 11-11-70**

## REMINGTON STANDARDS - ARMS

SHEET 1 of 2

MODEL	700	D Grade	F Grade
		Same as Standard Grade Specifications Except as indicated below:	
<b>ASSEMBLY – Action</b>		Smooth Working	Special Polish
<b>All Parts (Selection)</b>		Custom Assembly	Custom Assembly
<b>All Screws</b>		Qualify	Qualify
<b>BARREL</b>		Select (No Stainless Steel)	Select (No Stainless Steel)
<b>Length</b>		20", 22", 24"	20", 22", 24"
<b>ENGRAVE</b>			
<b>Barrel</b>		Simple Scroll	App. "F" Scroll
<b>Receiver</b>		Simple Scroll	App. "F" Scroll
<b>Trigger Guard</b>		Simple Scroll	Bear or Deer Head
<b>Trigger Guard Screw</b>		Simple Scroll (head on screw)	Simple scroll
<b>Floor Plate (BDL)</b>		Simple Scroll	Simple Scroll
<b>Bolt Handle – Plug</b>		Simple Scroll	Simple Scroll
<b>Bolt Body</b>		Damascene	Damascene
<b>FINISH (Exterior)</b>		Black except as shown below:	
<b>Barrel</b>		Special Polish	Special Polish
<b>Receiver</b>		Special Polish	Special Polish
<b>Trigger Guard</b>		Special Polish	Special Polish
<b>Floor Plate</b>		Special Polish	Special Polish
<b>Trigger Guard Screw</b>		Special Polish	Special Polish
<b>Butt Plate Screw</b>		Special Polish	Special Polish
<b>Safety</b>		Special Polish	Special Polish
<b>Firing Pin Head</b>		Satin Chrome	Satin Chrome
<b>Bolt Body</b>		Damascene	Damascene
<b>Bolt Head</b>		Special Polish	Special Polish
<b>Bolt Handle</b>		Special Polish	Special Polish
<b>Bolt Plug</b>		Special Polish	Special Polish

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

R2530633

5-24-77  
11-11-70  
REVISED

REMINGTON STANDARDS - ARMS

SHEET 2 of 2

MODEL 700	D Grade	F Grade
<b>MARKINGS (C-15360)</b>		
Barrel	Cal. Stamp only	Cal. Stamp only
Proof, Etc.	Not visible	Not visible
Receiver	Standard 700	Standard 700
<b>OPEN SIGHTS</b>	Optional	Optional
<b>PARKING</b>	Cloth Case	Protector-Caddy
Outer Carton	Standard	Special
<b>STOCK (Floor Plate)</b>	Blind Mag. Opt.	Blind Mag. Opt.
Bedding	Hand	Hand
Finish (Rubbed)	RK-W	RK-W
Oil - Optional	No Charge	No Charge
Grain	Fancy No. 4	Full Fancy No. 6
Checker	Hand	Hand
Pattern (See Photos)	"D"	"F"
Pitch	22	22
Grip Cap	Rosewood (India)	Rosewood (India)
White Spacer	Yes (Opt. w/6)	Yes (Opt. w/6)
Butt Plate (Plastic)	Black	Black
White Spacer	Yes (Opt. w/6)	Yes (Opt. w/6)
Nameplate	None	Gold
Recoil Pad	Use Pachmayr - Presentation type for Magnum	orders
Reinforcing Bolt	Rosewood Plug (2)	Rosewood Plug (2)
Fore-End Tip	Rosewood (India) (Opt. w/6)	Rosewood (India) (Opt. w/6)
White Spacer	Yes (Opt. w/0)	Yes (Opt. w/0)
Fore-End Length (From bbl. Bracket) 11" or 10" (Dep. on bbl. length)		11" or 10" (Dep. on bbl. length)
Swivels (7/8") Q.D.	Yes	Yes
Left Hand Cheekpiece	Optional	Optional
<b>SLING STRAP</b>	No	No
<b>TEST</b>	Rigid	Rigid

MODEL 700  
1974 VERSION

REVISED 5-20-81

## REMINGTON STANDARDS - ARMS

SHEET 1 of 1

MODEL	1974 700 Version	5-Shot Group Size	Test Ammo.						
BOLT ACTION REPEATER		(C to C)	(Gr.)						
CALIBERS (Center Fire)									
222 Rem.		2.2"	50 HPPL						
22-250 Rem.		2.2"	55 HDPL						
17 Rem.		2.2"	25 HPPL						
6mm Rem.		2.2"	80 HPPL						
243 Win.		2.2"	100 SP						
308 Win.		3.5"	180 PSP						
30-06		3.5"	220 SP						
270 Win.		3.5"	150 SP						
25-06 Rem.		2.2"	87 HPPL						
7mm Rem. Mag.		2.7"	175 PSP						
264 Win. Mag.		2.2"	140 SP						
300 Win. Mag.		3.5"	180 SP						
375 H.H. Mag.		3.5"	270 SP						
458 Win. Mag.		3.5"	510 SP						
8mm Rem. Mag.		3.5"	220 PSP						
7mm Mauser (7 x 57)		2.7"	175 SP						
7mm-08 Rem.		2.7"	140 PSP						
7mm Exp. Rem.		3.5"	165 SP						
CALIBERS (Varmint)*									
7mm-08 Rem.		1.5"	140 PSP						
222 Rem.		1.5"	50 PL						
223 Rem.		1.5"	50 PL						
22-250 Rem.		1.5"	55 PL						
6mm Rem.		1.5"	80 PL						
243 Win.		1.5"	80 PL						
25-06		1.5"	87 PL						
308 Win.		1.5"	168						
7.62 NATO		2.0	168						
*Current production lists 1.5" (inside to inside) for all Varmint calibers.									

REVISED 3-12-73 / 9-13-76

REMINGTON STANDARDS - ARMS

MODEL 700	1974 Version	5-Shot Group Size	Test Ammo.						
<b>BOLT ACTION REPEATOR</b>		(C to C)	(Gr.)						
<b>CALIBERS (Center Fire)</b>									
222 Rem.		2.2"	50 HPPL						
22-250 Rem.		2.2"	55 HDPL						
17 Rem.		2.2"	25 HPPL						
6mm Rem.		2.2"	80 HPPL						
243 Win.		2.2"	100 SP						
308 Win.		3.5"	180 PSP						
30-06		3.5"	220 SP						
270 Win.		3.5"	150 SP						
25-06 Rem.		2.2"	87 HPPL						
7mm Rem. Mag.		2.7"	175 PSP						
264 Win. Mag.		2.2"	140 SP						
300 Win. Mag.		3.5"	180 SP						
375 H. H. Mag.		3.5"	270 SP						
458 Win. Mag.		3.5"	510 SP						
(1) 8mm Rem. Mag.		3.5"	220 PSP						
<b>CALIBERS (Varmint)*</b>									
222 Rem.		1.5	50 PL						
223 Rem.		1.5	50 PL						
22-250 Rem.		1.5	55 PL						
6mm Rem.		1.5	80 PL						
243 Win.		1.5	80 PL						
25-06		1.5	87 PL						
308 Win.		1.5	168						
<b>CALIBER (SNIPER)</b>									
7.62 NATO		2.0	168						
* Current production lists 1.5" (inside to inside) for all Varmint calibers.									
(1) Added									



**KINZER V. REMINGTON**

**REMINGTON STANDARDS - ARMS**

SHEET 1 of 1

[illegible]

BDL Grade

[illegible]

R2530639

REVISED 3-12-73 / 9-13-76 / 1/26/79

## REMINGTON STANDARDS - ARMS

SHEET 2 of 8

MODEL 700	1974 Version	ADL Grade	BDL Grade
ANNOUNCEMENT		(Discontinued)	
30-06	1962		
270 Win.	1962		
222 Rem.	1962		
7mm Rem. Mag.	1962		
264 Win. Mag.	1962		
300 Win. Mag.	1964		
308 Win.	1962		
243 Win.	1962		
25-06 Rem.	1970		
6mm Rem.	1963		
22-250 Rem.	1965		
17 Rem.	1971		
6.5 Rem. Mag.	1969	1972	
350 Rem. Mag.	1969	1972	
(1) 8mm Rem. Mag.	1977		*
(2) 7 mm Exp. Rem.	1979		
BARREL	Round, tapered to breech, crowned, Black color, Medium luster.		
Material:	Remington specified alloy steel. Stainless steel for 17 Rem. only.		
Bore - Groove:	See Rifling Index.		
Optional Barrel:		w/o Sights	w/o Sights.
Markings:	See Marking - Barrel.		
BOLT ASSEMBLY:	3 piece brazed assembly - Bolt body, Bolt head, Bolt handle Includes Firing Pin Assembly.		
Bolt Plug:	Cover firing pin head. Black color		
Bolt Handle:	Swept back oval shape ball. Checker on upper and lower face of ball. Black color		
Bolt Body:	Bright Steel - damascene finish.		
Bolt Head	Black color.		
Feature	Anti-bind design		
Markings:	See Markings - Bolt		
Size:			
Short	222, 17 Rem.		
Short Std.	243, 6mm, 308, 22-250		
(2) Standard	30-06, 270, 25-06, 7 mm Exp. Rem.		
(1) Magnum	7mm, 264, 300 Mag., 8mm Rem. Mag.		
(1) Added 8mm Rem. Mag.	(2) Added	7 mm Exp. Rem.	

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

**REMINGTON STANDARDS - ARMS**

SHEET 3 of 8

MODEL 700		1974 Version	ADL Grade	BDL Grade
BOLT RELEASE	Located to front of trigger.		Black color.	
BUTT PLATE	Screw (2) fitted.		Black plastic, corrugated surface	
Caliber use:	30-06, 25-06, 222, 22-250, 270, 243, 308, 6mm, 17 Rem. (See recoil pad for magnum calibers).			
EJECTOR	Plunger Type,		spring loaded, pin assembled to bolt head.	
EXTRACTOR	Circular, clip type,		riveted inside bolt head.	
FIRING PIN	Spring retracted in bolt.			
Indent	.018" Min. - .026" Max.		(Use copper crusher)	
Protrusion	.045" Min. - .075" Max.			
FLOOR PLATE	Black metal.		Latch in trigger guard.	
Use			No	Yes
FORE-END (Cap)	Black plastic - bonded to stock.			
Use			No	Yes
Spacer			---	White Plastic
GRIP CAP	Black plastic - bonded to stock.			
Use			No	Yes
Spacer			---	White plastic

● 4 ●

R2530641

3-27-73

REVISED 9-13-76 1/26/79

## REMINGTON STANDARDS - ARMS

SHEET 4 of 8

1974 MODEL 700 Version		ADL Grade			BDL Grade			
GUN LENGTH & WEIGHT:		Barrel	Receiver	Overall	Weight	See below Weight		
243 Win.		22"	Short	41 5/8"	7 lbs.	Add 4 oz.		
308 Win.		22"	"	"	"	Sling, etc.		
6mm Rem.		22"	"	"	"			
(2)	7 mm Exp. Rem.	22"	Long	42 1/2"	"			
30-06		22"	Long	42 1/2"	7 lbs.	Sling, etc.		
270 Win.		22"	"	"	"			
17 Rem.		24"	Short	43 5/8"	7 lbs. 4 oz.	Sling, etc.		
222 Rem.		24"	"	"	"			
22-250		24"	"	"	"			
7mm Rem. Mag.		24"	Long	44 1/2"	7 lbs. 8 oz.	Sling, Etc.		
25-06 Rem.		24"	"	"	"			
264 Win. Mag.		24"	"	"	"			
300 Win. Mag.		24"	"	"	"			
(1)	8mm Rem. Mag.	24"	"	"	"	Sling, Etc.		
MAGAZINE		Fixed box. Stagger column loading.						
Capacity:		(Add one (1) for Gun Capacity)						
5 ctgs.		222, 17 Rem						
(2)	4"	22-250, 243, 308, 6mm, 270, 30-06, 25-06 7 mm Exp. Rem.						
3"		7mm, 264, 300 Mag.						
Floor Plate		(hinged with latch)			None		Yes	
Follower:		* Polished Stainless Steel						
Loads: (or unloads)					Top only		Top & Bottom	
* Finish corrected. Was bright nickel.								
(1) Added								
(2) Added 7 mm Exp. Rem.								

LIMITED DISTRIBUTION

REVISED 3-12-73

REMINGTON STANDARDS - ARMS

SHEET 5 of 8

MODEL 700 1974 Version		ADL Grade	BDL Grade
MARKINGS - Barrel (Dwg. C-15360)			
Assembly	Left Rear		
Caliber	Left Rear of Remington name		
Code (Mfg. Date)	Left Rear		
Inspection	Left Rear		
Patent Numbers	Below Remington address.		
Remington Address	Left Side		
Target	Right Rear.		
Test	Right Rear		
Magnaflux	Right Rear		
Other	---		
MARKINGS - Bolt (Prick-punch mark)			
Bolt Handle Braze	Rear Handle (Center)		
Bolt Head Braze	Left Lug (Center)		
Magnaflux	Right Lug (Center)		
Proof	Bottom Handle (Center)		
Serial Number (1)	Underside (Rear)	Last four (4) numbers only.	
MARKINGS - Receiver (Dwg. C-15360)			
Grade	None		
Model Number	Below Remington Script		
Model Script	None		
Remington Script	Left Side		
Serial Number	Left Side, Front		
Other	Mark "S" and "F" on receiver below and above resp. SAFE and FIRE stop positions of safety.		

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

## REMINGTON STANDARDS - ARMS

SHEET 6 of 8

MODEL 700 1974 Version	ADL Grade	BDL Grade
PACKING	Full length in single wall, inner rifle carton. Bolt removed and packed separately in same carton, Exposed metal parts coated with rust preventive.	
Inner Carton	One piece folding, corrugated fiberboard.	
Literature	Gun Owner's Guide - Form No. 5461 in carton. Misc. sale items if available.	
Markings	Printed label giving manufacturer, model name and/or number, caliber, serial number and packing code., sales number.	
Outer Carton	1, 2, 3 or 5 inner carton capacity. Corrugated carton of greater strength.	
Literature	Copy of regular Remington shipping ticket with, complete information.	
Markings	Name, address of Purchases with purchaser's order number.	
Shipping Weight		
1 gun	10 lbs.	
2 guns	19 lbs.	
3 guns	27 lbs.	
5 guns	46 lbs.	
Export	Packaging same as domestic but with "legal" or actual weight recorded on label.	
PATENT NO's.	2,473,373 - 2,514,981 - 2,585, 195	
PROOF TEST (REP)	Fire one (1 - standard proof cartridge in each rifle. For location of marking (REP), see MARKINGS - Barrel.	
RECEIVER	Cylindrical, alloy steel, black medium luster.	
Action Lengths	See Gun Length and Weights	
Finish	Medium Luster.	
Gas Escape	(1) Right Hand Side	
Markings	See Markings - Receiver	
Sighting	(6 holes) Drilled and tapped for popular scope mount and receiver sight.	
Feature	Anti-bind design.	

RD-6459

R2530644

# LIMITED DISTRIBUTION

REVISED 3-12-73

REMINGTON STANDARDS - ARMS

SHEET 7 of 8

MODEL 700	1974 Version	ADL Grade	BDL Grade
RECOIL PAD	Black Color		
Calibers:	All Magnum Grades only.		
(2) Markings:	"Remington" on back surface See Logo B2 for Size.		
Spacer	White plastic		
SAFETY	2 stop position, thumb operated - forward and back. Corrugated, black surface.		
Location	Right rear of Receiver.		
"FIRE" position	Forward stop position. Marked "F" on receiver.		
"SAFE" Position	Rearward stop position (Bolt lock position also). Marked "S" on receiver.		
SERIAL NUMBER	(Start 6,200,000 Last No. 6,899,999 Ref: See Marking Dwg. C-15360)		
Location	See MARKINGS - Receiver See BOLT - Markings (Last four (4) numbers only).		
SLING STRAP			
Type - 7/8"	Leather, one piece - purchased. Accessory		St. Equipment
SLING SWIVEL 7/8"	See STOCK	Accessory	Standard
O. D.		(added cost)	Equipment
SIGHTS	Metal, black color. (Removable).		
Front	Brass face head (dovetail) with screw (2) fit ramp.		
Rear (1)	Open, U-Notch - adjustable for windage and elevation. Sliding ramp for elevation.		
STOCK (Assembly)	American walnut, reddish filler. Monte Carlo with cheek piece. Pistol grip with comb cuts and checkered (Custom). See action: Long action, short action caliber use.		
Finish		RK-W	RK-W
Butt Plate	See Butt Plate		
Spacer (White Plastic)			
Recoil Pad	(MAGNUM caliber use only)		
Checkering		D-90976	D-91001
Recoil Pad Spacer (White Plastic)			
(1) REF: Op. Comm. meeting min. No. 9, June 1972, approving release to production.			
(2) See Memo J. H. Lewis to J. F. Finnegan dated 8-24-72			

RD-6489

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

KINZER V. REMINGTON

R2530645





**LIMITED DISTRIBUTION**

REVISED 3-14-73

REMINGTON STANDARDS - ARMS

SHEET 8 a of 8

MODEL 700 1974 Version

**All Grades – D & F Excepted**

STOCK TOLERANCES (Visible)								
Barrel Groove:	Max. Opening .015"							
Butt Plate:	Plate margin - none (when assembled) Stock margin - .010" Max. No opening allowable.							
Floor Plate:	Trigger guard margin - none Stock margin - .010" Max. No opening allowable.							
Floor Plate:	Trigger Guard margin - none Stock margin - .010" Max. Opening - .015" Max.							
Grip Cap:	Cap margin - none Stock margin - none No opening allowable							
Receiver:	Rear margin - none Stock margin, rear - .010" Max. Opening - .015" Max.							
Recoil Pad:	Pad margin - none (when assembled) Stock margin - .010" Max. No opening allowable.							
Safety:	Opening .020" Max. (Between safety arm and wood)							
REF: M. H. Walker								

REF: M. H. Walker

RD-6489

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

R2530647

M/700 Custom

11-11-70  
REVISED 9-12-68

REMINGTON STANDARDS - ARMS

SHEET 1 of 2

MODEL 700 Custom	C Grade	D Grade	F Grade	(1)
	Same as Standard Grade Specifications Except as indicated below:			
ASSEMBLY - Action	Smooth Working	Same as "C"	Special Polish	
All Parts (Selection)	Custom Assemble	" " "	Same as "C"	
All Screws	Not Qualified	Qualify	Qualify	
BARREL	Select (No Stainless Steel)	Same as "C"	Same as "C"	
Length	20", 22", 24"	" " "	" " "	
ENGRAVE				
Barrel	None	Simple Scroll	App. "F" Scroll	
Receiver	"	" "	" " "	
Trigger Guard	"	" "	Bear or Deer Head	
Trigger Guard Screw	"	Simple Scroll (head on screw)	Simple Scroll	
Floor Plate (BDL)	"	Simple Scroll	" "	
Bolt Handle - Plug	"	"	" "	
Bolt Body	Damascene	Same as "C"	Same as "C"	
FINISH (Exterior)	Black except as shown below:			
Barrel	Special Polish	Same as "C"	Same as "C"	
Receiver	" "	" " "	" " "	
Trigger Guard	" "	" " "	" " "	
Floor Plate	" "	" " "	" " "	
Trigger Guard Screw	Standard	Special Polish	Special Polish	
Butt Plate Screw	"	" "	" "	
Safety	"	" "	" "	
Firing Pin Head	Satin Chrome	Same as "C"	Same as "C"	
Bolt Body	Damascene	Same as "C"	Same as "C"	
Bolt Head	Special Polish	Same as "C"	Same as "C"	
Bolt Handle	" "	" " "	" " "	
Bolt Plug	" "	" " "	" " "	
(1) Removed C Grade 22 Cal. See new listing 40-XB Rim Fire Sporter.				

9-19-68

REVISED 11-11-70

## REMINGTON STANDARDS - ARMS

SHEET 2 of 2

MODEL 700 Custom	C Grade	D Grade	F Grade	(1)
MARKINGS (C-15360)				
Barrel	Cal. Stamp Only	Same as "C"	Same as "C"	
Proof, Etc.	Visible	Not Visible	Not Visible	
Receiver	Standard 700	Same as "C"	Same as "C"	
OPEN SIGHTS	Optional	Same as "C"	Same as "C"	
PARKING	Cloth Case	Same as "C"	Protector-Caddy	
Outer Carton	Standard	" " "	Special	
STOCK (Floor Plate)	Blind Mag. Opt.	Same as "C"	Same as "C"	
Bedding	Hand	" " "	" " "	
Finish (Rubbed)	RK-W	" " "	" " "	
Oil - Optional	Added Cost	No Charge	No Charge	
Grain	Fancy	Fancy No. 4	Full Fancy No. 6	
Checker	Hand	Same as "C"	Same as "C"	
Pattern (See Photos)	Skip-line	"D"	"F"	
Pitch	20	22	22	
Grip Cap	Rosewood (India)*	Same as "C"	Same as "C"	
White Spacer	Yes (Opt. w/6)	" " "	" " "	
Butt Plate (Plastic)	Black	" " "	" " "	
White Spacer	Yes (Opt.w/6)	" " "	" " "	
Nameplate	None	" " "	Gold	
Recoil Pad	Use Pachmayr - Presentation type for Magnum orders			
Reinforcing Bolt	Rosewood Plug (2)	Same as "C"	Same as "C"	
Fore-End Tip	Rosewood (India) (Opt.w/6)*	" " "	" " "	
White Spacer	Yes (Opt.w/6)	" " "	" " "	
Fore-End Length (from bbl. Bracket)	1" or 10" (dep. on bbl length)	" " "	" " "	
Swivels (7/8") O'D.	Yes	" " "	" " "	
Left Hand Cheekpiece	Optional (added cost)	Optional	Optional	
SLING STRAP	No	Same as "C"	Same as "C"	
TEST	Rigid	Same as "C"	Same as "C"	
*Steel Grip Cap (Black) is supplied when no Fore-End Tip is requested. w/o white spacer means all (3) places unless place specified.				
(1) Remove C grade 22Cal. See new listing 40-XB Rim Fire Sporter.				

**3/23/77  
REVISED**

**SHEET 1 of 2**

MODEL 700 Custom		C Grade	
	Same as BDL Grade Specifications Except as indicated below:		
ACCURACY	Specially Selected at gallery		
ASSEMBLY – Action	Smooth Working		
All Parts (Selection)	Custom Assemble		
All Screws	Not Qualified		
BARREL	Std. 700		
Length (1)	20", 22", 24" Depending on Caliber		
Sight Holes (2)	Customer Option		
CALIBERS (3)	All Calibers in BDL Grade except 17 Rem., 223 Rem., 375 H&H Mag. and 458 Win. Mag.		
FINISH (Exterior)	Black except as shown below:		
Barrel	Special Polish		
Receiver	" "		
Trigger Guard	" "		
Floor Plate	" "		
Trigger Guard Screw	Standard		
Recoil Pad Screw	"		
Safety	"		
Firing Pin Head	Satin Chrome		
Bolt Body	Damascene		
Bolt Head	Special Polish		
Bolt Handle	" "		
Bolt Plug	" "		
(1) Added 20"			
(2) Added			
(3) Added 223 Rem., 375 H&H Mag.			

RD 4100

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

R2530651

5/23/77  
3-14-78  
REVISED

REMINGTON STANDARDS - ARMS

SHEET 2 of 2

MODEL	700 Custom	C Grade						
<b>MARKINGS (C-15360)</b>								
	Barrel	Std. 700						
	Proof, Etc.	Visible						
	Receiver	Std. 700						
<b>OPEN SIGHTS</b>								
		See Packing						
<b>PACKING</b>								
	Outer Carton	Cloth Case Standard Sights packed in cloth bag						
<b>STOCK</b>								
	Bedding	Hand						
	Finish	RK-W or Satin Finish						
	Grain	Fancy						
	Checker	Cut						
(2)	Pattern (See Photos)	Full or Skipline						
	Pitch	20						
	Grip Cap	Rosewood (India)						
(3)	White Spacer	Optional						
	Recoil Pad	Use Pachmayr - Presentation type						
	Brown Spacer							
	Reinforcing Screw	Rosewood Plug (2)						
	Fore-End Tip	Rosewood (India)						
(3)	White Spacer	Optional						
(1)	Fore-End Length (from Bbl. Bracket)	11" or 10" (Dep. on Bbl. Length)						
	Studs	Yes						
	Left Hand Cheekpiece	Optional (Added cost)						
<b>SLING STRAP</b>								
		No						
<b>TEST</b>								
		Rigid						
<b>(1) Error on previous transmittal. was 1" or 10"</b>								
<b>(2) Was BDL</b>								
<b>(3) Was Standard</b>								

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

R2530652

REVISÉ 7-24-79

## REMINGTON STANDARDS - ARMS

SHEET 1 of 1

**MODEL 700 Classic**

Same as BDL Grade Except:

(1)	BARREL	No Sight Holes
-----	--------	----------------

CALIBERS	22-250	
	6mm	
	243	
	30-06	
	270	
	7mm Rem. Mag.	
(3)	7mm Mauser	(7 x 57)

RECOIL PAD

(Std. Calibers)

(7mm Rem. Mag.)

Presentation Type – Brown with black backer.

Same as used on Std. 700 except Brown with black backer.

**STOCK (Assembly)**

### Butt Plate

No

## Cheekpiece

No

## Checkering

Machine cut - 20 lines / in

### Fore-end Tip

No

## Finish

## Vinyl

### Grip Cap

No

### Recoil Pad

Yes (See Recoil Pad)

## Swivel Studs

No

(2) Drop at Comb	1 - 5/8"
------------------	----------

(2) Drop at Heel	2"
------------------	----

(1) Added Barrel

(2) Added Drops

(3) Added



REVISED 7-24-79

## REMINGTON STANDARDS - ARMS

SHEET 1 of 1

MODEL 700 Classic

(1) Same as BDL Grade Except:

BARREL No Sight Holes

CALIBERS 22-250

6mm

243

30-06

270

7mm Rem. Mag.

## RECOIL PAD

(Std. Calibers)

Presentation Type - Brown with black backer.

(7mm Rem. Mag.)

Same as used on Std. 700 except Brown with black backer.

## STOCK (Assembly)

Butt Plate

No

Cheekpiece

No

Checkering

Machine cut - 20 lines / in

Fore-end Tip

No

Finish

Vinyl

Grip Cap

No

Recoil Pad

Yes (See Recoil Pad)

Swivel Studs

No

(2) Drop at Comb

1 - 5/8"

(2) Drop at Heel

2"

(1) Added Barrel

(2) Added Drops

MODEL 700 LEFT HAND

Original : 3-30-72

REVISED

## REMINGTON STANDARDS - ARMS

SHEET of 1

MODEL 700 Left Hand							
SAME AS RIGHT HAND EXCEPT: BDL Grade only See Below:							
ACTION:		Left Hand Operation					
BARREL:							
Calibers		7mm Rem. Mag.					
		270 Win.					
		30-06					
BOLT:		Left Hand					
MARKINGS - RECEIVER		(C-90552)					
Remington Script:		Right Center					
Model Number:		Below Script					
Serial Number:		Right Front					
Safety "F" & "S":		Adjacent to Left Side Safety					
PACKAGING:							
RECEIVER:		Left Hand Ejection Port.					
Markings:		See MARKINGS - RECEIVER.					
SAFETY:		Left Side					
STOCK ASSEMBLY:		Left Side Bolt and Receiver Opening.					

M/766-L.H.

Original : 3-30-72

REVISED

## REMINGTON STANDARDS - ARMS

SHEET 1 of 1

MODEL 700 Left Hand

SAME AS RIGHT HAND EXCEPT: BDL Grade only See Below:

ACTION: Left Hand Operation

BARREL:

Calibers

7mm Rem. Mag.

270 Win.

30-06

BOLT:

Left Hand

MARKINGS - RECEIVER

(C-90552)

Remington Script:

Right Center

Model Number:

Below Script

Serial Number:

Right Front

Safety "F" &amp; "S":

Adjacent to Left Side Safety

PACKAGING:

RECEIVER:

Left Hand Ejection Port.

Markings:

See MARKINGS - RECEIVER.

SAFETY:

Left Side

STOCK ASSEMBLY:

Left Side Bolt and Receiver Opening.