

C6522148

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5715**

* Includes 1 in chamber.

Remington

Smead®

BARBER - M24 0003653
Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00110416** Serial: C6522148 Model M24 SWS Center Fire
 Verify Repair Caliber: 7.62 NATO Repairman: Status: New 3/29/2006 10:47:10 AM

Address Information

Customer: Received From Return To: Received From
 Name: CO A 1/20 SFG A CO A 1/20 SFG A
 Address 1: 1455 SHUG JORDAN PARKWAY 1455 SHUG JORDAN PARKWAY
 Address 2: ATTN MR GAY PO Box: ATTN MR GAY PO Box:
 City: AUBURN AUBURN
 State: AL Zip Code: 36832 Country: US State: AL Zip Code: 36832 Country: US

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information: Phone: Fax: Email: Comments:

Received Condition: Good
 Condition Notes:
 CSR Notes:

Accessories Received:

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
C000	SGT BASES	1

Repair Search Refresh Close

nagletj 3/28/2006 10:53 AM CAPS NUM INS SCFL

Start 2 Mic... Part Se... Arms S... 2 Mic... 2 Int... Create ... 10:53 AM

Serial Number: **C6522148**

Model: **M24 SWS**



RE00110416

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)

3.00 LBS (plus or minus 0.75 LBS)

4.00 LBS (plus or minus 1.00 LBS)

DATE 3-15-06TESTER R.P.

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.52	2.44		2.43	
PULL #2	2.52	2.46		2.53	
PULL #3	2.64	2.42		2.45	
PULL #4	2.30	2.42		2.53	
PULL #5	2.45	2.41		2.56	
TOTAL	12.43	12.15		12.50	
AVERAGE	2.48	2.43		2.50	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.05	3.00		
PULL #2	3.03	3.04		
PULL #3	3.10	3.03		
PULL #4	3.05	3.05		
PULL #5	3.09	3.10		
TOTAL	15.32	15.22		
AVERAGE	3.06	3.04		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.05	4.19		4.09
PULL #2	3.99	4.09		4.06
PULL #3	4.05	4.19		4.05
PULL #4	4.04	4.15		4.06
PULL #5	4.06	4.21		4.04
TOTAL	20.19	20.83		20.30
AVERAGE	4.03	4.16		4.06

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION


FIREARM SERIAL NUMBER / DATASET NAME: C6522148.___0
FILE DATE AND TIME: 04/11/2006 16:39

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.025
The Average Y Centroid of the Five Target Set:	-0.091
The Average Point of Impact of the Five Target Set:	0.094
The Average Mean Radius of the Five Target Set:	0.583
The Distance from POA to Centroid Target #1:	0.075
The Distance from Centroid Target #2 to Centroid Target #1:	0.195
The Distance from Centroid Target #3 to Centroid Target #1:	0.147
The Distance from Centroid Target #4 to Centroid Target #1:	0.264
The Distance from Centroid Target #5 to Centroid Target #1:	0.039

BARBER - M24 0003657

SERIAL NUMBER: C6522148. __0	POINT#	X	Y
TARGET NUMBER: 1	1:	-0.142	0.584
FILE DATE: 04/11/2006	2:	-0.194	0.327
FILE TIME: 16:39	3:	-0.192	0.116
	4:	-0.764	0.015
X CENTROID: -0.064	5:	-0.523	-0.234
Y CENTROID: -0.040	6:	-0.249	-0.204
POA TO CENTROID: 0.075	7:	0.002	-0.317
HORZ SPREAD: 1.720	8:	-0.068	-0.607
VERT SPREAD: 1.191	9:	0.956	-0.387
GROUP SPREAD: 1.766	10:	0.537	0.307
MIN RADIUS: 0.202			
MAX RADIUS: 1.077			
MEAN RADIUS: 0.529			
# IN 1 IN DIAMETER: 5			
# IN 2 IN DIAMETER: 9			
# in 3 IN DIAMETER: 10			

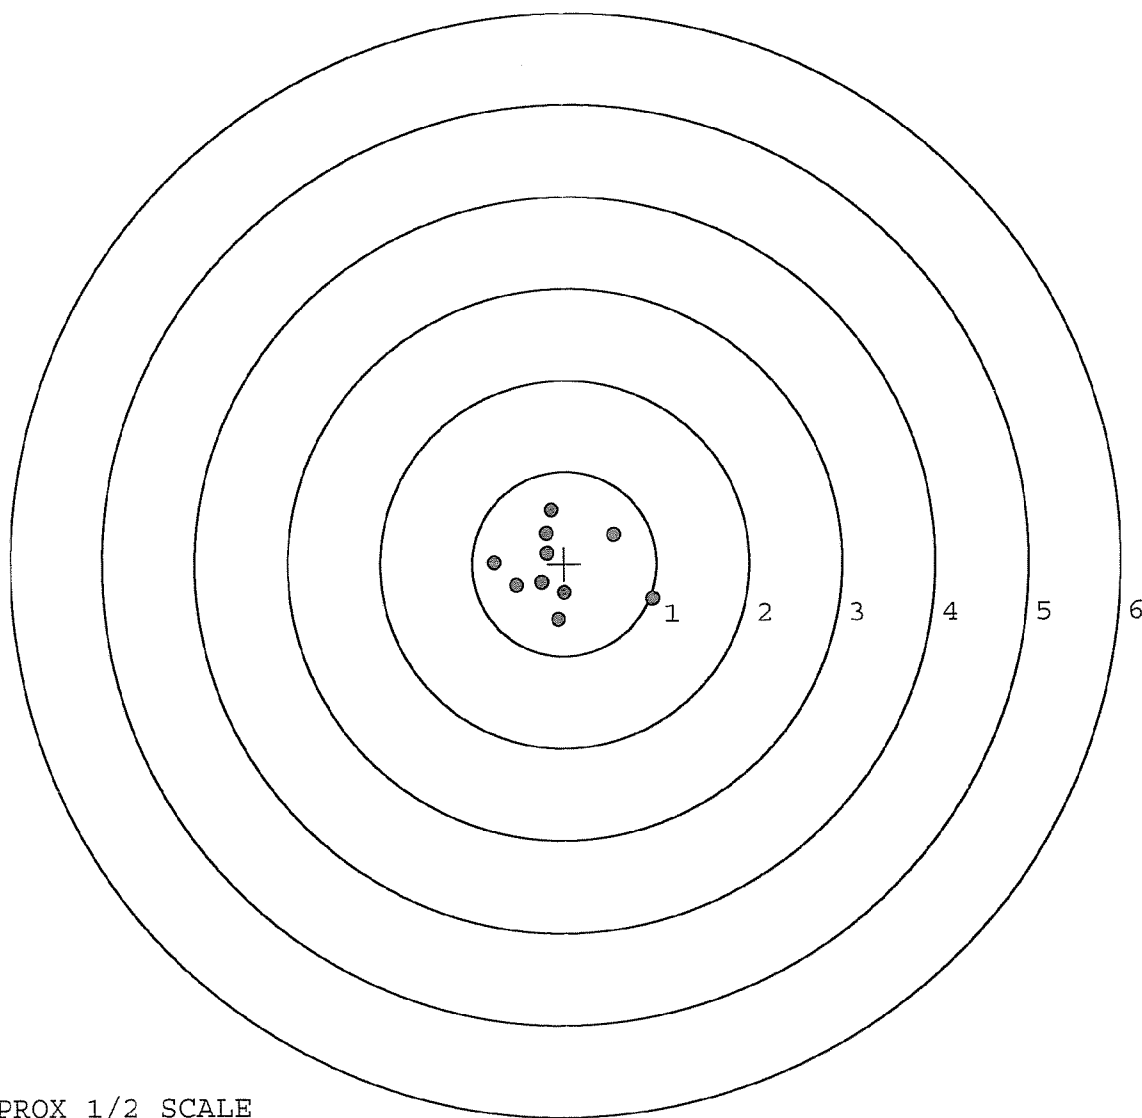


TARGET APPROX 1/2 SCALE

BARBER - M24 0003658

SERIAL NUMBER: C6522148. __0
 TARGET NUMBER: 2
 FILE DATE: 04/11/2006
 FILE TIME: 16:39

POINT#	X	Y
1:	-0.625	-0.250
2:	-0.592	-0.067
3:	-0.505	0.349
4:	-0.013	0.616
5:	0.145	0.153
6:	0.306	-0.067
7:	0.400	-0.307
8:	0.748	-0.137
9:	1.109	-0.602
10:	0.335	-0.037

X CENTROID: 0.131
 Y CENTROID: -0.035
 POA TO CENTROID: 0.135
 HORZ SPREAD: 1.734
 VERT SPREAD: 1.218
 GROUP SPREAD: 1.873
 MIN RADIUS: 0.178
 MAX RADIUS: 1.131
 MEAN RADIUS: 0.563
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

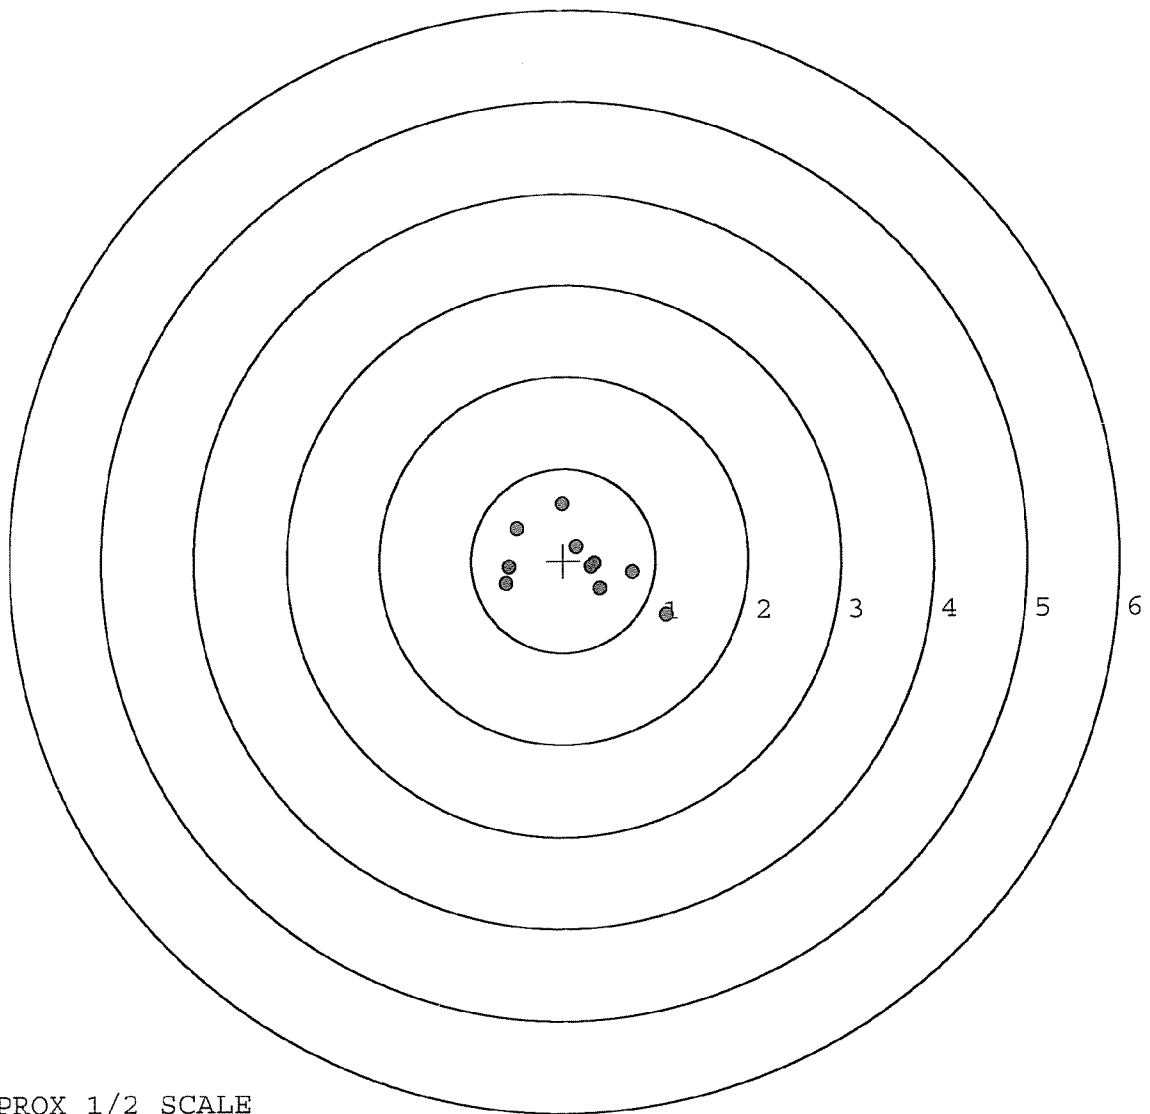


TARGET APPROX 1/2 SCALE

BARBER - M24 0003659

SERIAL NUMBER: C6522148. __0
 TARGET NUMBER: 3
 FILE DATE: 04/11/2006
 FILE TIME: 16:39

POINT#	X	Y
1:	-0.883	0.347
2:	-0.954	-0.223
3:	-1.193	-0.347
4:	0.555	0.841
5:	-0.372	-0.135
6:	-0.227	0.022
7:	0.303	0.008
8:	0.109	-0.398
9:	0.485	-0.932
10:	0.234	-0.261

X CENTROID: -0.194
 Y CENTROID: -0.108
 POA TO CENTROID: 0.222
 HORZ SPREAD: 1.748
 VERT SPREAD: 1.773
 GROUP SPREAD: 2.113
 MIN RADIUS: 0.134
 MAX RADIUS: 1.209
 MEAN RADIUS: 0.660
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 10

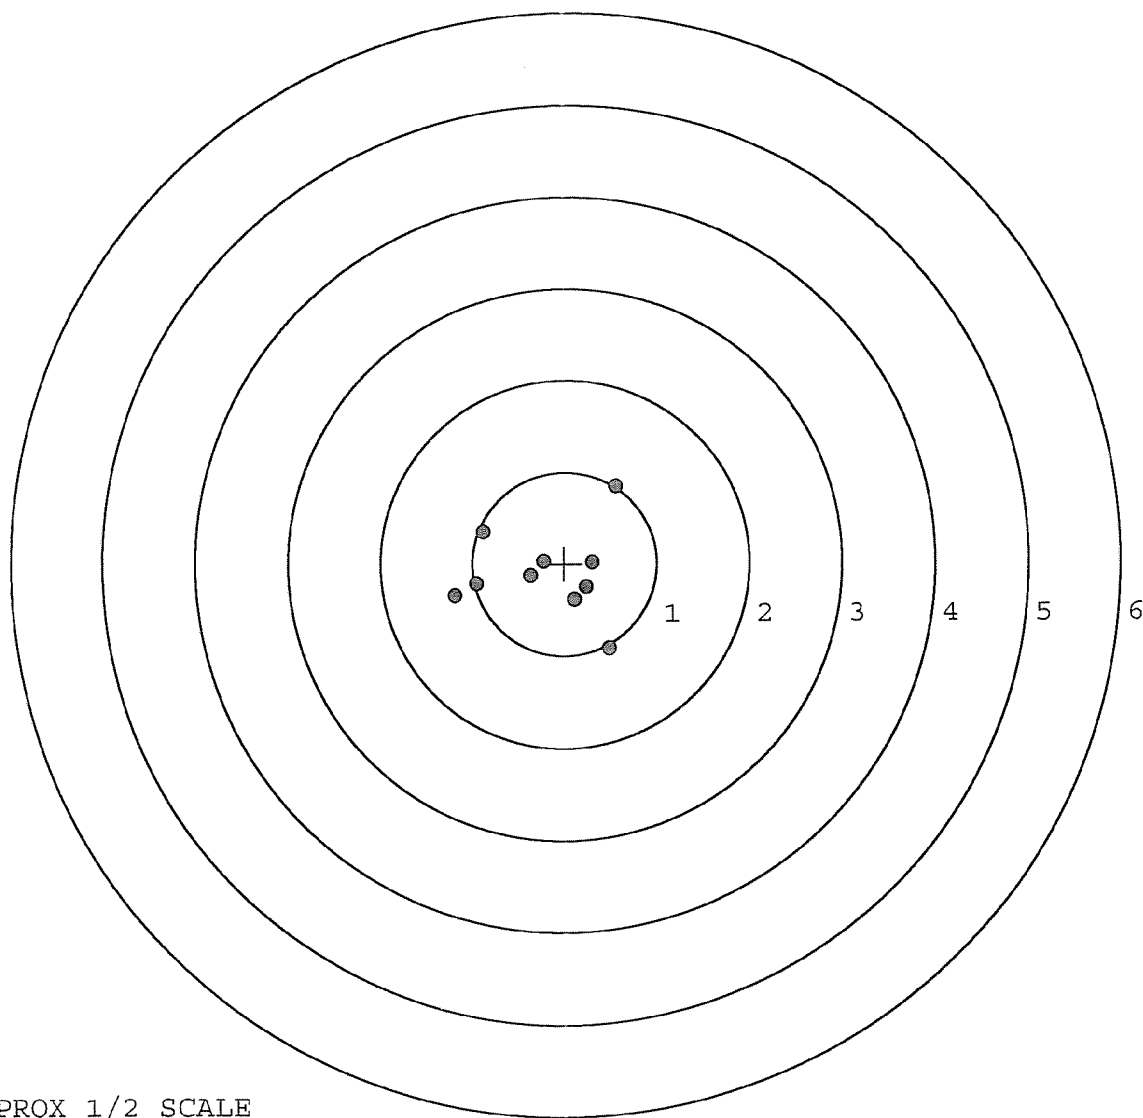

TARGET APPROX 1/2 SCALE

BARBER - M24 0003660

SERIAL NUMBER: C6522148. 0

TARGET NUMBER: 4

FILE DATE: 04/11/2006

FILE TIME: 16:39

X CENTROID: 0.063

Y CENTROID: -0.272

POA TO CENTROID: 0.279

HORZ SPREAD: 0.954

VERT SPREAD: 2.010

GROUP SPREAD: 2.072

MIN RADIUS: 0.148

MAX RADIUS: 1.163


MEAN RADIUS: 0.510

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.138	0.615
2:	-0.417	0.010
3:	-0.563	-0.223
4:	0.168	-0.031
5:	-0.085	-0.278
6:	0.386	-0.075
7:	0.391	-0.387
8:	0.259	-0.727
9:	0.365	-1.395
10:	0.266	-0.226

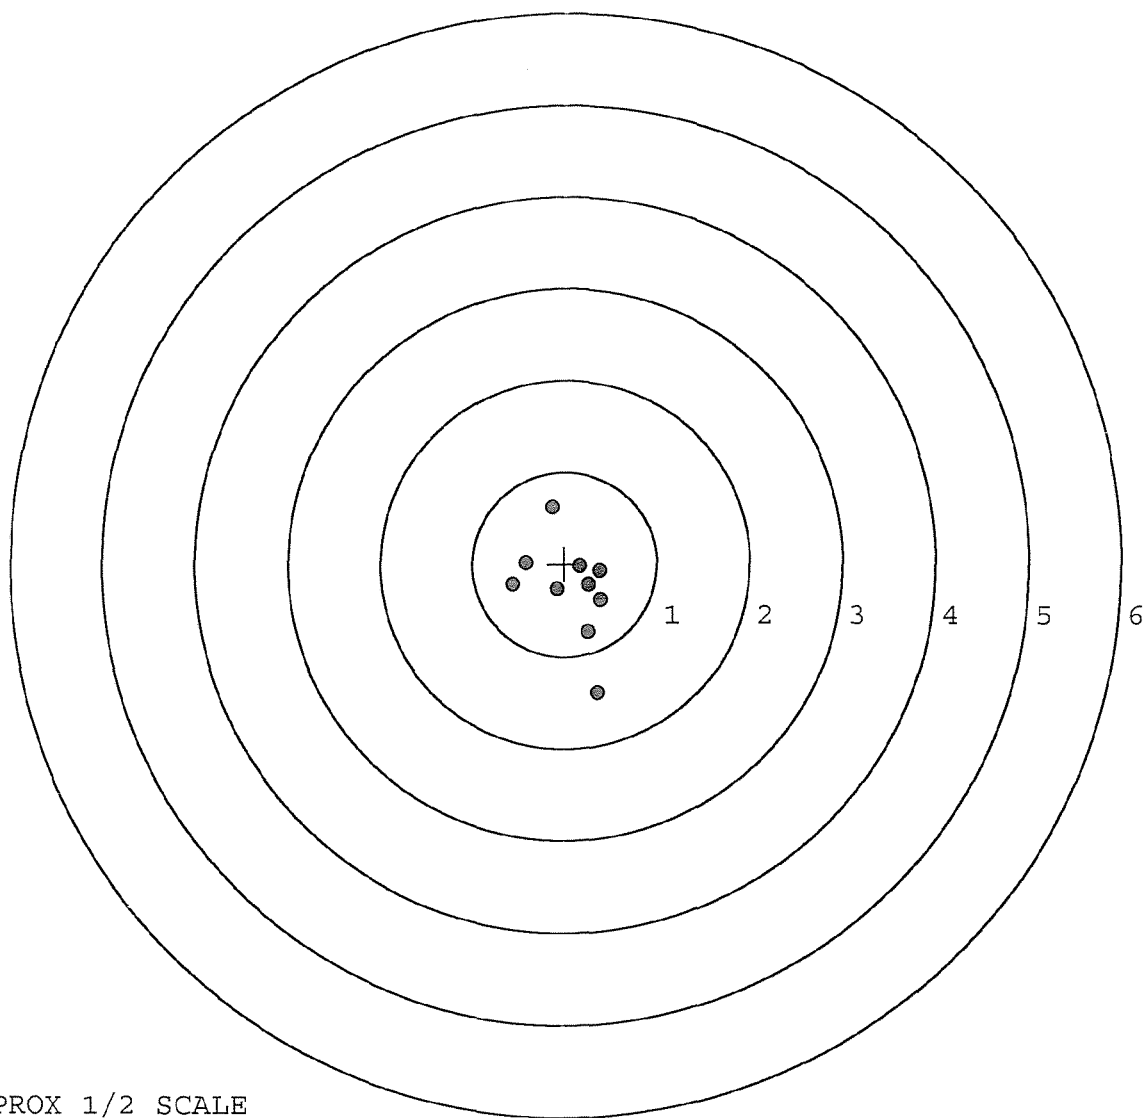

TARGET APPROX 1/2 SCALE

BARBER - M24 0003661

SERIAL NUMBER: C6522148. __0

TARGET NUMBER: 5

FILE DATE: 04/11/2006

FILE TIME: 16:39

POINT#	X	Y
1:	-0.719	-0.818
2:	0.242	-0.942
3:	0.330	-0.334
4:	0.344	-0.154
5:	0.062	0.071
6:	-0.190	-0.031
7:	-0.140	0.287
8:	-0.505	0.366
9:	-0.494	-0.255
10:	0.476	1.797

X CENTROID: -0.059

Y CENTROID: -0.001

POA TO CENTROID: 0.059

HORZ SPREAD: 1.195

VERT SPREAD: 2.739

GROUP SPREAD: 2.875

MIN RADIUS: 0.134


MAX RADIUS: 1.876

MEAN RADIUS: 0.651

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 9

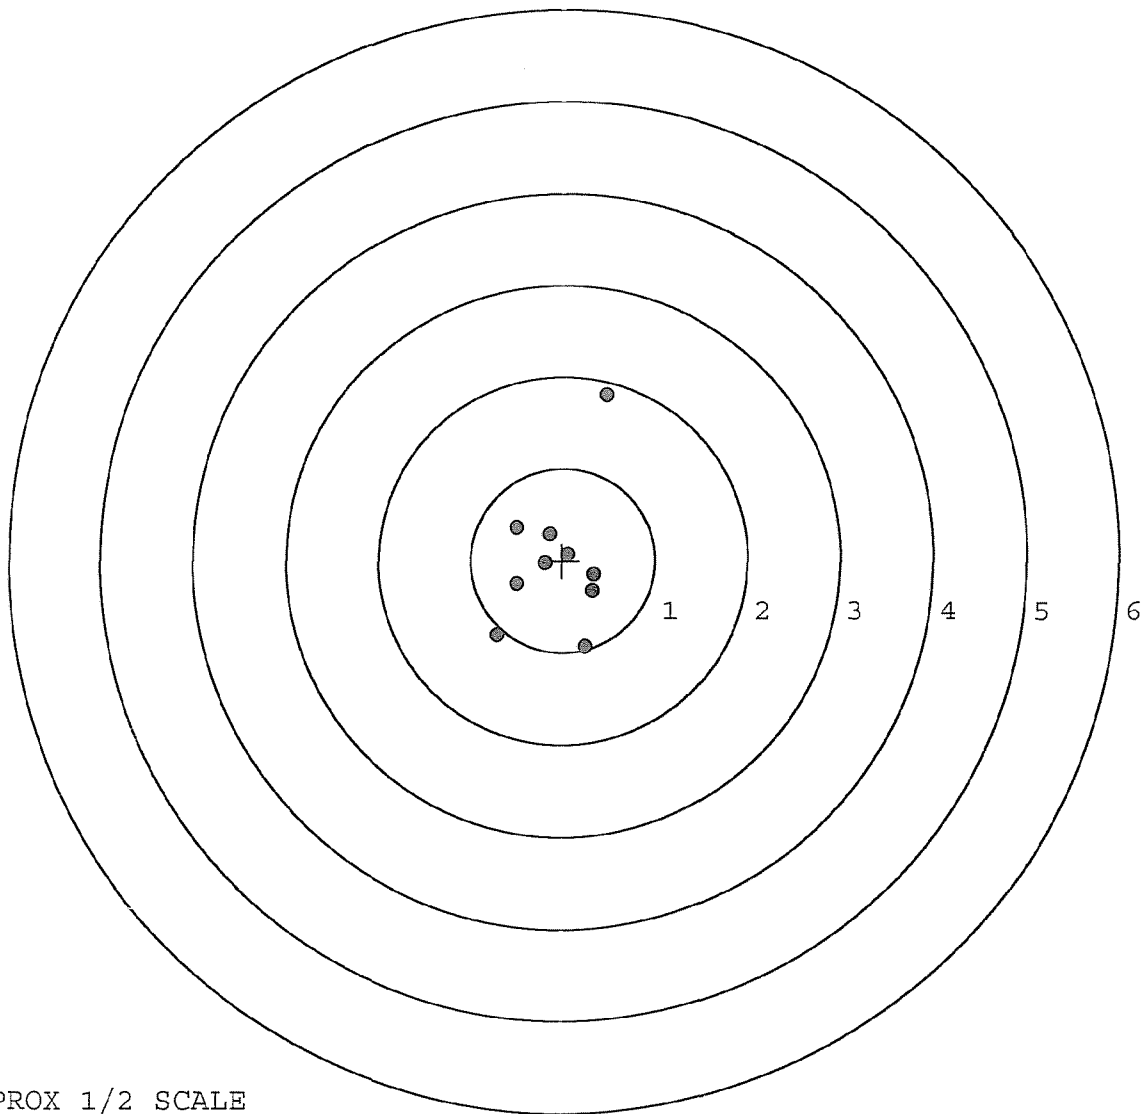

TARGET APPROX 1/2 SCALE

Remington
REG. U.S. PAT. & TM. OFF.

MODEL 700™ M24

VERY IMPORTANT:
 Instruction Book
 enclosed to assure
 safe use of this
 firearm.

DUPONT


MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marquo Deposae.

SERIAL NO. C6522148	ORDER NO. 5716
-------------------------------	--------------------------



5716 C6522148

LPC



0 47700 25716 7

100

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6522148
21 Aug 1990

CENTROIDAL DISTANCES

0 TO	1	1.15301
1 TO	2	.187218
1 TO	3	.328125
1 TO	4	1.32799
1 TO	5	1.81253

5
4 + ---- POI
3

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .149
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.557
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .576585
THE AMR FOR THIS RIFLE IS: .9196

21 Aug 1990

FILE:/PATTERNING/CENTERFIRE_PATT/CG522148

CENTERFIRE PATTERNS

1

POA

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 1

2in = 8

3in = 9

HS= 2.105

VS= 2.530

GS= 2.548

CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.232	1.232	1.100
MINIMUM X	-.873	-.873	-.719
MAXIMUM Y	1.588	1.015	.886
MINIMUM Y	-.942	-.766	-.639
CENTROID X	.319	.319	.165
CENTROID Y	-1.108	-1.284	-1.411
POA TO CENTROID in.	1.153	1.323	1.421
MIN RADIUS	.181	.127	.171
MEAN RADIUS	.928	.829	.702
MAX RADIUS	1.588	1.596	1.101
HORIZONTAL SPREAD	2.105	2.105	1.819
VERTICAL SPREAD	2.530	1.781	1.525
EXTREME SPREAD	2.548	2.423	1.819
NUMBER IN ONE INCH CIRCLE	= 1		
NUMBER IN TWO INCH CIRCLE	= 8		
NUMBER IN THREE INCH CIRCLE	= 9		

21 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6522148

CENTERFIRE PATTERNS # 2

POA

1in circle

2in circle

3in circle

OF SHOTS= 10

IN CIR

1in = 1

2in = 8

3in = 9

HS= 2.943

VS= 1.596

GS= 2.966

CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.917	.692	.567
MINIMUM X	-2.026	-.997	-.845
MAXIMUM Y	.796	.827	.739
MINIMUM Y	-.800	-.769	-.857
CENTROID X	.214	.439	.564
CENTROID Y	-.953	-.984	-.896
POA TO CENTROID in.	.977	1.078	1.059
MIN RADIUS	.290	.292	.275
MEAN RADIUS	.911	.720	.615
MAX RADIUS	2.045	1.219	1.193
HORIZONTAL SPREAD	2.943	1.689	1.412
VERTICAL SPREAD	1.596	1.596	1.596
EXTREME SPREAD	2.966	2.000	1.817
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		8	
NUMBER IN THREE INCH CIRCLE =		9	

21 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06522148

CENTERFIRE PATTERNS # 3

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 6

3 in = 7

HS= 2.379

VS= 2.384

GS= 2.685


PATTERN #	1	3	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.826	.653	.630
MINIMUM X	-1.553	-.591	-.614
MAXIMUM Y	.847	.900	.714
MINIMUM Y	-1.537	-1.484	-1.635
CENTROID X	.594	.767	.790
CENTROID Y	-1.287	-1.340	-1.154
POA TO CENTROID in.	1.417	1.544	1.398
MIN RADIUS	.437	.608	.432
MEAN RADIUS	.980	.905	.780
MAX RADIUS	1.624	1.495	1.636
HORIZONTAL SPREAD	2.379	1.244	1.244
VERTICAL SPREAD	2.384	2.384	2.349
EXTREME SPREAD	2.685	2.526	2.415
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		7	

21 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/CG522148

CENTERFIRE PATTERNS

4

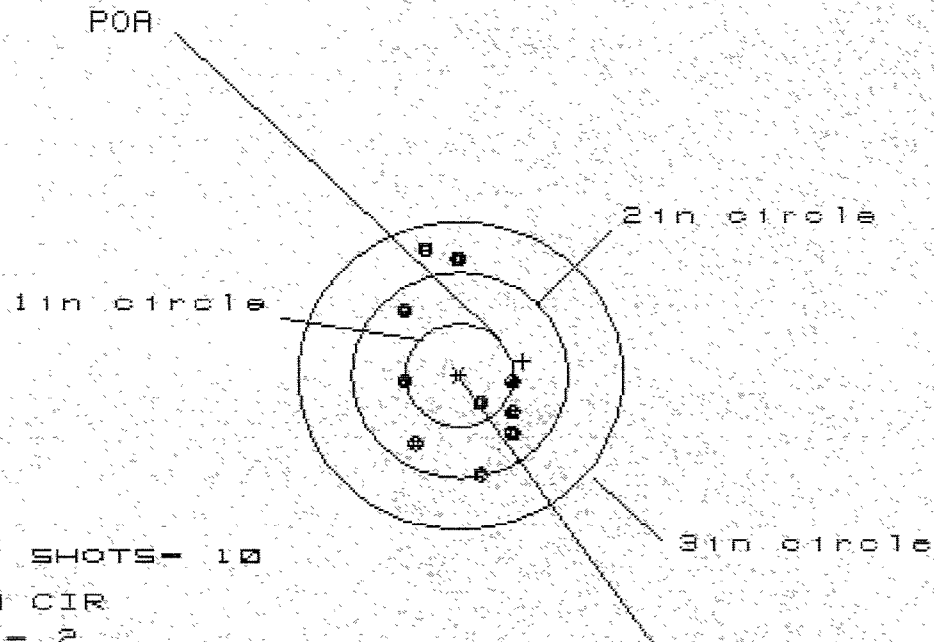

OF SHOTS- 10

IN CIR

1 in - 2

2 in - 7

3 in - 10

HS= 1.059

VS= 2.206

GS= 2.259

PATTERN #

4

SHOTS (BEST OF)

10

9

8

MAXIMUM X

.516

.479

.472

MINIMUM X

-.543

-.580

-.587

MAXIMUM Y

1.214

1.265

.882

MINIMUM Y

-.992

-.857

-.698

CENTROID X

-.588

-.551

-.544

CENTROID Y

-.138

-.272

-.431

POA TO CENTROID in.

.603

.615

.694

MIN RADIUS

.347

.224

.166

MEAN RADIUS

.765

.676

.572

MAX RADIUS

1.257

1.267

1.059

HORIZONTAL SPREAD

1.059

1.059

1.059

VERTICAL SPREAD

2.206

2.122

1.580

EXTREME SPREAD

2.259

2.130

1.730

NUMBER IN ONE INCH CIRCLE =

2

NUMBER IN TWO INCH CIRCLE =

7


NUMBER IN THREE INCH CIRCLE =

10

21 Aug 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C6522148

CENTERFIRE PATTERNS # 5

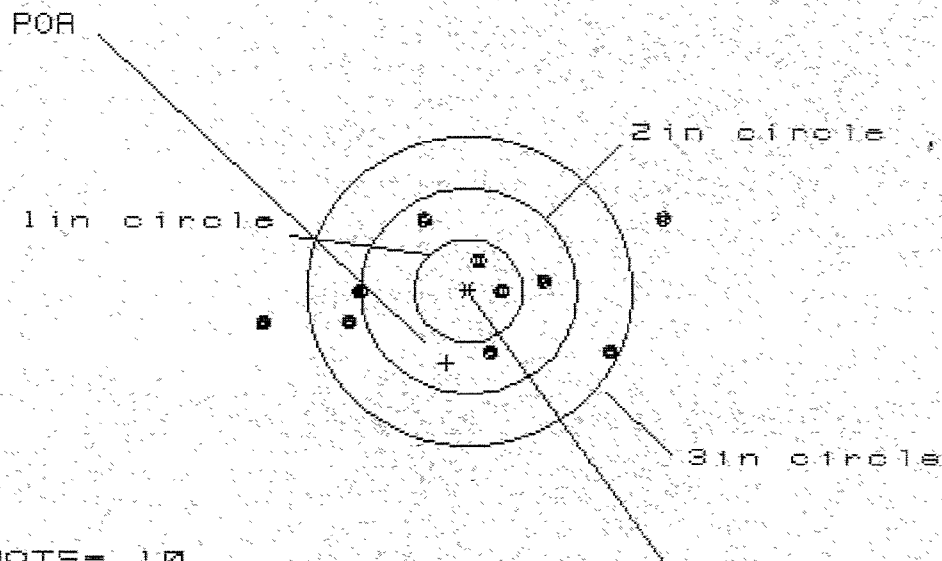

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 5

3 in = 8

HS= 3.630

VS= 1.364

GS= 3.766

CENTROID #

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.758	1.490	1.280
MINIMUM X	-1.872	-1.677	-1.119
MAXIMUM Y	.718	.795	.769
MINIMUM Y	-.646	-.566	-.592
CENTROID X	.206	.011	.221
CENTROID Y	.701	.621	.647
POA TO CENTROID in.	.731	.622	.684
MIN RADIUS	.278	.451	.283
MEAN RADIUS	1.014	.932	.795
MAX RADIUS	1.898	1.690	1.410
HORIZONTAL SPREAD	3.630	3.167	2.399
VERTICAL SPREAD	1.364	1.361	1.361
EXTREME SPREAD	3.766	3.188	2.427
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		8	

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6522148

DATE 9-14-90

TESTER JRU

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.31	2.26	2.31	2.21	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.25	2.37	2.27	2.25	
PULL #3	2.33	2.18	2.18	2.27	
PULL #4	2.27	2.34	2.25	2.30	
PULL #5	2.32	2.32	2.32	2.25	
TOTAL	11.48	11.47	11.33	11.28	
AVG.	2.296	2.294	2.266	2.256	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.25	3.31		
PULL #2	3.33	3.32		
PULL #3	3.35	3.20		
PULL #4	3.35	3.34		
PULL #5	3.38	3.39		
TOTAL	16.66	16.56		
AVG.	3.332	3.312		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.24	4.25		4.37
PULL #2	4.28	4.37		4.36
PULL #3	4.24	4.34		4.33
PULL #4	4.38	4.31		4.35
PULL #5	4.35	4.22		4.28
TOTAL	21.49	21.49		21.69
AVG.	4.298	4.298		4.338

MOD. _____		GA. CAL. _____	GUN # _____
# TEST	DATE	MALFUNCTION/DEFECT	ASSEM. #
	1st	Mag. box loads hard	AS
	2nd	chgd FOLLOWER	KS OK
	3rd		
	4th		

FUNCTION _____ RD 6654 Rev 1

TEST INIT. ACTION TO CORRECT		ASSEM. #
PROOF		
TEST		
TGT		
PROOF		
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # *C 6522148*

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		<i>7/10/90</i>	<i>KJ</i>
600	Proof		<i>7/10/90</i>	<i>KJ</i>
607	Check Headspace		<i>7/10/90</i>	<i>KJ</i>
610	Dis-assemble Gun		<i>7/10/90</i>	<i>KJ</i>
612	Magnaflux Barrel Action		<i>7-17-90</i>	<i>KR</i>
	Magnaflux Bolt		<i>7-17-90</i>	<i>KR</i>
615	Rollmark Caliber		<i>7-17-90</i>	<i>G.S.</i>
617	Drill and Tap Sight Holes		<i>7/27/90</i>	<i>EB</i>
618	Polish Barrel <i>RB</i>		<i>7/24/90</i>	<i>WB</i>
620	Apply Coatings (Barrel Action)		<i>8-6-90</i>	<i>JA</i>
	Apply Coating (Bolt)			<i>P</i>
625	Final Assembly A) Clean inside of Bolt Assembly		<i>8/17/90</i>	<i>KS</i>
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		<i>8/17/90</i>	<i>KS</i>
	C) Inspect Ejector Hole for Chamfer		<i>8/17/90</i>	<i>KS</i>
	D) Oil Firing Pin Ass'y		<i>8/17/90</i>	<i>KS</i>
	E) Adjust Trigger Pull to Min Setting and Stake		<i>9-14-90</i>	<i>ST</i>

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			9/14/90	WJ
	G) Safety Off Force	2	2	2			9/14/90	WJ
	H) Trigger Pull Test & Retainability						9-14-90	94
	I) Firing Pin Indent	.022	.022	.022			9/14/90	WJ
	J) Assemble Stock						8/20/90	KS
	K) Assemble Swivel Studs						9/15/90 8/20/90	928
	L) Attach Front and Rear Sight Assemblies						8/20/90	KS
	M) Iron Sight Alignment						8/20/90	KS
	N) Detach Front & Rear Sights & place in numbered container						8/20/90	KS
	O) Attach Scope to Rifle						8/20/90	KS
	P) Detach & Attach Scope 20 Times						8/24/90	KS
640	Gallery Target & Test						8-21-90	A
	A) Time						11	A
	B) Malfunctions						11	A
	C) Pierced Primers						11	A
	D) Optical Clarity of Scope						11	A
645	Inspect for Live Ammo						8-21-90	A
655	Final Inspection							
	A) Headspace						9/15/90	928
	B) Trigger Pull	2.21	2.25	2.27	2.30	2.25	9-14-90	94
	C) Function						9/15/90	928
660	Pack						9/19/90	NE

RECEIVED BARBER M24 REPORT

COMMENTS

ORDER
R 93-15395

ATTN: FRED MARTIN W/TARGET SIGHTS/M-24

INITIAL CUSTOMER ORDER NO.

FPS

DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE
07/19/93	07/19/93	OK 7-90	C6522148		700 7.62 NATO
ACCESSORIES		W/STUDS	W/SWIVELS	SCOPE BASE	SOFT CASE HARD CASE

FROM:

SHIP TO:

HHD 1/20 SFGA
ALABAMA ARMY NATIONAL GUARD
2499 JOHNSON RD. SW
HUNTSVILLE AL 35805

HHD 1/20 SFGA
ALABAMA ARMY NATIONAL GUARD
2499 JOHNSON RD. SW
HUNTSVILLE AL 35805

CUST NO: 081055 C.O.D

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

Barrel Contacts Stick

PARTS

COMMENTS

*Rebed Stock to Free Float
Barrel Action**Bench Test only*

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD5925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0003874
M2400003713

DEPARTMENT OF THE ARMY
HEADQUARTERS 1ST BATTALION 20TH SPECIAL FORCES GROUP (ABN) SF
ALABAMA ARMY NATIONAL GUARD
2499 JOHNSON RD SW
HUNTSVILLE, ALABAMA 35805-5834


ALSF-1PBO

15 JULY 93

MEMORANDUM FOR: REMINGTON ARMS CO., INC ATTN CUSTOM SHOP
14 HOEFLE AVENUE LLION, NY 13357

SUBJECT: REPAIR OF M24

1. Enclosed are rifles sn: C6522124 and C6522148 with day optic sight in soft case with DA2404, DA 5504.
2. POC SPC Gilewicz phone # com 205-883-7570.

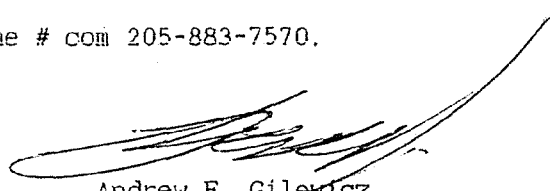

Andrew E. Gilewicz
AL ARNG
Supply Acct. Clerk

MAINTENANCE REQUEST				PAGE 1 OF 1		REQUIREMENTS CONTROL SYMBOL CSGLD - 1047		CONTROL NUMBER	
SECTION I - CUSTOMER DATA						SECTION II - MAINTENANCE ACTIVITY DATA			
1a. WORK ORDER NO. <u>WITPIC AIP</u>		b. CUSTOMER UNIT NAME <u>Co ACJ 1/205F6A</u>		c. PHONE NO. <u>205-887-8973</u>		3a. WORK ORDER NO (WON)		b. SHOP	c. PHONE NO.
2. If Intransit Customer, enter data in Blocks 2a and 2b		2a. SAMS-2 UIC		b. UTILIZATION CODE		4a. UIC SUPPORT		b. SUPPORT UNIT NAME	
SECTION III - EQUIPMENT DATA									
5. ID		6. NSN <u>1005012402136</u>				15. FAILURE DETECTED DURING (Select one - use / or X)			
7. TYPE MNT. REQ. CODE		8. MODEL <u>M24</u>				☒ A Sch. Main. ☐ C Test ☐ E Storage ☐ G Flight ☐ B Handling ☐ D Normal Op ☐ F Inspection ☐ H Other ☐ I Calibration			
9. NOUN <u>RIFLE 7.62 MM; SNIPER</u>						16a. MILES/KILOMETERS (Enter or X)		b. HOURS	c. ROUNDS <u>000000</u>
10a. ORG WON				b. EIC		d. LANDINGS		e. AUTO ROTATIONS	17. PROJ. CODE (If Assigned)
11. SERIAL NUMBER <u>016522148</u>				b. QTY. <u>01001012</u>		13. PD		19. IN WARRANTY? (Y or N)	
24. Describe Deficiencies or Symptoms on the basis of Complete Checkout and Diagnostic Procedure in Equipment TM (Do not prescribe repairs.) <u>BARREL TOUCHING STOCK</u> <u>UNIT JOB ORD # 2-92</u>						20. LEVEL OF WORK (Select one - use / or X)			
						☐ O Unit Level ☐ H Intermediate General Spt. ☒ Special Repair Activity ☐ F Immediate Direct Spt. ☐ D Depot			
21. BUMPER NO./TAIL NO.						22. REIMBURSABLE CUSTOMER? (If Intransit Customer, enter Y or N)			
23. PD AUTHENTICATION SIGNATURE (Payroll Signature) <u>[Signature]</u>									
PREPARATION INSTRUCTIONS									
SECTION I - Block 1a. Enter UIC of submitting organization. Block 1b. Enter name of submitting organization. Block 1c. Enter number to be called when maintenance is completed. Block 2b. Enter UIC of supporting SAMS-2 if work is requested while intransit and away from your support maintenance unit. Block 2c. Enter equipment utilization code under which Materiel Condition Status is reported. See SAMS Codes and Tables.					SECTION III (Continued) - Block 14. Leave blank. Block 15. Select one. Use a " / or x" to indicate when failure was detected. Block 16. Enter the accumulated usage data in block 16a through 16e, when equipment is subject to usage reporting. Block 17. Enter the project code if one has been assigned. If not, leave blank. Block 18. Leave blank (for DSU/GSU use). Block 19. Enter a "Y" or "N" to indicate whether equipment is still under manufacturer's warranty. Block 20. Select one. Use a " / or x" to indicate the level of work to be performed on equipment submitted. See SAMS Codes and Tables. Block 21. Enter the bumper number or admin. number assigned for property control purposes to the equipment being submitted. Block 22. Leave blank (for DSU/GSU use). Block 23. Enter the payroll signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank. Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maintenance.				
SECTION II - Leave blank. To be completed by the support maintenance DSU/GSU.									
SECTION III - Block 5. Enter the Type Maintenance Request Code. See SAMS Codes and Tables. Block 6. Enter ID associated with block 7. See SAMS Codes and Tables. Block 7. Enter the NSN or stock number of the item being submitted. Block 8. Enter model of item being submitted. Block 9. Enter noun/nomenclature of item being submitted. Block 10a. Enter Work Order Number (WON) assigned when item submitted is reportable for MCSR. Otherwise, leave blank. Block 10b. Enter EIC (left justify). Block 11. Enter serial number of item being submitted. Block 12. Enter the quantity of items being submitted. Block 13. Enter the maintenance priority designator determined from SAMS Codes and Tables.					Block 34a. Enter signature of submitter. Block 34b. Enter Ordinal Date submitted (YYDDD). Block 35a. Enter signature of person accepting the maintenance request. Block 35b. Enter the status. Block 35c. Enter Ordinal Date accepted (YYDDD). Block 35d. Enter Military Time.				
34a. SUBMITTED BY <u>[Signature]</u> b. ORD DATE <u>9/31/94</u> b. ST c. ORD DATE d. MIL TIME					35a. ACCEPTED BY b. ST c. ORD DATE d. MIL TIME				

[illegible]

★U.S.GPO:1988-0-211-840

Final Inspection

In: _____ DATE REC'D: 7/19/93 DATE RET'D: 7/26/93
 Auditor: RW _____ C6522148

Item:

Barrel Assy.

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BLOCK
☒ REAR SIGHT BLOCK
☒ SCREWS
☒ FINISH

Scope Assy.

☐ Scope
☐ Scope Rings
☐ Mounting Screws
☐ Mounting Base
☐ Screws
☐ FINISH
☐ Looseness
☐ CLARITY

Misc.

☐ DD-250
☐ BAR CODE
☐ PACKAGING

Item:

Stock Assy.

☒ STOCK
☒ SLING SWIVEL STUDS
☒ ADJUSTABLE BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR/FINISH

Systems Case

☐ Scope Case
☐ Iron SIGHTS
☐ Deployment Kit

Trigger

☒ SAFETY OPERATION
☒ SET
☐

Comments: _____