

C6522152

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

<

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6522152

OP. #	OP. NAME	READINGS	
-------	----------	----------	--

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			7/30/90	JS
	G) Safety Off Force	3	3					

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6522152
DATE 8/15/90
TESTER JH

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6522152
17 Aug 1990

CENTROIDAL DISTANCES

0 TO	1	.4438
------	---	-------

16 Aug 1998

FILE: \PATTERNING\CENTERFIRE_PATT\08522152


CENTERFIRE PATTERNS # 1

POA

16 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6522152


CENTERFIRE PATTERNS # 2

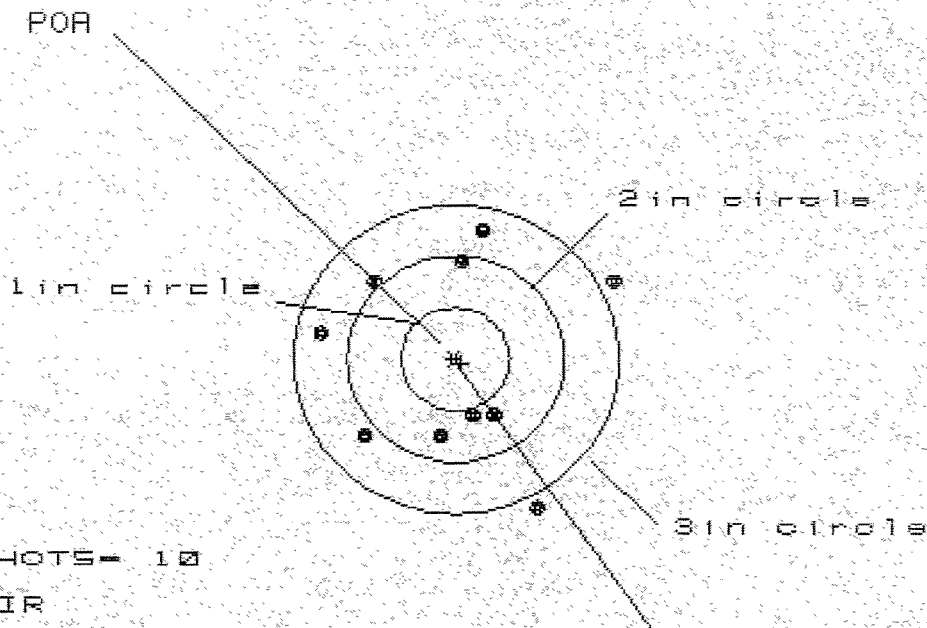

16 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6522152


CENTERFIRE PATTERNS # 3

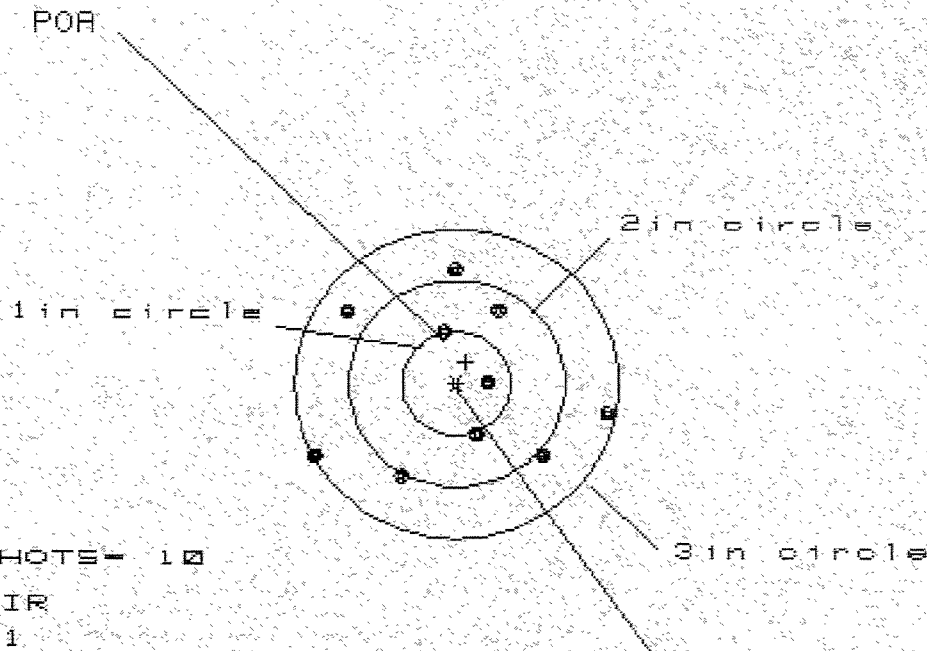

16 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6522152

CENTERFIRE PATTERNS # 4

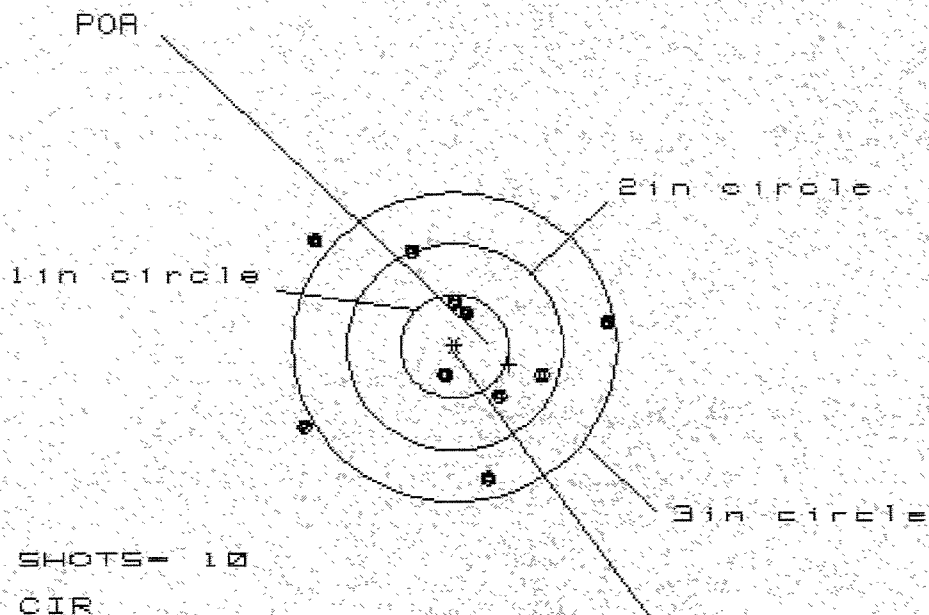

16 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6522152

CENTERFIRE PATTERNS # 5

POA

Remington[®] **DUPONT**
REG. U.S. PAT. & TM. OFF.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700TM M24

SERIAL NO.
C6522152

ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg.