

C6522295

MODEL 700™ M24

Model SMS™


Action

Barrel Length

Capacity

Order No. 5716

*Includes 1 in chamber.

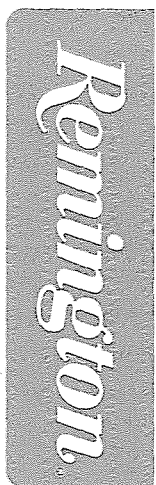

Repair Inquiry

Repair Number: RE00137543

Serial: C6522295 Model M24 SWS Center Fire
Caliber: 7.62 NATO Produced: 09/19/1990

Repairman:

Verify Repair

Status:

Closed 11/28/2007 1:22:11 PM

Address Information

Customer:

Received From

Return To:

Received From

Name: FORT DRUM POLICE

FORT DRUM POLICE

Address 1: 10715 MT BELVEDERE BLVD

10715 MT BELVEDERE BLVD

Address 2: PO Box:

PO Box:

City: FORT DRUM

FORT DRUM

State: NY Zip Code: 13602

Country: US

State: NY Zip Code: 13602

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: 315 772 2677

Fax: 315 772 7888

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A006	Sling Strap	1
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A026	Scope	1
A045	Bi Pod	1
A057	Fit and Rear Sgt Base	1

Repair Search

Refresh

Close

nagletj

11/29/2007

2:57 PM

CAPS

NUM

INS


SCRL



2:57 PM

Serial Number: C6522295

Model: M24 SWS



RE00137543

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER		137543	
SERIAL NUMBER		C6522295	
LOG-IN DATE		11-28-07	
OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	12-1-07	RTZ
505	RE-BARREL		
560	ASSEMBLE		
600	PROOF		
605	CHECK HEADSPACE		
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX		
510	DRILL AND TAP		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625	FINAL ASSEMBLY		
640	FUNCTION TEST AND	(PASS) FAIL	12-3-07 TRW
650	TARGET 2-10 shot groups	(PASS) FAIL	12-3-07 TRW
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION		
	A) HEADSPACE	PASS FAIL	
	B) TRIGGER PULL		
		+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	
680	F) SAFETY ON FORCE		
		2 LBS MIN 10 LBS MAX	
	G) SAFETY OFF FORCE		
		2 LBS MIN	
	I) FIRING PIN INDENT		
		.020	
690	PACK		12-6-07 DA

Repair Number: RE00075703	Serial: C6522295 Model 700 CenterFire Caliber 7 62 NATO M24 SWS Produced: 09/19/1990	Repairman:	Status: Closed 1/15/2004 3:22:58 PM
Verify Repair			

Address Information	
Customer: ☒ Received From	Return To: ☐ Received From
Name: DEPT OF ARMY	DEPT OF ARMY
Address 1: MSG ROBERT RUSSELL	MSG ROBERT RUSSELL
Address 2: PO Box:	PO Box:
City: FORT DRUM	FORT DRUM
State: NY Zip Code: 13602 Country: US	State: NY Zip Code: 13602 Country: US
FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐	

Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing
---------------------	----------	----------	------------------	--------------------

Contact Information Phone: 315 772 9090 Fax: Email: Comments: DOOR GUN#005116	Received Condition Good Condition Notes: CSR Notes:	Accessories Received <table border="1"> <thead> <tr> <th>Code</th> <th>Desc</th> <th>Qty</th> </tr> </thead> <tbody> <tr> <td>A007</td> <td>With Studs</td> <td>3</td> </tr> <tr> <td>A009</td> <td>Soft Case</td> <td>1</td> </tr> <tr> <td>A042</td> <td>Adjustable Butt Pad</td> <td>1</td> </tr> <tr> <td>A045</td> <td>Bi Pod</td> <td>1</td> </tr> </tbody> </table>	Code	Desc	Qty	A007	With Studs	3	A009	Soft Case	1	A042	Adjustable Butt Pad	1	A045	Bi Pod	1
Code	Desc	Qty															
A007	With Studs	3															
A009	Soft Case	1															
A042	Adjustable Butt Pad	1															
A045	Bi Pod	1															

Repair Search	Refresh	Close
---------------	---------	-------

nagletj	1/16/2004	7:33 AM	CAGE	NUM	INS	SORT
---------	-----------	---------	------	-----	-----	------

Serial Number: **C6522295**

Model: **700**



RE00075703

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6522295.___0
FILE DATE AND TIME: 02/02/2004 07:29

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.017
The Average Y Centroid of the Five Target Set:	0.053
The Average Point of Impact of the Five Target Set:	0.055
The Average Mean Radius of the Five Target Set:	0.806
The Distance from POA to Centroid Target #1:	0.240
The Distance from Centroid Target #2 to Centroid Target #1:	0.375
The Distance from Centroid Target #3 to Centroid Target #1:	0.182
The Distance from Centroid Target #4 to Centroid Target #1:	0.205
The Distance from Centroid Target #5 to Centroid Target #1:	0.294

SERIAL NUMBER: C6522295. __0

TARGET NUMBER: 1

FILE DATE: 02/02/2004

FILE TIME: 07:29

X CENTROID: -0.151

Y CENTROID: 0.187

POA TO CENTROID: 0.240

HORZ SPREAD: 1.450

VERT SPREAD: 1.718

GROUP SPREAD: 2.248

MIN RADIUS: 0.145

MAX RADIUS: 1.181


MEAN RADIUS: 0.688

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.491	-0.670
2:	-0.337	-0.647
3:	-0.392	-0.420
4:	0.214	-0.123
5:	0.213	0.562
6:	0.401	0.707
7:	-0.959	1.048
8:	-0.852	0.962
9:	-0.281	0.299
10:	-0.012	0.147

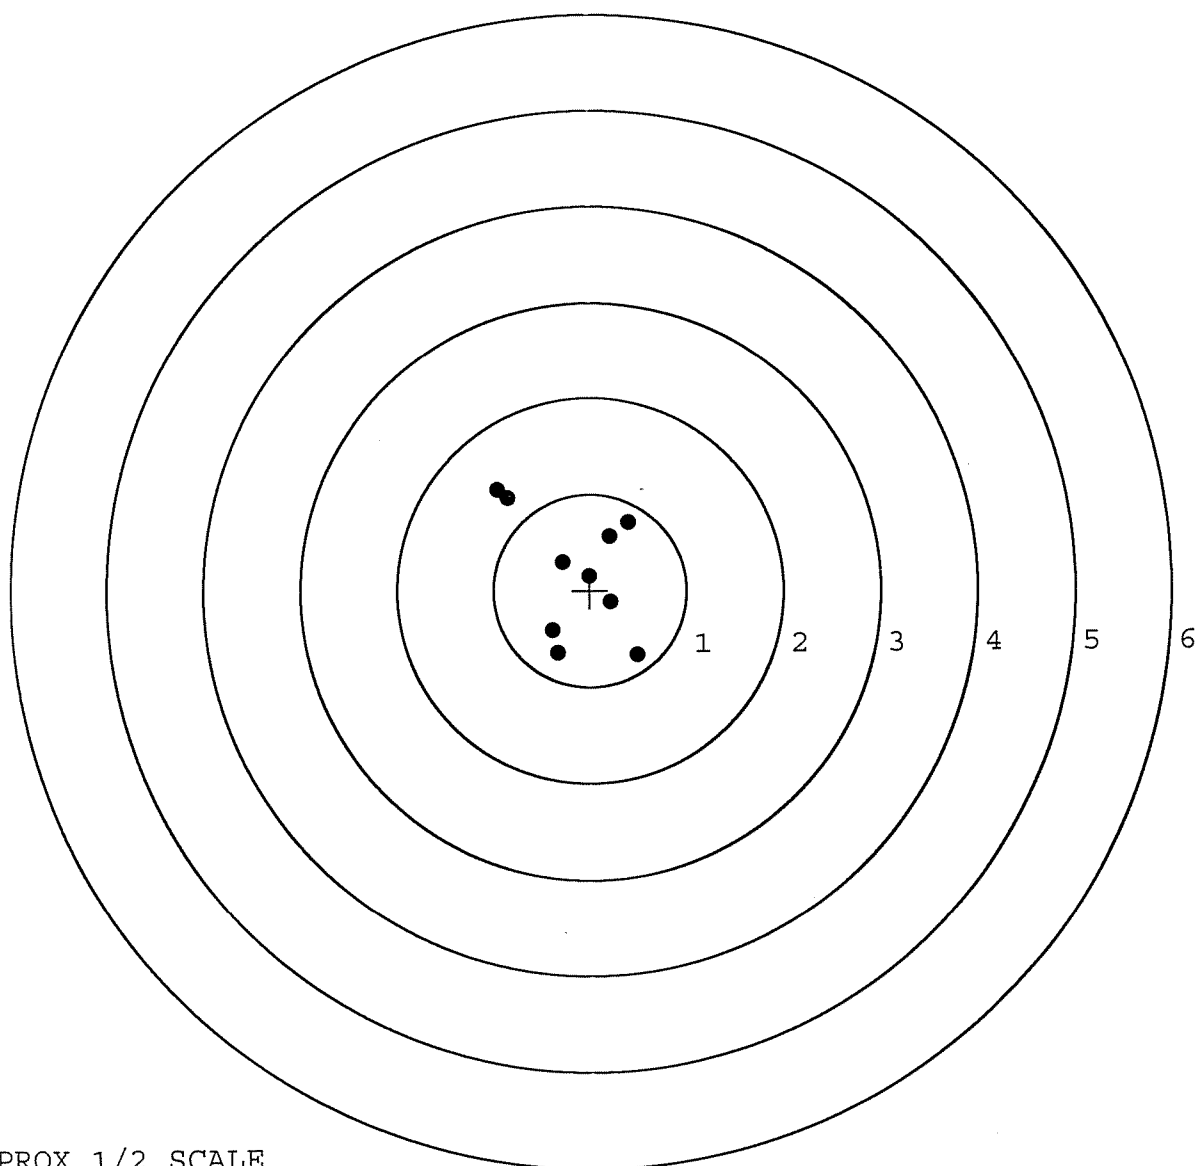

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6522295. __0

TARGET NUMBER: 2

FILE DATE: 02/02/2004

FILE TIME: 07:29

X CENTROID: 0.076

Y CENTROID: -0.112

POA TO CENTROID: 0.135

HORZ SPREAD: 2.948

VERT SPREAD: 3.499

GROUP SPREAD: 4.064

MIN RADIUS: 0.324

MAX RADIUS: 2.751


MEAN RADIUS: 1.085

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 8

POINT#	X	Y
1:	1.532	-2.446
2:	-0.230	-1.187
3:	-0.431	-0.874
4:	-1.416	0.267
5:	-0.535	1.053
6:	0.133	0.880
7:	0.713	0.461
8:	0.556	0.304
9:	0.282	0.138
10:	0.155	0.285

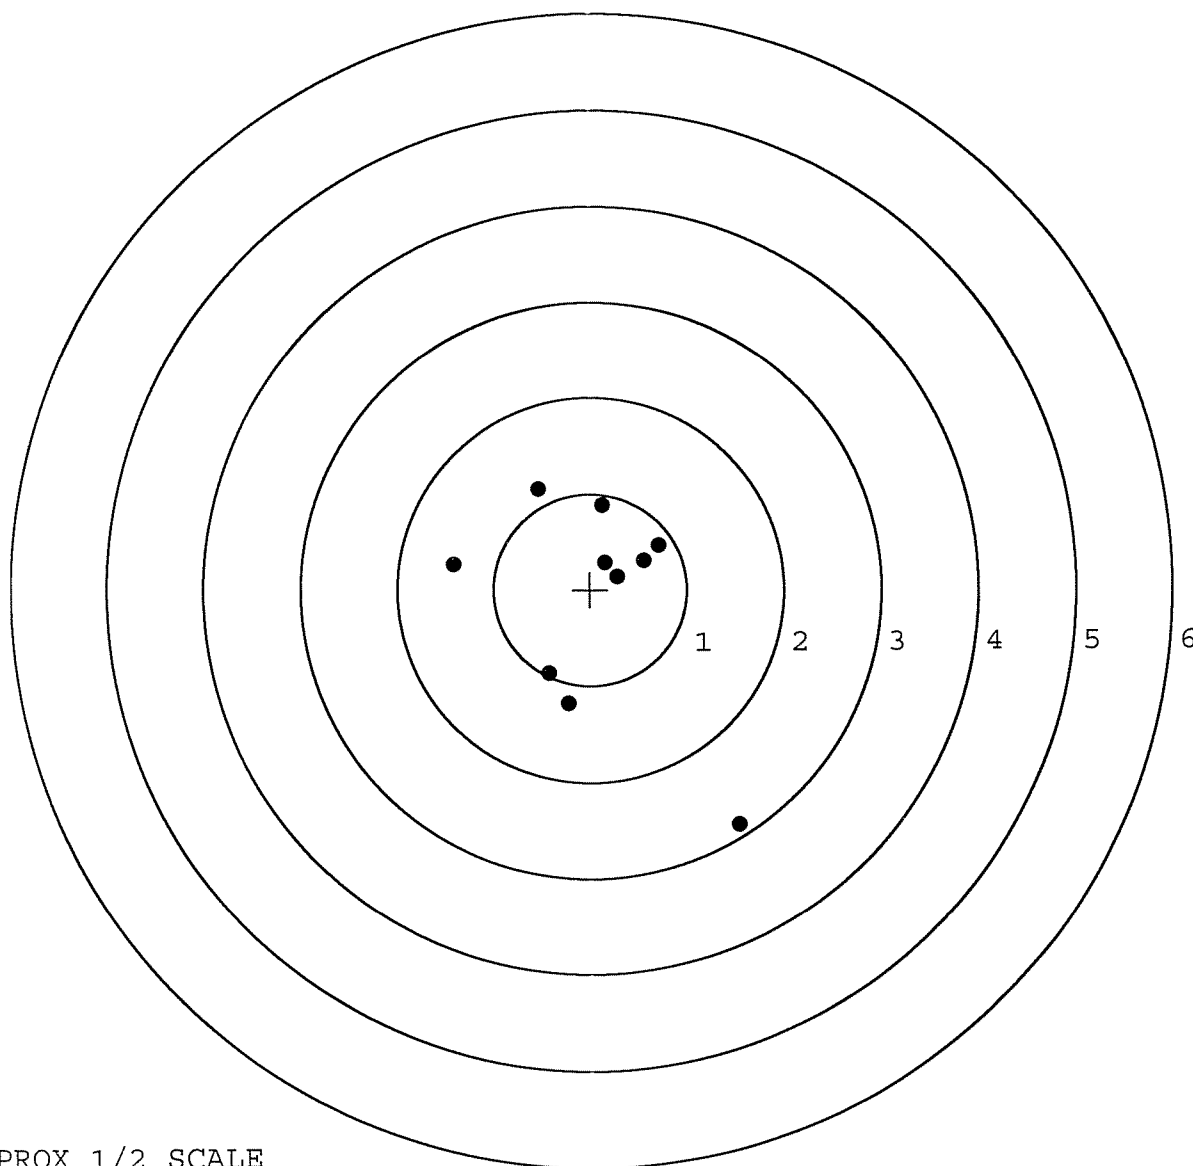


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6522295. __0
 TARGET NUMBER: 3
 FILE DATE: 02/02/2004
 FILE TIME: 07:29

X CENTROID: -0.147
 Y CENTROID: 0.004
 POA TO CENTROID: 0.147
 HORZ SPREAD: 1.223
 VERT SPREAD: 2.072
 GROUP SPREAD: 2.072
 MIN RADIUS: 0.201
 MAX RADIUS: 1.044
 MEAN RADIUS: 0.549
 # IN 1 IN DIAMETER: 5
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.134	-1.024
2:	-0.419	-0.464
3:	-0.171	-0.217
4:	-0.169	1.048
5:	-0.984	0.560
6:	0.131	0.451
7:	0.051	0.136
8:	0.239	-0.119
9:	0.100	-0.134
10:	-0.115	-0.194

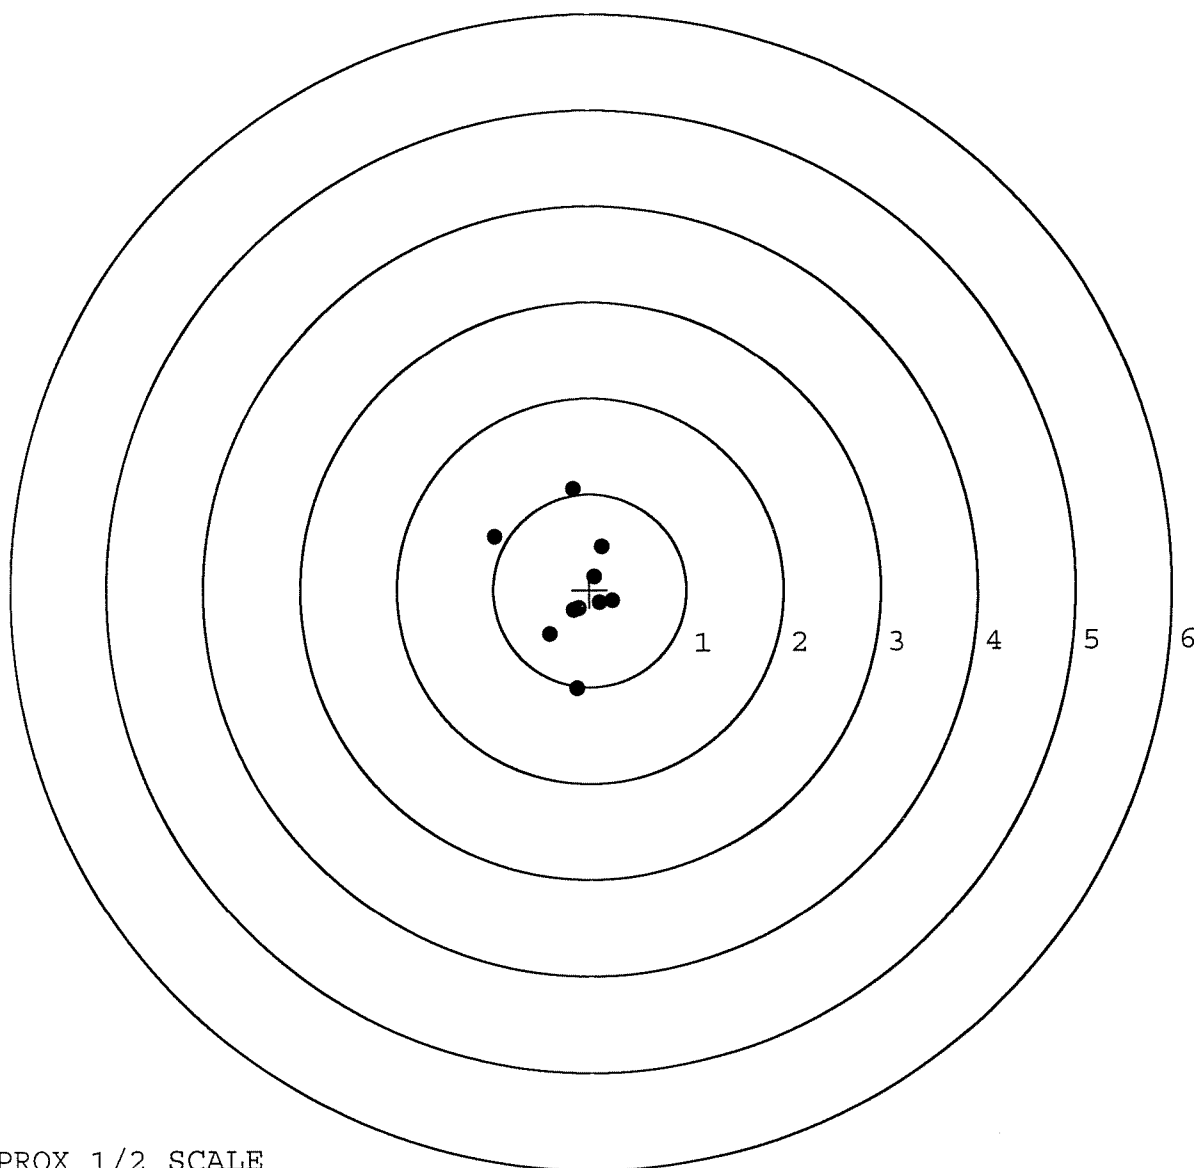


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6522295. __0
 TARGET NUMBER: 4
 FILE DATE: 02/02/2004
 FILE TIME: 07:29

X CENTROID: 0.002
 Y CENTROID: 0.050
 POA TO CENTROID: 0.050
 HORZ SPREAD: 1.112
 VERT SPREAD: 3.262
 GROUP SPREAD: 3.352
 MIN RADIUS: 0.239
 MAX RADIUS: 2.029
 MEAN RADIUS: 0.882
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 6
 # in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.035	-1.322
2:	0.377	-1.007
3:	-0.058	0.770
4:	0.193	1.506
5:	-0.735	1.940
6:	0.234	-0.006
7:	0.304	-0.445
8:	-0.339	-0.241
9:	-0.120	-0.373
10:	0.124	-0.326

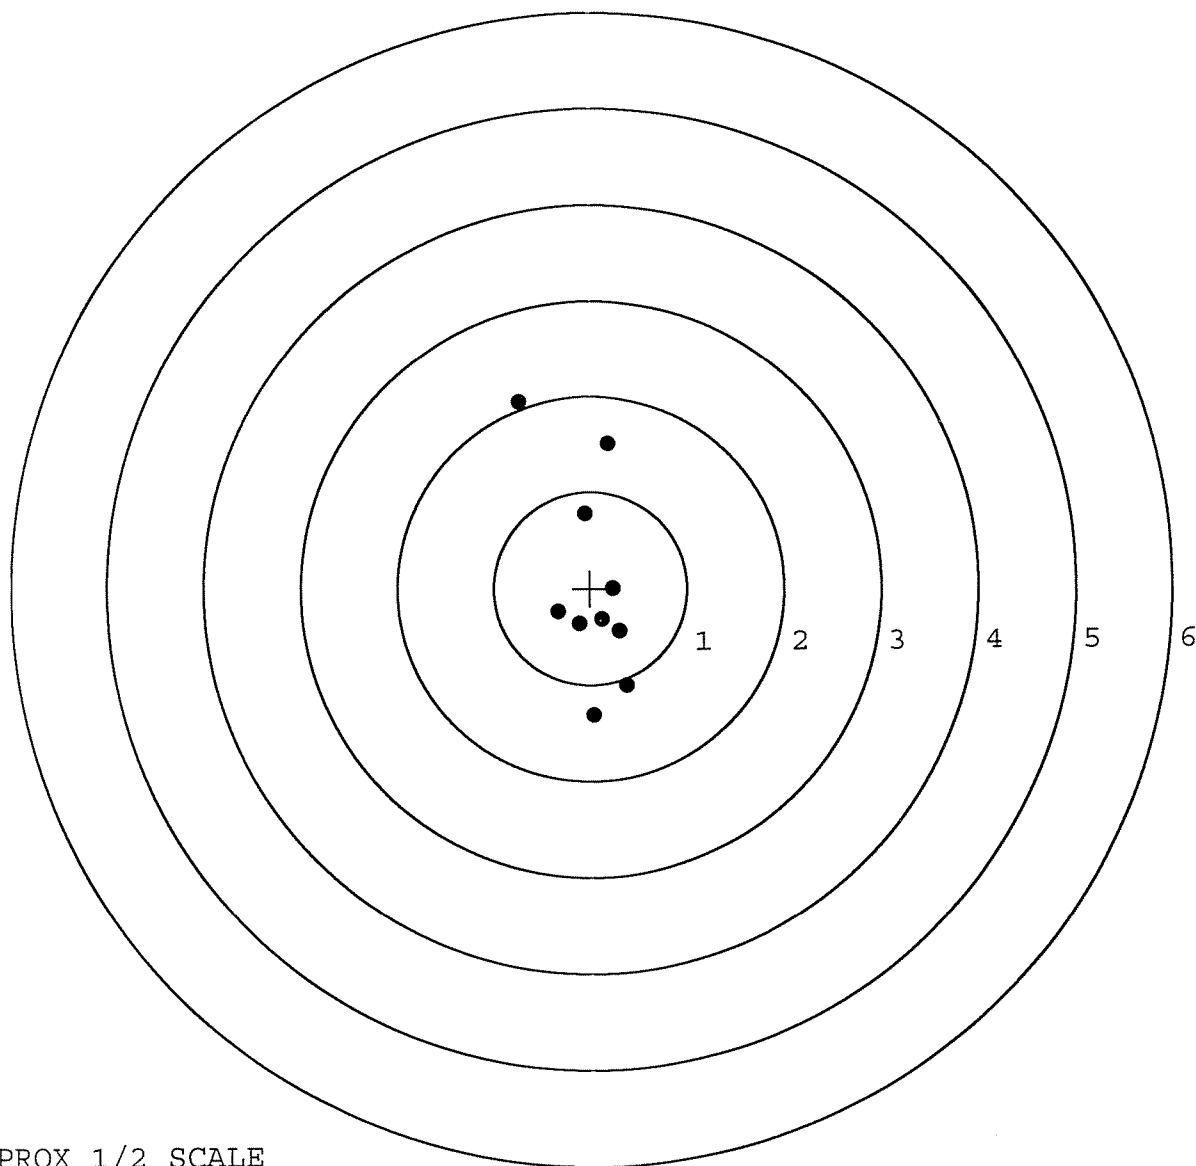

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6522295. __0

TARGET NUMBER: 5

FILE DATE: 02/02/2004

FILE TIME: 07:29

X CENTROID: 0.138

Y CENTROID: 0.134

POA TO CENTROID: 0.192

HORZ SPREAD: 1.167

VERT SPREAD: 3.278

GROUP SPREAD: 3.305

MIN RADIUS: 0.322

MAX RADIUS: 2.150


MEAN RADIUS: 0.826

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.728	-1.000
2:	0.482	0.149
3:	0.223	0.445
4:	-0.211	0.299
5:	-0.439	1.166
6:	0.306	2.278
7:	-0.025	-0.185
8:	0.056	-0.340
9:	0.240	-0.632
10:	0.017	-0.838

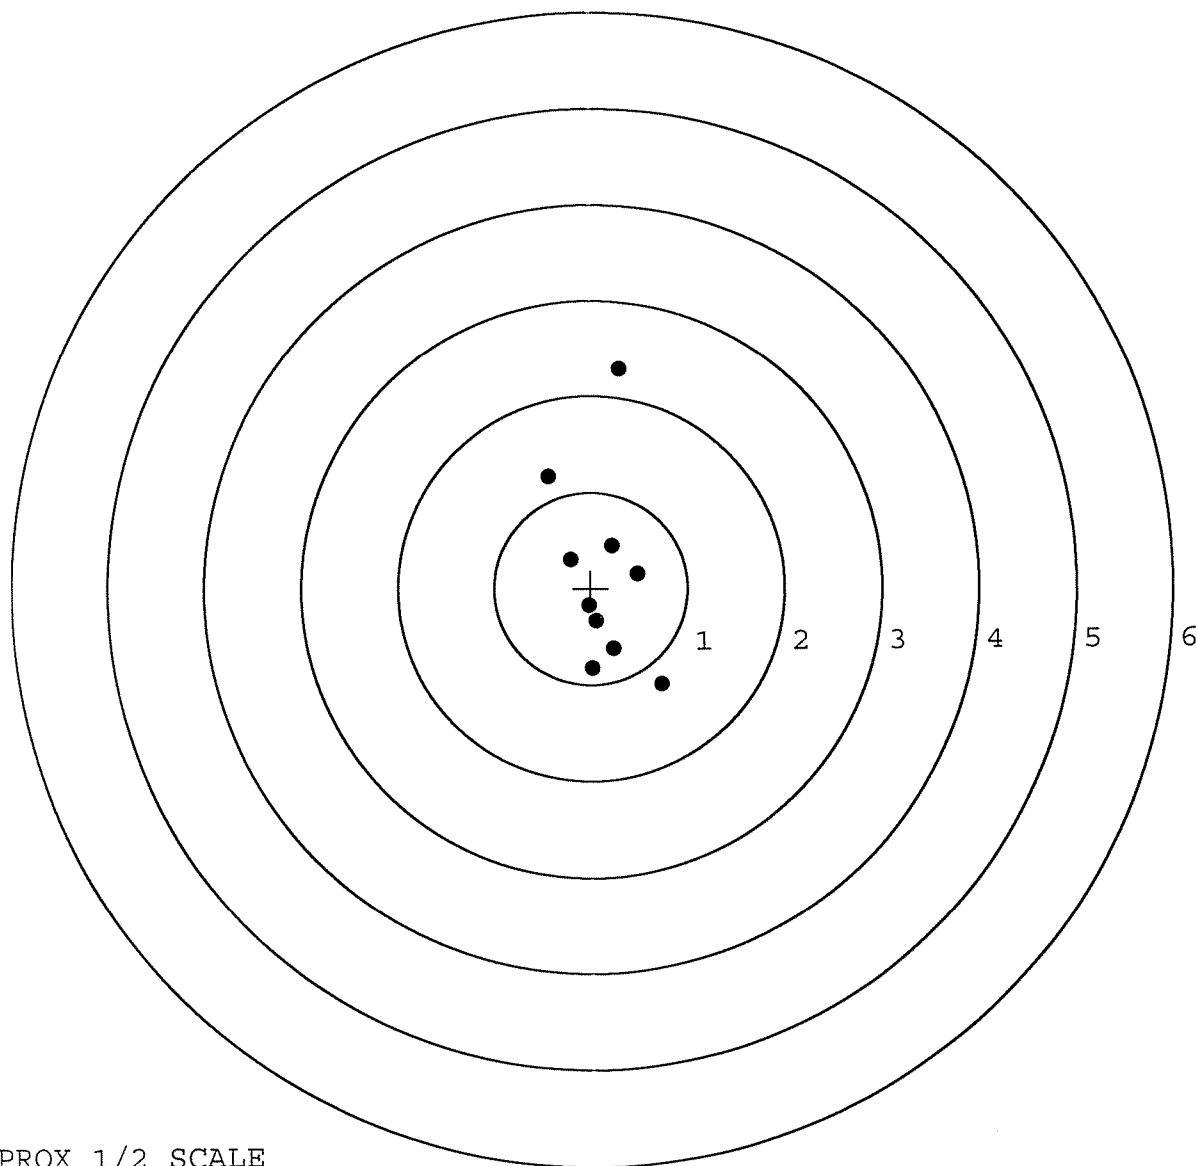

TARGET APPROX 1/2 SCALE

Remington®

MODEL 700™ H24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

DUPONT
REG. U.S. PAT. & T.M. OFF.

SERIAL NO.
C6522295


ORDER NO.
5716

01



5716 C6522295

LPC



0 47700 25716 7

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6522295
7 Sep 1990

CENTROIDAL DISTANCES

0 TO	1	.108296
1 TO	2	.357169
1 TO	3	.404339
1 TO	4	.230541
1 TO	5	.363167

415 <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0546
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0144
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .056467
THE AMR FOR THIS RIFLE IS: .8894

7 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8522295

CENTERFIRE PATTERNS

1

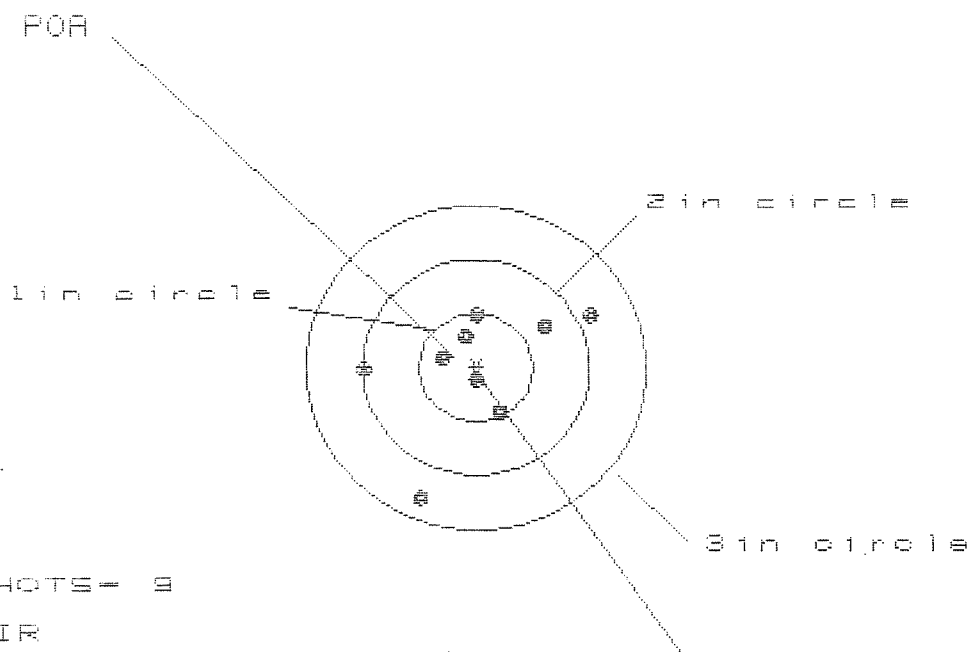

OF SHOTS = 9

IN CIR

1 in = 4

2 in = 7

3 in = 9

HS = 2.002

VS = 1.714

GS = 2.283


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	9	8	7
MAXIMUM X	1.022	.960	.721
MINIMUM X	-.980	-1.042	-.905
MAXIMUM Y	.509	.358	.408
MINIMUM Y	-1.205	-.513	-.463
CENTROID X	-.008	.054	-.083
CENTROID Y	.108	.259	.209
POA TO CENTROID in.	.108	.264	.225
MIN RADIUS	.148	.210	.158
MEAN RADIUS	.648	.558	.470
MAX RADIUS	1.305	1.059	.916
HORIZONTAL SPREAD	2.002	2.002	1.626
VERTICAL SPREAD	1.714	.871	.871
EXTREME SPREAD	2.283	2.071	1.679
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	9		

7 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06522295

CENTERFIRE PATTERNS # 2

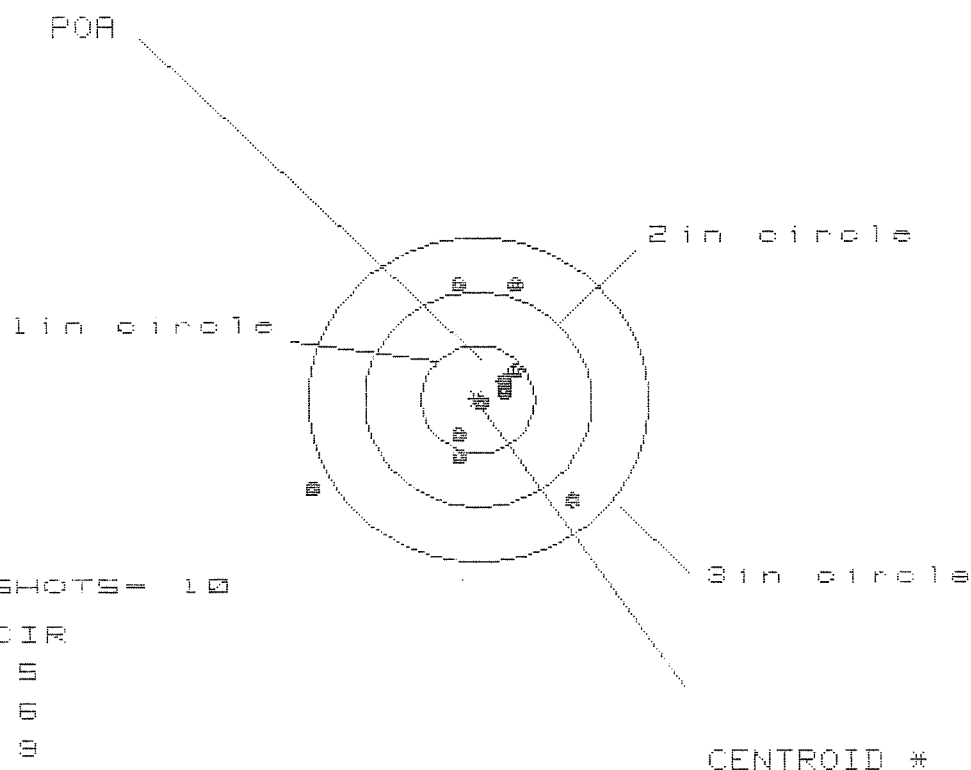

OF SHOTS= 10

IN CIR

1 in = 5

2 in = 6

3 in = 9

HS= 2.356

VS= 1.972

GS= 2.596


CENTROID #

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.853	.686	.265
MINIMUM X	:	-1.503	-.342	-.257
MAXIMUM Y	:	1.060	.967	.842
MINIMUM Y	:	-.912	-1.005	-.741
CENTROID X	:	-.231	-.064	-.149
CENTROID Y	:	-.171	-.078	.047
POA TO CENTROID in.	:	.287	.101	.157
MIN RADIUS	:	.052	.049	.176
MEAN RADIUS	:	.707	.562	.500
MAX RADIUS	:	1.720	1.216	.977
HORIZONTAL SPREAD	:	2.356	1.028	.522
VERTICAL SPREAD	:	1.972	1.972	1.583
EXTREME SPREAD	:	2.596	2.219	1.626
NUMBER IN ONE INCH CIRCLE	=		5	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

7 Sep 1990

FILE:/PATTERNING/CENTERFIRE_PATT/08522295

CENTERFIRE PATTERNS # 3

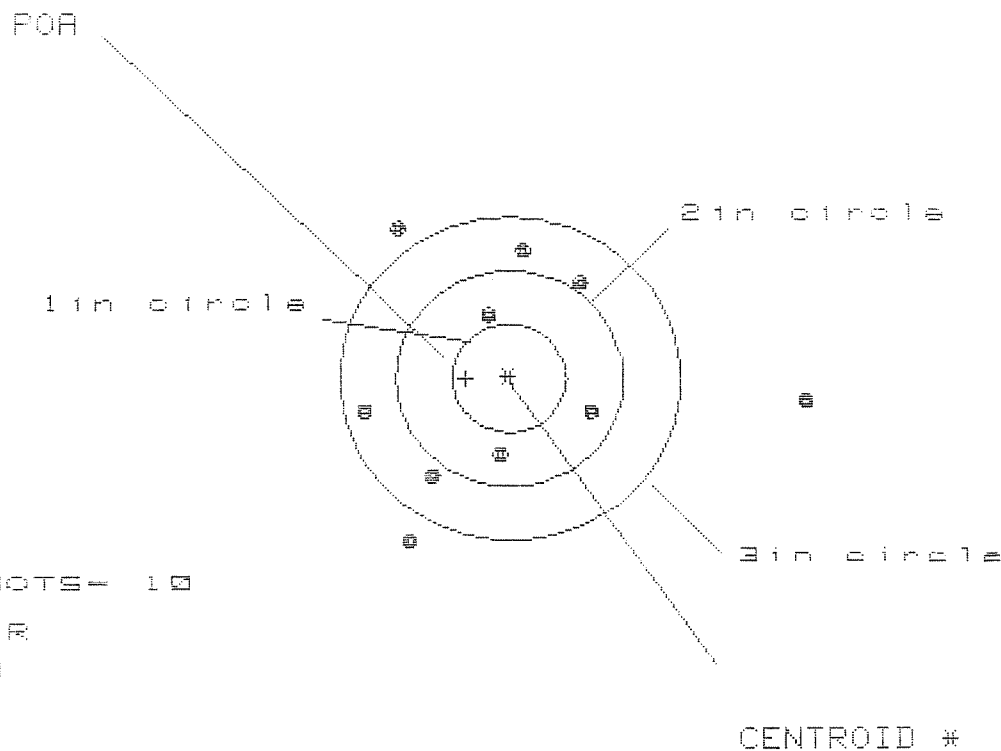

OF SHOTS = 10

IN CIR

1 in = 0

2 in = 3

3 in = 7

HS = 3.916

VS = 2.987

GS = 3.923


PATTERN #	3	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	2.586	1.046	.976
MINIMUM X	-1.330	-1.043	-1.113
MAXIMUM Y	1.442	1.415	1.218
MINIMUM Y	-1.545	-1.572	-1.103
CENTROID X	.383	.096	.166
CENTROID Y	.005	.032	.229
POA TO CENTROID in.	.383	.101	.283
MIN RADIUS	.597	.532	.331
MEAN RADIUS	1.291	1.127	1.035
MAX RADIUS	2.597	1.669	1.425
HORIZONTAL SPREAD	3.916	2.089	2.089
VERTICAL SPREAD	2.987	2.987	2.321
EXTREME SPREAD	3.923	2.989	2.469
NUMBER IN ONE INCH CIRCLE =		0	
NUMBER IN TWO INCH CIRCLE =		3	
NUMBER IN THREE INCH CIRCLE =		7	

7 Sep 1980

FILE:/PATTERNING/CENTERFIRE_PATT/08522295

CENTERFIRE PATTERNS

4

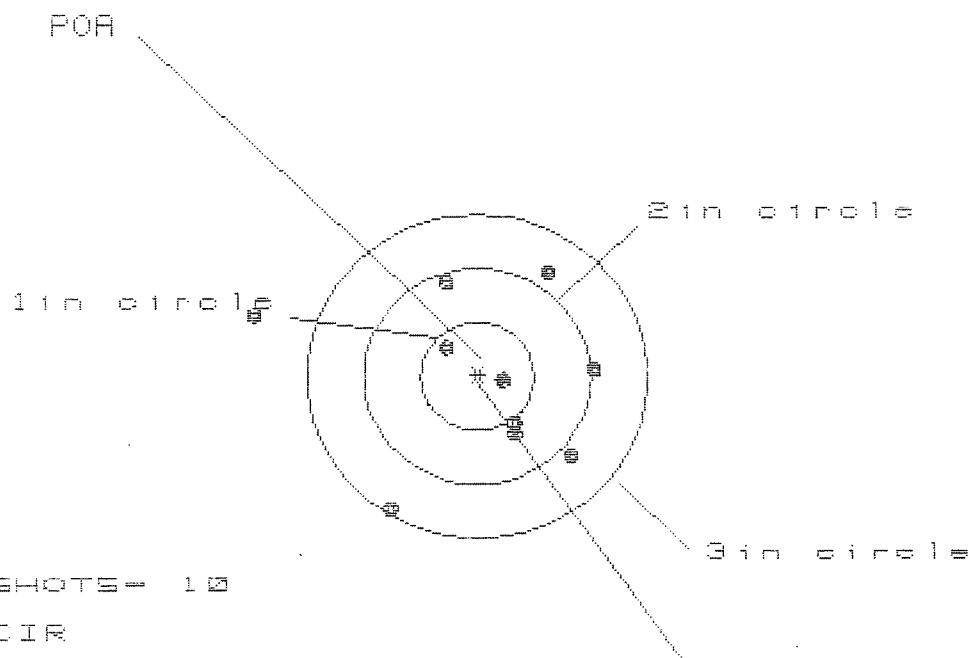

OF SHOTS= 10

IN CIR

1in = 2

2in = 5

3in = 9

HS= 3.075

VS= 2.168

GS= 3.116


PATTERN #	4		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.067	.844	.715
MINIMUM X	-2.008	-1.028	-.646
MAXIMUM Y	.973	1.039	.898
MINIMUM Y	-1.195	-1.129	-.758
CENTROID X	-.226	-.003	.126
CENTROID Y	.033	-.033	.108
POA TO CENTROID in.	.228	.034	.165
MIN RADIUS	.231	.026	.170
MEAN RADIUS	.954	.767	.687
MAX RADIUS	2.095	1.527	1.028
HORIZONTAL SPREAD	3.075	1.872	1.361
VERTICAL SPREAD	2.168	2.168	1.656
EXTREME SPREAD	3.116	2.597	1.900
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		9	

7 Sep 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08522295

CENTERFIRE PATTERNS

5

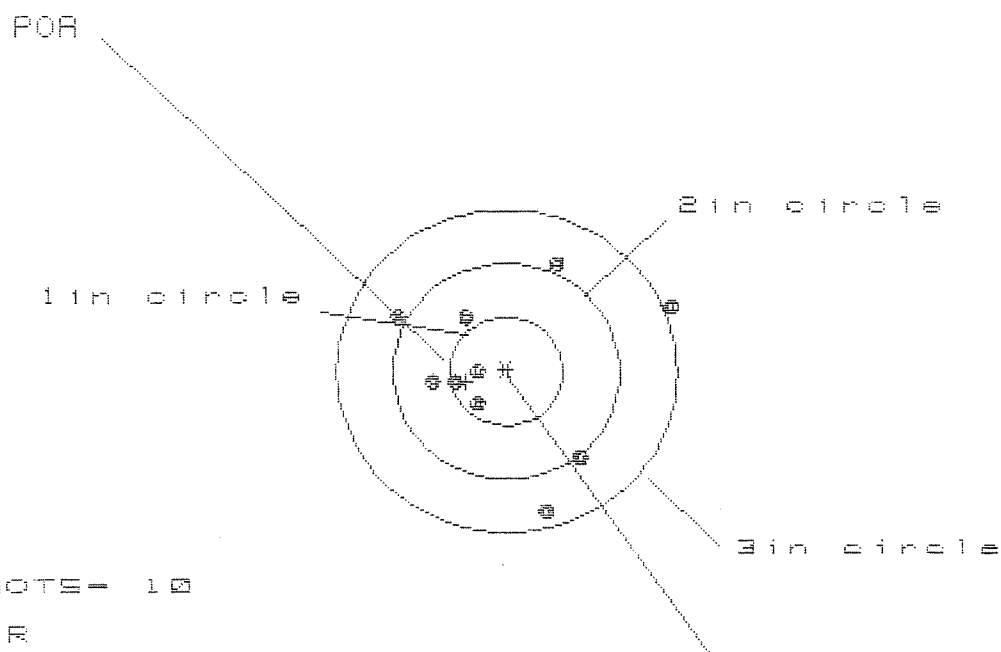

OF SHOTS- 10

IN CIR

1in = 3

2in = 5

3in = 9

HS= 2.332

VS= 2.341

GS= 2.344

CENTROID *

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.421
MINIMUM X	-.911
MAXIMUM Y	1.005
MINIMUM Y	-1.336
CENTROID X	.355
CENTROID Y	.097
POR TO CENTROID in.	.368
MIN RADIUS	.258
MEAN RADIUS	.847
MAX RADIUS	1.535
HORIZONTAL SPREAD	2.332
VERTICAL SPREAD	2.341
EXTREME SPREAD	2.344
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	5
NUMBER IN THREE INCH CIRCLE =	9

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C 6527295
DATE 9/6/90
TESTER WB

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.42	2.26	2.48	242	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.43	2.43	2.57	252	
PULL #3	2.43	2.38	2.55	253	
PULL #4	2.49	2.43	2.51	261	
PULL #5	2.37	2.34	2.38	270	
TOTAL	12.14	11.84	12.49		
AVG.	2.43	2.37	2.50		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.09	3.33		
PULL #2	3.10	3.31		
PULL #3	3.12	3.28		
PULL #4	3.30	3.38		
PULL #5	3.16	3.29		
TOTAL	15.77	16.59		
AVG.	3.15	3.32		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.09	4.26		4.16
PULL #2	4.11	4.29		4.29
PULL #3	4.14	4.39		4.32
PULL #4	4.13	4.40		4.40
PULL #5	4.09	4.19		4.42
TOTAL	20.56	21.53		21.59
AVG.	4.11	4.31		4.32

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			9/6/90	WB
	G) Safety Off Force	2 1/4	2 1/4	2 1/4			9/6/90	WB
	H) Trigger Pull Test & Retainability						9/6/90	WB
	I) Firing Pin Indent	.0245	.025	.0245			9/6/90	WB
	J) Assemble Stock						9/6/90	KS
	K) Assemble Swivel Studs						9/9/90	KS
	L) Attach Front and Rear Sight Assemblies						9/6/90	KS
	M) Iron Sight Alignment						9/6/90	KS
	N) Detach Front & Rear Sights & place in numbered container						9/6/90	KS
	O) Attach Scope to Rifle						9/6/90	KS
	P) Detach & Attach Scope 20 Times						9/6/90	KS
640	Gallery Target & Test						9/7/90	KS
	A) Time						9/7/90	KS
	B) Malfunctions						9/7/90	KS
	C) Pierced Primers						9/7/90	KS
	D) Optical Clarity of Scope						9/7/90	KS
645	Inspect for Live Ammo						9/7/90	KS
655	Final Inspection						9/9/90	KS
	A) Headspace						9/9/90	KS
	B) Trigger Pull	242	252	253	261	270	9/9/90	KS
	C) Function						9/9/90	KS
660	Pack						9-18-90	KS

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 6522295

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		8/1/90	KS
600	Proof		8/1/90	KS
607	Check Headspace		8/1/90	KS
610	Dis-assemble Gun		8/1/90	KS
612	Magnaflux Barrel Action		8/6/90	KR
	Magnaflux Bolt		8/6/90	KR
615	Rollmark Caliber		8/6/90	GS
617	Drill and Tap Sight Holes		8/10/90	FB
618	Polish Barrel RB		8/14/90	WB
620	Apply Coatings (Barrel Action)		8-22-90	JSA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake		9/6/90	WB

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO. C 6522295

LOG IN DATE: / /

DATE

INT.

INSPECT & VERIFY:

OP. #

OP. NAME

550

DIS-ASSEMBLE GUN

560 A

RE-BARREL AT CUSTOM SHOP

B

DRILL & TAP

C

POLISH

575

ASSEMBLE

600

PROOF

605

CHECK HEADSPACE

610

DIS-ASSEMBLE

612

MAGNAFLUX

B411202

4-16
4-16

B.K.

615

ROLLMARK CALIBER

618

ROTO-BLAST

620

APPLY COATINGS

625 A

FINAL ASSEMBLY

B

TRIGGER PULL TEST

C

SAFETY ON FORCE

D

SAFETY OFF FORCE

E

FIRING PIN INDENT

640

TARGET

655

FINAL INSPECT

660

PACK

QAR INSPECTION

SHIP DATE

INITIAL JJM	CUSTOMER ORDER NO. 013771	WOG 1 OF 3 M-24		W/LEUPOLD 10X SCOPE		# 90-0638	
DATE RECEIVED 03/27/98	DATE OPENED 03/27/98	DATE CODE WK 8-90	SERIAL NUMBER C6522295	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62	NATO	
ACCESSORIES	HARD CASE	SCOPE MNTS	SCOPE BASE	W/STUDS			

FROM:	SHIP TO:
FORT DRUM PROVOST MARSHALL PMO - P-10715 MT BELEVEDORE BLVD FT DRUM NY 13602	FORT DRUM PROVOST MARSHALL PMO - P-10715 MT BELEVEDORE BLVD FT DRUM NY 13602

L		CUST NO: 185724 C.O.D L			
ACCOUNT NUMBER	ACCOUNT NUMBER NIC	WRITE ☐	PROM. DATE	ESTIMATED	VIA
			DOOR		
GUN CONDITION	W81 PER W52 H098099 H243			REPAIR CHARGE	
☐ NEW				EXCISE	
☐ LIGHTLY WORN				TAX	
☐ WORN				INSURANCE	
☐ VERY WORN				UPS	
☐ UNREPAIRABLE				PARCEL POST	
☐ MARRED				TOTAL	

FIREARMS INSPECTION REPORT						
CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A	E1				
TRIGGER GROUP		E2			E1	S
BOLT ASSY.		E3			E2	F1
BARREL ASSY.		E4		D1	E3	F2
REC. ASSY.		E5		D2	E4	F3
WOOD			G1	D3	E5	F4
METAL			G2			
MAIN FAULT						

[illegible]

RD-6947-Rev 3

PAYMENT:

Mastercard / Visa (circle one)

Card #: _____

Exp. Date: _____

Signature: _____

RETURN:

☒ Clark Street Entrance☐ Via US Mail or UPS

(PLEASE PRINT CLEARLY)

FIREARMS DELIVERED TO PLANT

FILE Nº 013771DATE 3/27/98

CUSTOMER NAME:

FT. DRUM Provost Marshal

REMINGTON EMPLOYEE:

ADDRESS:

PMO - P-10715YES ☐ NO ☒MT. Belvedere Blvd

EMPLOYEE # _____

ZIP:

FT. DRUM, NY 13602

DEPT. # _____

PHONE:

315-772-0734 (5293)

FIREARM

MODEL: M24 (3)

CHECK FOR AMMUNITION

GAUGE: .308C6522299-

SERIAL # _____

C6522295-C6523514-

CONDITION:

WOOD

GOOD

FAIR

POOR

FANCY

PLAIN

METAL

GOOD

FAIR

POOR

FANCY

PLAIN

BARREL

VT. RIB

PLAIN

DEER RSS

ACCESSORIES:

SCOPE: YES ☒ NO ☐

(BRAND NAME/POWER) _____

SLING: YES ☐ NO ☒GUN CASE: YES ☒ NO ☐ (HARD - SOFT)

EXTRA BBL FOR GUN MENTIONED ABOVE:

OTHER (Note in this area items missing or added from orig. equipment)

CUSTOMER REQUEST:

Re-cond. from - see notesAttached to Firearm

SIGNATURE: _____

(Person delivering firearm to Plant)

DATE: _____

3/27/98

SIGNATURE: _____

(Security Officer)

DATE: _____

3/27/98

SIGNATURE: _____

(Firearm picked up by)

DATE: _____

3/27/98

Arm Service Copy

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6522295
28 Apr 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.0104$
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $.5828$
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.582893$

THE AMR FOR THIS RIFLE IS: 1.111

CENTROIDAL DISTANCES

Ø TO	1	.559893
1 TO	2	.443407
1 TO	3	.303488
1 TO	4	.305884
1 TO	5	.278658

2
4
1 5
+ <----POA

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 010

POA TO CENTROID: .559

MIN RADIUS : .216

MEAN RADIUS : 1.201

MAX RADIUS : 2.278


CENTROID X : -.222

CENTROID Y : .514

28 Apr 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6522295

CENTERFIRE PATTERN # 1

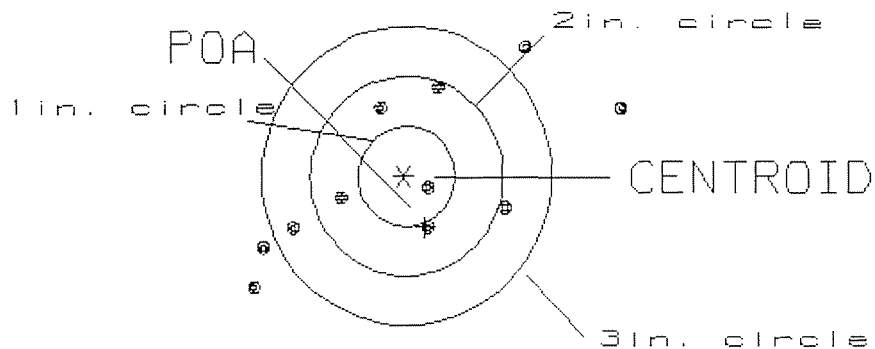

OF SHOTS= 11

IN CIRCLE

HS= 3.77

1

VS= 2.45

5

GS= 4.20

7

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
 POA TO CENTROID: .859
 MIN RADIUS : .226
 MEAN RADIUS : 1.006
 MAX RADIUS : 1.733
 CENTROID X : .059
 CENTROID Y : .857

28 Apr 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6522295

CENTERFIRE PATTERN # 2

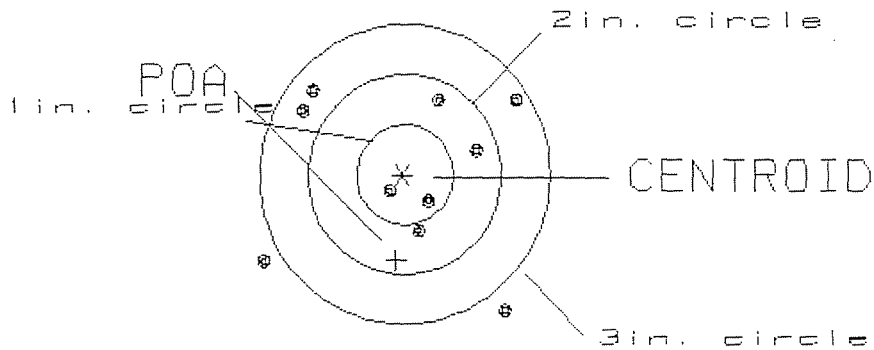

OF SHOTS= 10

IN CIRCLE

HS= 2.58

2

VS= 2.20

5

GS= 3.04

8

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 3

POA TO CENTROID: .453
 MIN RADIUS : .237
 MEAN RADIUS : .722
 MAX RADIUS : 1.490
 CENTROID X : .074
 CENTROID Y : .447

28 Apr 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6522295

CENTERFIRE PATTERN # 3

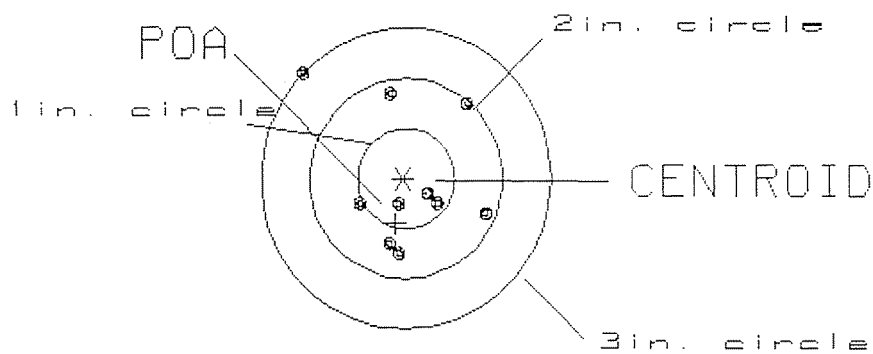

OF SHOTS= 10

IN CIRCLE

HS= 1.83

3

VS= 1.86

9

GS= 2.33

10

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 4
 POA TO CENTROID: .711
 MIN RADIUS : .416
 MEAN RADIUS : 1.539
 MAX RADIUS : 2.360
 CENTROID X : .012
 CENTROID Y : .711

28 Apr 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6522295

CENTERFIRE PATTERN # 4

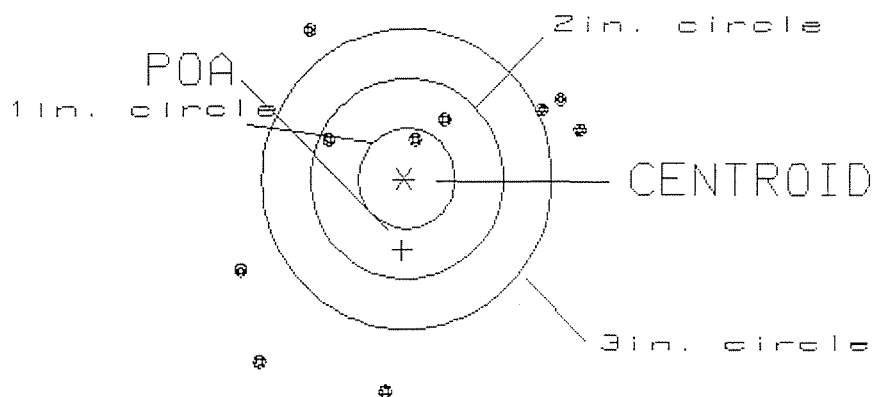

OF SHOTS= 10

IN CIRCLE

HS= 3.47

1

VS= 3.65

3

GS= 4.08


4

PATTERN #: 5
 POA TO CENTROID: .386
 MIN RADIUS : .071
 MEAN RADIUS : 1.086
 MAX RADIUS : 2.042
 CENTROID X : .025
 CENTROID Y : .385

28 Apr 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6522295

CENTERFIRE PATTERN # 5

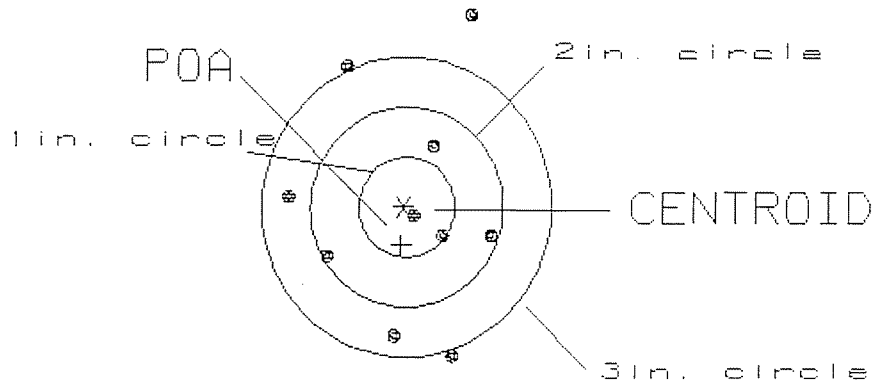

OF SHOTS= 10

IN CIRCLE

HS= 2.17
 VS= 3.45
 GS= 3.45

1
 5
 7