

C6522350

MODEL 700TM M24

Model **SMS**TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

 		VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.
MODEL 700TM M24		SERIAL NO. C6522350
MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.		ORDER NO. 5716



5716 C6522350

UPC



0 47700 25716 7

CENTROIDAL DISTANCE CALCULATIONS
 FOR RIFLE # C6522350
 14 Aug 1990

CENTROIDAL DISTANCES

0 TO	1	.484232
1 TO	2	.546465
1 TO	3	.403387
1 TO	4	.802002
1 TO	5	.386793


$\begin{matrix} 4 \\ 2+ \\ 1 \\ 3 \end{matrix}$
 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.2272
 THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.153
 THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .275036
 THE AMR FOR THIS RIFLE IS: .845

13 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8522350

CENTERFIRE PATTERNS # 1

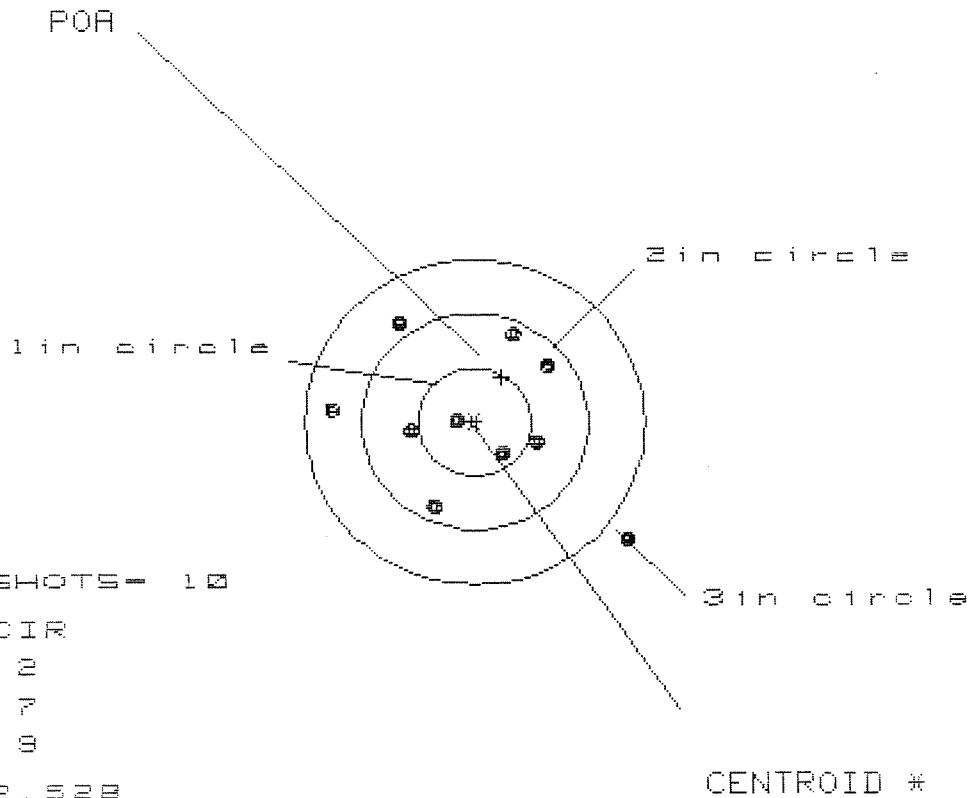

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 7

3 in = 9

HS= 2.528

VS= 2.064


GS= 2.883

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.307	.754	.620
MINIMUM X	:	-1.221	-1.076	-.695
MAXIMUM Y	:	.960	.837	.831
MINIMUM Y	:	-1.104	-.864	-.870
CENTROID X	:	-.241	-.386	-.252
CENTROID Y	:	-.420	-.297	-.291
POA TO CENTROID in.	:	.484	.487	.385
MIN RADIUS	:	.129	.131	.180
MEAN RADIUS	:	.811	.711	.653
MAX RADIUS	:	1.711	1.076	1.084
HORIZONTAL SPREAD	:	2.528	1.830	1.315
VERTICAL SPREAD	:	2.064	1.701	1.701
EXTREME SPREAD	:	2.883	1.873	1.729
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		9	

13 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06522350

CENTERFIRE PATTERNS # 2

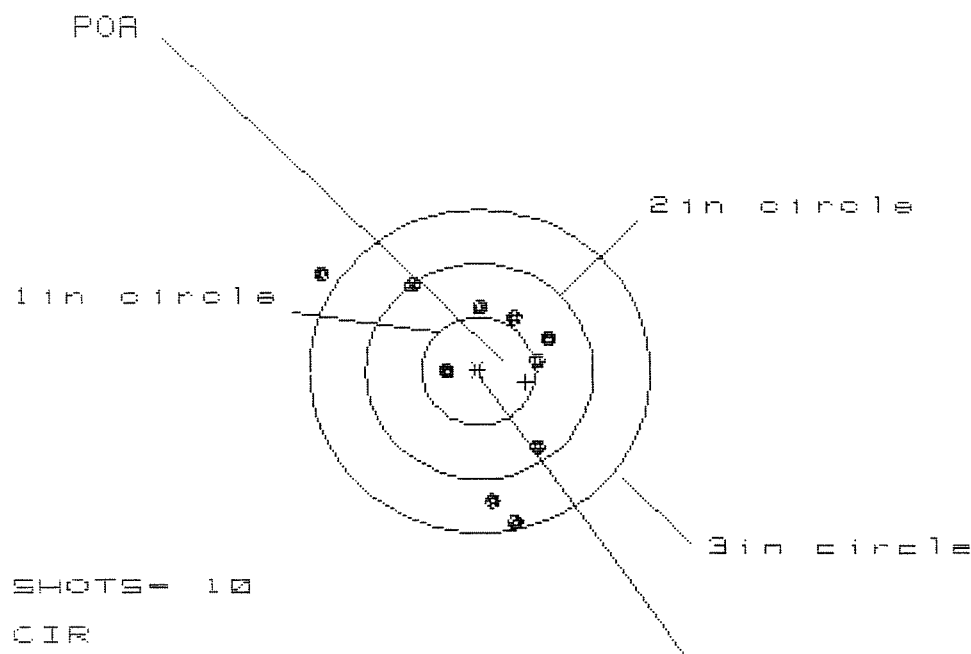

OF SHOTS= 10

IN CIR

1in = 2

2in = 6

3in = 9

HS= 1.987

VS= 2.286

GS= 2.675

CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.589	.434	.458
MINIMUM X	:	-1.397	-.773	-.749
MAXIMUM Y	:	.927	.933	.776
MINIMUM Y	:	-1.359	-1.256	-1.248
CENTROID X	:	-.409	-.254	-.278
CENTROID Y	:	.100	-.003	.154
POR TO CENTROID in.	:	.422	.254	.318
MIN RADIUS	:	.251	.364	.336
MEAN RADIUS	:	.866	.767	.670
MAX RADIUS	:	1.677	1.271	1.250
HORIZONTAL SPREAD	:	1.987	1.207	1.207
VERTICAL SPREAD	:	2.286	2.189	2.024
EXTREME SPREAD	:	2.675	2.391	2.135
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

13 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6522350

CENTERFIRE PATTERNS # 3

POR

1in circle

2in circle

3in circle

OF SHOTS= 10

IN CIR

1in = 4

2in = 8

3in = 9

HS= 2.068

VS= 1.863

GS= 2.645


CENTROID *

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.262	.697	.637
MINIMUM X	:	-.806	-.666	-.726
MAXIMUM Y	:	1.036	.944	.701
MINIMUM Y	:	-.827	-.814	-.696
CENTROID X	:	.023	-.117	-.057
CENTROID Y	:	-.725	-.633	-.752
POR TO CENTROID in.	:	.726	.644	.754
MIN RADIUS	:	.125	.287	.204
MEAN RADIUS	:	.688	.615	.525
MAX RADIUS	:	1.508	1.058	.779
HORIZONTAL SPREAD	:	2.068	1.363	1.363
VERTICAL SPREAD	:	1.863	1.758	1.396
EXTREME SPREAD	:	2.645	1.793	1.405
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

13 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8522350

CENTERFIRE PATTERNS # 4

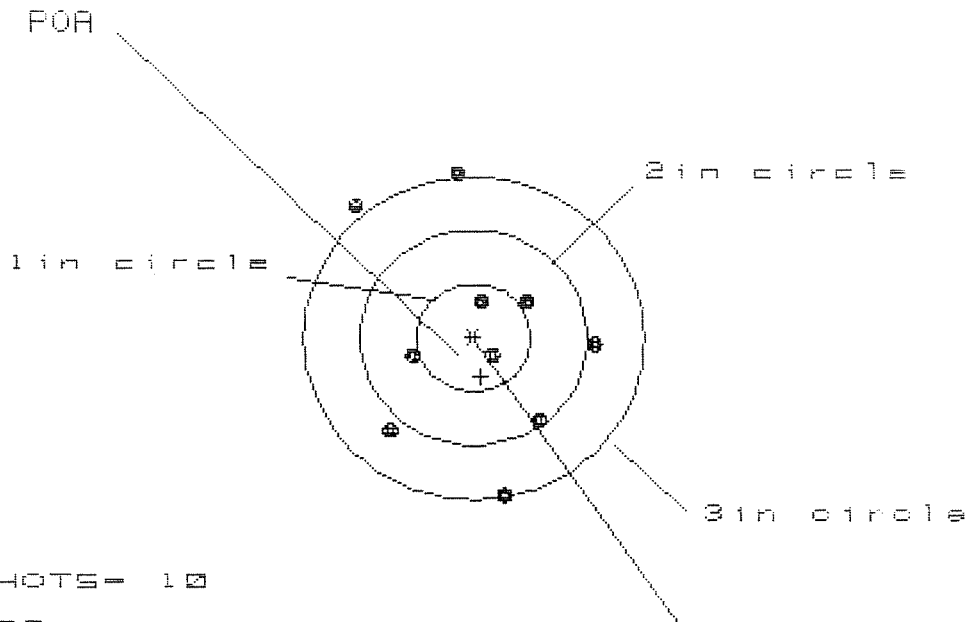

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 5

3 in = 8

HS= 2.116

VS= 3.002

GS= 3.018


CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.042	.923	.896
MINIMUM X	:	-1.074	-.894	-.921
MAXIMUM Y	:	1.541	1.679	.710
MINIMUM Y	:	-1.461	-1.323	-1.113
CENTROID X	:	-.063	.056	.083
CENTROID Y	:	.362	.224	.014
POA TO CENTROID in.	:	.367	.231	.084
MIN RADIUS	:	.231	.071	.222
MEAN RADIUS	:	.956	.856	.764
MAX RADIUS	:	1.641	1.693	1.115
HORIZONTAL SPREAD	:	2.116	1.817	1.817
VERTICAL SPREAD	:	3.002	3.002	1.823
EXTREME SPREAD	:	3.018	3.018	1.974
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

13 Aug 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8522350

CENTERFIRE PATTERNS # 5

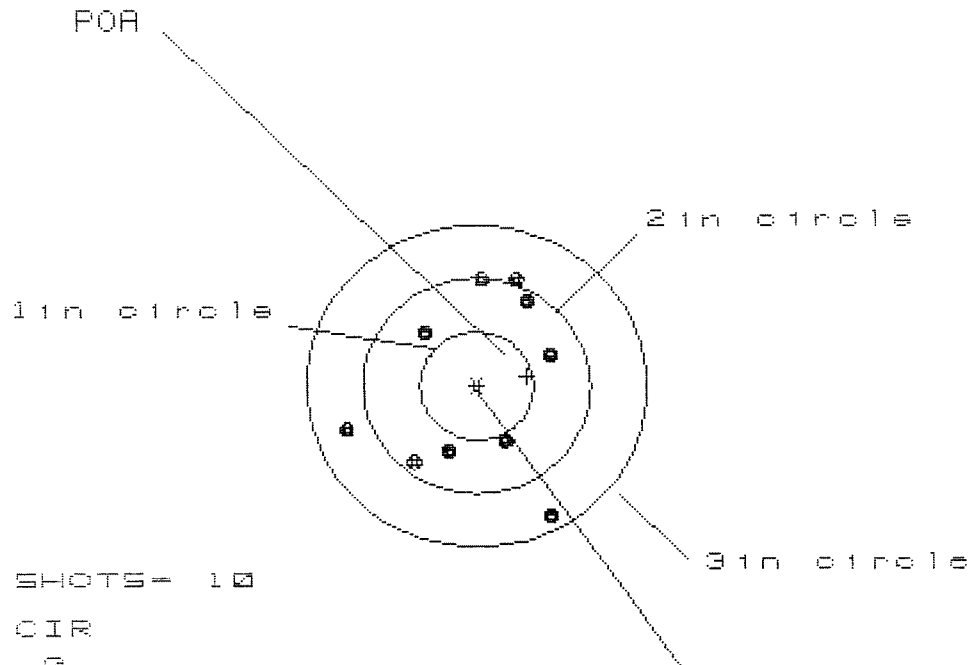

OF SHOTS= 10

IN CIR

1in = 0

2in = 7

3in = 10

HS= 1.869

VS= 2.201

GS= 2.274

CENTROID *

PATTERN #	:	5	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.685	.679	.540
MINIMUM X	:	-1.184	-1.107	-.587
MAXIMUM Y	:	.950	.811	.745
MINIMUM Y	:	-1.251	-.811	-.877
CENTROID X	:	-.446	-.523	-.384
CENTROID Y	:	-.092	.047	.113
POA TO CENTROID in.	:	.456	.525	.400
MIN RADIUS	:	.616	.544	.546
MEAN RADIUS	:	.904	.835	.766
MAX RADIUS	:	1.427	1.226	1.055
HORIZONTAL SPREAD	:	1.869	1.786	1.127
VERTICAL SPREAD	:	2.201	1.622	1.622
EXTREME SPREAD	:	2.274	2.055	1.856
NUMBER IN ONE INCH CIRCLE	=	0		
NUMBER IN TWO INCH CIRCLE	=	7		
NUMBER IN THREE INCH CIRCLE	=	10		

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6522350

DATE 9-12-90

TESTER JR

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.36	2.36	2.41	2.30	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.21	2.36	2.43	2.15	
PULL #3	2.30	2.37	2.49	2.20	
PULL #4	2.40	2.31	2.40	2.27	
PULL #5	2.46	2.32	2.30	2.30	
TOTAL	11.73	11.72	12.03	11.22	
AVG.	2.346	2.344	2.406	2.244	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.50	3.33		
PULL #2	3.49	3.50		
PULL #3	3.42	3.31		
PULL #4	3.49	3.29		
PULL #5	3.45	3.21		
TOTAL	17.35	16.64		
AVG.	3.47	3.328		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.14	4.36		4.36
PULL #2	4.17	4.40		4.33
PULL #3	4.17	4.38		4.45
PULL #4	4.15	4.48		4.35
PULL #5	4.36	4.42		4.47
TOTAL	20.99	22.04		21.96
AVG.	4.198	4.408		4.392

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # *C6522350*

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	6 29	90	<i>RW</i>
600	Proof	6 29	90	<i>RW</i>
607	Check Headspace	6 29	90	<i>RW</i>
610	Dis-assemble Gun	6 29	90	<i>RW</i>
612	Magnaflux Barrel Action		7-12-90	KR
	Magnaflux Bolt		7-12-90	KR
615	Rollmark Caliber		7-12-90	<i>L.S.</i>
617	Drill and Tap Sight Holes		7/9/90	<i>LB</i>
618	Polish Barrel <i>LB</i>		7/16/90	<i>WB</i>
620	Apply Coatings (Barrel Action)		7-13-90	<i>TA</i>
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		7/25/90	<i>RW</i>
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		7/25/90	<i>RW</i>
	C) Inspect Ejector Hole for Chamfer		7/25/90	<i>RW</i>
	D) Oil Firing Pin Ass'y		7/25/90	<i>RW</i>
	E) Adjust Trigger Pull to Min Setting and Stake		9-12-90	<i>JM</i>

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			7/30/90	RL
	G) Safety Off Force	3	3	3			7/30/90	RL
	H) Trigger Pull Test & Retainability						9-12-90	RL
	I) Firing Pin Indent	.023	.023	.023			7/30/90	RL
	J) Assemble Stock						8/7/90	RW
	K) Assemble Swivel Studs						9/13/90	RL
	L) Attach Front and Rear Sight Assemblies						8/7/90	RW
	M) Iron Sight Alignment						8/7/90	RW
	N) Detach Front & Rear Sights & place in numbered container						8/7/90	RW
	O) Attach Scope to Rifle						8/7/90	RW
	P) Detach & Attach Scope 20 Times						8/7/90	RW
640	Gallery Target & Test						8/13/90	NF
	A) Time						8/13/90	NF
	B) Malfunctions						8/13/90	NF
	C) Pierced Primers						8/13/90	NF
	D) Optical Clarity of Scope						8/13/90	NF
645	Inspect for Live Ammo						8/13/90	NF
655	Final Inspection							
	A) Headspace						9/13/90	RL
	B) Trigger Pull	2.30	2.15	2.20	2.27	2.30	9-12-90	RL
	C) Function						9/13/90	RL
660	Pack						9/19/90	NF