

DUPONT RECORDS CONTROL SCHEDULE

RECORDS CATEGORY OR TITLE:
[REDACTED]

1980

COPY "O" (OFFICIAL) ☐ "X" (EXTRA) ☒

TOTAL RETENTION: [REDACTED]

GS-11050 Rev. 8/78

20
CB498775
RS

20	RS
C6498775	
MODEL 700 TM M24	
Model	SMS TM
Action	
Barrel Length	
Capacity	
Order No.	5716
*Includes 1 in chamber.	
Remington	

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00112655** Serial: C6498775 Model M24 SWS Center Fire
 Verify Repair Caliber: 7.62 NATO Produced: 06/19/1990 Repairman: Status: Closed 5/22/2006 2:49:41 PM

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: **HQ-STARC (-) COARNG** **HQ-STARC (-) COARNG**

Address 1: **6848 S REVERE PARKWAY** **6848 S REVERE PARKWAY**

Address 2: **ATTN: USPFO-TRANS.** **ATTN: USPFO-TRANS.** PO Box:

City: **CENTENNIAL** **CENTENNIAL**

State: **CO** Zip Code: **80112** Country: **US** State: **CO** Zip Code: **80112** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone: **NA**

Fax:

Email:

Comments:

Received Condition

Fair

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A026	Scope	1
A045	Bi Pod	1
A057	Fit and Rear Sgt Base	1
C000	SCOPE CASE	1

Repair Search **Refresh** **Close**

naglet 5/23/2006 7:24 AM CAPS NUM INS SCAL

start 2 Micro... Microsoft... 2 Inter... Part Sear... Arms Ser... 7:24 AM

Serial Number: **C6498775**

Model: **M24 SWS**



RE00112655

BARBER - M24 0007484
**AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS**

2.50 LBS (plus or minus 0.50 LBS)

3.00 LBS (plus or minus 0.75 LBS)

4.00 LBS (plus or minus 1.00 LBS)

 DATE 6-2-06

 TESTER R.P.

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	253	245		252	
PULL #2	257	249		248	
PULL #3	264	244		261	
PULL #4	247	241		260	
PULL #5	241	244		246	
TOTAL	1262	1223		1267	
AVERAGE	252	244		253	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	305	304		
PULL #2	313	302		
PULL #3	295	302		
PULL #4	297	319		
PULL #5	302	297		
TOTAL	1512	1524		
AVERAGE	302	304		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	413	397		401
PULL #2	410	410		397
PULL #3	404	397		400
PULL #4	400	401		403
PULL #5	406	406		398
TOTAL	2033	2011		1999
AVERAGE	406	402		399


SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6498775.___0
FILE DATE AND TIME: 06/14/2006 16:17

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.113
The Average Y Centroid of the Five Target Set:	-0.102
The Average Point of Impact of the Five Target Set:	0.152
The Average Mean Radius of the Five Target Set:	0.846
The Distance from POA to Centroid Target #1:	0.257
The Distance from Centroid Target #2 to Centroid Target #1:	0.326
The Distance from Centroid Target #3 to Centroid Target #1:	0.159
The Distance from Centroid Target #4 to Centroid Target #1:	0.280
The Distance from Centroid Target #5 to Centroid Target #1:	0.228

SERIAL NUMBER: C6498775. __0	POINT#	X	Y
TARGET NUMBER: 1	1:	-0.099	1.039
FILE DATE: 06/14/2006	2:	1.419	0.203
FILE TIME: 16:17	3:	0.482	-1.509
	4:	-0.425	-0.639
X CENTROID: 0.024	5:	-0.071	-0.658
Y CENTROID: -0.256	6:	-0.387	-0.460
POA TO CENTROID: 0.257	7:	-0.171	-0.364
HORZ SPREAD: 1.844	8:	-0.268	-0.211
VERT SPREAD: 2.548	9:	-0.406	0.181
GROUP SPREAD: 2.027	10:	0.169	-0.139
MIN RADIUS: 0.186			
MAX RADIUS: 1.468			
MEAN RADIUS: 0.688			
# IN 1 IN DIAMETER: 5			
# IN 2 IN DIAMETER: 7			
# in 3 IN DIAMETER: 10			

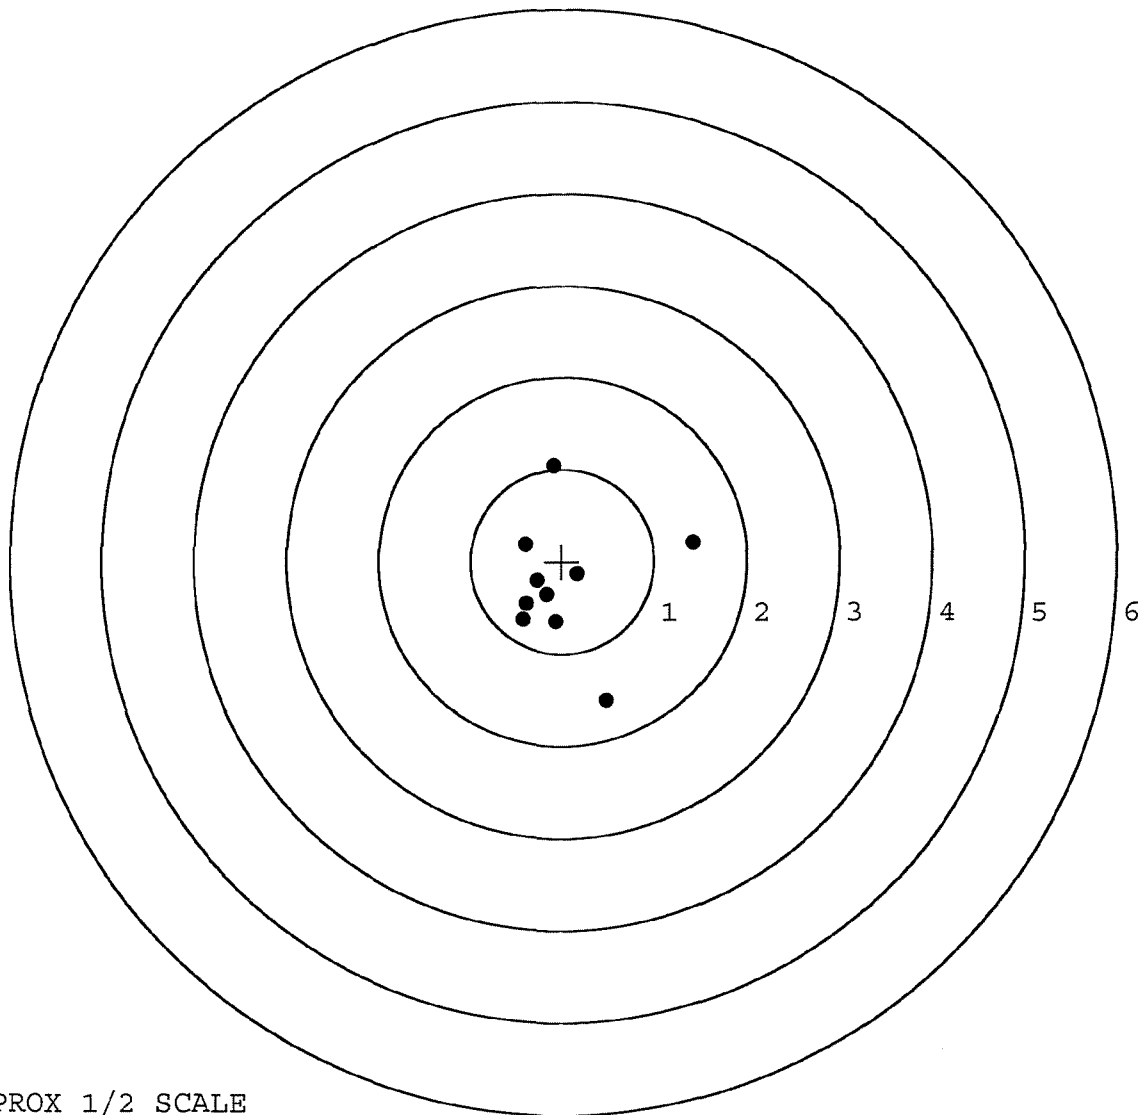


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498775. __0
 TARGET NUMBER: 2
 FILE DATE: 06/14/2006
 FILE TIME: 16:17

POINT#	X	Y
1:	-0.556	0.839
2:	-0.479	0.320
3:	0.489	1.824
4:	0.304	0.982
5:	0.594	0.281
6:	0.310	-0.194
7:	0.042	-0.480
8:	-0.239	-1.027
9:	-0.007	-0.920
10:	0.591	-1.024

X CENTROID: 0.105
 Y CENTROID: 0.060
 POA TO CENTROID: 0.121
 HORZ SPREAD: 1.150
 VERT SPREAD: 2.851
 GROUP SPREAD: 2.942
 MIN RADIUS: 0.327
 MAX RADIUS: 1.805
 MEAN RADIUS: 0.913
 # IN 1 IN DIAMETER: 1
 # IN 2 IN DIAMETER: 6
 # in 3 IN DIAMETER: 9

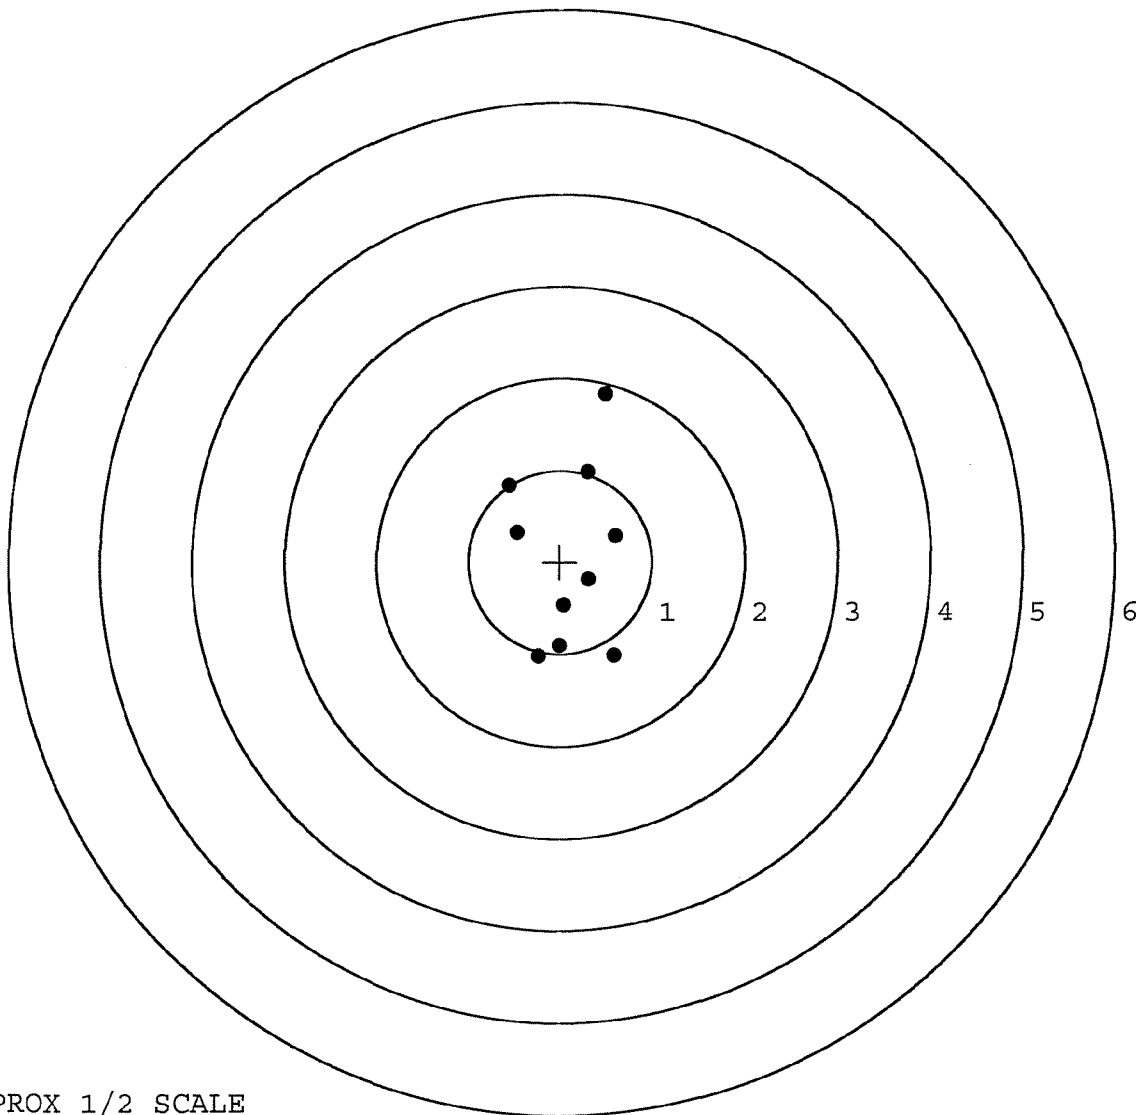


TARGET APPROX 1/2 SCALE

BARBER - M24 0007488

SERIAL NUMBER: C6498775. __0
 TARGET NUMBER: 3
 FILE DATE: 06/14/2006
 FILE TIME: 16:17

POINT#	X	Y
1:	-0.416	0.565
2:	-0.249	0.807
3:	0.073	0.547
4:	0.322	0.076
5:	0.681	0.222
6:	0.490	-0.346
7:	0.124	-0.574
8:	-0.582	-0.416
9:	-0.108	-1.258
10:	1.494	-2.296

X CENTROID: 0.183
 Y CENTROID: -0.267
 POA TO CENTROID: 0.324
 HORZ SPREAD: 2.076
 VERT SPREAD: 3.103
 GROUP SPREAD: 3.559
 MIN RADIUS: 0.312
 MAX RADIUS: 2.415
 MEAN RADIUS: 0.893
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 6
 # in 3 IN DIAMETER: 9

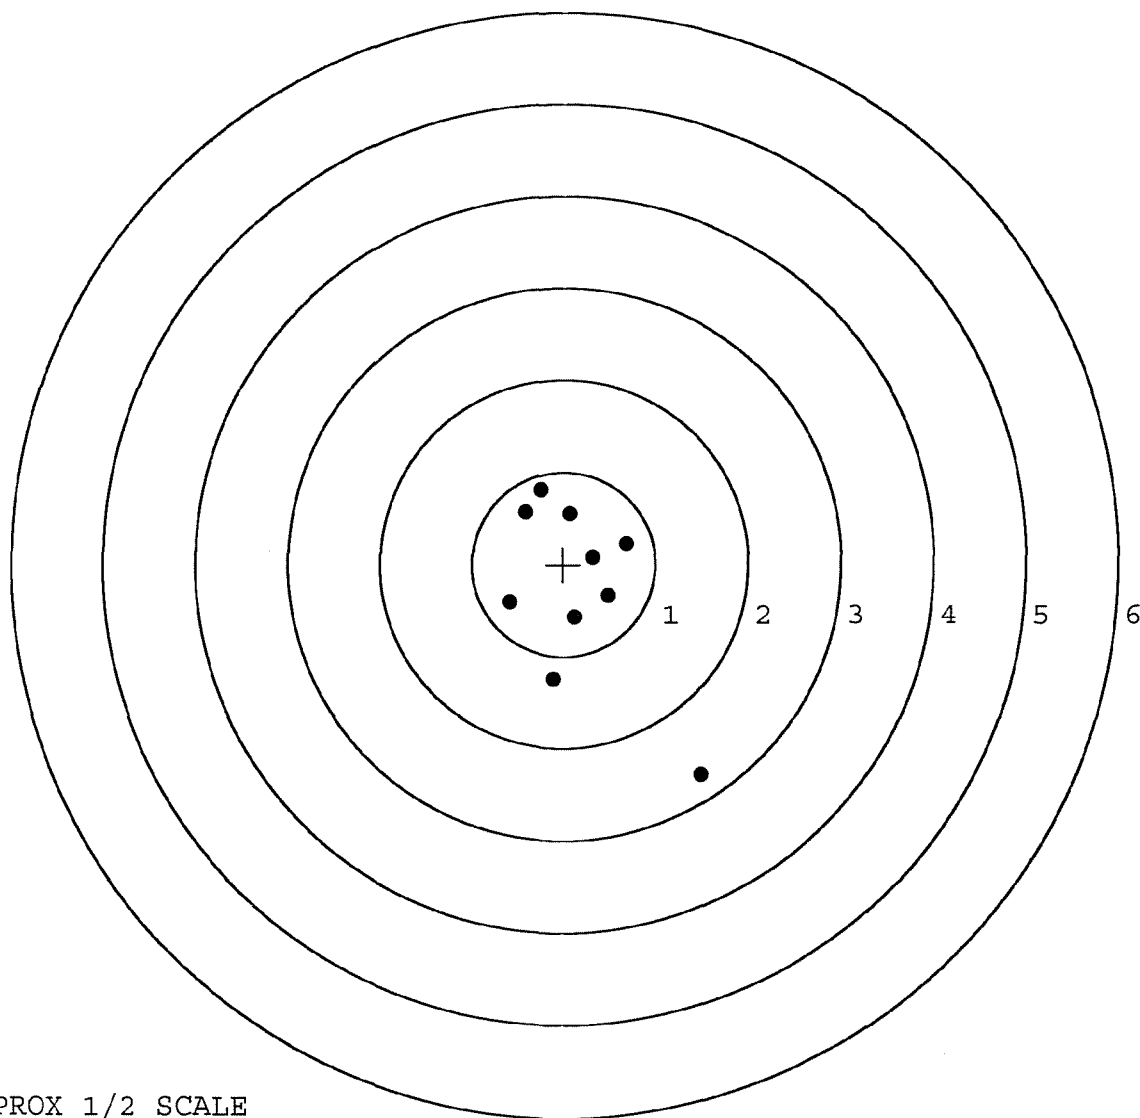

TARGET APPROX 1/2 SCALE

BARBER - M24 0007489

SERIAL NUMBER: C6498775. __0

TARGET NUMBER: 4

FILE DATE: 06/14/2006

FILE TIME: 16:17

POINT#	X	Y
1:	0.305	1.385
2:	-0.708	0.479
3:	-0.521	0.163
4:	-0.311	-0.363
5:	0.054	-0.878
6:	0.047	-0.206
7:	0.319	-0.292
8:	0.840	-0.724
9:	0.462	0.281
10:	0.817	0.189

X CENTROID: 0.130

Y CENTROID: 0.003

POA TO CENTROID: 0.130

HORZ SPREAD: 1.548

VERT SPREAD: 2.263

GROUP SPREAD: 2.277

MIN RADIUS: 0.225


MAX RADIUS: 1.393

MEAN RADIUS: 0.722

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

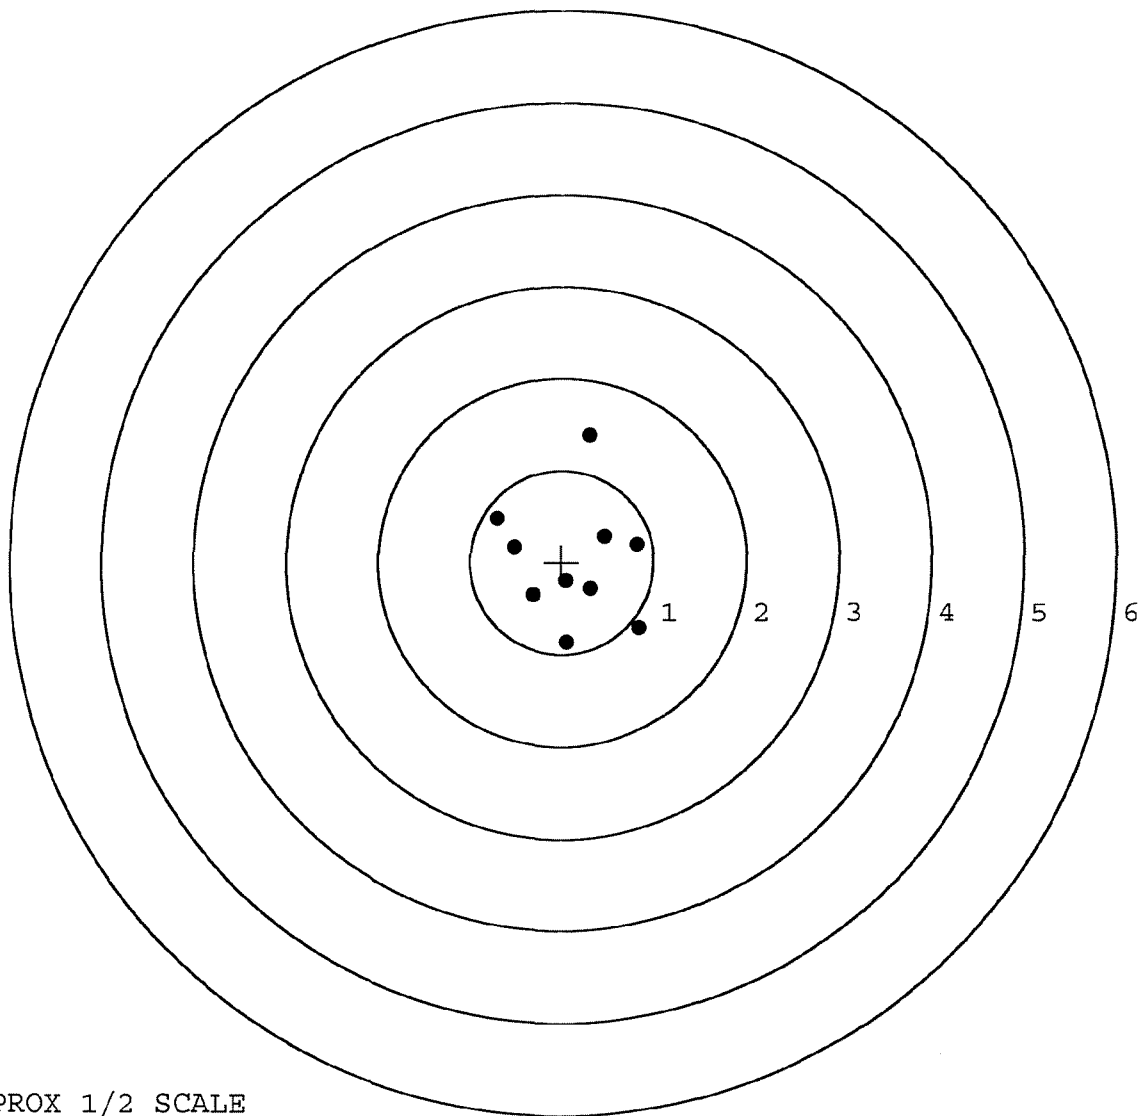


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6498775. __0
 TARGET NUMBER: 5
 FILE DATE: 06/14/2006
 FILE TIME: 16:17

POINT#	X	Y
1:	-0.470	0.305
2:	-0.418	0.878
3:	0.041	1.289
4:	0.087	0.803
5:	0.136	0.217
6:	-0.488	-1.875
7:	-0.432	-1.047
8:	0.272	-0.484
9:	0.848	-0.513
10:	1.662	-0.074

X CENTROID: 0.124
 Y CENTROID: -0.050
 POA TO CENTROID: 0.134
 HORZ SPREAD: 2.150
 VERT SPREAD: 3.164
 GROUP SPREAD: 3.208
 MIN RADIUS: 0.267
 MAX RADIUS: 1.925
 MEAN RADIUS: 1.015
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 5
 # in 3 IN DIAMETER: 8

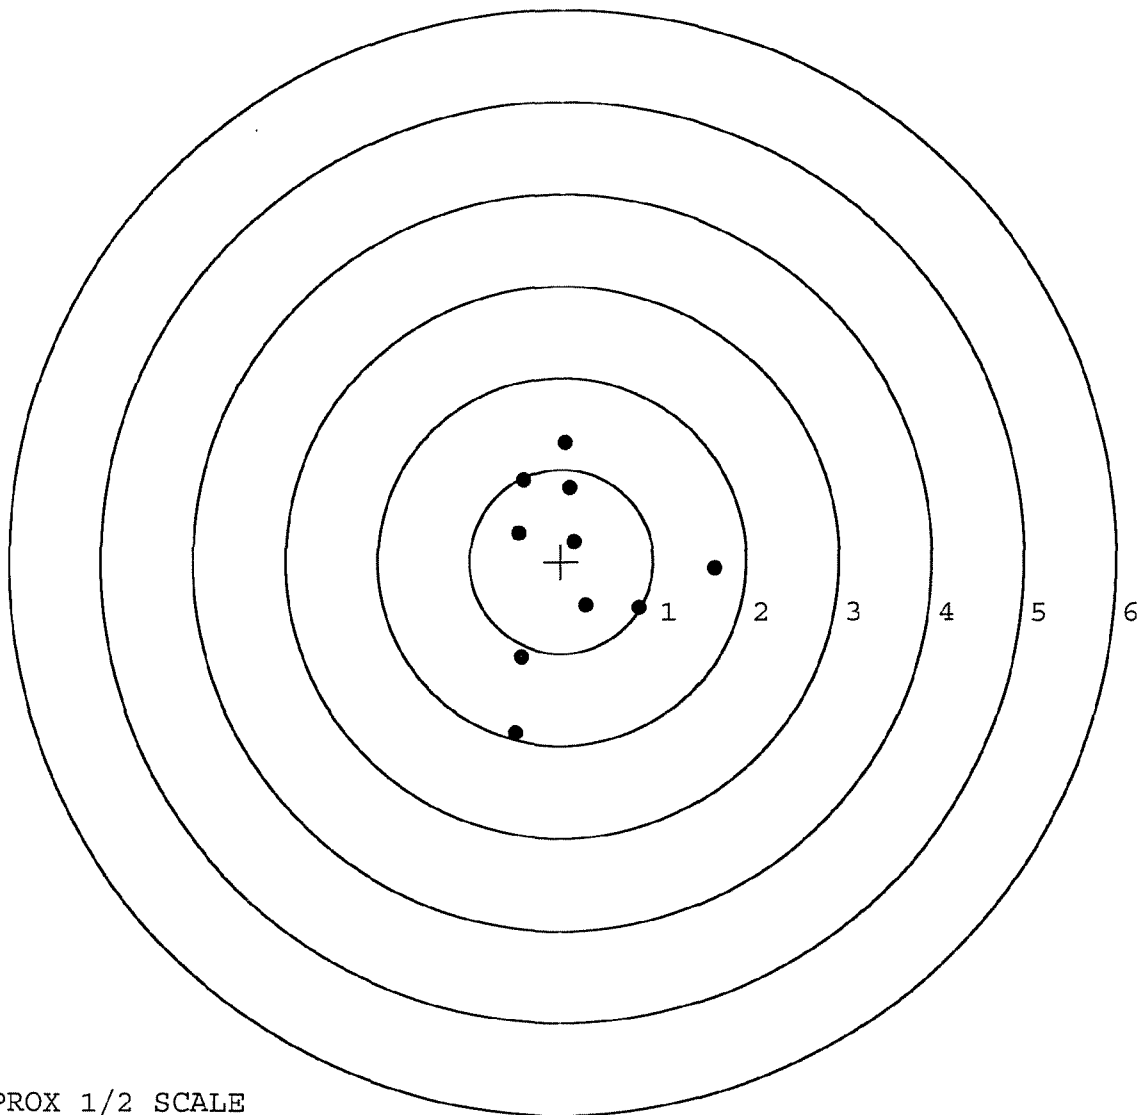

TARGET APPROX 1/2 SCALE

R & E NUMBER	112655		
SERIAL NUMBER	C6498775		
LOG-IN DATE	5-22-06		
OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	6-5-06	RTZ
505	RE-BARREL	6-6-06	RTZ
560	ASSEMBLE	6-7-06	RTZ
600	PROOF	MAGNA-FLUX INSPECTED JUN 09 2006 6-7-06	TRW
605	CHECK HEADSPACE	6-7-06	RTZ
610	DIS-ASSEMBLE GUN	6-7-06	RTZ
612	MAGNAFLUX	OPERATOR <u>APD</u> 6-9-06	APD
510	DRILL AND TAP	6-8-06	TRW
615	ROLLMARK CALIBER	6-9-06	CW
618	ROTO-BLAST	6-9-06	CB
620	APPLY COATINGS	6-13-06	FB
625	FINAL ASSEMBLY	6-14-06	RTZ
640	FUNCTION TEST AND	PASS FAIL	6-14-06 X.P.D.
650	TARGET	PASS FAIL	6-14-06 X.P.D.
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	6-20-06	X.P.D.
	A) HEADSPACE	PASS FAIL	6-20-06 X.P.D.
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS 2.30 2.32 2.30 2.33 2.32	6-15-06 DA
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX 6.0 6.0 6.0	6-15-06 DA
	G) SAFETY OFF FORCE	2 LBS MIN 3.5 4.0 4.0	6-15-06 DA
	I) FIRING PIN INDENT	.020 .023 .023 .023	6-15-06 DA
690	PACK		6-20-06 DA



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ M24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

01

SERIAL NO.	C6498775
ORDER NO.	5716



5716 C6498775

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6498775

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	5 17	90	RW
600	Proof	5 17	90	RW
607	Check Headspace	5 17	90	RW
610	Dis-assemble Gun	5 17	90	RW
612	Magnaflux Barrel Action		5/22/90	KCR
	Magnaflux Bolt		5/22/90	KCR
615	Rollmark Caliber		5/22/90	G.S.
617	Drill and Tap Sight Holes		5/23/90	FB
618	Polish Barrel <i>RWB</i>		5/24/90	WB
620	Apply Coatings (Barrel Action)		6/4/90	TH
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		6/4/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		6/4/90	RW
	C) Inspect Ejector Hole for Chamfer		6/4/90	RW
	D) Oil Firing Pin Ass'y		6/4/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		6/8/90	JS

BARBER - M24 0007494		READINGS					DATE	INIT
op. #	OP. NAME							
625 cont.	F) Safety On Force	3	3	3			6/12/90	gll
	G) Safety Off Force	2	2	2			6/12/90	gll
	H) Trigger Pull Test & Retainability						6/8/90	gll
	I) Firing Pin Indent	.0225	.022	.022			6/11/90	WB
	J) Assemble Stock						6/13/90	RW
	K) Assemble Swivel Studs						6/18/90	WB
	L) Attach Front and Rear Sight Assemblies						6/13/90	RW
	M) Iron Sight Alignment						6/13/90	RW
	N) Detach Front & Rear Sights & place in numbered container						6/13/90	RW
	O) Attach Scope to Rifle						6/13/90	gll
	P) Detach & Attach Scope 20 Times						6/13/90	gll
640	Gallery Target & Test						6-14-90	DH
	A) Time						6-14-90	DH
	B) Malfunctions						6-14-90	DH
	C) Pierced Primers						6-14-90	DH
	D) Optical Clarity of Scope						6-14-90	DH
645	Inspect for Live Ammo						6-14-90	DH
655	Final Inspection						6/18/90	WB
	A) Headspace							
	B) Trigger Pull	2.32	2.52	2.47	2.53	2.48	6/18/90	RW
	C) Function						6/18/90	WB
660	Pack						6-19-90	DH

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. 66498775

DATE 6/8/90

TESTER JU

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.53	2.43	2.40	2.32	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.31	2.46	2.30	2.52	
PULL #3	2.45	2.50	2.33	2.47	
PULL #4	2.41	2.33	2.35	2.53	
PULL #5	2.50	2.35	2.40	2.46	
TOTAL	12.20	12.07	11.78	12.30	
AVG.	2.44	2.414	2.356	2.46	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.30	3.43		
PULL #2	3.25	3.38		
PULL #3	3.10	3.26		
PULL #4	3.18	3.38		
PULL #5	3.14	3.45		
TOTAL	16.02	16.89		
AVG.	3.204	3.378		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.24	4.30		4.30
PULL #2	4.13	4.34		4.31
PULL #3	4.29	4.03		4.34
PULL #4	4.32	4.22		4.16
PULL #5	4.28	4.28		4.32
TOTAL	21.26	21.17		21.43
AVG.	4.252	4.234		4.286

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6498775
18 Jun 1990

CENTROIDAL DISTANCES

0 TO	1	.957882
1 TO	2	.570674
1 TO	3	.578547
1 TO	4	.511806
1 TO	5	.490181

+ $\frac{2}{3}$ (----FOR
5 1

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .546
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2034
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .582656
THE AMR FOR THIS RIFLE IS: .8578


15 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6498775

CENTERFIRE PATTERNS

1

POA

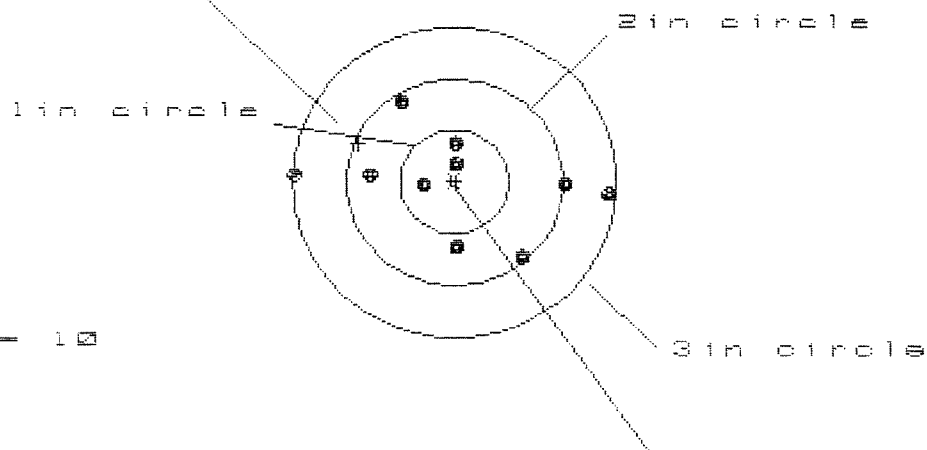

OF SHOTS = 10

IN CIR

1in = 3

2in = 7

3in = 10

HS = 2.854

VS = 1.515

GS = 2.863


CENTROID #

PATTERN #	:	1	2	3
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.389	1.227	1.036
MINIMUM X	:	-1.465	-.976	-.823
MAXIMUM Y	:	.808	.815	.796
MINIMUM Y	:	-.707	-.700	-.719
CENTROID X	:	.881	1.043	.890
CENTROID Y	:	-.376	-.383	-.364
POA TO CENTROID in.	:	.957	1.111	.962
MIN RADIUS	:	.182	.260	.172
MEAN RADIUS	:	.806	.746	.648
MAX RADIUS	:	1.466	1.236	1.036
HORIZONTAL SPREAD	:	2.854	2.203	1.859
VERTICAL SPREAD	:	1.515	1.515	1.515
EXTREME SPREAD	:	2.863	2.213	1.863
NUMBER IN ONE INCH CIRCLE =	:	3		
NUMBER IN TWO INCH CIRCLE =	:	7		
NUMBER IN THREE INCH CIRCLE =	:	10		

15 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/CG49B775

CENTERFIRE PATTERNS # 2

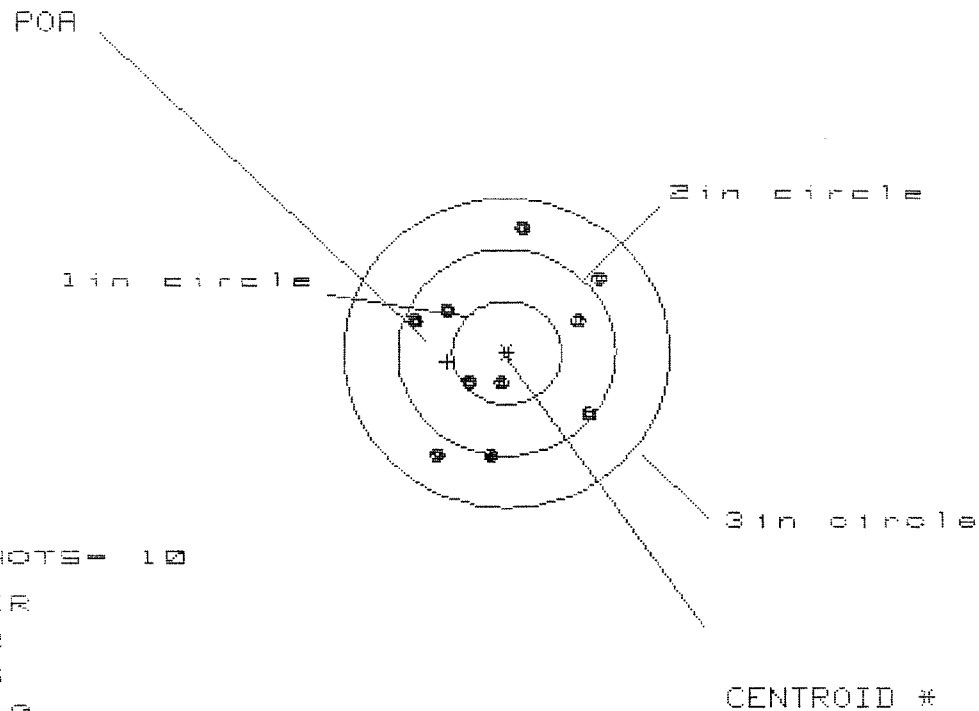

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 6

3 in = 10

HS= 1.695

VS= 2.272


GS= 2.337

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.880	.898	.819
MINIMUM X	:	-.815	-.797	-.876
MAXIMUM Y	:	1.243	.866	.764
MINIMUM Y	:	-1.029	-.890	-.992
CENTROID X	:	.546	.528	.607
CENTROID Y	:	.086	-.053	.049
POA TO CENTROID in.	:	.553	.531	.609
MIN RADIUS	:	.249	.111	.235
MEAN RADIUS	:	.843	.771	.753
MAX RADIUS	:	1.253	1.247	1.120
HORIZONTAL SPREAD	:	1.695	1.695	1.695
VERTICAL SPREAD	:	2.272	1.756	1.756
EXTREME SPREAD	:	2.337	2.269	2.013
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		10	

15 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6498775

CENTERFIRE PATTERNS # 3

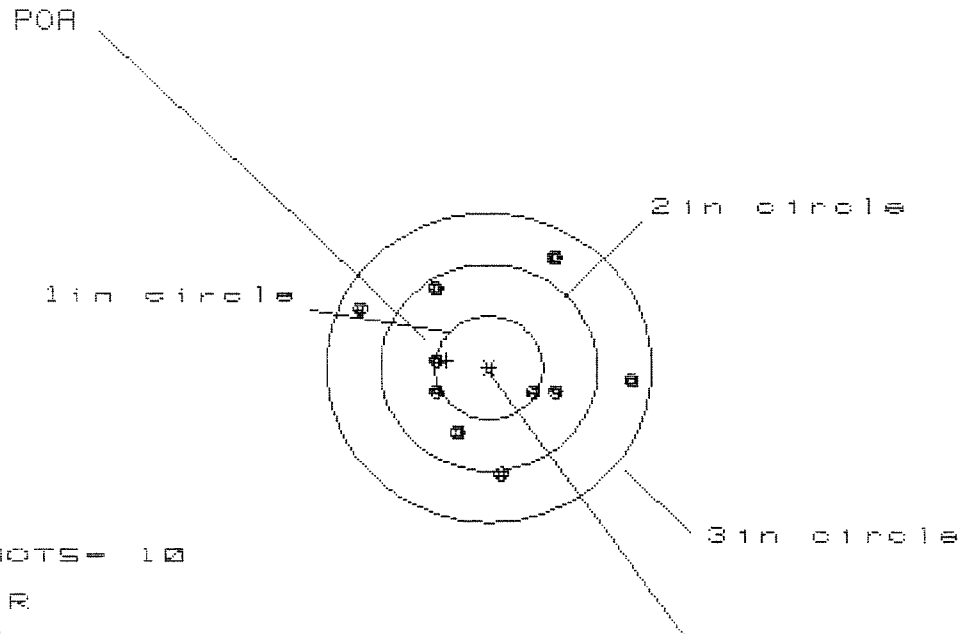

OF SHOTS - 10

IN CIR

1 in = 2

2 in = 6

3 in = 10

HS = 2.450

VS = 2.040

GS = 2.557

CENTROID *

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.284	1.154	.638
MINIMUM X	:	-1.166	-.656	-.511
MAXIMUM Y	:	1.026	1.092	1.083
MINIMUM Y	:	-1.014	-.948	-.957
CENTROID X	:	.390	.520	.375
CENTROID Y	:	-.070	-.136	-.127
POA TO CENTROID in.	:	.396	.537	.396
MIN RADIUS	:	.464	.320	.448
MEAN RADIUS	:	.855	.793	.735
MAX RADIUS	:	1.309	1.195	1.252
HORIZONTAL SPREAD	:	2.450	1.810	1.149
VERTICAL SPREAD	:	2.040	2.040	2.040
EXTREME SPREAD	:	2.557	2.112	2.112
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		10	

15 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6498775

CENTERFIRE PATTERNS

4

POA

1in circle

2in circle

3in circle

CENTROID #

OF SHOTS- 10

IN CIR

1in = 1

2in = 6

3in = 8

HS= 2.201

VS= 2.974


GS= 3.076

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.795	.746	.581
MINIMUM X	:	-1.406	-1.318	-.817
MAXIMUM Y	:	1.631	1.052	1.164
MINIMUM Y	:	-1.343	-1.162	-1.050
CENTROID X	:	.473	.385	.550
CENTROID Y	:	-.067	-.248	-.360
POA TO CENTROID in.	:	.478	.458	.657
MIN RADIUS	:	.163	.359	.459
MEAN RADIUS	:	1.004	.914	.804
MAX RADIUS	:	1.814	1.593	1.167
HORIZONTAL SPREAD	:	2.201	2.064	1.398
VERTICAL SPREAD	:	2.974	2.214	2.214
EXTREME SPREAD	:	3.076	2.497	2.214
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		8	

15 Jun 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C649B775

CENTERFIRE PATTERNS # 5

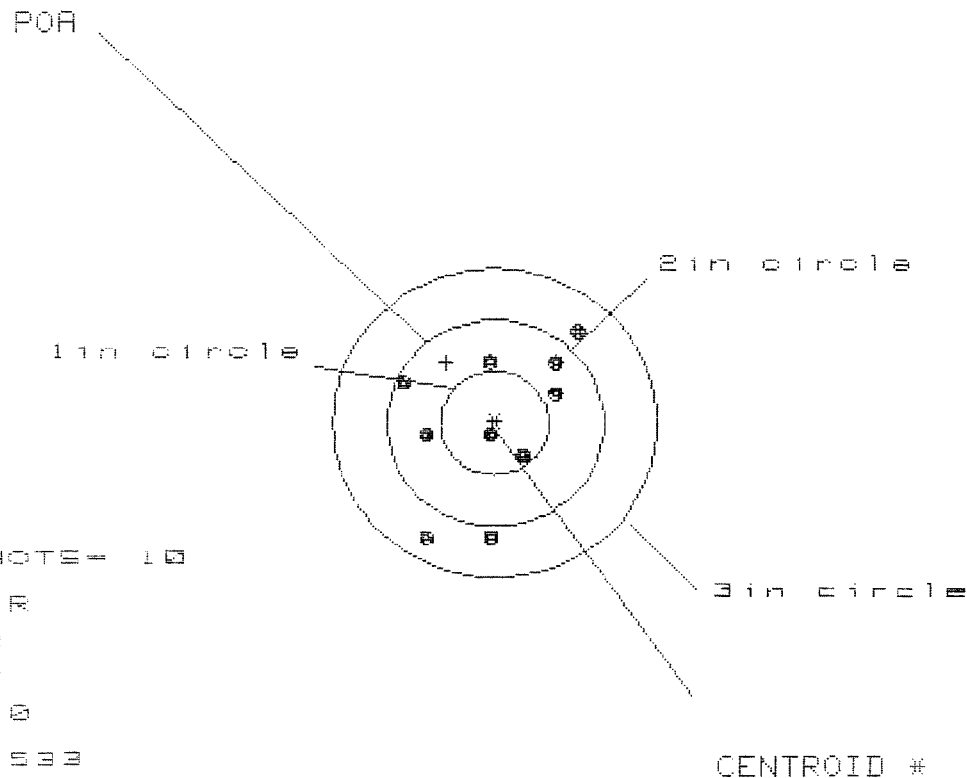

OF SHOTS = 10

IN CIR

1in = 2

2in = 7

3in = 10

HS = 1.533

VS = 2.065

GS = 2.452

CENTROID *

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.727	.652	.616
MINIMUM X	-.806	-.881	-.799
MAXIMUM Y	.908	.785	.591
MINIMUM Y	-1.157	-1.280	-1.182
CENTROID X	.440	.515	.433
CENTROID Y	-.590	-.467	-.565
POA TO CENTROID in.	.736	.695	.712
MIN RADIUS	.087	.223	.112
MEAN RADIUS	.781	.717	.671
MAX RADIUS	1.294	1.282	1.182
HORIZONTAL SPREAD	1.533	1.533	1.415
VERTICAL SPREAD	2.065	2.065	1.773
EXTREME SPREAD	2.452	2.189	1.874
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	10		