

C6225336

MODEL 700™ M24

Model 700 M24™

Action _____

Barrel Length _____

Capacity _____

Order No. 5716

*Includes 1 in chamber.

Remington.

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00168560** Serial: **C6225336** Model **700** Center Fire Caliber: **7.62 NATO M-24 (SW3)** Repairman:
 Verify Repair Status: **Closed 5/26/2009 10:05:23 AM**

Address Information

Customer: ☒ Received From Return To: ☐ Received From
 Name: **COMMANDER**
 Address 1: **HSC 3/7 SFG (ABN)**
 Address 2: PO Box:
 City: **FT BRAGG**
 State: **NC** Zip Code: **28310** Country: **US**
 State: **NC** Zip Code: **28310** Country: **US**
 FFL: ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing
Date	Code	User ID	Desc1	Current Status
5/26/2009 9:58:37 AM	New	valentds	Repair Added	Closed
5/26/2009 10:05:23 AM	Closed	valentds	Closed at Expedite	5/26/2009 10:05:23 AM valentds
				Sniper Systems
				Repair Location
				ILN
				Current Location
				ILN
				Transfer Number

Shipping Hold ☐
 Interface Hold ☐
 Estimate Sent ☐
 Parts Received ☐
 Passed Inspection ☐
 Return As Received ☐
 Has been Approved ☐
 Internal Repair ☐

Repair Search Refresh Close

naglatj 5/26/2009 10:56 AM CAPS NUM INGS SCRL

start Microsoft Microsoft Google News Part Search Arms Services Stock Overvie 10:56 AM

Serial Number: **C6225336**

Model: **700**



RE00168560

INSPECTION CHECKLIST - REPAIRS

CONTRACT #: W52H09-07-C-0207

ISSUED 10/1/2007

R & E NUMBER

1168560

Deployment Kit

SERIAL NUMBER

C6225336

LOG-IN DATE

5-26-09

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	5-28-09	RTZ
505	RE-BARREL	5-28-09	RTZ
420	ASSEMBLE	5-28-09	RTZ
440	PROOF	5-28-09	RTZ
460	CHECK HEADSPACE	5-28-09	RTZ
470	DIS-ASSEMBLE GUN	5-28-09	RTZ
480	MAGNAFLUX	5-30-09	RTZ
510	DRILL AND TAP	5-29-09	RTZ
500	ROLLMARK CALIBER	6-11-09	RTZ
520	GOFF BLAST BBL / REC	6-1-09	OWA
530 & 540	APPLY COATINGS	6/3	RTZ
560	FINAL ASSEMBLY	6-8-09	RTZ
640	FUNCTION TEST AND	6-8-09	RTZ
650	TARGET	6-8-09	RTZ
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	6-8-09	RTZ
	A) HEADSPACE	6-15-09	RTZ
	B) TRIGGER PULL	279 281 273 289 281 6-15-09	RTZ
680	F) SAFETY ON FORCE	4° 4° 4° 6-15-09	RTZ
	G) SAFETY OFF FORCE	5° 5° 5° 6-15-09	RTZ
	I) FIRING PIN INDENT	0.022 0.022 0.022 6-15-09	RTZ
690	PACK	8/28/09	RTZ

F006 REV 1/2009

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225336.___0
FILE DATE AND TIME: 06/09/2009 07:54

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.030
The Average Y Centroid of the Five Target Set:	0.039
The Average Point of Impact of the Five Target Set:	0.049
The Average Mean Radius of the Five Target Set:	0.550
The Distance from POA to Centroid Target #1:	0.151
The Distance from Centroid Target #2 to Centroid Target #1:	0.161
The Distance from Centroid Target #3 to Centroid Target #1:	0.298
The Distance from Centroid Target #4 to Centroid Target #1:	0.087
The Distance from Centroid Target #5 to Centroid Target #1:	0.073

SERIAL NUMBER: C6225336. __0

TARGET NUMBER: 1

FILE DATE: 06/09/2009

FILE TIME: 07:54

X CENTROID: -0.106

Y CENTROID: 0.108

POA TO CENTROID: 0.151

HORZ SPREAD: 1.794

VERT SPREAD: 1.559

GROUP SPREAD: 2.220

MIN RADIUS: 0.249

MAX RADIUS: 1.296


MEAN RADIUS: 0.689

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.071	-0.434
2:	0.406	-0.685
3:	0.460	-0.302
4:	0.089	0.276
5:	-0.365	-0.239
6:	-0.336	0.012
7:	-0.662	0.197
8:	-0.695	0.603
9:	-0.305	0.773
10:	-0.723	0.874

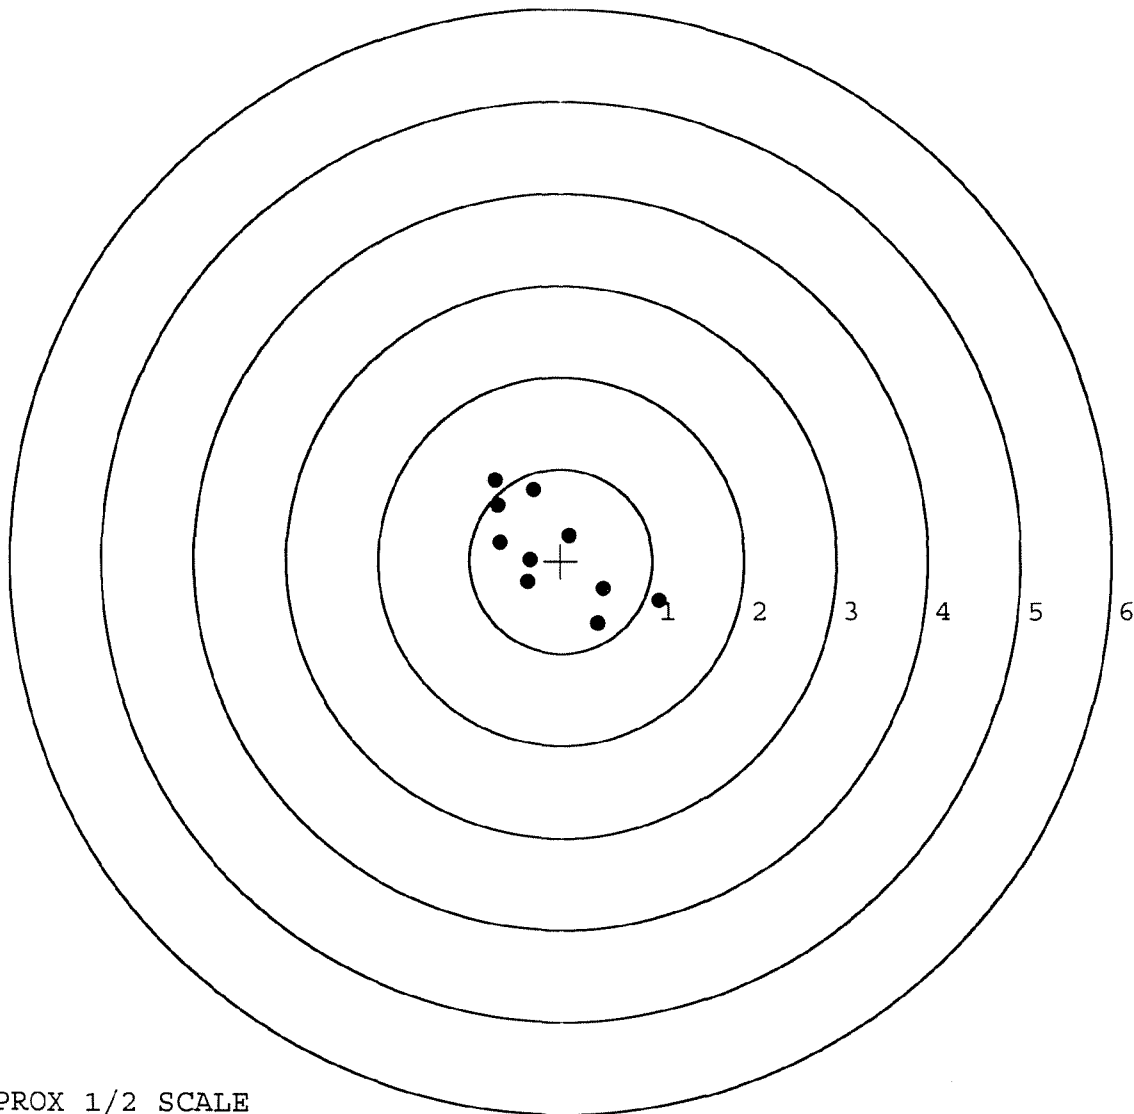

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225336. __0

TARGET NUMBER: 2

FILE DATE: 06/09/2009

FILE TIME: 07:54

POINT#	X	Y
1:	1.015	-0.732
2:	0.433	-0.268
3:	0.196	1.009
4:	0.184	0.391
5:	0.144	-0.077
6:	-0.112	-0.430
7:	-0.140	-0.147
8:	-0.419	0.023
9:	-0.309	0.754
10:	-0.439	0.607

X CENTROID: 0.055

Y CENTROID: 0.113

POA TO CENTROID: 0.126

HORZ SPREAD: 1.454

VERT SPREAD: 1.741

GROUP SPREAD: 1.990

MIN RADIUS: 0.210


MAX RADIUS: 1.279

MEAN RADIUS: 0.605

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

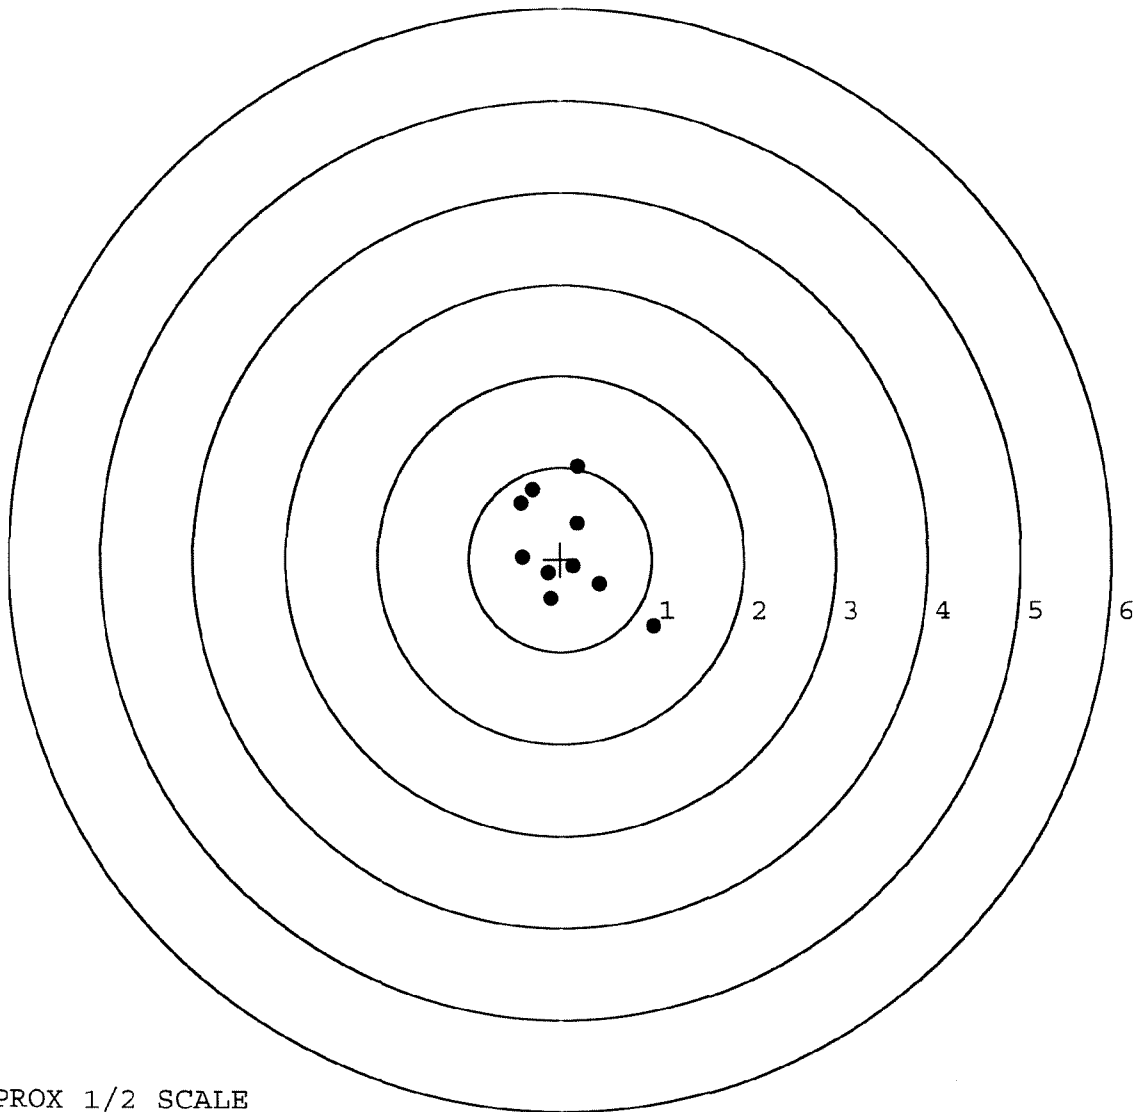

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225336. 0

TARGET NUMBER: 3

FILE DATE: 06/09/2009

FILE TIME: 07:54

POINT#	X	Y
1:	0.301	-0.148
2:	1.011	0.055
3:	0.696	0.293
4:	0.319	0.242
5:	-0.061	0.401
6:	-0.195	-0.949
7:	-0.478	-0.692
8:	-0.638	-0.175
9:	-0.341	-0.234
10:	-0.451	-0.437

X CENTROID: 0.016

Y CENTROID: -0.164

POA TO CENTROID: 0.165

HORZ SPREAD: 1.649

VERT SPREAD: 1.350

GROUP SPREAD: 1.666

MIN RADIUS: 0.285


MAX RADIUS: 1.019

MEAN RADIUS: 0.630

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

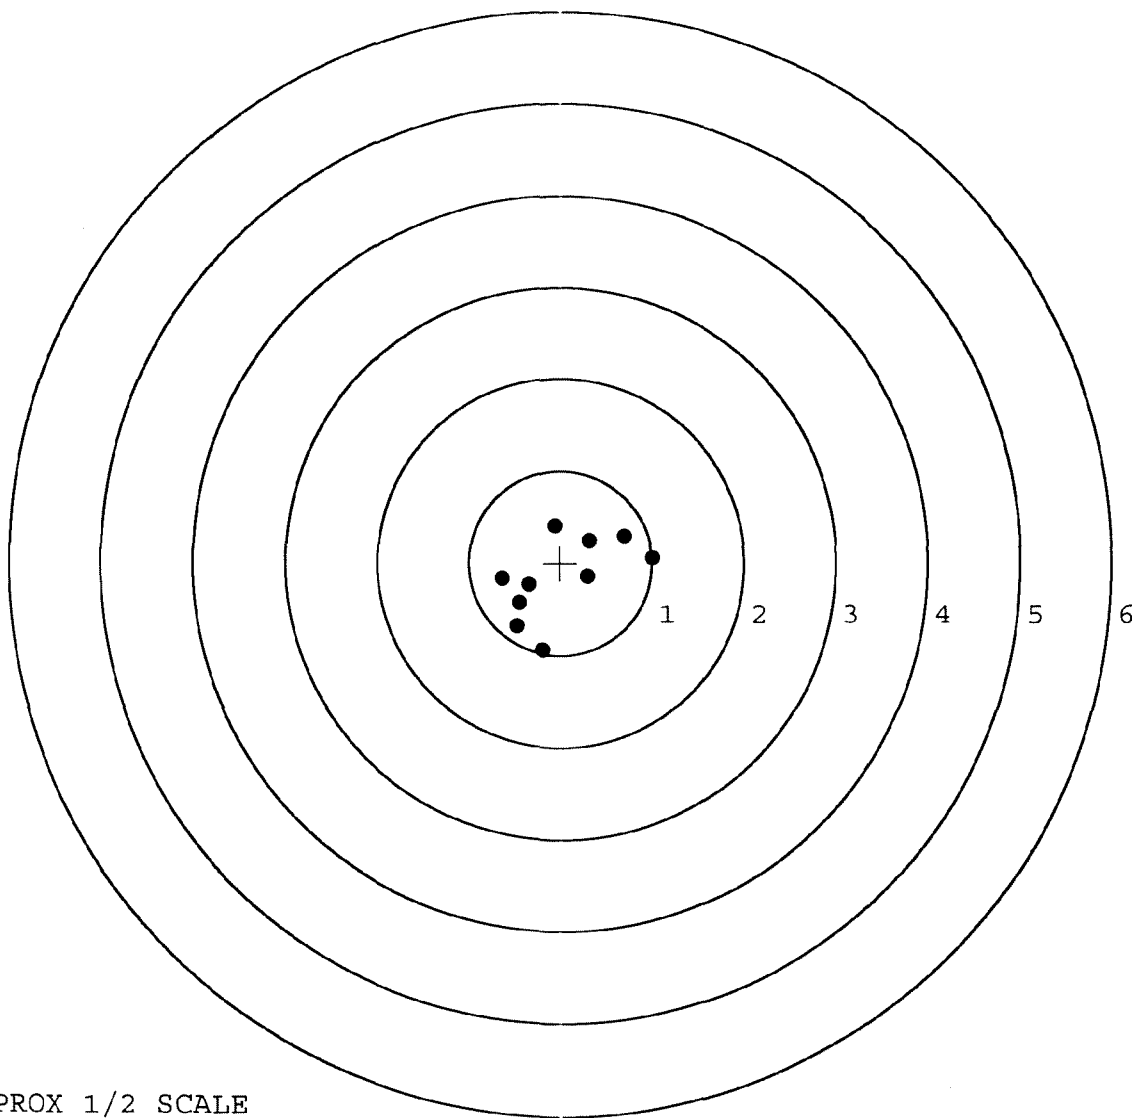

TARGET APPROX 1/2 SCALE

BARBER - M24 0013027

SERIAL NUMBER: C6225336. __0

TARGET NUMBER: 4

FILE DATE: 06/09/2009

FILE TIME: 07:54

POINT#	X	Y
1:	-0.436	0.578
2:	-0.438	-0.172
3:	-0.167	0.338
4:	-0.151	0.034
5:	0.011	-0.166
6:	0.454	-0.026
7:	0.322	0.132
8:	0.099	0.260
9:	0.129	0.014
10:	-0.019	0.027

X CENTROID: -0.020

Y CENTROID: 0.102

POA TO CENTROID: 0.104

HORZ SPREAD: 0.892

VERT SPREAD: 0.750

GROUP SPREAD: 1.076

MIN RADIUS: 0.075


MAX RADIUS: 0.633

MEAN RADIUS: 0.311

IN 1 IN DIAMETER: 8

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

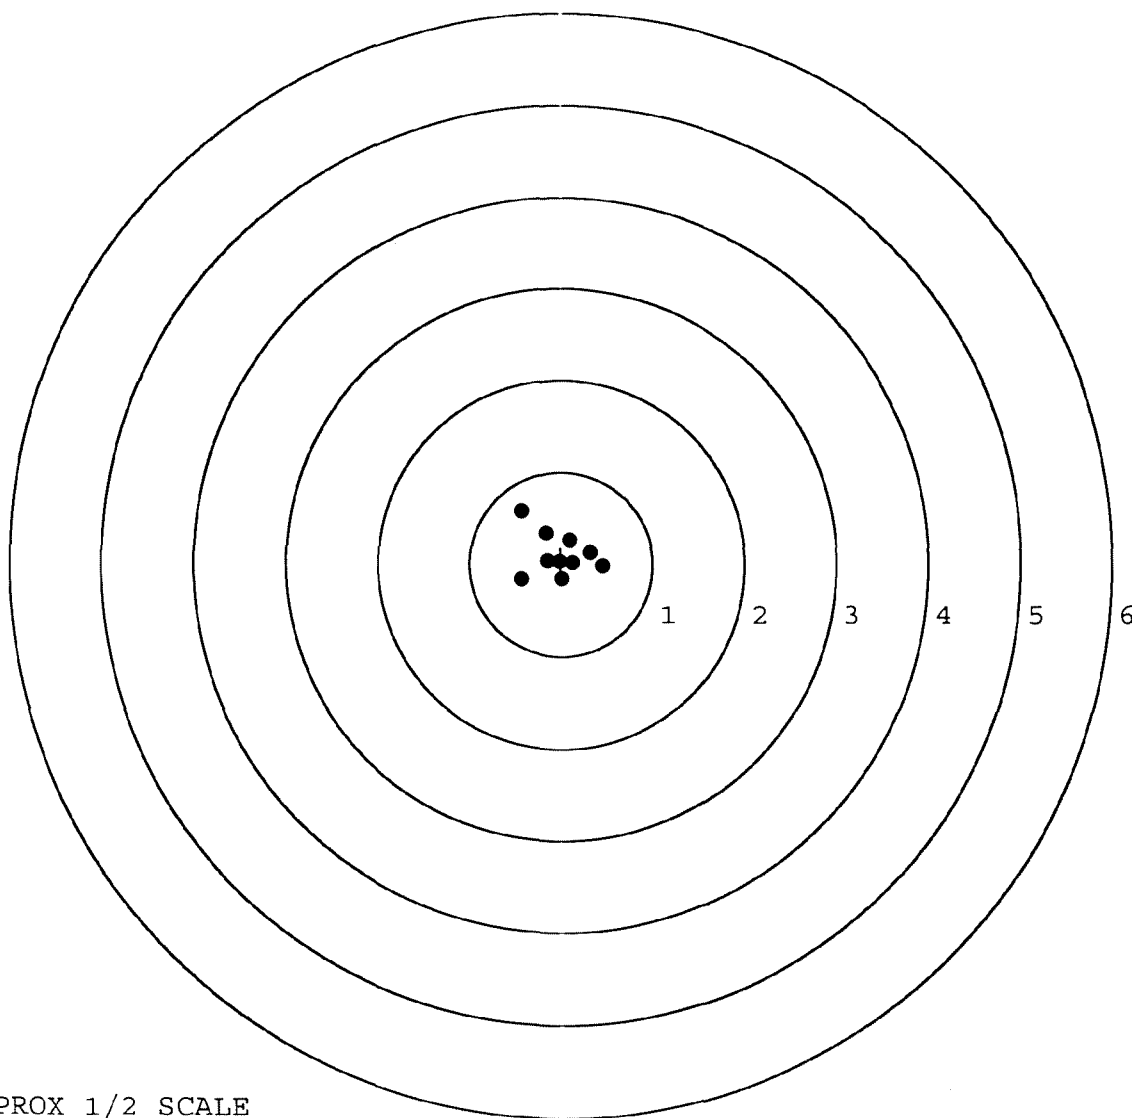

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225336. 0

TARGET NUMBER: 5

FILE DATE: 06/09/2009

FILE TIME: 07:54

POINT#	X	Y
1:	-1.144	0.250
2:	-0.679	0.199
3:	-0.584	-0.755
4:	0.483	0.256
5:	0.432	-0.169
6:	-0.089	-0.087
7:	0.026	0.296
8:	0.325	0.204
9:	0.201	0.018
10:	0.084	0.139

X CENTROID: -0.095

Y CENTROID: 0.035

POA TO CENTROID: 0.101

HORZ SPREAD: 1.627

VERT SPREAD: 1.051

GROUP SPREAD: 1.631

MIN RADIUS: 0.122


MAX RADIUS: 1.071

MEAN RADIUS: 0.516

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

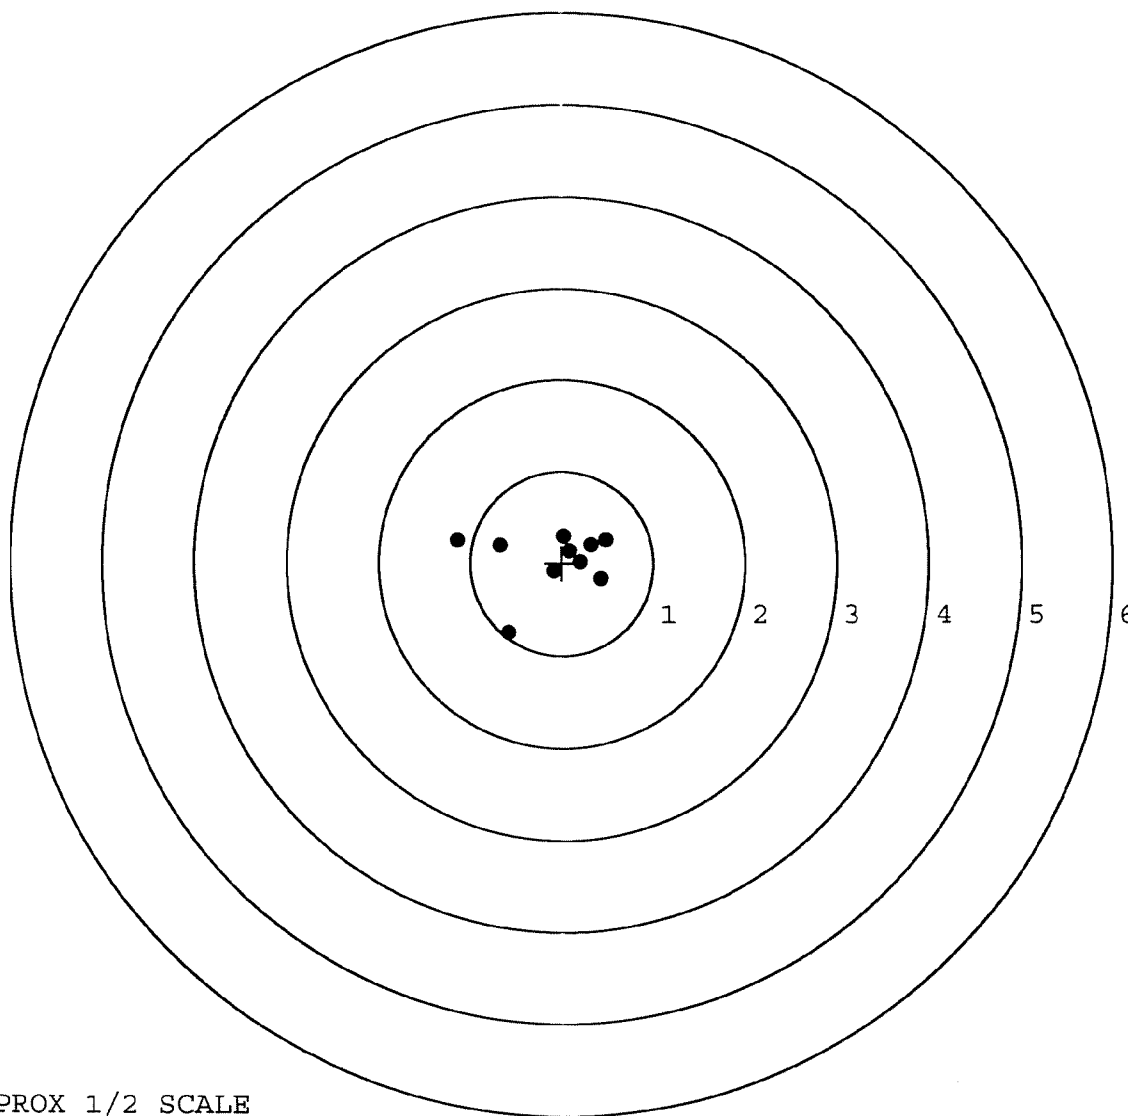

TARGET APPROX 1/2 SCALE

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6225336

Score #

1281

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock	8	9/88	FB
600	Proof	9	7/88	RW
607	Check Headspace	9	7/88	RW
610	Dis-assemble gun	9	7/88	RW
612	Magnaflux Barrel Action		9-14-88	Afe.
	Magnaflux Bolt		9-14-88	Afe.
615	Rollmark Caliber			
617	Drill & Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)		10-31-88	TJA
	Apply Coatings (Bolt)		10-31-88	TJA
625	Final Assembly A) Clean inside of Bolt Assembly		11/7/88	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		11/7/88	RW
	C) Inspect Ejector Hole for Chamfer		11/7/88	RW

-OVER

OP. #		READINGS	DATE	INITIAL
625 cont.	D) Oil Firing Pin Ass'y		11/2/88	RW
	E) Adjust Trigger Pull to Min. Setting and Stake		8 NOV 88	Ju
	F) Safety on Force	5 5 5	8 NOV 88	JSS
	G) Safety off Force	3 3 3	8 NOV 88	JSS
	H) Trigger Pull Test & Retainability		8 NOV 88	J.L
	I) Firing Pin Indent	.0205 .0205 .0205	8 NOV 88	JSS
	J) Assemble Stock		11/16/88	RW
	K) Assemble Swivel Studs		1 Dec 88	JSS
	L) Attach Front & Rear Sight Assemblies		11/16/88	RW
	M) Iron Sight Alignment		11/16/88	RW
	N) Detach Front & Rear Sights & place in numbered container		11/16/88	RW
	O) Attach Scope to Rifle		11/16/88	WB
	P) Detach & Attach Scope 20 times		11/16/88	WB
640	Gallery Target & Test	39R 13L	11/17/88	AC.
	A) Optical Clarity of Scope		11/17/88	Ju
645	Inspect for Live Ammo		11/17/88	Ju
655	Final Inspection			
	A) Headspace		1 Dec 88	JSS
	B) Trigger Pull		1 Dec 88	JSS
	C) Function		1 Dec 88	JSS
660	Pack		14 Dec 88	JSS

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6225336DATE 11-8-88TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.45	2.51	2.30	2.33	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.45	2.30	2.60	2.24	
PULL #3	2.41	2.45	2.37	2.32	
PULL #4	2.38	2.27	2.60	2.28	
PULL #5	2.63	2.28	2.43	2.27	
TOTAL	12.32	11.81	12.30	11.44	
AVG.	2.464	2.362	2.460	2.288	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.23	3.13		
PULL #2	3.05	3.09		
PULL #3	3.14	3.09		
PULL #4	3.00	3.09		
PULL #5	3.00	3.06		
TOTAL	15.42	15.46		
AVG.	3.084	3.092		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.11	4.08		4.10
PULL #2	4.09	4.07		4.15
PULL #3	4.09	4.07		3.98
PULL #4	4.12	4.08		4.01
PULL #5	4.12	4.12		4.16
TOTAL	20.53	20.42		19.50
AVG.	4.106	4.084		3.900

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225336

CENTROIDAL DISTANCES

0 TO	1	1.12925
1 TO	2	.454389
1 TO	3	.670351
1 TO	4	.305851
1 TO	5	.416823

41
25
+ <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .6366
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .609
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .876663
THE AMR FOR THIS RIFLE IS: .9128

28 May 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225336

CENTERFIRE PATTERNS

1

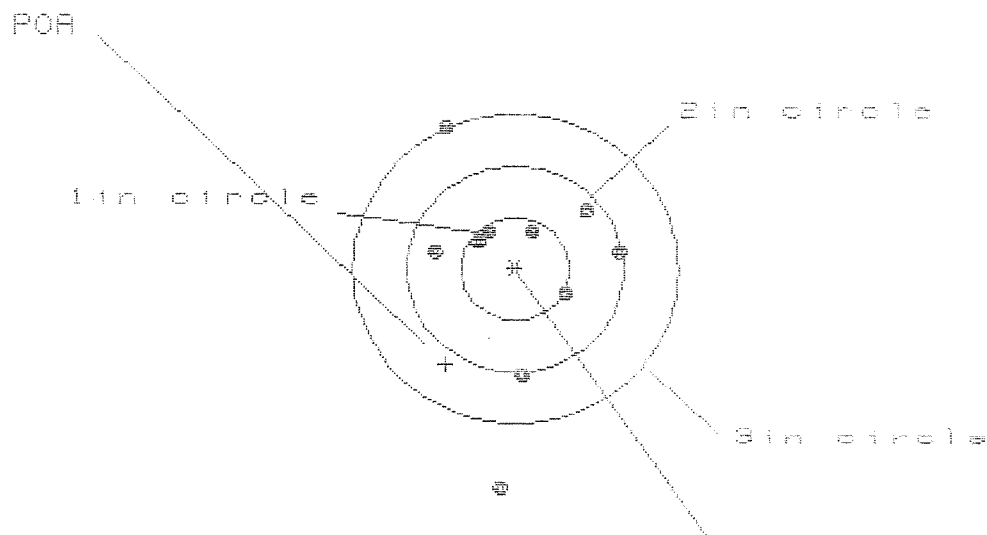

OF SHOTS= 10

IN CIR

1in = 4

2in = 7

3in = 8

HS= 1.647

VS= 3.484

GS= 3.537

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.915	.900	.811
MINIMUM X	-.732	-.747	-.836
MAXIMUM Y	1.360	1.123	.504
MINIMUM Y	-2.134	-1.243	-1.103
CENTROID X	.642	.657	.746
CENTROID Y	.929	1.166	1.026
POA TO CENTROID in.	1.130	1.339	1.268
MIN RADIUS	.403	.179	.290
MEAN RADIUS	.906	.715	.651
MAX RADIUS	2.139	1.326	1.104
HORIZONTAL SPREAD	1.647	1.647	1.647
VERTICAL SPREAD	3.494	2.366	1.607
EXTREME SPREAD	3.537	2.479	1.711
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	8		


28 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225336

CENTERFIRE PATTERNS

2

POA

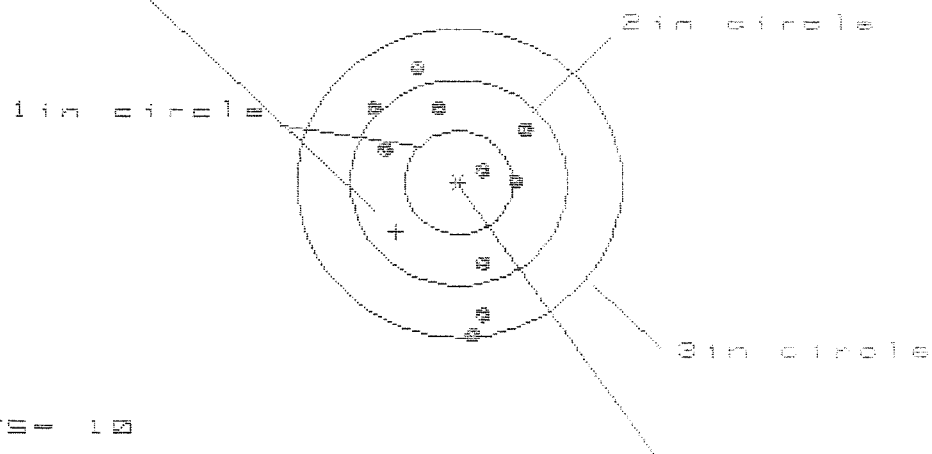

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 6

3 in = 10

HS= 1.498

VS= 2.617

GS= 2.684

CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.670	.689	.724
MINIMUM X	-.828	-.809	-.774
MAXIMUM Y	1.140	.976	.793
MINIMUM Y	-1.477	-1.458	-1.090
CENTROID X	.579	.560	.525
CENTROID Y	.479	.643	.826
POA TO CENTROID in.	.752	.853	.978
MIN RADIUS	.280	.272	.370
MEAN RADIUS	.900	.809	.703
MAX RADIUS	1.487	1.485	1.120
HORIZONTAL SPREAD	1.498	1.498	1.498
VERTICAL SPREAD	2.617	2.434	1.883
EXTREME SPREAD	2.684	2.530	1.986
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

28 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225336

CENTERFIRE PATTERNS

3

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS= 10

IN CIR

1in = 3

2in = 7

3in = 9

HS= 2.466

VS= 2.202

GS= 2.678

PATTERN #

3

SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.547	.683	.658
MINIMUM X	:	-.919	-.747	-.772
MAXIMUM Y	:	1.450	1.483	.505
MINIMUM Y	:	-.752	-.719	-.534
CENTROID X	:	.741	.569	.594
CENTROID Y	:	.266	.233	.048
POA TO CENTROID in.	:	.787	.615	.596
MIN RADIUS	:	.326	.189	.220
MEAN RADIUS	:	.770	.655	.532
MAX RADIUS	:	1.574	1.496	.939
HORIZONTAL SPREAD	:	2.466	1.430	1.430
VERTICAL SPREAD	:	2.202	2.202	1.069
EXTREME SPREAD	:	2.678	2.269	1.696
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		9	

28 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225336

CENTERFIRE PATTERNS

4

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS= 10

IN CIR

1in = 1

2in = 7

3in = 8

HS= 1.552

VS= 3.441

GS= 3.458

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.738	.747	.716
MINIMUM X	-.814	-.805	-.836
MAXIMUM Y	1.883	.899	.731
MINIMUM Y	-1.558	-1.349	-1.061
CENTROID X	.359	.350	.381
CENTROID Y	.813	.604	.772
POA TO CENTROID in.	.889	.698	.861
MIN RADIUS	.474	.432	.520
MEAN RADIUS	.976	.868	.788
MAX RADIUS	1.885	1.371	1.073
HORIZONTAL SPREAD	1.552	1.552	1.552
VERTICAL SPREAD	3.441	2.248	1.792
EXTREME SPREAD	3.458	2.308	1.861
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	8		


28 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225336

CENTERFIRE PATTERNS

5

POA

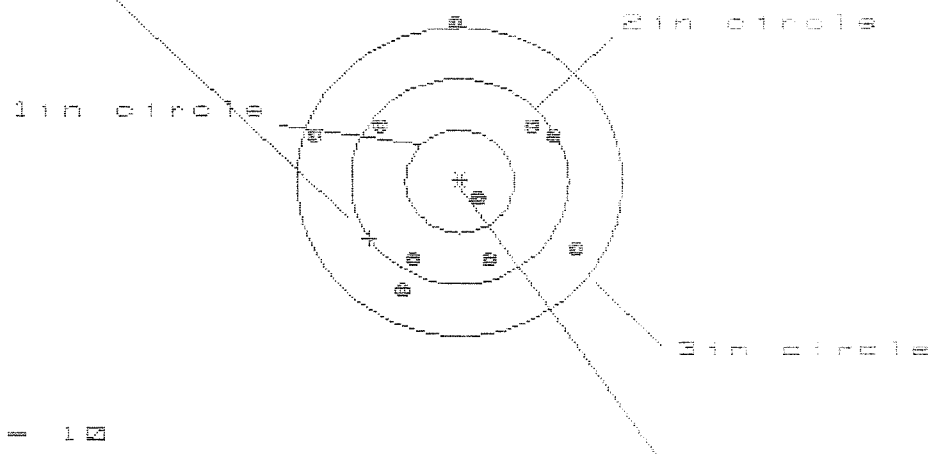

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 6

3 in = 9

HS = 2.407

VS = 2.522

GS = 2.665

CENTROID #

PATTERN #	1	5	9
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.079	1.072	.985
MINIMUM X	-1.328	-1.335	-.903
MAXIMUM Y	1.505	.747	.827
MINIMUM Y	-1.017	-.850	-.770
CENTROID X	.832	.839	1.006
CENTROID Y	.558	.391	.311
POA TO CENTROID in.	1.002	.925	1.053
MIN RADIUS	.265	.172	.049
MEAN RADIUS	1.012	.929	.824
MAX RADIUS	1.506	1.480	1.181
HORIZONTAL SPREAD	2.407	2.407	1.808
VERTICAL SPREAD	2.522	1.597	1.597
EXTREME SPREAD	2.665	2.665	2.162
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		9	

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00014566** Serial: **C6225336** Model: **700** Center Fire Caliber: **7.62 NATO M-24 (SW5)** Repairman: Status: **Closed 9/27/90 2:50:07 PM**

Verify Repair:

Address Information

Customer: Received From: Return To: Received From:

Name: **HSC 3RD BN 3RD SFG (A)** **HSC 3RD BN 3RD SFG (A)**

Address 1: **BLDG J 2050** **BLDG J 2050**

Address 2: PO Box: PO Box:

City: **FORT BRAGG** **FORT BRAGG**

State: **NC** Zip Code: **28310** Country: **US** State: **NC** Zip Code: **28310** Country: **US**

FFL:

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Condition: **Poor**

Condition Notes:

CSR Notes:

Accessories Received


Code	Desc	Qty
A007	With Stud	1
A016	Scope Mounts	1
A017	Scope Base	1
A026	Scope	1

Repair Search Refresh Close

Logoff 9/29/90 7:26 AM CAPS NUM JUS SCPL

Start End Na QEx MI Pa Ar Om Pil 7:25 AM

Serial Number:

C6225336Model: **700****RE00014566**BBL
Boit96003
96005

Final Inspection

S.N. C6225336

DATE REC'D: 9-16-00

DATE RET'D:

AUDITOR: RW

Item:

BARREL ASSY.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

SCOPE ASSY.

☒ SCOPE☒ SCOPE RINGS☒ MOUNTING SCREWS☒ MOUNTING BASE☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Item:

STOCK ASSY.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

SYSTEMS CASE

☒ SCOPE CASE☒ IRON SIGHTS☒ DEPLOYMENT KIT

TRIGGER

☒ SAFETY OPERATION☒ SET

Comments:

MISC.

☒ DD-250☒ BAR CODE☒ PACKAGING

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER		14566	
SERIAL NUMBER		C6225336	
LOG-IN DATE		9-26-00	
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	9-28-00	PK
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL AND TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	10-3-00	RW
605	CHECK HEADSPACE	10-3-00	CK
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	10-12-00	RW
655	FINAL INSPECT	10-25-00	CK
660	PACK		
		SHIP DATE	
QAR INSPECTION DATE			

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225336
23 Oct 2000

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0184
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0834
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0854056

THE AMR FOR THIS RIFLE IS: 1.144

CENTROIDAL DISTANCES

0 TO	1	.39847
1 TO	2	.608922
1 TO	3	.783993
1 TO	4	.281301
1 TO	5	1.1669

4
1
+ <----POA
2 3
5

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 012
 POA TO CENTROID: .399
 MIN RADIUS : .162
 MEAN RADIUS : .997
 MAX RADIUS : 2.004
 CENTROID X : -.177
 CENTROID Y : .357

23 Oct 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225336

CENTERFIRE PATTERN # 1

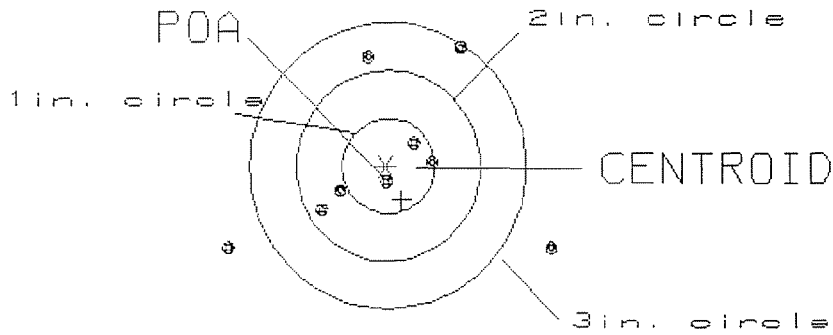

OF SHOTS= 9

IN CIRCLE

HS= 3.57
 VS= 2.08
 GS= 3.57


3
 5
 7

PATTERN #: 2
 POA TO CENTROID: .270
 MIN RADIUS : .363
 MEAN RADIUS : 1.173
 MAX RADIUS : 2.896
 CENTROID X : -.108
 CENTROID Y : -.248

23 Oct 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225336

CENTERFIRE PATTERN # 2

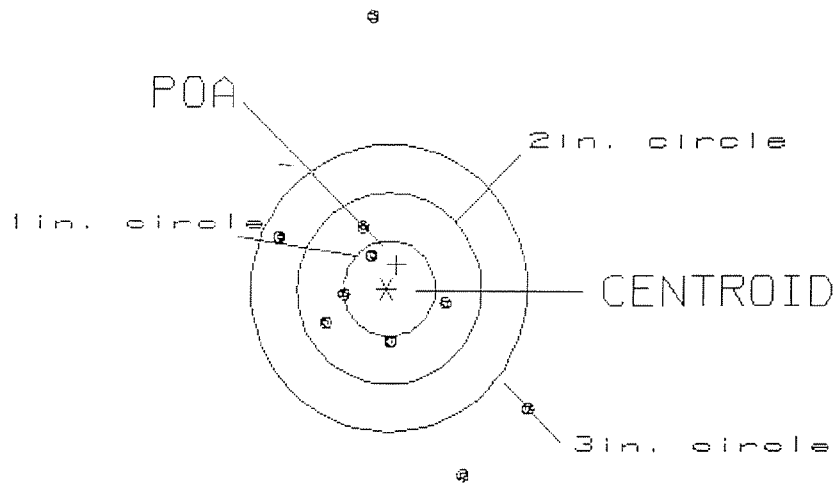

OF SHOTS= 10

IN CIRCLE

HS= 2.66
 VS= 4.86
 GS= 4.95


2
 6
 7

PATTERN #: 3
 POA TO CENTROID: .386
 MIN RADIUS : .114
 MEAN RADIUS : 1.230
 MAX RADIUS : 2.765
 CENTROID X : .149
 CENTROID Y : -.356

23 Oct 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225336

CENTERFIRE PATTERN # 3

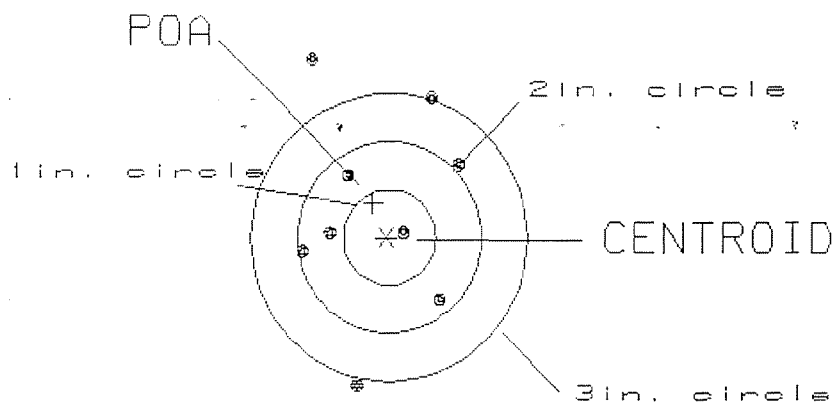

OF SHOTS= 10

IN CIRCLE

HS= 2.15
 VS= 4.32
 GS= 4.80

1
 5
 7

BARBER - M24 0013045

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 4

POA TO CENTROID: .610

MIN RADIUS : .378

MEAN RADIUS : 1.160


MAX RADIUS : 1.979

CENTROID X : -.050

CENTROID Y : .608

23 Oct 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225336

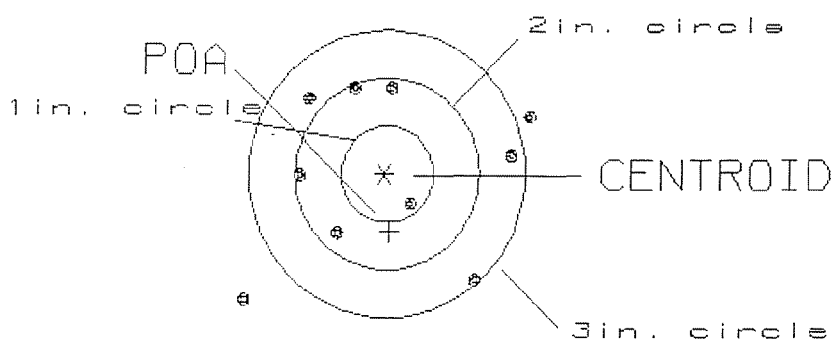CENTERFIRE PATTERN # 4

OF SHOTS= 10

IN CIRCLE

HS= 3.10

1

VS= 2.15

5

GS= 3.59

8

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 5

POA TO CENTROID: .784
 MIN RADIUS : .347
 MEAN RADIUS : 1.158
 MAX RADIUS : 2.202
 CENTROID X : .094
 CENTROID Y : -.778

23 Oct 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225336

CENTERFIRE PATTERN # 5

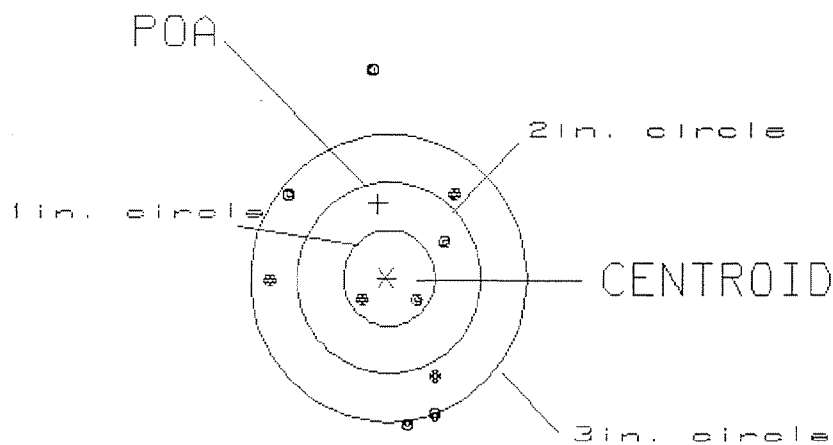

OF SHOTS= 10

IN CIRCLE

HS= 2.01
 VS= 3.67
 GS= 3.70

2
 3
 5