

C6594625

MODEL 700™ M24

Model **SWS**™


Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.



start
10 Micro...
8 Micro...
My Docum...
Arms Serv...
DMS - Glo...
Google Ne...
Part Searc...
12:39 PM

RE00163629

INSPECTION CHECKLIST - REPAIRS

CONTRACT #: W52H09-07-C-0207

ISSUED 10/1/2007

R & E NUMBER

163629

SERIAL NUMBER

C6594625

LOG-IN DATE

3-3-09

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	3-7-09	RTZ
505	RE-BARREL	3-16-09	RTZ
420	ASSEMBLE	3-16-09	RTZ
440	PROOF	3-17-09	TC
460	CHECK HEADSPACE	3-17-09	TC
470	DIS-ASSEMBLE GUN	3-16-09	RTZ
480	MAGNAFLUX	3-20-09	RTZ
510	DRILL AND TAP	3-17-09	SP
500	ROLLMARK CALIBER	3-24-09	RT
520	GOFF BLAST BBL / REC	3-24	RT
530 & 540	APPLY COATINGS	3-31	TC
560	FINAL ASSEMBLY	4-3-09	RTZ
640	FUNCTION TEST AND	4-3-09	TC
650	TARGET	4-3-09	TC
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	4-3-09	TC
	A) HEADSPACE	4-4-09	TC
	B) TRIGGER PULL	2.95 2.96 2.98 2.98 2. 4-3-09	TC
680	F) SAFETY ON FORCE	4.0 4.0 4.0 4-4-09	TC
	G) SAFETY OFF FORCE	5.0 5.0 4.0 4-4-09	TC
	I) FIRING PIN INDENT	.004 .004 .004 4-4-09	TC
690	PACK	4-6-09	TC

F006 REV 1/2009

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6594625.___0
FILE DATE AND TIME: 04/04/2009 04:40

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.023
The Average Y Centroid of the Five Target Set:	0.021
The Average Point of Impact of the Five Target Set:	0.031
The Average Mean Radius of the Five Target Set:	0.602
The Distance from POA to Centroid Target #1:	0.107
The Distance from Centroid Target #2 to Centroid Target #1:	0.110
The Distance from Centroid Target #3 to Centroid Target #1:	0.140
The Distance from Centroid Target #4 to Centroid Target #1:	0.264
The Distance from Centroid Target #5 to Centroid Target #1:	0.124

BARBER - M24 0020489

SERIAL NUMBER: C6594625. __0

TARGET NUMBER: 1

FILE DATE: 04/04/2009

FILE TIME: 04:40

X CENTROID: 0.092

Y CENTROID: 0.054

POA TO CENTROID: 0.107

HORZ SPREAD: 1.643

VERT SPREAD: 1.419

GROUP SPREAD: 1.996

MIN RADIUS: 0.123

MAX RADIUS: 1.113


MEAN RADIUS: 0.584

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.215	0.579
2:	-0.359	0.392
3:	0.117	0.175
4:	0.231	0.382
5:	0.603	0.151
6:	1.073	0.294
7:	0.365	0.325
8:	-0.247	-0.396
9:	-0.570	-0.840
10:	-0.079	-0.518

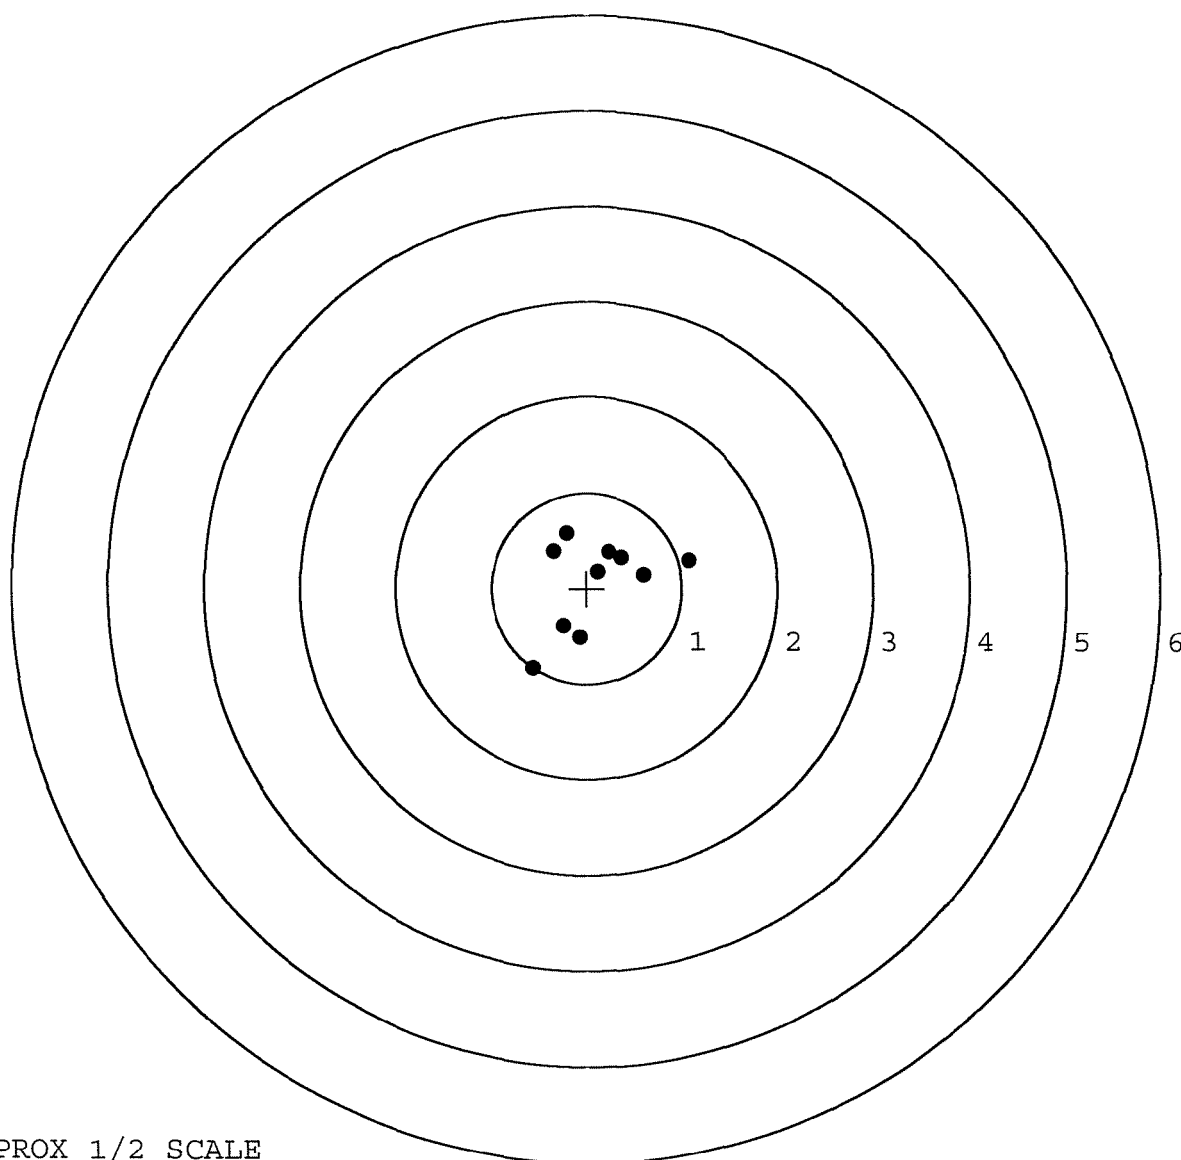


TARGET APPROX 1/2 SCALE

BARBER - M24 0020490

SERIAL NUMBER: C6594625. __0
TARGET NUMBER: 2
FILE DATE: 04/04/2009
FILE TIME: 04:40

POINT#	X	Y
1:	0.758	0.532
2:	0.485	0.385
3:	0.049	0.562
4:	-0.308	0.491
5:	-0.537	0.192
6:	-0.042	-0.005
7:	-0.232	-0.162
8:	-0.253	-0.607
9:	-0.404	-1.179
10:	0.472	-0.260

X CENTROID: -0.001
Y CENTROID: -0.005
POA TO CENTROID: 0.005
HORZ SPREAD: 1.295
VERT SPREAD: 1.741
GROUP SPREAD: 2.068
MIN RADIUS: 0.041
MAX RADIUS: 1.241
MEAN RADIUS: 0.603
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

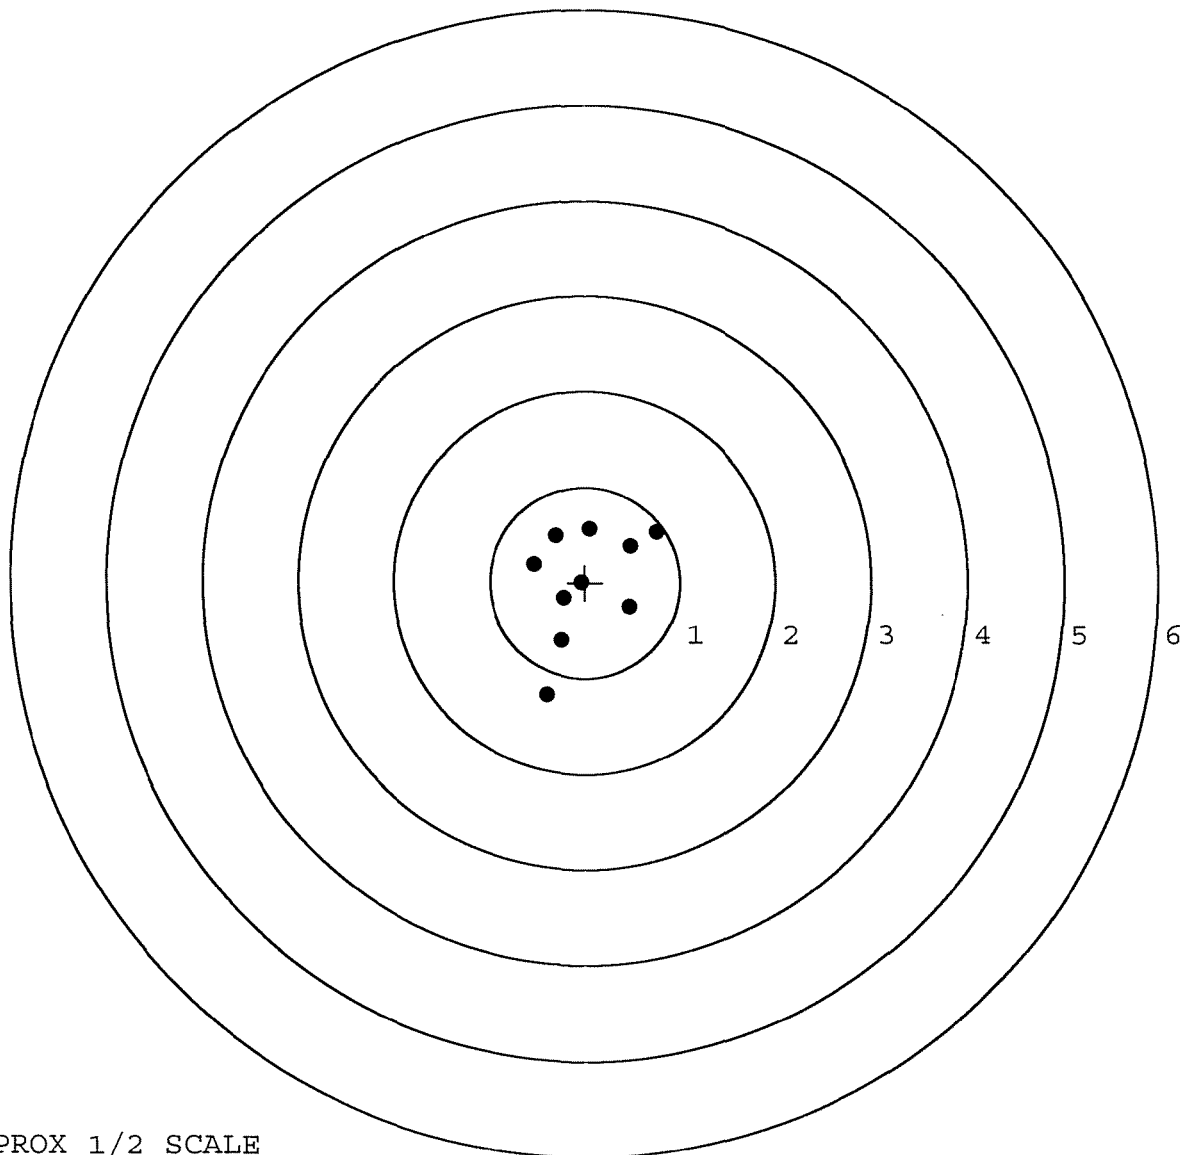

TARGET APPROX 1/2 SCALE

BARBER - M24 0020491

SERIAL NUMBER: C6594625. __0

TARGET NUMBER: 3

FILE DATE: 04/04/2009

FILE TIME: 04:40

X CENTROID: 0.225

Y CENTROID: 0.010

POA TO CENTROID: 0.225

HORZ SPREAD: 1.618

VERT SPREAD: 1.850

GROUP SPREAD: 2.185

MIN RADIUS: 0.283

MAX RADIUS: 1.359


MEAN RADIUS: 0.723

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.929	-0.912
2:	0.933	-0.533
3:	1.217	0.938
4:	-0.016	0.720
5:	0.117	0.530
6:	0.006	0.189
7:	-0.389	0.165
8:	-0.401	-0.531
9:	0.011	-0.298
10:	-0.160	-0.171

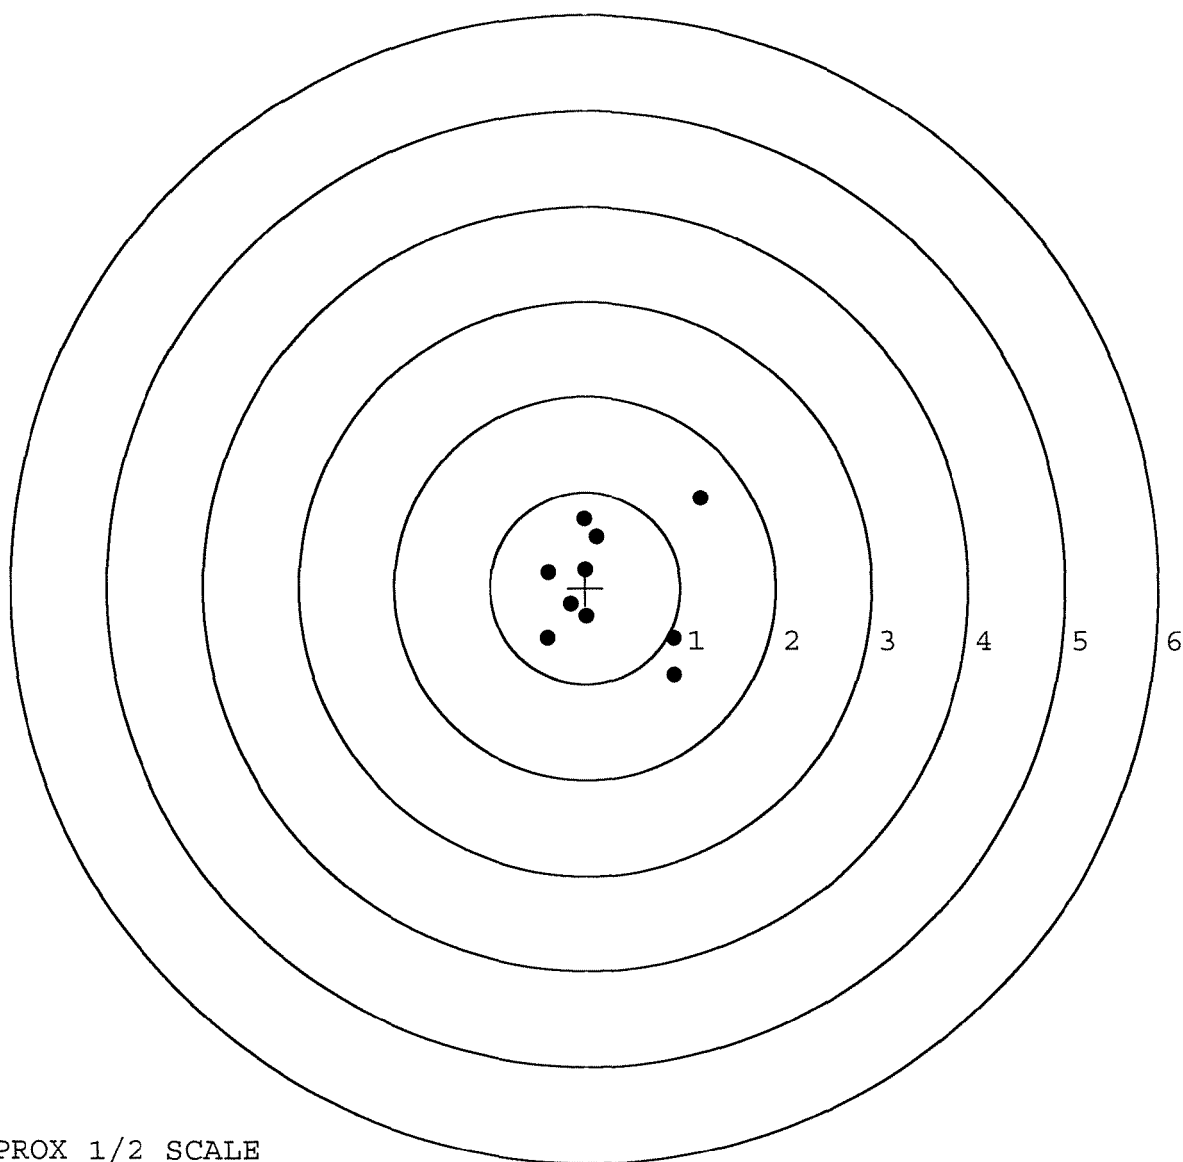


TARGET APPROX 1/2 SCALE

BARBER - M24 0020492

SERIAL NUMBER: C6594625. __0
TARGET NUMBER: 4
FILE DATE: 04/04/2009
FILE TIME: 04:40

POINT#	X	Y
1:	-1.079	0.354
2:	-0.491	0.329
3:	-0.564	0.156
4:	-0.663	-0.250
5:	0.251	0.401
6:	0.006	0.259
7:	-0.102	-0.170
8:	0.026	-0.442
9:	0.320	-0.462
10:	0.613	-0.047

X CENTROID: -0.168
Y CENTROID: 0.013
POA TO CENTROID: 0.169
HORZ SPREAD: 1.692
VERT SPREAD: 0.863
GROUP SPREAD: 1.739
MIN RADIUS: 0.194
MAX RADIUS: 0.973
MEAN RADIUS: 0.543
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

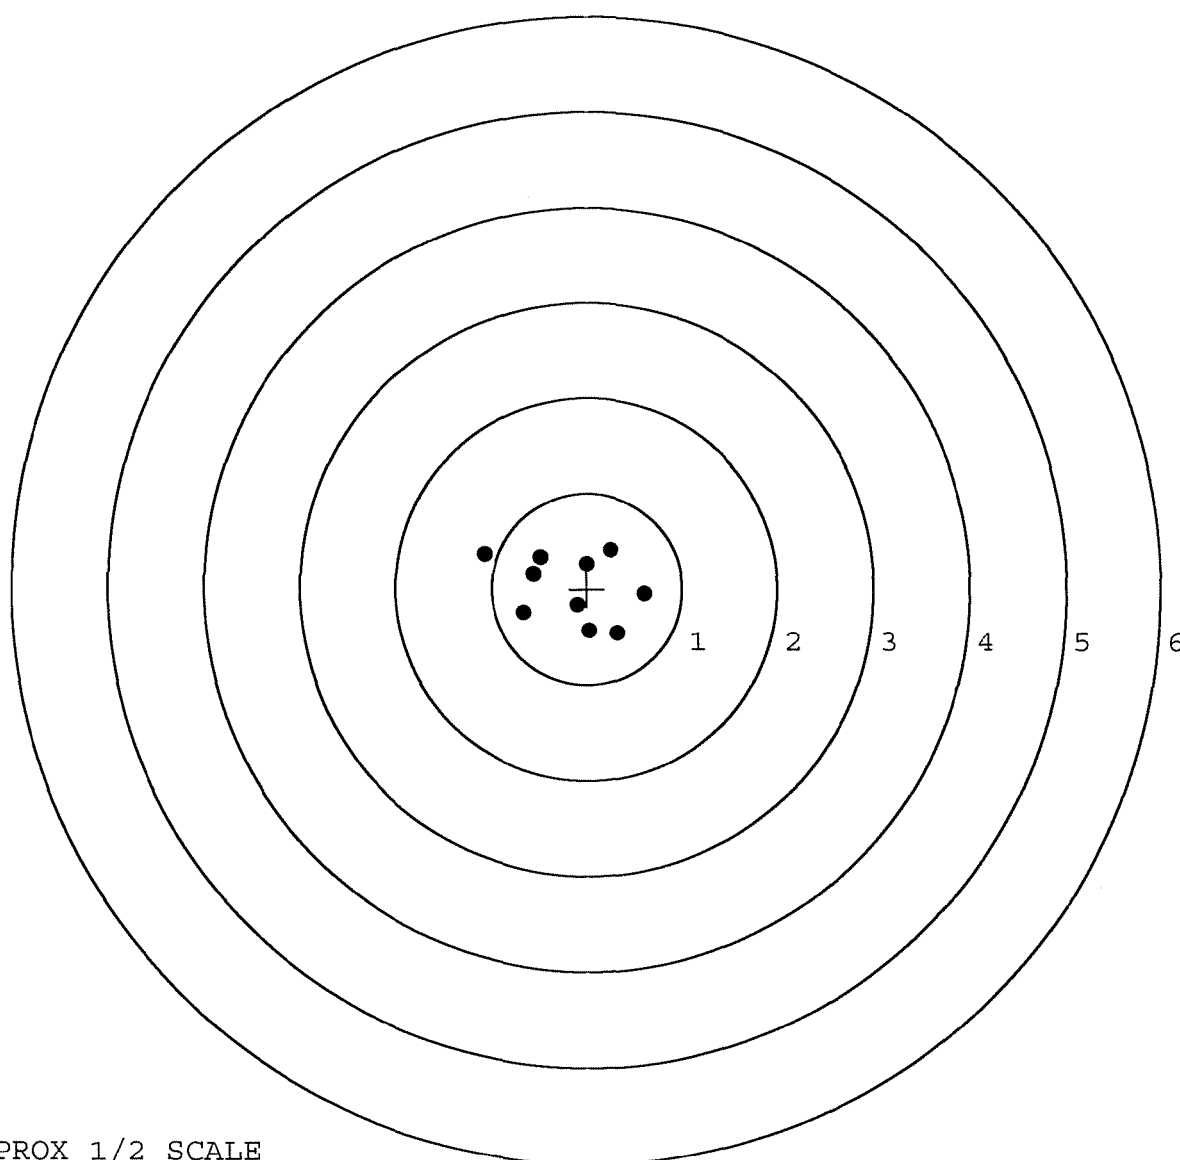


TARGET APPROX 1/2 SCALE

BARBER - M24 0020493

SERIAL NUMBER: C6594625. __0
TARGET NUMBER: 5
FILE DATE: 04/04/2009
FILE TIME: 04:40

POINT#	X	Y
1:	0.074	0.778
2:	0.484	0.553
3:	0.425	0.193
4:	0.502	-0.136
5:	0.295	-0.293
6:	-0.296	-0.464
7:	-0.579	-0.442
8:	-0.175	-0.211
9:	-0.315	0.039
10:	-0.715	0.304

X CENTROID: -0.030
Y CENTROID: 0.032
POA TO CENTROID: 0.044
HORZ SPREAD: 1.217
VERT SPREAD: 1.242
GROUP SPREAD: 1.384
MIN RADIUS: 0.283
MAX RADIUS: 0.753
MEAN RADIUS: 0.558
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

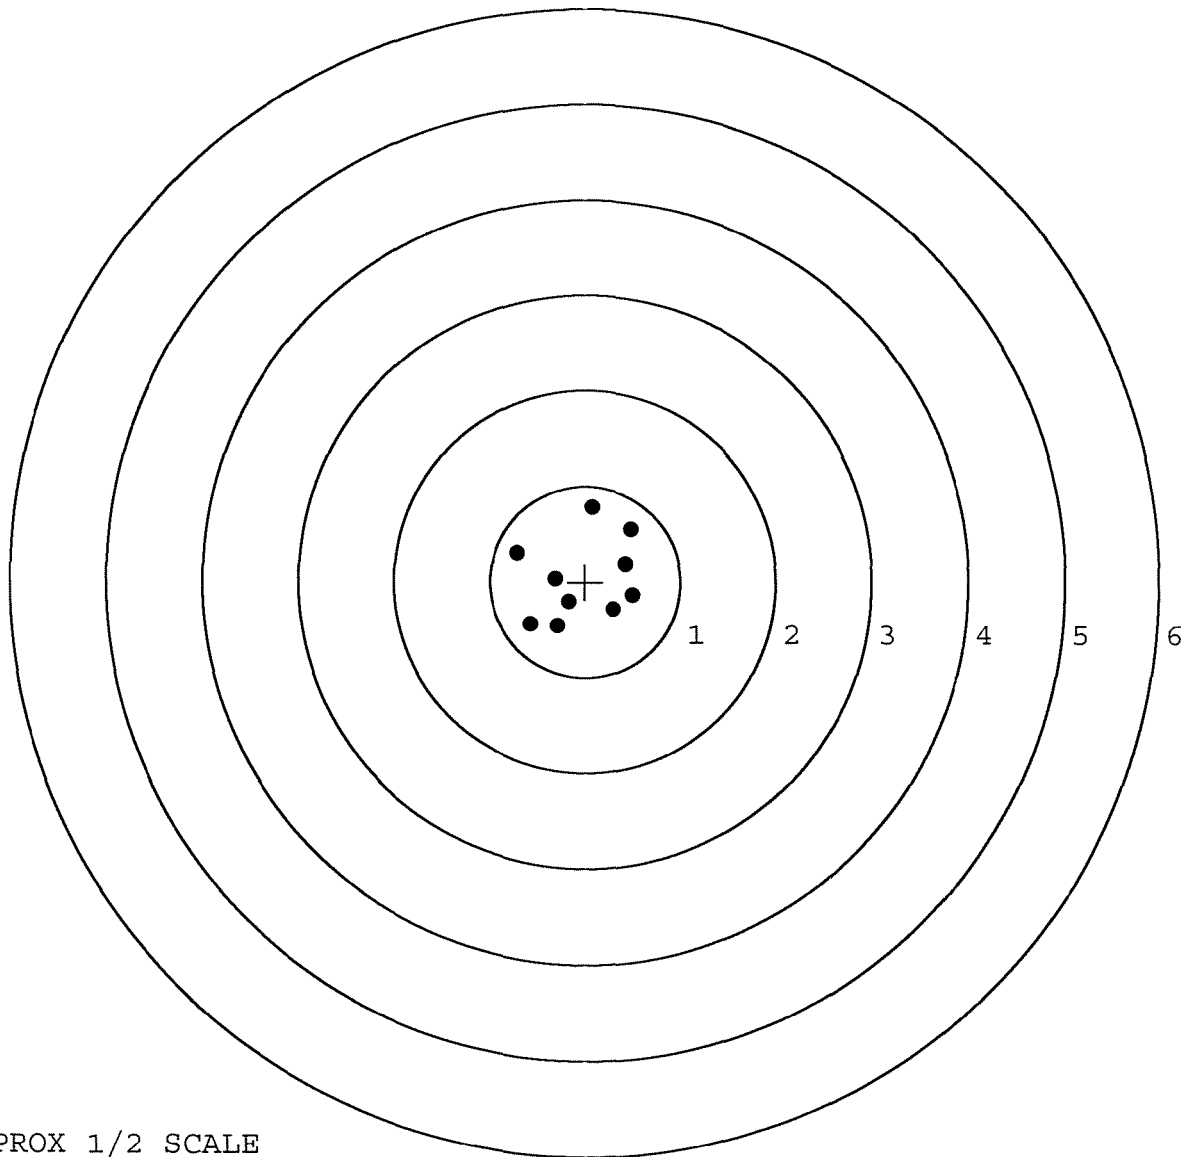


TARGET APPROX 1/2 SCALE

Remington MODEL 700™ M24		VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.
REMINGTON-UMC REG. U.S. PAT. & TM. OFF.		SERIAL NO. C6594625
MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.		ORDER NO. 5716



5716 C6594625

UPC



0 47700 25716 2

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6594625

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	QUALITY AUDIT	12/26/90	K.S.
600	Proof		12/26/90	K.S.
607	Check Headspace		12/26/90	K.S.
610	Dis-assemble Gun		12/26/90	K.S.
612	Magnaflux Barrel Action		1-7-91	KR
	Magnaflux Bolt		1-7-91	KR
615	Rollmark Caliber		1-7-91	YG
617	Drill and Tap Sight Holes	1	10 91	FB
618	Polish Barrel	1	10 91	WB
620	Apply Coatings (Barrel Action)		1-26-91	JA
	Apply Coating (Bolt)			
625	Final Assembly		4/24/91	KS
	A) Clean inside of Bolt Assembly		4/24/91	KS
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/24/91	KS
	C) Inspect Ejector Hole for Chamfer		4/24/91	KS
	D) Oil Firing Pin Ass'y		4/24/91	KS
	E) Adjust Trigger Pull to Min Setting and Stake		4/26/91	JA

BARBER - M24 0020496

op. #	OP. NAME	READINGS				DATE	INIT	
625 cont.	F) Safety On Force	5	5	5		4/29/91	RL	
	G) Safety Off Force	4	4	4		4/29/91	RL	
	H) Trigger Pull Test & Retainability					4/26/91	RL	
	I) Firing Pin Indent	.022	.022	.022		4/29/91	RL	
	J) Assemble Stock					4/30/91	KS	
	K) Assemble Swivel Studs					5-1-91	DH	
	L) Attach Front and Rear Sight Assemblies					4/29/91	KS	
	M) Iron Sight Alignment					4/29/91	KS	
	N) Detach Front & Rear Sights & place in numbered container					4/29/91	KS	
	O) Attach Scope to Rifle					4/29/91	KS	
	P) Detach & Attach Scope 20 Times					4/29/91	KS	
640	Gallery Target & Test					5-1-91	DH	
	A) Time					5-1-91	DH	
	B) Malfunctions					5-1-91	DH	
	C) Pierced Primers					5-1-91	DH	
	D) Optical Clarity of Scope					5-1-91	DH	
645	Inspect for Live Ammo					5-1-91	DH	
655	Final Inspection					5-1-91	DH	
	A) Headspace					5-1-91	DH	
	B) Trigger Pull	2.42	2.44	2.33	2.35	2.45	5/10/91	RL
	C) Function					5-1-91	DH	
660	Pack					6-19-91	N	

Interchangeable
5/23/91

MOD. _____ GA. CAL. _____ GUN # 4625

#	DATE	MALFUNCTION/DEFECT	ASSEM. #
TEST	1st	Shaver brass and ejector sticks	KS
	2nd	Team Ejector hole	KS
	3rd	100 Rd 5-2-91 AC	
	4th		OK
		FUNCTION	RD 6654 Rev 1

TEST INIT. ACTION TO CORRECT		ASSEM. #
PROOF		
TEST		
TGT		
PROOF		
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C-6594625

DATE 4/26/81

TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.55	2.36	2.30	2.42	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.26	2.38	2.37	2.44	
PULL #3	2.52	2.45	2.39	2.33	
PULL #4	2.51	2.38	2.41	2.35	
PULL #5	2.31	2.39	2.42	2.45	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.28	3.29		
PULL #2	3.30	3.32		
PULL #3	3.15	3.37		
PULL #4	3.31	3.33		
PULL #5	3.34	3.33		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.33	4.53		4.14
PULL #2	4.30	4.52		4.26
PULL #3	4.53	4.22		4.20
PULL #4	4.46	4.31		4.33
PULL #5	4.51	4.22		4.33
TOTAL				
AVG.				

INTERCHANGEABILITY

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6594625
23 May 1991

CENTROIDAL DISTANCES

0 TO	1	.255392
1 TO	2	.418561
1 TO	3	.274765
1 TO	4	.406149
1 TO	5	.262774

 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0928
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0294
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0973458
THE RMS FOR THIS RIFLE IS: .7032

23 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6594625.1

CENTERFIRE PATTERNS # 1

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 9

3 in = 10

HS= 1.809

VS= 1.310


GS= 1.906

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.858	.753	.493
MINIMUM X	:	-.951	-.779	-.685
MAXIMUM Y	:	.684	.615	.603
MINIMUM Y	:	-.626	-.634	-.646
CENTROID X	:	.100	.205	.111
CENTROID Y	:	-.235	-.166	-.154
POA TO CENTROID in.	:	.255	.264	.190
MIN RADIUS	:	.434	.313	.384
MEAN RADIUS	:	.659	.589	.561
MAX RADIUS	:	1.138	.857	.797
HORIZONTAL SPREAD	:	1.809	1.532	1.178
VERTICAL SPREAD	:	1.310	1.249	1.249
EXTREME SPREAD	:	1.906	1.554	1.359
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		10	

23 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6594625.1

CENTERFIRE PATTERNS # 3

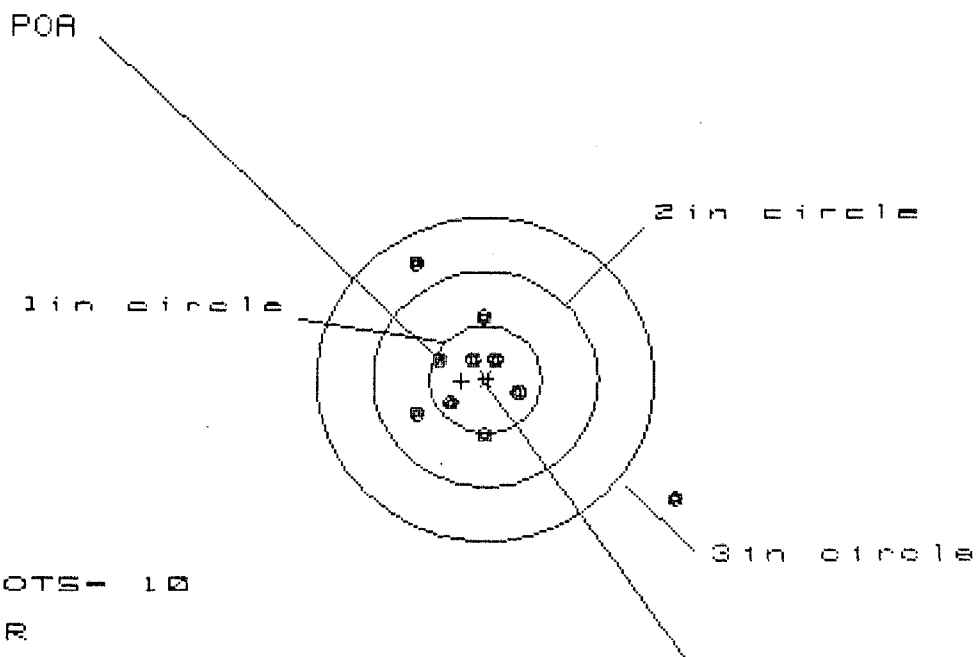

OF SHOTS- 10

IN CIR

1 in - 5

2 in - 8

3 in - 9

HS- 2.379

VS- 2.178

GS- 3.192


CENTROID *

PATTERN #	:	3	3	3
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.734	.468	.417
MINIMUM X	:	-.645	-.452	-.503
MAXIMUM Y	:	1.103	.983	.542
MINIMUM Y	:	-1.075	-.625	-.502
CENTROID X	:	.214	.021	.072
CENTROID Y	:	.015	.135	.012
POA TO CENTROID in.	:	.215	.136	.073
MIN RADIUS	:	.217	.127	.234
MEAN RADIUS	:	.665	.480	.403
MAX RADIUS	:	2.040	1.064	.615
HORIZONTAL SPREAD	:	2.379	.920	.920
VERTICAL SPREAD	:	2.178	1.608	1.044
EXTREME SPREAD	:	3.192	1.710	1.100
NUMBER IN ONE INCH CIRCLE	=	5		
NUMBER IN TWO INCH CIRCLE	=	8		
NUMBER IN THREE INCH CIRCLE	=	9		

23 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6594625.1

CENTERFIRE PATTERNS # 4

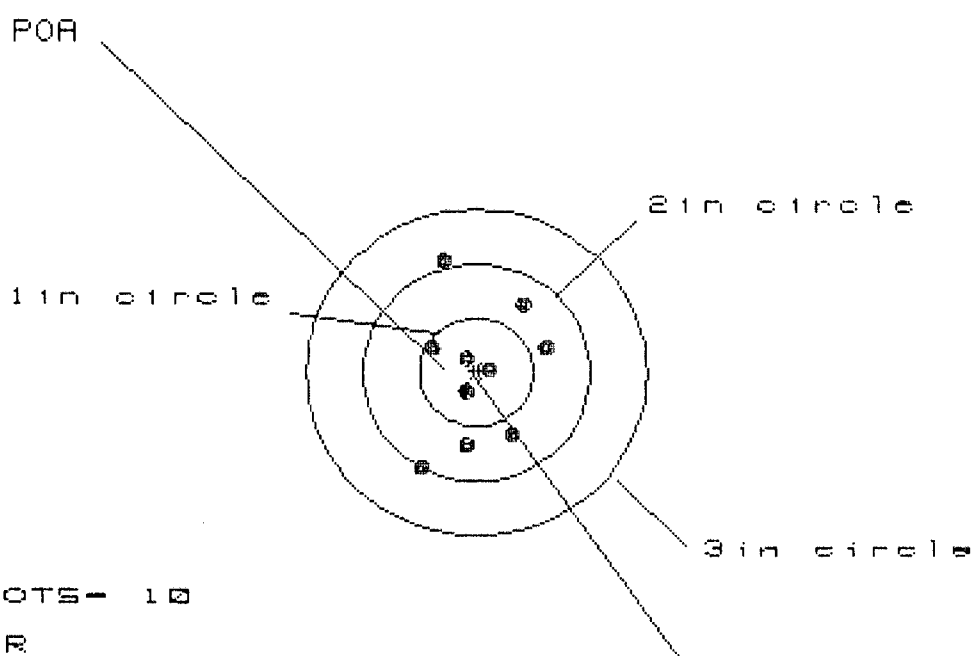

OF SHOTS- 10

IN CIR

1in = 4

2in = 8

3in = 10

HS= 1.160

VS= 1.913

GS= 1.931

CENTROID #


PATTERN #	:	4	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.638	.610	.541
MINIMUM X	:	-.522	-.550	-.464
MAXIMUM Y	:	1.034	.787	.692
MINIMUM Y	:	-.879	-.764	-.642
CENTROID X	:	.089	.117	.186
CENTROID Y	:	.171	.056	.151
POA TO CENTROID in.	:	.192	.130	.240
MIN RADIUS	:	.096	.150	.058
MEAN RADIUS	:	.575	.523	.462
MAX RADIUS	:	1.066	.941	.758
HORIZONTAL SPREAD	:	1.160	1.160	1.005
VERTICAL SPREAD	:	1.913	1.551	1.334
EXTREME SPREAD	:	1.931	1.808	1.421
NUMBER IN ONE INCH CIRCLE	=	4		
NUMBER IN TWO INCH CIRCLE	=	8		
NUMBER IN THREE INCH CIRCLE	=	10		

23 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6594625.1

CENTERFIRE PATTERNS # 5

POA

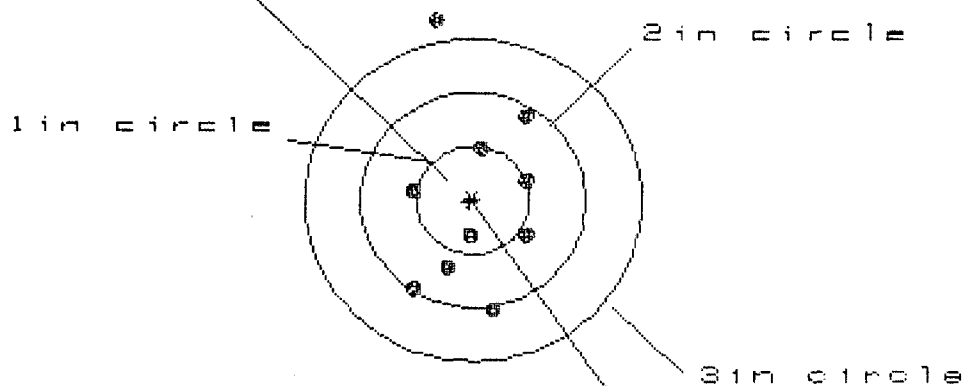

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 8

3 in = 9

HS= 1.043

VS= 2.759

GS= 2.800

PATTERN #	:	5	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.481	.442	.453
MINIMUM X	:	-.562	-.601	-.590
MAXIMUM Y	:	1.698	.998	.889
MINIMUM Y	:	-1.061	-.872	-.714
CENTROID X	:	.029	.068	.057
CENTROID Y	:	.018	-.171	-.062
POA TO CENTROID in.	:	.034	.184	.084
MIN RADIUS	:	.360	.188	.287
MEAN RADIUS	:	.777	.639	.612
MAX RADIUS	:	1.735	1.087	.993
HORIZONTAL SPREAD	:	1.043	1.043	1.043
VERTICAL SPREAD	:	2.759	1.870	1.603
EXTREME SPREAD	:	2.800	1.906	1.906
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6594625
1 May 1991

CENTROIDAL DISTANCES

0 TO	1	.496025
1 TO	2	.477074
1 TO	3	.818678
1 TO	4	.221551
1 TO	5	.518518

$\bar{x}_4$ <----FOR

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1212
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .077
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .143591
THE AMR FOR THIS RIFLE IS: 1.19

1 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6594625

CENTERFIRE PATTERNS

1

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 4

3 in = 6

HS= 3.072

VS= 3.635


GS= 4.059

PATTERN #	:	1	2	3
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.803	1.662	1.556
MINIMUM X	:	-1.269	-1.325	-1.431
MAXIMUM Y	:	1.608	1.383	1.111
MINIMUM Y	:	-2.027	-2.174	-1.062
CENTROID X	:	.485	.626	.732
CENTROID Y	:	-.104	.121	.393
POA TO CENTROID in.	:	.496	.637	.831
MIN RADIUS	:	.067	.332	.322
MEAN RADIUS	:	1.307	1.151	.962
MAX RADIUS	:	2.391	2.336	1.561
HORIZONTAL SPREAD	:	3.072	2.987	2.987
VERTICAL SPREAD	:	3.635	3.557	2.173
EXTREME SPREAD	:	4.059	3.599	3.026
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	4		
NUMBER IN THREE INCH CIRCLE	=	6		

1 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8594625

CENTERFIRE PATTERNS # 2

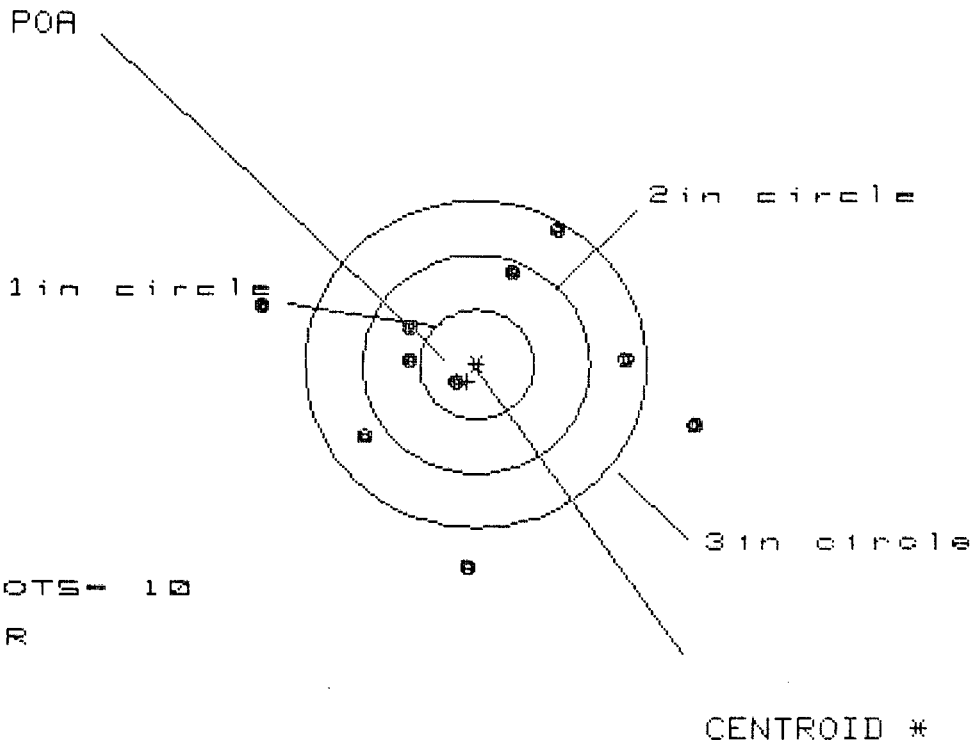

OF SHOTS - 10

IN CIR

1 in = 1

2 in = 4

3 in = 7

HS = 3.829

VS = 3.089


GS = 3.979

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.963	1.549	1.343
MINIMUM X	:	-1.867	-1.648	-1.012
MAXIMUM Y	:	1.257	1.194	1.250
MINIMUM Y	:	-1.832	-1.895	-1.839
CENTROID X	:	.085	-.134	.073
CENTROID Y	:	.156	.219	.163
POA TO CENTROID in.	:	.177	.257	.178
MIN RADIUS	:	.255	.209	.249
MEAN RADIUS	:	1.231	1.091	1.038
MAX RADIUS	:	2.043	1.898	1.841
HORIZONTAL SPREAD	:	3.829	3.197	2.355
VERTICAL SPREAD	:	3.089	3.089	3.089
EXTREME SPREAD	:	3.979	3.227	3.202
NUMBER IN ONE INCH CIRCLE =			1	
NUMBER IN TWO INCH CIRCLE =			4	
NUMBER IN THREE INCH CIRCLE =			7	

1 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06594625

CENTERFIRE PATTERNS # 3

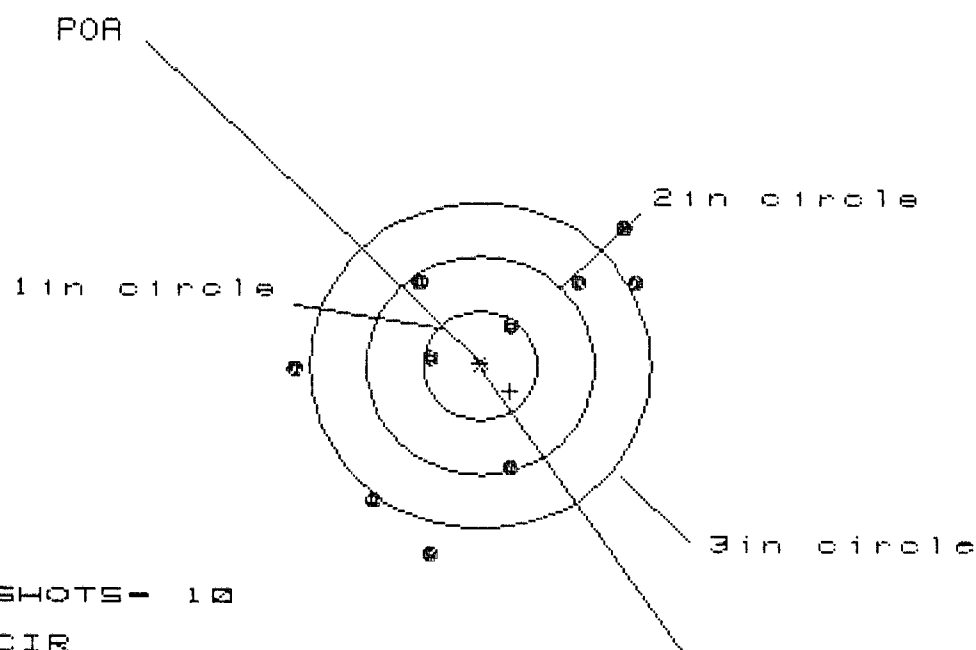

OF SHOTS - 10

IN CIR

1 in = 2

2 in = 4

3 in = 5

HS = 2.999

VS = 3.001

GS = 3.442

PATTERN #	:	3	3	3
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.371	1.320	1.466
MINIMUM X	:	-1.628	-1.679	-1.533
MAXIMUM Y	:	1.242	1.046	.724
MINIMUM Y	:	-1.759	-1.445	-1.314
CENTROID X	:	-.262	-.211	-.357
CENTROID Y	:	.231	.427	.296
POA TO CENTROID in.	:	.350	.476	.464
MIN RADIUS	:	.414	.311	.314
MEAN RADIUS	:	1.235	1.141	1.085
MAX RADIUS	:	1.820	1.779	1.635
HORIZONTAL SPREAD	:	2.999	2.999	2.999
VERTICAL SPREAD	:	3.001	2.491	2.038
EXTREME SPREAD	:	3.442	3.329	3.117
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		5	


1 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6594625

CENTERFIRE PATTERNS

4

POA

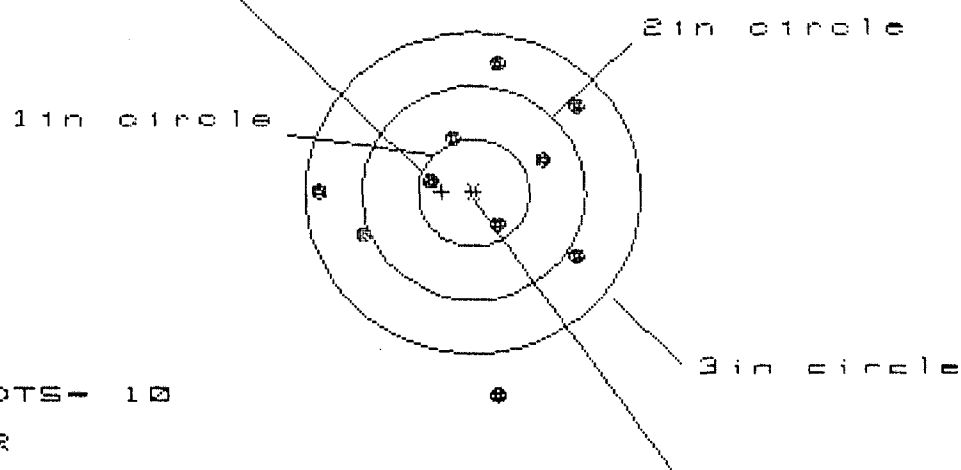

OF SHOTS- 10

IN CIR

1in - 2

2in - 4

3in - 9

HS- 2.287

VS- 3.060

GS- 3.061

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.897	.916	.745
MINIMUM X	:	-1.390	-1.371	-1.130
MAXIMUM Y	:	1.198	.991	.973
MINIMUM Y	:	-1.862	-.767	-.785
CENTROID X	:	.283	.264	.435
CENTROID Y	:	-.013	.194	.212
POA TO CENTROID in.	:	.283	.327	.484
MIN RADIUS	:	.336	.359	.438
MEAN RADIUS	:	.980	.858	.783
MAX RADIUS	:	1.870	1.379	1.296
HORIZONTAL SPREAD	:	2.287	2.287	1.875
VERTICAL SPREAD	:	3.060	1.758	1.758
EXTREME SPREAD	:	3.061	2.400	2.241
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	4		
NUMBER IN THREE INCH CIRCLE	=	9		

1 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6594625


CENTERFIRE PATTERNS # 5

POA

1in circle

2in circle

3in circle



OF SHOTS- 10

IN CIR

1in - 0

2in - 3

3in - 9

HS= 2.259

VS= 3.357

GS= 3.386

CENTROID #

PATTERN #	5	6	7
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.417	1.365	1.355
MINIMUM X	-.842	-.894	-.903
MAXIMUM Y	1.475	1.265	1.136
MINIMUM Y	-1.882	-1.200	-1.041
CENTROID X	.015	.067	.076
CENTROID Y	.115	.325	.166
POA TO CENTROID in.	.116	.331	.183
MIN RADIUS	.577	.638	.542
MEAN RADIUS	1.198	1.110	1.071
MAX RADIUS	1.940	1.396	1.390
HORIZONTAL SPREAD	2.259	2.259	2.259
VERTICAL SPREAD	3.357	2.465	2.177
EXTREME SPREAD	3.386	2.545	2.545
NUMBER IN ONE INCH CIRCLE	= 0		
NUMBER IN TWO INCH CIRCLE	= 3		
NUMBER IN THREE INCH CIRCLE	= 9		

RECEIVING REPORT

COMMENTS

ORDER
R 97-06760

INITIAL

CUSTOMER ORDER NO.

WOG 1 OF 3

JJM

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

03/20/97

03/20/97

BL 1-91

C6594625

700

7.62

NATO

ACCESSORIES

HARD CASE

SCOPE BASE

W/STUDS

FROM:

SHIP TO:

TRANSPORTATION OFFICER
ATTN AFZB-DL-TO-BLDG 873
FT CAMPBELL KY 42223TRANSPORTATION OFFICER
ATTN AFZB-DL-TO-BLDG 873
FT CAMPBELL KY 42223

CUST NO:087942 C.D.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

W5214097160 H545

PARTS

COMMENTS

96003 - Barrel

Repauder Coat - Trigger Guard Assy
Front & Rear Sight BasesRezinc Scope Base & Survival
Studs

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

RW

✓

✓

✓

✓

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

A

3/24/97

4/8/97

4/9/97

4/9/97

OFFICE COPY

RD6925 REV. 6/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0620511

U.S. GOVERNMENT FREIGHT WAYBILL

CARRIER'S
COPY

B/L
NO. **G-6579263**

1. TRANSPORTATION COMPANY TENDERED TO TRI-STATE MOTOR TRANSIT CO.		2. SCAC TSMT	3. DATE B/L PREPARED 97.03.18	4. ROUTE ORDER/RELEASE NUMBER 7YBCAGDVOA
5. DESTINATION (Name, address and ZIP code) REMINGTON ARMS CO., INC. 14 HOEFLER AVENUE ILION, NY 13357		6. SPLC (Dest.) 172856000	8. ORIGIN STATION STATE TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294	
9. CONSIGNEE (Name, address and ZIP code of installation) REMINGTON ARMS CO., INC. 14 HOEFLER AVENUE ILION, NY 13357		7. SPLC (Orig.) 297980251	11. SHIPPER (Name, address and ZIP code) TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294 W34GNA	
12. APPROPRIATION CHARGEABLE 21 72020000007602020420000002217015056 FAAD00GBL		10. GBLOC (Cons.) IOOI CMAH2W	13. BILL CHARGES TO (Dept./agency, bureau/office mailing address and ZIP code) DEFENSE FINANCE AND ACCOUNTING SVC INDIANAPOLIS CENTER TRANSPORTATION OPS. (DFAS-I-THA) INDIANAPOLIS, IN 46249-0611 AGENCY LOC CODE W53QRD	
14. VIA (Route shipment when advantageous to the Government)				

15. MARKS AND ANNOTATIONS TP:3 DDD:97.03.22 FAAT-01-7073001-01

EQUIPMENT 1
DH: DROMEDARY WITH MECHANICAL RESTRAIN
... 1) INITIATING EXPL: N
DN: DUAL DRIVER PROTECTIVE SERVICE WIT
SM: DTT SATELLITE MOTOR SURVEILLANCE
(108) DUAL DRIVER PROTECTIVE SERVICE
WITH NATIONAL AGENCY CHECK REQUESTED.

SIGNATURE AND TALLY RECORD (DD FORM
1907) FURNISHED TO CARRIER.

(111) SHIPPER TO LOAD AND CONSIGNEE TO
UNLOAD.

SEE DESCRIPTION OF ARTICLES

16. PACKAGES		17. HM	18. DESCRIPTION OF ARTICLES AND EXCEPTIONS	COMMODITY CODE NO.	19. WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND					Services	Rate	Charges
1	PT		CLASSIFICATION ITEM NO. 146230 THIS BL CONSISTS OF 2 PAGES GUNS, MACHINE, OR PARTS, NOI, FOR USE OF SMALL ARMS AMMUNITITON, IN BOXES TCN: W81LDN70160003XXX CU:36.0 FAAD RIFLE, M24 SWS NSN: 1005-01-240-2136 DOC #W81LDN 7016 0003 XXX		200			
1	PT		MARKS & ANNOTATIONS: (112) FLAME OR HEAT PRODUCING TOOLS WILL NOT BE USED TO REMOVE SECURITY DEVICES. TOT QTY:200 P CU:36.0 SHIP AS-> SEE CONTINUATION SHEET FOR DETAILS		5000	TOTAL CHARGES		

20. TARIFF/SPECIAL RATE AUTHORITY TSMT 002173-00	21. PICKUP SERV. FURNISHED ☐ YES VEHICLE FULLY LOADED ☐ YES	SHIPPER'S INITIALS	22. CARRIER WAY/FREIGHT BILL NO. AND DATE
---	--	-----------------------	---

23. STOP THIS SHIPMENT AT FOR:	24. FURNISH INFORMATION ON CAR/TRUCKLOAD/CONTAINER SHIPMENTS								
	INITIALS & NO.		SEAL NUMBERS		LENGTH/CUBE		MARKED CAPACITY		DATE FURNISHED
	TSMT:721		0790317 0790310 APPLIED BY: SH		ORDERED	FURNISHED	ORDERED AD6	FURNISHED AD6	97.03.18

25. CARRIER'S PICKUP DATE (Year, month, & day) 97.03.18	26a. SIGNATURE OF AGENT TSMT	26b. PER TSMT	B/L NUMBER G-6579263
---	---------------------------------	------------------	-------------------------

27. MODE B	28. ESTIMATE 1958	29. NO. OF CLS/TLS 1	30. TYPE RATE 1	31. PSC DN:SM	32. REASON	WEIGHED AT GROSS TARE ALLOWANCE NET		
---------------	----------------------	----------------------------	-----------------------	------------------	------------	--	--	--

FOR USE OF ISSUING OFFICE			
33a. ISSUING OFFICE (Name and complete address) TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294			33b. GBLOC FAAT
33c. ISSUING OFFICER MICHAEL F. BOWERS, CHIEF, ITO			
33d. CONTRACT/PURCHASE ORDER NO. OR OTHER AUTHORITY			33e. DATED
33f. FOB POINT NAMED IN CONTRACT			

*Show also cubic measurements for shipments via
air, truck or water carrier in cases where required.

1106-121-01

WHITE

STANDARD FORM 1106-LP (EFF. 6/96)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 06209920551

BARBER - M24 0020513

U.S. GOVERNMENT FREIGHT WAYBILL
CONTINUATION SHEETCARRIER'S
COPYB/L
NO.

G-6579263

SHEET NO.

2 OF 2

(This form is to be used as a continuation sheet for SF 1106, U.S. Government Freight Waybill- Carrier's copy, or SF 1206, U.S. Government Freight Waybill- Privately Owned Personal Property- Carrier's Copy.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICER
FORT CAMPBELL KY
ATTN: AFZB-DL-TO, BLDG 873
FORT CAMPBELL, KY 42223-1294

TRANSPORTATION COMPANY TENDERED TO

TRI-STATE MOTOR TRANSIT

FROM (Shipping Point)

W34GNA
297980251

WAYBILL DATE

WAYBILL NUMBER

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
			(114) CARRIER TO NOTIFY CONSIGNEE REMINGTON ARMS (DUTY PHONE (315) 894-9961 AV- - , NON-DUTY PHONE (757) 878-5006) AND CONSIGNOR TRANSPORTATION OFFICER, FT CAMPBELL KY (DUTY PHONE (502) 798-7154 AV-635-7154, NON-DUTY PHONE (502) 798-9793) IMMEDIATELY IF SHIPMENT IS DELAYED EN ROUTE BECAUSE OF AN ACCIDENT OR INCIDENT. IF NEITHER CAN BE REACHED, CONTACT THE AC AT HOTLINE (876) 878-7687. USE HOTLINE NUMBER TO OBTAIN SAFE HAVEN OR REFUGE INSTRUCTIONS IN THE EVENT OF A CIVIL DISORDER, NATURAL DISASTER, CARRIER STRIKE OR OTHER EMERGENCY. (337) SATELLITE MOTOR SURVEILLANCE SERVICE (SM) REQUESTED. IN EVENT OF SYSTEM FAILURE, DRIVER MUST IMMEDIATELY NOTIFY THE MOTOR CARRIER'S DISPATCHER WHO WILL IMMEDIATELY NOTIFY DTTS AT 1-(800)-826-0794. THE DRIVER MUST SUBSEQUENTLY PROVIDE DTTS A TELEPHONIC LOCATION/STATUS REPORT EVERY FOUR (4) HOURS, WITH A FINAL TELEPHONIC REPORT UPON DELIVERY AT DESTINATION. (339) DROMEDARY SERVICE REQUESTED. (367) THIS SHIPMENT MUST NOT BE TRANSPORTED IN TRIP-LEASED EQUIPMENT. THIS IS A DTTS SHIPMENT! =====				
			BLOCK 24 EQUIPMENT DESCRIPTION CONT.: TRACTOR: 960				

*Show also cubic measurements for shipments via air,
truck or water carrier in cases where required.

1112-114

WHITE

STANDARD FORM 1112, (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0020513 0020552

SIGNATURE AND TALLY RECORD

FORM APPROVED
OMB No. 0702-0027
Expires Oct 31, 1988

DISTRIBUTION INSTRUCTIONS

- * The SHIPPER will prepare copies 1 through 4, retain copy 4 and deliver copies 1 through 3 to the Origin Carrier.
- * The CARRIER will deliver copies 1 through 3 to the Destination Carrier.
- * The DESTINATION CARRIER will attach copy 1 (reflecting all signatures) and Standard Form 1113 (Public Voucher for Transportation Charges) to the original Government Bill of Lading, and forward for payment. Copy 2 will be delivered to the Consignee. Copy 3 will be retained.
- * The CONSIGNEE will ensure Destination Carrier surrenders copy 2.

SECTION A - To be completed by the SHIPPER

1. SHIPPER		2. PROTECTIVE SERVICE REQUESTED	
a. NAME FORT CAMPBELL KY W34GNA		DN DUAL DRIVER PROTECTIVE SERVICE WITH NAC SM DTTS SATELLITE MOTOR SURVEILLANCE SERVICE	
b. ORIGIN TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294		3. GBL OR CBL NUMBER G-6579263	
4. CONSIGNEE		5. PERMIT NUMBER (if any)	
a. NAME REMINGTON ARMS CO CMAH2W			
b. DESTINATION REMINGTON ARMS CO., INC. 14 HOEFLER AVENUE ILION, NY 13357		6. TRANSPORTATION CONTROL NUMBER (FAAT-01-7073001 -01) W81LDN70160003XXX	
7. ROUTING TRI-STATE MOTOR TRANSIT CO.		8. WEIGHT 200 POUNDS	9. CUBE 36.0
10. SPECIAL INSTRUCTIONS		11. DATE SHIPMENT TENDERED TO CARRIER 97.03.18	12. NAME OF CARRIER TSMT
13. NUMBER OF PIECES 1	14. TYPE OF PACKAGE(S) (For unsealed loads only) OR CONVEYANCE IDENTIFICATION & SEAL NUMBERS (for sealed loads only) TSMT-721 0790317 0790310		15. FREIGHT CLASSIFICATION DESCRIPTION 146230 GUNS, MACHINE, OR PARTS, NOI, FOR USE OF SMALL ARMS AMMUNITITON, IN BOXES

SECTION B - To be completed by each person accepting custody of classified or protected material
requiring the use of transportation protective service during transit.

16. CUSTODY RECORD				
a. PRINT NAME OF PERSON AND COMPANY REPRESENTED	b. STATION INTERCHANGE POINT DESTINATION	c. SIGNATURE OF PERSON ACCEPTING CUSTODY	d. TIME ACCEPTED	e. DATE ACCEPTED
J Thornsberry	F+ Campbell KY	J Thornsberry	1500	3-18-97
C Thornsberry	F+ Campbell KY	C Thornsberry	1500	3-18-97
e martin TSMT	ILION NY	e Martin	2100	3-19-97
R McKee TSMT	" "	R McKee	2145	3-19-97
S McKee TSMT	" "	S McKee	2145	3-19-97
F.E. MARTIN Remington Arms Co	Remington Arms Co	Fred E Martin	0915	3/20/97

BARBER - M24 0020515

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6594625
24 Apr 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.0132$
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $-.21$
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.210414$

THE AMR FOR THIS RIFLE IS: 1.203

CENTROIDAL DISTANCES

0 TO	1	.261283
1 TO	2	.268337
1 TO	3	.557073
1 TO	4	.168867
1 TO	5	.442477

5
4 + <----POA
1
2 3

BARBER - M24 0020516

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .261

MIN RADIUS : .229

MEAN RADIUS : 1.074

MAX RADIUS : 1.875


CENTROID X : -.162

CENTROID Y : -.205

24 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6594625

CENTERFIRE PATTERN # 1

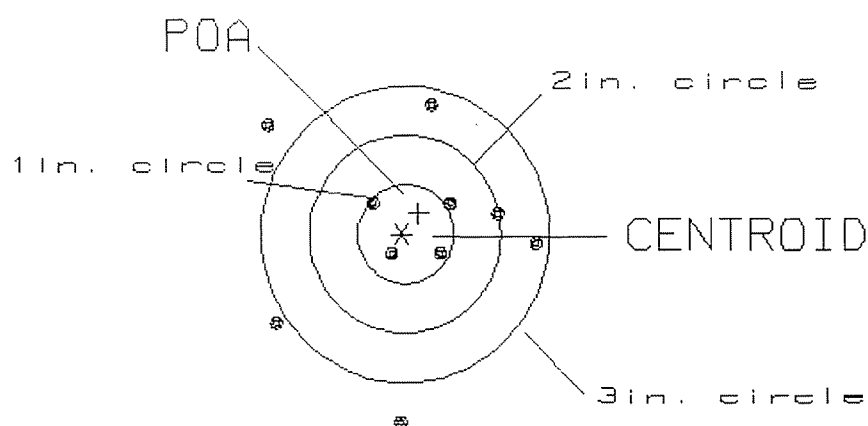

OF SHOTS= 10

IN CIRCLE

HS= 2.88

3

VS= 3.21

5

GS= 3.30

7

BARBER - M24 0020517

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .446

MIN RADIUS : .753

MEAN RADIUS : 1.444

MAX RADIUS : 2.871


CENTROID X : -.040

CENTROID Y : -.444

24 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6594625

CENTERFIRE PATTERN # 2

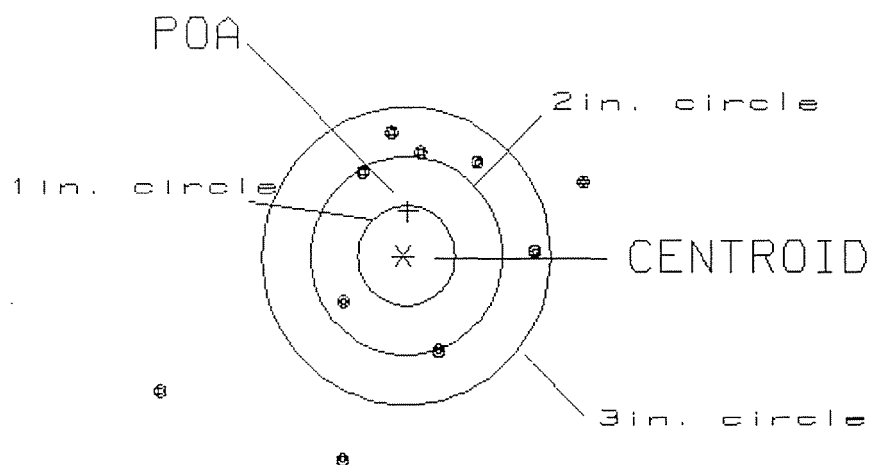

OF SHOTS= 10

IN CIRCLE

HS= 4.34

0

VS= 3.21

2

GS= 4.81

7

BARBER - M24 0020518

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 3 ☐

POA TO CENTROID: .605
MIN RADIUS : .343
MEAN RADIUS : 1.401
MAX RADIUS : 2.603
CENTROID X : .289
CENTROID Y : -.532

24 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6594625

CENTERFIRE PATTERN # 3

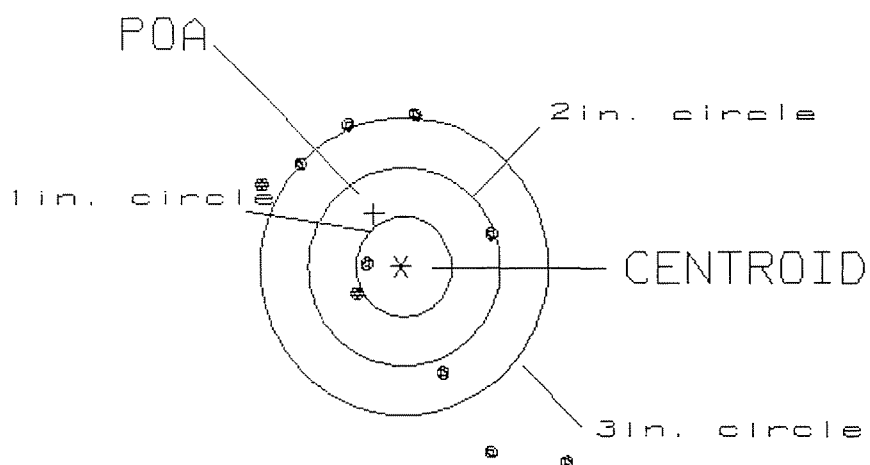

OF SHOTS= 10

IN CIRCLE

HS= 3.24

1

VS= 3.50

3

GS= 4.29

5

BARBER - M24 0020519

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 4 ☐

POA TO CENTROID: .221
MIN RADIUS : .185
MEAN RADIUS : 1.033
MAX RADIUS : 1.829
CENTROID X : -.216
CENTROID Y : -.045

24 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6594625

CENTERFIRE PATTERN # 4

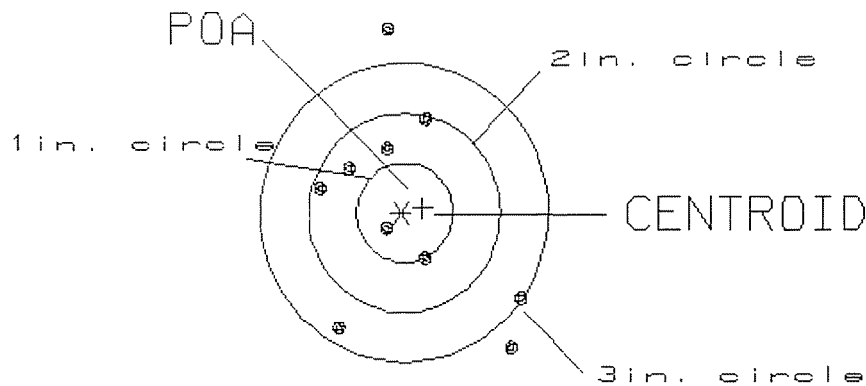

OF SHOTS= 10

IN CIRCLE

HS= 2.11

2

VS= 3.21

6

GS= 3.46

7

BARBER - M24 0020520

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 5 ☐

POA TO CENTROID: .187
MIN RADIUS : .300
MEAN RADIUS : 1.064
MAX RADIUS : 1.790
CENTROID X : .063
CENTROID Y : .176

24 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6594625

CENTERFIRE PATTERN # 5

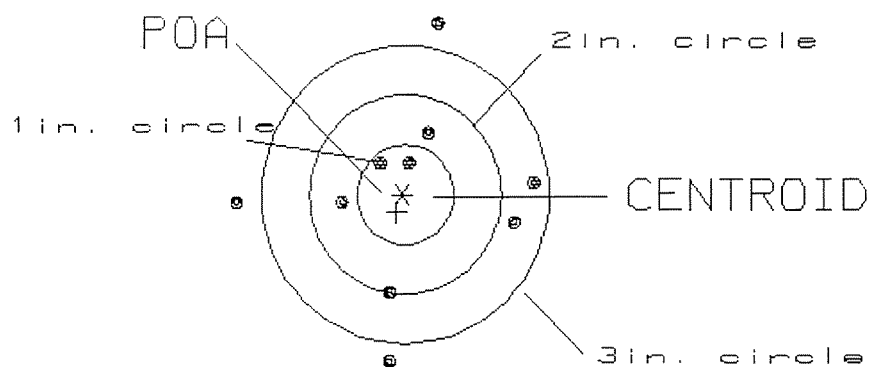

OF SHOTS= 10

IN CIRCLE

HS= 3.03

2.

VS= 3.41

5

GS= 3.45

7

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

Barrel

R&E NO.

SERIAL NO.

C6594625

LOG IN DATE: / /

DATE

INT.

INSPECT & VERIFY:

OP. #

OP. NAME

550

DIS-ASSEMBLE GUN

560 A

RE-BARREL AT CUSTOM SHOP

B

DRILL & TAP

C

POLISH

575

ASSEMBLE

600

PROOF

3/24/97

Ru

605

CHECK HEADSPACE

610

DIS-ASSEMBLE

612

MAGNAFLUX

615

ROLLMARK CALIBER

618

ROTO-BLAST

620

APPLY COATINGS

625 A

FINAL ASSEMBLY

B

TRIGGER PULL TEST

C

SAFETY ON FORCE

D

SAFETY OFF FORCE

E

FIRING PIN INDENT

640

TARGET

4-9-97

A

655

FINAL INSPECT

660

PACK

QAR INSPECTION

SHIP DATE

Final Inspection

Sn: C6594625 | DATE REC'D: 3/20/97 | DATE RET'D:

Auditor: RW

Item:

BARREL ASSY.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

SCOPE ASSY.

- ☐ SCOPE
- ☐ SCOPE RINGS
- ☒ MOUNTING SCREWS
- ☒ MOUNTING BASE
- ☐ SCREWS
- ☐ FINISH
- ☐ LOOSENESS
- ☐ CLARITY

MISC.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

Item:

STOCK ASSY.

- ☒ STOCK
- ☒ SLING SWIVEL STUDS
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

SYSTEMS CASE

- ☐ SCOPE CASE
- ☐ IRON SIGHTS
- ☐ DEPLOYMENT KIT

TRIGGER

- ☒ SAFETY OPERATION
- ☒ SET
- ☐

Comments: _____

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG				PAGE NO	NO OF PAGES	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)																	
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA																			
1a. UIC CUSTOMER WV 404		1b. CUSTOMER UNIT NAME MPC 716 MP BN		1c. PHONE NO 798-6686		3a. WORK ORDER NUMBER (WOM)		3b. SHOP		3c. PHONE NO													
2a. SAMS-2 UIC/SAMS-I/TDA		2b. UTILIZATION CODE		2c. MCSR		4a. UIC SUPPORT UNIT		4b. SUPPORT UNIT NAME															
SECTION III - EQUIPMENT DATA																							
5. TYPE MNT REQ CODE		6. ID		7. NSN 1PP5-P1-249-2136		15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751																	
8. MODEL M24						15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		16. MILES/KILOMETERS/HOURS/ROUNDS M		K													
9. NOUN M24 SHIPER WEAPON SYSTEM								H		R													
10a. ORG WON/DOC NO				10b. EIC		17. PROJECT CODE (if assigned)		18. ACCOUNT PROCESSING CODE		19. IN WARRANTY? (enter Y or N)													
11. SERIAL NUMBER C6594625				12. QTY		13. PD		20. ADMIN NO 3															
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)						21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)																	
						22. LEVEL OF WORK		23. SIGNATURE															
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs) EXCESSIVE ROUNDS THROUGH BARREL																							
I certify equipment is Govt property carried on the property book and is authorized for repair by TDA maintenance.																							
25. REMARKS DOC SGT STEADY EXT 6686						TODD E. THOMAS CPT, MP																	
26. TECHNICAL REFERENCES																							
SECTION IV - TASK REQUIREMENTS DATA																							
27a. FILE INPUT ACT CD		27b. TASK NO	27c. ACT CODE	27d. TASK DESCRIPTION			27e. QTY TO BE RPR	27f. WORK CENTER	27g. FAILURE CODE	27h. MH PROJ	27i. MH EXP												
SECTION V - PART REQUIREMENTS																							
28a. FILE INPUT ACT CD	28b. TASK NO	28c. ID NO	28d. NSN OR PART NUMBER			28e. SFX CD	28f. QTY RQD	28g. QTY ISSUED	28h. NMCS CD	28i. FAILURE CODE	28j. STORAGE LOCATION	28k. INITIALS	28l. COST \$										
28m. TOTAL MANHOURS			28n. TOTAL MANHOURS COSTS \$				28o. TOTAL PARTS COSTS \$																
SECTION VI - COMPLETION DATA																							
29. QTY RPR		30. QTY CONDEMN		31. QTY NRTS		32. EVAC WON		33. EVAC UNIT NAME															
SECTION VII - ACTION SIGNATURES																							
34a. SUBMITTED BY RC		35a. ACCEPTED BY		35c. DATE		36a. WORK STARTED BY		37a. INSPECTED BY		38a. PICKED UP BY													
34b. DATE		35b. STATUS		35d. TIME		36b. STATUS		36c. DATE		36d. TIME		37b. STATUS		37c. DATE		37d. TIME		38b. STATUS		38c. DATE		38d. TIME	

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG				PAGE NO	NO OF PAGES	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)									
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA											
1a. UIC CUSTOMER 00040.4		1b. CUSTOMER UNIT NAME MPC 716 MP BN		1c. PHONE NO 798-6686		3a. WORK ORDER NUMBER (WON)		3b. SHOP		3c. PHONE NO					
2a. SAMS-2 UIC/SAMS-I/TDA		2b. UTILIZATION CODE		2c. MCSR		4a. UIC SUPPORT UNIT		4b. SUPPORT UNIT NAME							
SECTION III - EQUIPMENT DATA															
5. TYPE MNT REQ CODE		6. ID		7. NSN 1005-P1T-240-2136		15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751									
8. MODEL M24		9. NOUN M24 SHIPER WEAPON SYSTEM		10a. ORG WON/DOC NO		10b. EIC		15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		16. MILES/KILOMETERS/HOURS/ROUNDS M K H R					
11. SERIAL NUMBER 6601451		12. QTY		13. PD		17. PROJECT CODE (if assigned)		18. ACCOUNT PROCESSING CODE		19. IN WARRANTY? (enter Y or N)					
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)				21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)				20. ADMIN NO 2							
				22. LEVEL OF WORK				23. SIGNATURE							
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs) BOLT FACE WORN, EXCESSIVE ROUNDS THROUGH BARREL															
25. REMARKS I certify equipment is Govt property carried on the property book and is authorized for repair by TDA maintenance. POL BT STEANE EXT 6686 TODD E. THOMAS CMM, MP Commanding															
26. TECHNICAL REFERENCES															
SECTION IV - TASK REQUIREMENTS DATA															
27a. FILE INPUT ACT CD		27b. TASK NO	27c. ACT CODE	27d. TASK DESCRIPTION			27e. QTY TO BE RPR	27f. WORK CENTER	27g. FAILURE CODE	27h. MH PROJ	27i. MH EXP				
SECTION V - PART REQUIREMENTS															
28a. FILE INPUT ACT CD		28b. TASK NO	28c. ID NO	28d. NSN OR PART NUMBER			28e. SFX CD	28f. QTY RQD	28g. QTY ISSUED	28h. NMCS CD	28i. FAILURE CODE	28j. STORAGE LOCATION	28k. INITIALS	28l. COST \$	
28m. TOTAL MANHOURS				28n. TOTAL MANHOURS COSTS \$				28o. TOTAL PARTS COSTS \$							
SECTION VI - COMPLETION DATA															
29. QTY RPR				30. QTY CONDEMN		31. QTY NRTS		32. EVAC WON				33. EVAC UNIT NAME			
SECTION VII - ACTION SIGNATURES															
34a. SUBMITTED BY K Carter		35a. ACCEPTED BY		35c. DATE		36a. WORK STARTED BY		37a. INSPECTED BY				38a. PICKED UP BY			
34b. DATE		35b. STATUS		35d. TIME		36b. STATUS		36c. DATE		36d. TIME		37b. STATUS		37c. DATE	
												37d. TIME		38b. STATUS	
														38c. DATE	
														38d. TIME	