

06587539

MODEL 700<sup>TM</sup> M24

Model **SMS** <sup>TM</sup>

Action

Barrel Length

Capacity

Order No. **5716**

\*Includes 1 in chamber.

*Remington*

**Remington**  
MODEL 700™ M24


VERY IMPORTANT:  
Instruction Book  
enclosed to assure  
safe use of this  
firearm.

**DUPONT**  
REG. U.S. PAT. & TM. OFF.


SERIAL NO.  
06587539

ORDER NO.  
5716

MADE IN ILLION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marquo Deposee.



LPC



CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6587539

| OP. #        | OP. NAME                                                       | READINGS | DATE     | INIT |
|--------------|----------------------------------------------------------------|----------|----------|------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   | 1023     | 90       | RW   |
| 600          | Proof                                                          | 1023     | 90       | RW   |
| 607          | Check Headspace                                                | 1023     | 90       | RW   |
| 610          | Dis-assemble Gun                                               | 1023     | 90       | RW   |
| 612          | Magnaflux Barrel<br>Action                                     |          | 10/24/90 | KR   |
|              | Magnaflux Bolt                                                 |          | 10/24/90 | KR   |
| 615          | Rollmark Caliber                                               |          | 10/24/90 | ZL   |
| 617          | Drill and Tap Sight Holes                                      |          | 10/25/90 | LB   |
| 618          | Polish Barrel RB                                               |          | 10/26/90 | WB   |
| 620          | Apply Coatings<br>(Barrel Action)                              |          | 11-7-90  | TH   |
|              | Apply Coating (Bolt)                                           |          |          |      |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          | 12/12/90 | RW   |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          | 12/12/90 | RW   |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          | 12/12/90 | RW   |
|              | D) Oil Firing Pin Ass'y                                        |          | 12/12/90 | RW   |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          | 1-9-91   | TH   |

| op. #        | OP. NAME                                                    | READINGS |      |      |      |      | DATE    | INIT |
|--------------|-------------------------------------------------------------|----------|------|------|------|------|---------|------|
| 625<br>cont. | F) Safety On Force                                          | 3.75     | 3.75 | 3.75 |      |      | 1/8/91  | KJ   |
|              | G) Safety Off Force                                         | 3.0      | 3.0  | 3.0  |      |      | 1/8/91  | KJ   |
|              | H) Trigger Pull Test & Retainability                        |          |      |      |      |      | 1-9-91  | JH   |
|              | I) Firing Pin Indent                                        | .020     | .020 | .020 |      |      | 1/8/91  | KJ   |
|              | J) Assemble Stock                                           |          |      |      |      |      | 1/18/91 | RW   |
|              | K) Assemble Swivel Studs                                    |          |      |      |      |      | 2-1-91  | ✓    |
|              | L) Attach Front and Rear Sight Assemblies                   |          |      |      |      |      | 1/18/91 | RW   |
|              | M) Iron Sight Alignment                                     |          |      |      |      |      | 1/18/91 | RW   |
|              | N) Detach Front & Rear Sights & place in numbered container |          |      |      |      |      | 1/18/91 | RW   |
|              | O) Attach Scope to Rifle                                    |          |      |      |      |      | 1/18/91 | RW   |
|              | P) Detach & Attach Scope 20 Times                           |          |      |      |      |      | 1/18/91 | RW   |
| 640          | Gallery Target & Test                                       |          |      |      |      |      | 1-20-91 | AC   |
|              | A) Time                                                     |          |      |      |      |      | 1-20-91 | AC   |
|              | B) Malfunctions                                             |          |      |      |      |      | 1-20-91 | AC   |
|              | C) Pierced Primers                                          |          |      |      |      |      | 1-20-91 | AC   |
|              | D) Optical Clarity of Scope                                 |          |      |      |      |      | 1-20-91 | AC   |
| 645          | Inspect for Live Ammo                                       |          |      |      |      |      | 1-20-91 | AC   |
| 655          | Final Inspection                                            |          |      |      |      |      |         |      |
|              | A) Headspace                                                |          |      |      |      |      | 2-1-91  | ✓    |
|              | B) Trigger Pull                                             | 2.50     | 2.49 | 2.50 | 2.48 | 2.48 | 1-22-91 | JH   |
|              | C) Function                                                 |          |      |      |      |      | 2-1-91  | AC   |
| 660          | Pack                                                        |          |      |      |      |      | 3-19-91 | ✓    |

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS  
2.50# + .50#  
3.00# + .75#  
4.00# + 1.00#

SERIAL NO. C 6587539DATE 1-9-91TESTER JEL

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# |      | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|------|------------------------------------------------------------------------|
| PULL #1 | 2.37             | 2.39                     | 2.43                           | 2.50 | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.32             | 2.28                     | 2.40                           | 2.49 |                                                                        |
| PULL #3 | 2.34             | 2.50                     | 2.42                           | 2.51 |                                                                        |
| PULL #4 | 2.44             | 2.44                     | 2.43                           | 2.48 |                                                                        |
| PULL #5 | 2.46             | 2.42                     | 2.38                           | 2.48 |                                                                        |
| TOTAL   |                  |                          |                                |      |                                                                        |
| AVG.    |                  |                          |                                |      |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES |  | COMMENTS |
|---------|------------------|--------------------------|--|----------|
| PULL #1 | 3.42             | 3.30                     |  |          |
| PULL #2 | 3.29             | 3.30                     |  |          |
| PULL #3 | 3.30             | 3.20                     |  |          |
| PULL #4 | 3.21             | 3.32                     |  |          |
| PULL #5 | 3.32             | 3.28                     |  |          |
| TOTAL   |                  |                          |  |          |
| AVG.    |                  |                          |  |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.45             | 4.46                     |                                | 4.49                                 |
| PULL #2 | 4.44             | 4.50                     |                                | 4.30                                 |
| PULL #3 | 4.47             | 4.41                     |                                | 4.24                                 |
| PULL #4 | 4.43             | 4.36                     |                                | 4.21                                 |
| PULL #5 | 4.23             | 4.39                     |                                | 4.31                                 |
| TOTAL   |                  |                          |                                |                                      |
| AVG.    |                  |                          |                                |                                      |

CENTROIDAL DISTANCE CALCULATIONS  
FOR RIFLE # 06587539  
21 Jan 1991

CENTROIDAL DISTANCES

|      |   |         |
|------|---|---------|
| 0 TO | 1 | .391736 |
| 1 TO | 2 | .40102  |
| 1 TO | 3 | .294416 |
| 1 TO | 4 | .309782 |
| 1 TO | 5 | .302478 |

5  
S) <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1964  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0626  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .206135

THE AMR FOR THIS RIFLE IS: .9698

21 Jan 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/06587539

## CENTERFIRE PATTERNS # 1

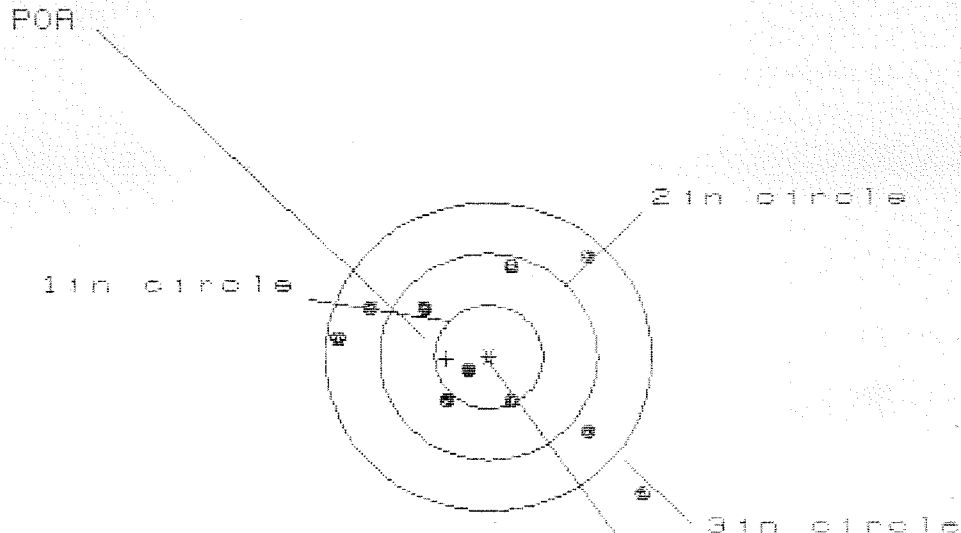

# OF SHOTS= 10

# IN CIR

1in = 2

2in = 5

3in = 9

HS= 2.780

VS= 2.329

GS= 3.149


CENTROID #

| PATTERN #                   | 1      | 2      | 3      |
|-----------------------------|--------|--------|--------|
| SHOTS (BEST OF)             | 10     | 9      | 8      |
| MAXIMUM X                   | 1.369  | 1.053  | .895   |
| MINIMUM X                   | -1.411 | -1.258 | -1.123 |
| MAXIMUM Y                   | .976   | .826   | .823   |
| MINIMUM Y                   | -1.353 | -.855  | -.858  |
| CENTROID X                  | .391   | .238   | .396   |
| CENTROID Y                  | .024   | .174   | .177   |
| POA TO CENTROID in.         | .391   | .295   | .434   |
| MIN RADIUS                  | .236   | .277   | .345   |
| MEAN RADIUS                 | .995   | .879   | .836   |
| MAX RADIUS                  | 1.925  | 1.356  | 1.240  |
| HORIZONTAL SPREAD           | 2.780  | 2.311  | 2.018  |
| VERTICAL SPREAD             | 2.329  | 1.681  | 1.681  |
| EXTREME SPREAD              | 3.149  | 2.460  | 2.359  |
| NUMBER IN ONE INCH CIRCLE   | = 2    |        |        |
| NUMBER IN TWO INCH CIRCLE   | = 5    |        |        |
| NUMBER IN THREE INCH CIRCLE | = 9    |        |        |

21 Jan 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/C6587533

## CENTERFIRE PATTERNS # 2

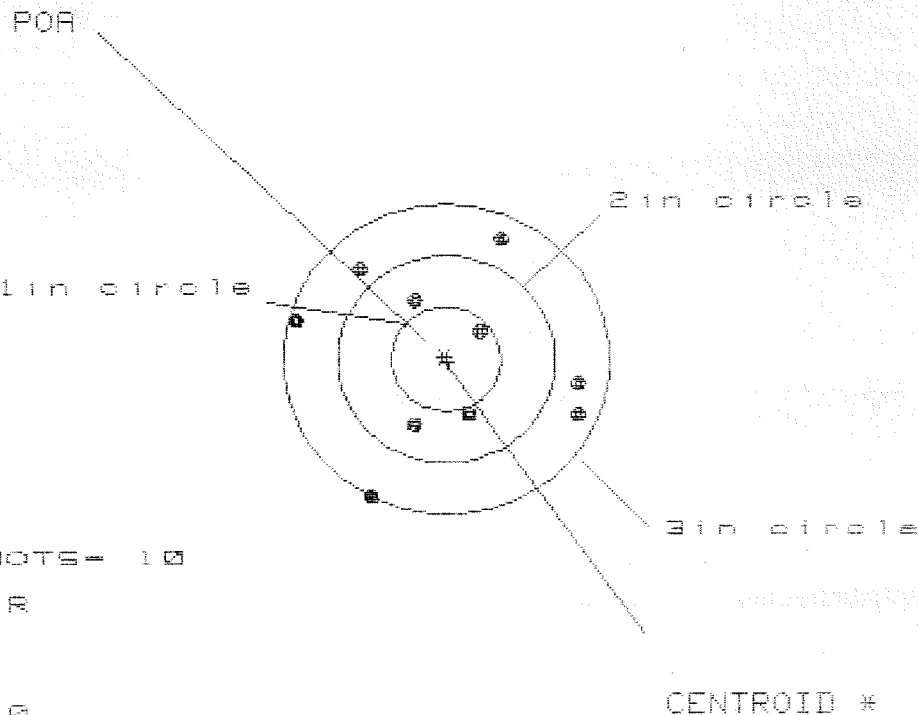

# OF SHOTS = 10

# IN CIR

1 in = 1

2 in = 4

3 in = 10

HS = 2.607

VS = 2.462

GS = 2.774

| PATTERN #                   | 2      | 9      | 8      |
|-----------------------------|--------|--------|--------|
| SHOTS (BEST OF)             | 10     | 9      | 8      |
| MAXIMUM X                   | 1.217  | 1.142  | .959   |
| MINIMUM X                   | -1.390 | -1.465 | -1.013 |
| MAXIMUM Y                   | 1.156  | 1.011  | 1.043  |
| MINIMUM Y                   | -1.306 | -.753  | -.721  |
| CENTROID X                  | -.010  | .065   | .249   |
| CENTROID Y                  | .028   | .173   | .141   |
| POA TO CENTROID in.         | .030   | .185   | .286   |
| MIN RADIUS                  | .411   | .280   | .143   |
| MEAN RADIUS                 | 1.010  | .944   | .855   |
| MAX RADIUS                  | 1.471  | 1.488  | 1.240  |
| HORIZONTAL SPREAD           | 2.607  | 2.607  | 1.971  |
| VERTICAL SPREAD             | 2.462  | 1.764  | 1.764  |
| EXTREME SPREAD              | 2.774  | 2.774  | 2.402  |
| NUMBER IN ONE INCH CIRCLE   | = 1    |        |        |
| NUMBER IN TWO INCH CIRCLE   | = 4    |        |        |
| NUMBER IN THREE INCH CIRCLE | = 10   |        |        |

21 Jan 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/06587539

## CENTERFIRE PATTERNS

# 3

POA

1in circle

2in circle

3in circle

# OF SHOTS= 10

# IN CIR

1in = 2

2in = 4

3in = 8

HS= 1.719

VS= 2.688

GS= 2.912

CENTROID #

| PATTERN #                     | 1      | 2      | 3      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | 1.019  | .960   | .993   |
| MINIMUM X                     | -.700  | -.759  | -.726  |
| MAXIMUM Y                     | 1.203  | 1.038  | .847   |
| MINIMUM Y                     | -1.485 | -1.529 | -1.340 |
| CENTROID X                    | .111   | .170   | .137   |
| CENTROID Y                    | -.067  | .098   | .289   |
| POA TO CENTROID in.           | .129   | .196   | .320   |
| MIN RADIUS                    | .380   | .206   | .140   |
| MEAN RADIUS                   | 1.001  | .906   | .787   |
| MAX RADIUS                    | 1.578  | 1.552  | 1.421  |
| HORIZONTAL SPREAD             | 1.719  | 1.719  | 1.719  |
| VERTICAL SPREAD               | 2.688  | 2.567  | 2.187  |
| EXTREME SPREAD                | 2.912  | 2.580  | 2.419  |
| NUMBER IN ONE INCH CIRCLE =   | 2      |        |        |
| NUMBER IN TWO INCH CIRCLE =   |        | 4      |        |
| NUMBER IN THREE INCH CIRCLE = |        |        | 9      |

21 Jan 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/06587539

## CENTERFIRE PATTERNS

# 4

POA

1in circle

2in circle

3in circle

# OF SHOTS= 10

# IN CIR

1in = 1

2in = 7

3in = 10

HS= 2.077

VS= 1.491

GS= 2.220

CENTROID #

PATTERN #

4

|                             |   |        |       |       |
|-----------------------------|---|--------|-------|-------|
| SHOTS (BEST OF)             | : | 10     | 9     | 8     |
| MAXIMUM X                   | : | 1.065  | 1.178 | 1.066 |
| MINIMUM X                   | : | -1.012 | -.899 | -.622 |
| MAXIMUM Y                   | : | .693   | .701  | .783  |
| MINIMUM Y                   | : | -.798  | -.721 | -.634 |
| CENTROID X                  | : | .082   | -.031 | .082  |
| CENTROID Y                  | : | .002   | -.075 | -.162 |
| POA TO CENTROID in.         | : | .082   | .081  | .182  |
| MIN RADIUS                  | : | .402   | .308  | .446  |
| MEAN RADIUS                 | : | .837   | .774  | .732  |
| MAX RADIUS                  | : | 1.232  | 1.181 | 1.066 |
| HORIZONTAL SPREAD           | : | 2.077  | 2.077 | 1.687 |
| VERTICAL SPREAD             | : | 1.491  | 1.422 | 1.417 |
| EXTREME SPREAD              | : | 2.220  | 2.220 | 1.724 |
| NUMBER IN ONE INCH CIRCLE   | = | 1      |       |       |
| NUMBER IN TWO INCH CIRCLE   | = | 7      |       |       |
| NUMBER IN THREE INCH CIRCLE | = | 10     |       |       |

21 Jan 1991

FILE:/PATTERNING/CENTERFIRE\_PATT/C6597539

## CENTERFIRE PATTERNS

# 5

POA

1 in circle

2 in circle

3 in circle

# OF SHOTS- 10

# IN CIR

1 in = 1

2 in = 5

3 in = 9

HS= 2.659

VS= 2.233

GS= 2.705

CENTROID \*

| PATTERN #                     | 1      | 2      | 3     |
|-------------------------------|--------|--------|-------|
| SHOTS (BEST OF)               | 10     | 9      | 8     |
| MAXIMUM X                     | 1.445  | 1.546  | .636  |
| MINIMUM X                     | -1.214 | -1.113 | -.920 |
| MAXIMUM Y                     | 1.292  | 1.289  | 1.299 |
| MINIMUM Y                     | -.941  | -.797  | -.787 |
| CENTROID X                    | .408   | .307   | .114  |
| CENTROID Y                    | .326   | .182   | .172  |
| POA TO CENTROID in.           | .522   | .357   | .206  |
| MIN RADIUS                    | .356   | .445   | .316  |
| MEAN RADIUS                   | 1.006  | .911   | .808  |
| MAX RADIUS                    | 1.578  | 1.548  | 1.363 |
| HORIZONTAL SPREAD             | 2.659  | 2.659  | 1.556 |
| VERTICAL SPREAD               | 2.233  | 2.086  | 2.086 |
| EXTREME SPREAD                | 2.705  | 2.705  | 2.169 |
| NUMBER IN ONE INCH CIRCLE =   | 1      | 5      | 9     |
| NUMBER IN TWO INCH CIRCLE =   |        |        |       |
| NUMBER IN THREE INCH CIRCLE = |        |        |       |

# BARBER M24 0022320 RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER  
R 96-21856

|                           |                         |                       |                           |                   |                                  |                 |
|---------------------------|-------------------------|-----------------------|---------------------------|-------------------|----------------------------------|-----------------|
| INITIAL<br>JOM            | CUSTOMER ORDER NO.      |                       | W/LEUPOLD 10X SCOPE       |                   |                                  |                 |
| DATE RECEIVED<br>10/03/96 | DATE OPENED<br>10/03/96 | DATE CODE<br>EK 10-90 | SERIAL NUMBER<br>C6587539 | NEW SERIAL NUMBER | MODEL AND GRADE<br>700 7.62 NATO | Scope # 90-0470 |
| ACCESSORIES<br>W/STUDS    |                         | W/SWIVELS             |                           | SCOPE BASE        |                                  |                 |

FROM:

SHIP TO:

TRANSPORTATION OFFICER  
ANNISTON ARMY DEPOT  
ANNISTON

AL 36201

TRANSPORTATION OFFICER  
ANNISTON ARMY DEPOT  
ANNISTON

AL 36201

CUST NO: 150939 C.O.D.L

|                                                                                                                                                                                                                                           |                    |                                |           |           |                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------------------|-----------|-----------|----------------------------------------------------------------------------|
| ACCOUNT NUMBER                                                                                                                                                                                                                            | ACCOUNT NUMBER N/C | WRITE <input type="checkbox"/> | PROM DATE | ESTIMATED | VIA<br>UPS                                                                 |
| GUN CONDITION<br><input type="checkbox"/> NEW<br><input type="checkbox"/> LIGHTLY WORN<br><input type="checkbox"/> WORN<br><input type="checkbox"/> VERY WORN<br><input type="checkbox"/> UNREPAIRABLE<br><input type="checkbox"/> MARRED |                    |                                |           |           | REPAIR CHARGE<br>EXCISE<br>TAX<br>INSURANCE<br>UPS<br>PARCEL POST<br>TOTAL |

| CUSTOMER CONCERN | AMMO | FUNCTION | FINISH | ACCURACY | FIT | INSPECT |
|------------------|------|----------|--------|----------|-----|---------|
| CYCLE            | A1   | B1       |        |          |     |         |
| TRIGGER GROUP    |      | B2       |        |          | E1  | F1      |
| BOLT ASSY.       |      | B3       |        |          | E2  | F2      |
| BARREL ASSY.     |      | B4       |        | D1       | E3  | F3      |
| REC. ASSY.       |      | B5       |        | D2       | E4  | F4      |
| WOOD             |      |          | C1     | D3       | E5  | F5      |
| METAL            |      |          | C2     |          |     |         |
| MAIN FAULT       |      |          |        |          |     |         |

|                            |                                        |
|----------------------------|----------------------------------------|
| PARTS                      | COMMENTS                               |
| ✓ Trigger Assy - 96024     |                                        |
| ✓ Firing Pin Assy - 96002  |                                        |
| ✓ Front Sight Assy - 96118 |                                        |
| ✓ Rear Sight - 96119       |                                        |
|                            | Scope Sent Back To Factory For Inspec. |
| REPAIRMAN<br>RW            | PROOF<br>✓                             |
| GALLERY TESTER<br>A        | DATE<br>6/6/97                         |
| TEST<br>AC                 | DATE<br>6/9/97                         |
| TARGET                     | PATTERN                                |

OFFICE COPY

RD6925 REV. 6/86

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

BARBER - M24 0022320 22359

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6587539

DATE 4-14-97

TESTER EK

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# |  | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|--|------------------------------------------------------------------------|
| PULL #1 | 2.51             | 2.68                     | 2.61                           |  | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.60             | 2.67                     | 2.69                           |  |                                                                        |
| PULL #3 | 2.42             | 2.66                     | 2.66                           |  |                                                                        |
| PULL #4 | 2.60             | 2.67                     | 2.49                           |  |                                                                        |
| PULL #5 | 2.54             | 2.36                     | 2.41                           |  |                                                                        |
| TOTAL   | 12.67            | 13.09                    | 12.86                          |  |                                                                        |
| AVG.    | 2.53             | 2.61                     | 2.57                           |  |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES |  | COMMENTS |
|---------|------------------|--------------------------|--|----------|
| PULL #1 | 3.11             | 2.80                     |  |          |
| PULL #2 | 3.11             | 3.13                     |  |          |
| PULL #3 | 3.12             | 2.86                     |  |          |
| PULL #4 | 3.00             | 3.10                     |  |          |
| PULL #5 | 3.15             | 3.11                     |  |          |
| TOTAL   | 15.49            | 15.00                    |  |          |
| AVG.    | 3.10             | 3.00                     |  |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.25             | 4.03                     | 4.14                           |                                      |
| PULL #2 | 4.06             | 4.10                     | 4.12                           |                                      |
| PULL #3 | 4.07             | 3.99                     | 4.05                           |                                      |
| PULL #4 | 4.07             | 4.16                     | 4.14                           |                                      |
| PULL #5 | 4.09             | 4.12                     | 4.04                           |                                      |
| TOTAL   | 20.54            | 20.4                     | 20.49                          |                                      |
| AVG.    | 4.11             | 4.08                     | 4.10                           |                                      |

## 21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

R&amp;E NO.

SERIAL NO. C6587539

LOG IN DATE: / /

DATE

INIT.

INSPECT &amp; VERIFY:

| OP. # | OP. NAME                 |
|-------|--------------------------|
| 550   | DIS-ASSEMBLE GUN         |
| 560 A | RE-BARREL AT CUSTOM SHOP |
| B     | DRILL & TAP              |
| C     | POLISH                   |
| 575   | ASSEMBLE                 |
| 600   | PROOF                    |
| 605   | CHECK HEADSPACE          |
| 610   | DIS-ASSEMBLE             |
| 612   | MAGNAFLUX                |
| 615   | ROLLMARK CALIBER         |
| 618   | ROTO-BLAST               |
| 620   | APPLY COATINGS           |
| 625 A | FINAL ASSEMBLY           |
| B     | TRIGGER PULL TEST        |
| C     | SAFETY ON FORCE          |
| D     | SAFETY OFF FORCE         |
| E     | FIRING PIN INDENT        |
| 640   | TARGET                   |
| 655   | FINAL INSPECT            |
| 660   | PACK                     |

QAR INSPECTION

SHIP DATE

## Final Inspection

Sn: C6587539

DATE REC'D: 10/3/96

DATE RET'D:

Auditor: RW

## Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

## Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☒ Scope Case☒ Iron Sights☒ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_