

C6587590

MODEL 700<sup>TM</sup> N24

Model SMS<sup>TM</sup>


Action

Barrel Length

Capacity

Order No. 5716

\*Includes 1 in chamber.



**Remington**  
MODEL 700™ M24


VERY IMPORTANT:  
Instruction Book  
enclosed to assure  
safe use of this  
firearm.

**DUPONT**  
REG. U.S. PAT. & TM. OFF.

SERIAL NO.  
C6587590


ORDER NO.  
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5716 C6587590

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C 6587590

| OP. #        | OP. NAME                                                       | READINGS | DATE     | INIT |
|--------------|----------------------------------------------------------------|----------|----------|------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   |          | 10/19/90 | KA   |
| 600          | Proof                                                          |          | 10/19/90 | KA   |
| 607          | Check Headspace                                                |          | 10/19/90 | KA   |
| 610          | Dis-assemble Gun                                               |          | 10/19/90 | KA   |
| 612          | Magnaflux Barrel<br>Action                                     |          | 10/22/90 | KS   |
|              | Magnaflux Bolt                                                 |          | 10/22/90 | K.R. |
| 615          | Rollmark Caliber                                               |          | 10/22/90 | KS.  |
| 617          | Drill and Tap Sight Holes                                      |          | 10/27/90 | KB   |
| 618          | Polish Barrel                                                  | KB       | 10/24/90 | KB   |
| 620          | Apply Coatings<br>(Barrel Action)                              |          | 11-7-90  | TJA  |
|              | Apply Coating (Bolt)                                           |          |          |      |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          | 12/5/90  | KS   |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          | 12/5/90  | KS   |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          | 12/5/90  | KS   |
|              | D) Oil Firing Pin Ass'y                                        |          | 12/5/90  | KS   |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          | 12/6/90  | KS   |

| OP. NO.      | OP. NAME                                                    | READINGS |        |       |     |     | DATE    | INIT |
|--------------|-------------------------------------------------------------|----------|--------|-------|-----|-----|---------|------|
| 625<br>cont. | F) Safety On Force                                          | 5 1/4    | 5 1/4  | 5 1/4 |     |     | 12/6/90 | WB   |
|              | G) Safety Off Force                                         | 2 1/2    | 2 1/2  | 2 1/2 |     |     | 12/6/90 | WB   |
|              | H) Trigger Pull Test & Retainability                        |          |        |       |     |     | 12/6/90 | 811  |
|              | I) Firing Pin Indent                                        | 1.0223   | 1.0233 | 1.023 |     |     | 12/6/90 | WB   |
|              | J) Assemble Stock                                           |          |        |       |     |     | 12/7/90 | KS   |
|              | K) Assemble Swivel Studs                                    |          |        |       |     |     | 12-8-90 | 928  |
|              | L) Attach Front and Rear Sight Assemblies                   |          |        |       |     |     | 12/7/90 | KS   |
|              | M) Iron Sight Alignment                                     |          |        |       |     |     | 12/7/90 | KS   |
|              | N) Detach Front & Rear Sights & place in numbered container |          |        |       |     |     | 12/7/90 | KS   |
|              | O) Attach Scope to Rifle                                    |          |        |       |     |     | 12/7/90 | KS   |
|              | P) Detach & Attach Scope 20 Times                           |          |        |       |     |     | 12/7/90 | KS   |
| 640          | Gallery Target & Test                                       |          |        |       |     |     | 12/7/90 | KS   |
|              | A) Time                                                     |          |        |       |     |     | "       | KJ   |
|              | B) Malfunctions                                             |          |        |       |     |     | "       | KJ   |
|              | C) Pierced Primers                                          |          |        |       |     |     | "       | KJ   |
|              | D) Optical Clarity of Scope                                 |          |        |       |     |     | "       | KJ   |
| 645          | Inspect for Live Ammo                                       |          |        |       |     |     | 12/7/90 | KJ   |
| 655          | Final Inspection                                            |          |        |       |     |     |         |      |
|              | A) Headspace                                                |          |        |       |     |     | 12-8-90 | 928  |
|              | B) Trigger Pull                                             | 265      | 282    | 282   | 280 | 287 | 12-8-90 | 928  |
|              | C) Function                                                 |          |        |       |     |     | 12-8-90 | 928  |
| 660          | Pack                                                        |          |        |       |     |     | 12-7-90 | DH   |

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. 66587590

DATE 12/6/90

TESTER JH

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# |     | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|-----|------------------------------------------------------------------------|
| PULL #1 | 2.45             | 2.46                     | 2.46                           | 265 | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.38             | 2.44                     | 2.44                           | 282 |                                                                        |
| PULL #3 | 2.40             | 2.38                     | 2.44                           | 282 |                                                                        |
| PULL #4 | 2.39             | 2.43                     | 2.46                           | 280 |                                                                        |
| PULL #5 | 2.40             | 2.42                     | 2.42                           | 281 |                                                                        |
| TOTAL   |                  |                          |                                |     |                                                                        |
| AVG.    |                  |                          |                                |     |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES |  | COMMENTS |
|---------|------------------|--------------------------|--|----------|
| PULL #1 | 3.30             | 3.16                     |  |          |
| PULL #2 | 3.22             | 3.20                     |  |          |
| PULL #3 | 3.23             | 3.17                     |  |          |
| PULL #4 | 3.18             | 3.24                     |  |          |
| PULL #5 | 3.20             | 3.20                     |  |          |
| TOTAL   |                  |                          |  |          |
| AVG.    |                  |                          |  |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.27             | 4.24                     |                                | 4.19                                 |
| PULL #2 | 4.23             | 4.20                     |                                | 4.20                                 |
| PULL #3 | 4.22             | 4.19                     |                                | 4.22                                 |
| PULL #4 | 4.21             | 4.17                     |                                | 4.25                                 |
| PULL #5 | 4.26             | 4.22                     |                                | 4.20                                 |
| TOTAL   |                  |                          |                                |                                      |
| AVG.    |                  |                          |                                |                                      |

CENTROIDAL DISTANCE CALCULATIONS  
FOR RIFLE # C6587590  
8 Dec 1990

CENTROIDAL DISTANCES

|      |   |         |
|------|---|---------|
| 0 TO | 1 | .372678 |
| 1 TO | 2 | .492297 |
| 1 TO | 3 | .263139 |
| 1 TO | 4 | .784593 |
| 1 TO | 5 | .558014 |

$\frac{4}{5} \sigma_{\bar{x}}$  <----FOR

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0118  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .01  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0154674  
THE AMR FOR THIS RIFLE IS: 1.007

8 Dec 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/C6587590

## CENTERFIRE PATTERNS

# 1

POA

1 in circle

2 in circle

3 in circle

CENTROID \*

# OF SHOTS = 10

# IN CIR

1 in = 0

2 in = 3

3 in = 8

HS = 2.779

VS = 3.445


GS = 3.946

| PATTERN #                   | : | 1      | 9      | 8      |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | 1.576  | .985   | .988   |
| MINIMUM X                   | : | -1.203 | -1.028 | -1.025 |
| MAXIMUM Y                   | : | 1.325  | 1.090  | .813   |
| MINIMUM Y                   | : | -2.120 | -2.214 | -1.275 |
| CENTROID X                  | : | .267   | .092   | .089   |
| CENTROID Y                  | : | -.260  | -.025  | .252   |
| POA TO CENTROID in.         | : | .373   | .095   | .267   |
| MIN RADIUS                  | : | .727   | .598   | .356   |
| MEAN RADIUS                 | : | 1.336  | 1.117  | .892   |
| MAX RADIUS                  | : | 2.641  | 2.214  | 1.613  |
| HORIZONTAL SPREAD           | : | 2.779  | 2.013  | 2.013  |
| VERTICAL SPREAD             | : | 3.445  | 3.304  | 2.088  |
| EXTREME SPREAD              | : | 3.946  | 3.347  | 2.388  |
| NUMBER IN ONE INCH CIRCLE   | = |        | 0      |        |
| NUMBER IN TWO INCH CIRCLE   | = |        | 3      |        |
| NUMBER IN THREE INCH CIRCLE | = |        | 8      |        |

8 Dec 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/C6587590

## CENTERFIRE PATTERNS # 2

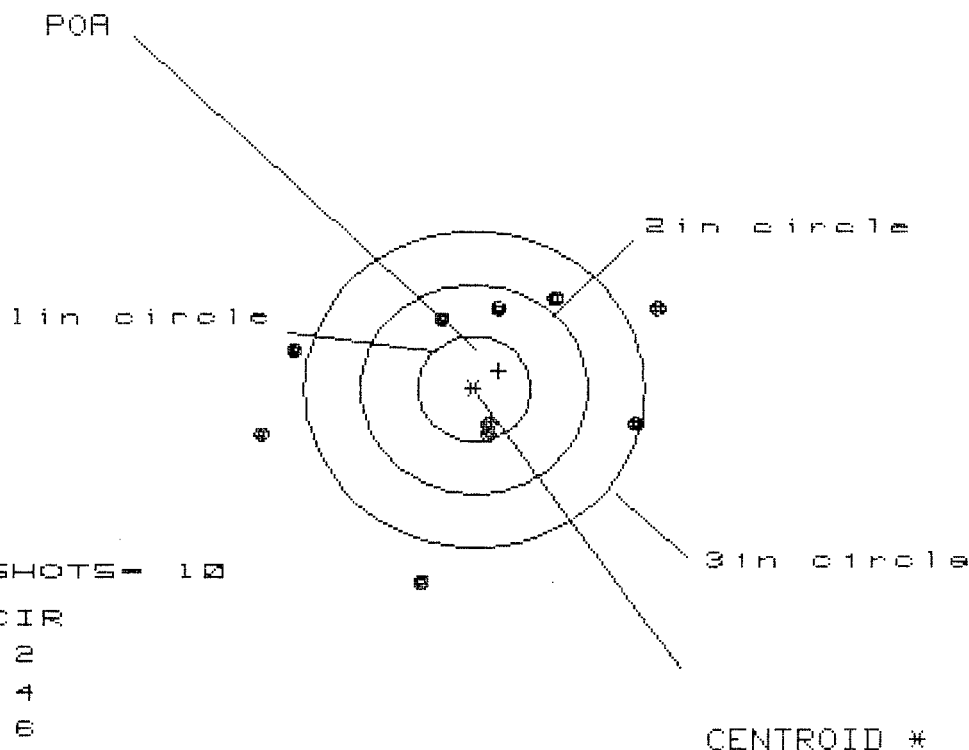

# OF SHOTS - 10

# IN CIR

1 in = 2

2 in = 4

3 in = 6

HS = 3.449

VS = 2.692

GS = 3.661

| PATTERN #                   | : | 2      |        |        |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | 1.601  | 1.549  | 1.311  |
| MINIMUM X                   | : | -1.848 | -1.900 | -1.859 |
| MAXIMUM Y                   | : | .837   | .631   | .547   |
| MINIMUM Y                   | : | -1.855 | -.682  | -.766  |
| CENTROID X                  | : | -.217  | -.165  | .072   |
| CENTROID Y                  | : | -.170  | .036   | .120   |
| POA TO CENTROID in.         | : | .275   | .169   | .140   |
| MIN RADIUS                  | : | .371   | .550   | .496   |
| MEAN RADIUS                 | : | 1.221  | 1.126  | .987   |
| MAX RADIUS                  | : | 1.913  | 2.014  | 1.861  |
| HORIZONTAL SPREAD           | : | 3.449  | 3.449  | 3.171  |
| VERTICAL SPREAD             | : | 2.692  | 1.313  | 1.313  |
| EXTREME SPREAD              | : | 3.661  | 3.661  | 3.197  |
| NUMBER IN ONE INCH CIRCLE   | = |        | 2      |        |
| NUMBER IN TWO INCH CIRCLE   | = |        | 4      |        |
| NUMBER IN THREE INCH CIRCLE | = |        | 6      |        |



8 Dec 1990

FILE:/PATTERNING/CENTERFIRE\_PATT/C6587590

## CENTERFIRE PATTERNS # 3

POA

1in circle

2in circle

3in circle

CENTROID \*

# OF SHOTS- 10

# IN CIR

1in = 2

2in = 7

3in = 9

HS= 1.837

VS= 2.572


GS= 2.834

| PATTERN #                   | : | 3      |       |       |
|-----------------------------|---|--------|-------|-------|
| SHOTS (BEST OF)             | : | 10     | 9     | 8     |
| MAXIMUM X                   | : | .947   | 1.036 | .922  |
| MINIMUM X                   | : | -.890  | -.801 | -.671 |
| MAXIMUM Y                   | : | .988   | .812  | .799  |
| MINIMUM Y                   | : | -1.584 | -.697 | -.596 |
| CENTROID X                  | : | .086   | -.003 | -.133 |
| CENTROID Y                  | : | -.069  | .107  | .006  |
| POA TO CENTROID in.         | : | .110   | .107  | .133  |
| MIN RADIUS                  | : | .373   | .231  | .155  |
| MEAN RADIUS                 | : | .904   | .792  | .697  |
| MAX RADIUS                  | : | 1.776  | 1.316 | .952  |
| HORIZONTAL SPREAD           | : | 1.837  | 1.837 | 1.593 |
| VERTICAL SPREAD             | : | 2.572  | 1.509 | 1.395 |
| EXTREME SPREAD              | : | 2.834  | 2.102 | 1.807 |
| NUMBER IN ONE INCH CIRCLE   | = |        | 2     |       |
| NUMBER IN TWO INCH CIRCLE   | = |        | 7     |       |
| NUMBER IN THREE INCH CIRCLE | = |        | 9     |       |

8 Dec 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/C8587590

## CENTERFIRE PATTERNS # 4

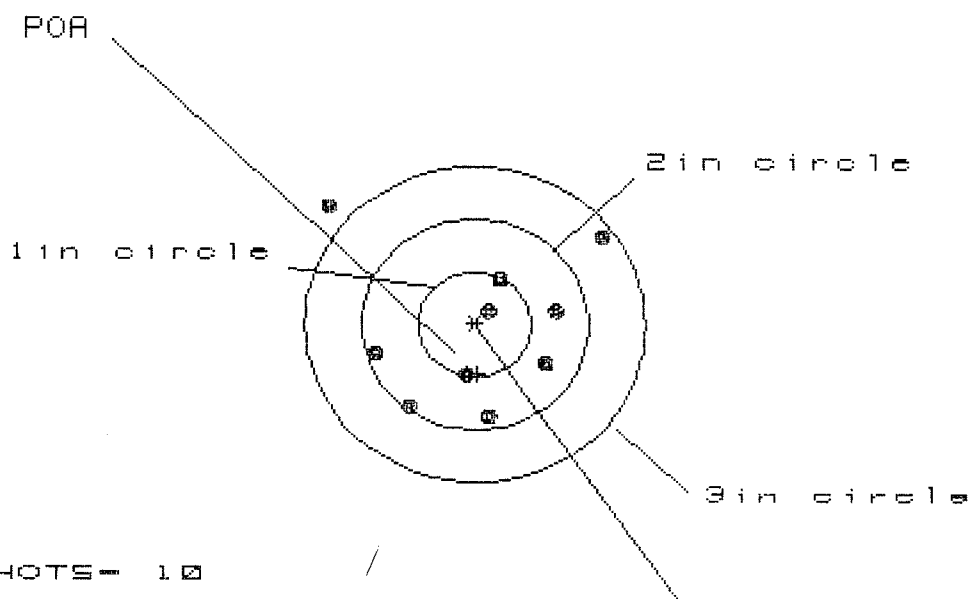

# OF SHOTS- 10

# IN CIR

1in = 3

2in = 8

3in = 9

HS= 2.410

VS= 1.932


GS= 2.424

| PATTERN #                   | : | 4      |        |       |
|-----------------------------|---|--------|--------|-------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8     |
| MAXIMUM X                   | : | 1.082  | .935   | .680  |
| MINIMUM X                   | : | -1.328 | -1.023 | -.906 |
| MAXIMUM Y                   | : | 1.109  | .975   | .665  |
| MINIMUM Y                   | : | -.823  | -.700  | -.578 |
| CENTROID X                  | : | -.018  | .129   | .012  |
| CENTROID Y                  | : | .471   | .348   | .226  |
| POA TO CENTROID in.         | : | .471   | .371   | .226  |
| MIN RADIUS                  | : | .186   | .275   | .232  |
| MEAN RADIUS                 | : | .835   | .709   | .621  |
| MAX RADIUS                  | : | 1.730  | 1.351  | .908  |
| HORIZONTAL SPREAD           | : | 2.410  | 1.958  | 1.586 |
| VERTICAL SPREAD             | : | 1.932  | 1.675  | 1.243 |
| EXTREME SPREAD              | : | 2.424  | 2.323  | 1.653 |
| NUMBER IN ONE INCH CIRCLE   | = |        | 3      |       |
| NUMBER IN TWO INCH CIRCLE   | = |        | 8      |       |
| NUMBER IN THREE INCH CIRCLE | = |        | 9      |       |

8 Dec 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/C6587590

## CENTERFIRE PATTERNS # 5

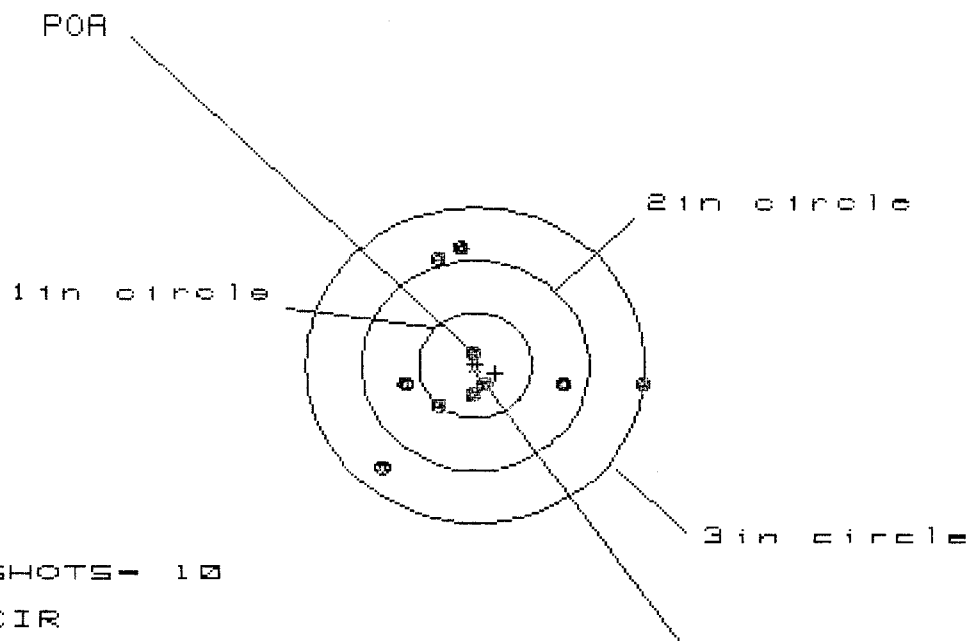

# OF SHOTS- 10

# IN CIR

1in = 4

2in = 6

3in = 10

HS= 2.326

VS= 2.042

GS= 2.456

CENTROID #

| PATTERN #                     | 5     | 9     | 8     |
|-------------------------------|-------|-------|-------|
| SHOTS (BEST OF)               | 10    | 9     | 8     |
| MAXIMUM X                     | 1.476 | .904  | .818  |
| MINIMUM X                     | -.850 | -.686 | -.568 |
| MAXIMUM Y                     | 1.109 | 1.093 | .974  |
| MINIMUM Y                     | -.933 | -.949 | -.512 |
| CENTROID X                    | -.177 | -.341 | -.255 |
| CENTROID Y                    | .078  | .094  | .213  |
| POA TO CENTROID in.           | .194  | .354  | .333  |
| MIN RADIUS                    | .112  | .211  | .107  |
| MEAN RADIUS                   | .740  | .660  | .601  |
| MAX RADIUS                    | 1.483 | 1.171 | .976  |
| HORIZONTAL SPREAD             | 2.326 | 1.590 | 1.386 |
| VERTICAL SPREAD               | 2.042 | 2.042 | 1.486 |
| EXTREME SPREAD                | 2.456 | 2.162 | 1.606 |
| NUMBER IN ONE INCH CIRCLE =   | 4     |       |       |
| NUMBER IN TWO INCH CIRCLE =   | 6     |       |       |
| NUMBER IN THREE INCH CIRCLE = | 10    |       |       |

RECEIVED BARBER - M24 0023302 PORT

COMMENTS

ORDER

R 94-18352

INITIAL CUSTOMER ORDER NO.

FDC DAAA09-92-C-0834

W/10X SCOPE, M-24 SNIPER, W/DEPLOYMENT KIT

ATTN: FRED MARTIN

SCOPE 90-0997

DATE RECEIVED

06/11/94

DATE OPENED

06/11/94

DATE CODE

SERIAL NUMBER

C6587590

NEW SERIAL NUMBER

MODEL AND GRADE

700 7.62

NATO

ACCESSORIES

SLING STRAP

HARD CASE

SCOPE MNTS

SCOPE BASE

FROM:

COMMANDER (W52H094138H226)  
DEFENSE DIST DEPOT ANNISTON  
ATTN DDAA-UR BLDG 112  
ANNISTON

AL 36201-5025

SHIP TO:

COMMANDER (W52H094138H226)  
DEFENSE DIST DEPOT ANNISTON  
ATTN DDAA-UR BLDG 112  
ANNISTON

AL  
36201-5025

CUST NO: 098397 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

FRT

GUN CONDITION

- ☐ NEW  
☐ LIGHTLY WORN  
☐ WORN  
☐ VERY WORN  
☐ UNREPAIRABLE  
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Trigger Assy \$ 173.31  
V.F. Ring pin Assy 9.96  
CTR 30.00  
\$ 213.27

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

BARBER - M24 0023302 23341

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS  
2.50# + .50#  
3.00# + .75#  
4.00# + 1.00#

SERIAL NO. C6582590

DATE \_\_\_\_\_

TESTER RW

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|------------------------------------------------------------------------|
| PULL #1 | 2.63             | 2.58                     | 2.76                           | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.66             | 2.63                     | 2.72                           |                                                                        |
| PULL #3 | 2.65             | 2.67                     | 2.78                           |                                                                        |
| PULL #4 | 2.63             | 2.64                     | 2.74                           |                                                                        |
| PULL #5 | 2.64             | 2.70                     | 2.81                           |                                                                        |
| TOTAL   | 13.21            | 13.22                    | 13.81                          |                                                                        |
| AVG.    | 2.64             | 2.64                     | 2.76                           |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES | COMMENTS |
|---------|------------------|--------------------------|----------|
| PULL #1 | 3.04             | 3.18                     |          |
| PULL #2 | 3.12             | 3.17                     |          |
| PULL #3 | 3.09             | 3.17                     |          |
| PULL #4 | 3.11             | 3.21                     |          |
| PULL #5 | 3.16             | 3.14                     |          |
| TOTAL   | 15.52            | 15.87                    |          |
| AVG.    | 3.10             | 3.17                     |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.14             | 4.07                     |                                | 4.32                                 |
| PULL #2 | 4.08             | 4.11                     |                                | 4.30                                 |
| PULL #3 | 4.04             | 4.07                     |                                | 4.30                                 |
| PULL #4 | 4.02             | 4.01                     |                                | 4.25                                 |
| PULL #5 | 4.05             | 4.04                     |                                | 4.34                                 |
| TOTAL   | 20.33            | 20.30                    |                                | 21.51                                |
| AVG.    | 4.07             | 4.06                     |                                | 4.30                                 |

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6587590

| OP. #        | OP. NAME                                                       | READINGS | DATE | INITIAL |
|--------------|----------------------------------------------------------------|----------|------|---------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   |          |      |         |
| 600          | Proof                                                          |          |      |         |
| 607          | Check Headspace                                                |          |      |         |
| 610          | Dis-assemble Gun                                               |          |      |         |
| 612          | Magnaflux Barrel<br>Action                                     |          |      |         |
|              | Magnaflux Bolt                                                 |          |      |         |
| 615          | Rollmark Caliber                                               |          |      |         |
| 617          | Drill and Tap Sight Holes                                      |          |      |         |
| 618          | Polish Barrel                                                  |          |      |         |
| 620          | Apply Coatings<br>(Barrel Action)                              |          |      |         |
|              | Apply Coating (Bolt)                                           |          |      |         |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          |      |         |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          |      |         |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          |      |         |
|              | D) Oil Firing Pin Ass'y                                        |          |      |         |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          |      |         |

| BARBER - M24 0023305 |                                                             |          |       |       |      |      |      |    |
|----------------------|-------------------------------------------------------------|----------|-------|-------|------|------|------|----|
| op. #                | OP. NAME                                                    | READINGS |       |       | DATE | INIT |      |    |
| 625<br>cont.         | F) Safety On Force                                          | 6 1/2    | 6 1/2 | 6 1/4 | 12/5 | WB   |      |    |
|                      | G) Safety Off Force                                         | 3        | 3     | 3     | 12/5 | WB   |      |    |
|                      | H) Trigger Pull Test & Retainability                        |          |       |       |      |      |      |    |
|                      | I) Firing Pin Indent                                        |          |       |       |      |      |      |    |
|                      | J) Assemble Stock                                           |          |       |       |      |      |      |    |
|                      | K) Assemble Swivel Studs                                    |          |       |       |      |      |      |    |
|                      | L) Attach Front and Rear Sight Assemblies                   |          |       |       |      |      |      |    |
|                      | M) Iron Sight Alignment                                     |          |       |       |      |      |      |    |
|                      | N) Detach Front & Rear Sights & place in numbered container |          |       |       |      |      |      |    |
|                      | O) Attach Scope to Rifle                                    |          |       |       |      |      |      |    |
|                      | P) Detach & Attach Scope 20 Times                           |          |       |       |      |      |      |    |
| 640                  | Gallery Target & Test                                       |          |       |       |      |      |      |    |
|                      | A) Time                                                     |          |       |       |      |      |      |    |
|                      | B) Malfunctions                                             |          |       |       |      |      |      |    |
|                      | C) Pierced Primers                                          |          |       |       |      |      |      |    |
|                      | D) Optical Clarity of Scope                                 |          |       |       |      |      |      |    |
| 645                  | Inspect for Live Ammo                                       |          |       |       |      |      |      |    |
| 655                  | Final Inspection<br>A) Headspace                            |          |       |       |      |      |      |    |
|                      | B) Trigger Pull                                             | 2.69     | 2.69  | 2.51  | 2.56 | 2.65 | 12/5 | WB |
|                      | C) Function                                                 |          |       |       |      |      |      |    |
| 660                  | Pack                                                        |          |       |       |      |      |      |    |