

C6587643

MODEL 700TM M24

Model **SMS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.



Aims Services Repair & Estimate System																				
File Load Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help																				
Repair Inquiry																				
Repair Number: RE00034335		Serial: C6587643 Model 700 Center Fire Caliber: 7.62 NATO M24 SWS WOG 2 of 2		Repairman:																
Verify Repair				Status: Closed 10/22/01 1:51:18 PM																
Address Information																				
Customer:		☒ Received From		Return To: ☒ Received From																
Name: B CO 33 SFG A		B CO 33 SFG A																		
Address 1:																				
Address 2:		PO Box:																		
City: FORT BRAGG		FORT BRAGG																		
State: NC Zip Code: 28310 Country: US		State: NC Zip Code: 28310 Country: US																		
EFL																				
Contact / Condition		Problems		Estimate																
History / Status		Shipping / Billing																		
Contact Information:		Received Condition:		Accessories Received:																
Phone:		Fair		<table border="1"><thead><tr><th>Code</th><th>Desc</th><th>Qty</th></tr></thead><tbody><tr><td>A007</td><td>With Stud</td><td>3</td></tr><tr><td>A010</td><td>Hard Case(WOG)</td><td>1</td></tr><tr><td>A017</td><td>Scope Base</td><td>1</td></tr><tr><td>X001</td><td>Adjustable Butt plate</td><td>1</td></tr></tbody></table>		Code	Desc	Qty	A007	With Stud	3	A010	Hard Case(WOG)	1	A017	Scope Base	1	X001	Adjustable Butt plate	1
Code	Desc	Qty																		
A007	With Stud	3																		
A010	Hard Case(WOG)	1																		
A017	Scope Base	1																		
X001	Adjustable Butt plate	1																		
Fax:		Condition Notes:																		
Email:		CSR Notes:																		
Comments:																				
Repair Search		Refresh		Close																
nagleh 10/22/01 2:14 PM CAPS NJM INS SCRL																				
Start S C A P S E R S T M F																				
2:14 PM																				

Serial Number: **C6587643**
Model: **700**



RE00034335

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6587643.___0

FILE DATE AND TIME: 11/01/2001 03:49

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.061
The Average Y Centroid of the Five Target Set:	0.045
The Average Point of Impact of the Five Target Set:	0.076
The Average Mean Radius of the Five Target Set:	1.025
The Distance from POA to Centroid Target #1:	0.321
The Distance from Centroid Target #2 to Centroid Target #1:	0.092
The Distance from Centroid Target #3 to Centroid Target #1:	0.660
The Distance from Centroid Target #4 to Centroid Target #1:	0.270
The Distance from Centroid Target #5 to Centroid Target #1:	0.857

SERIAL NUMBER: C6587643-0

TARGET NUMBER: 1

FILE DATE: 11/01/2001

FILE TIME: 03:49

X CENTROID: 0.093

Y CENTROID: -0.307

POA TO CENTROID: 0.321

HORZ SPREAD: 3.398

VERT SPREAD: 1.805

GROUP SPREAD: 3.691

MIN RADIUS: 0.100

MAX RADIUS: 2.061


MEAN RADIUS: 1.019

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 7

POINT#	X	Y
1:	-0.490	0.399
2:	-1.268	0.093
3:	-0.829	-0.601
4:	-1.273	-1.406
5:	0.037	-0.224
6:	0.101	-0.592
7:	0.754	-0.496
8:	1.673	0.323
9:	2.125	0.034
10:	0.099	-0.604

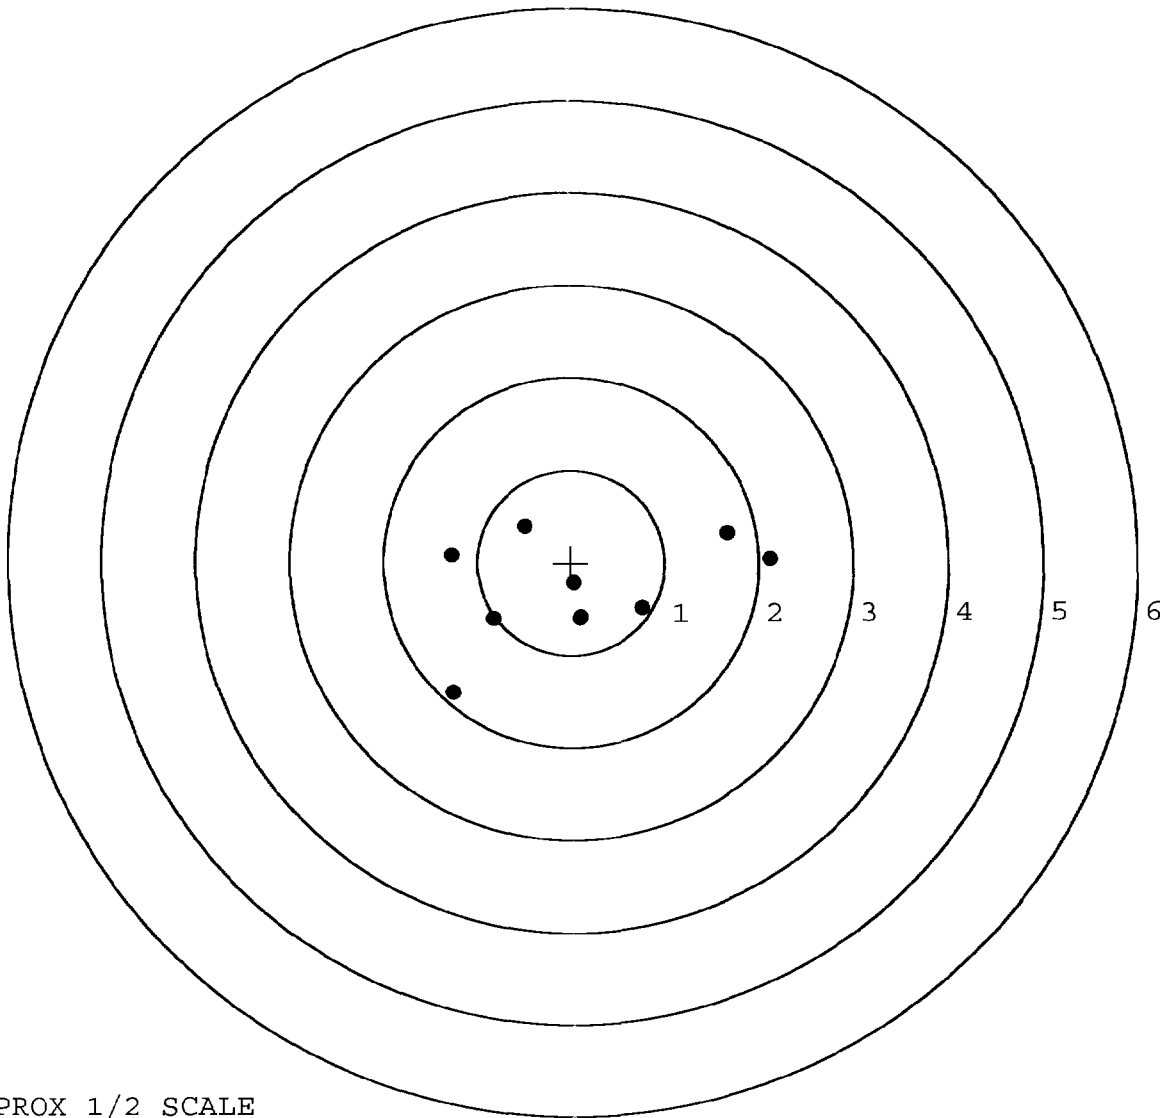

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: **BARBER - M24 00243120**

TARGET NUMBER: 2

FILE DATE: 11/01/2001

FILE TIME: 03:49

X CENTROID: 0.005

Y CENTROID: -0.280

POA TO CENTROID: 0.280

HORZ SPREAD: 2.371

VERT SPREAD: 3.820

GROUP SPREAD: 4.293

MIN RADIUS: 0.163

MAX RADIUS: 2.249


MEAN RADIUS: 0.976

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 8

POINT#	X	Y
1:	0.524	1.813
2:	0.366	0.602
3:	0.209	0.177
4:	-0.045	0.292
5:	-0.383	-0.778
6:	-1.435	-2.007
7:	-0.039	-1.382
8:	0.076	-0.744
9:	0.936	-0.521
10:	-0.155	-0.252

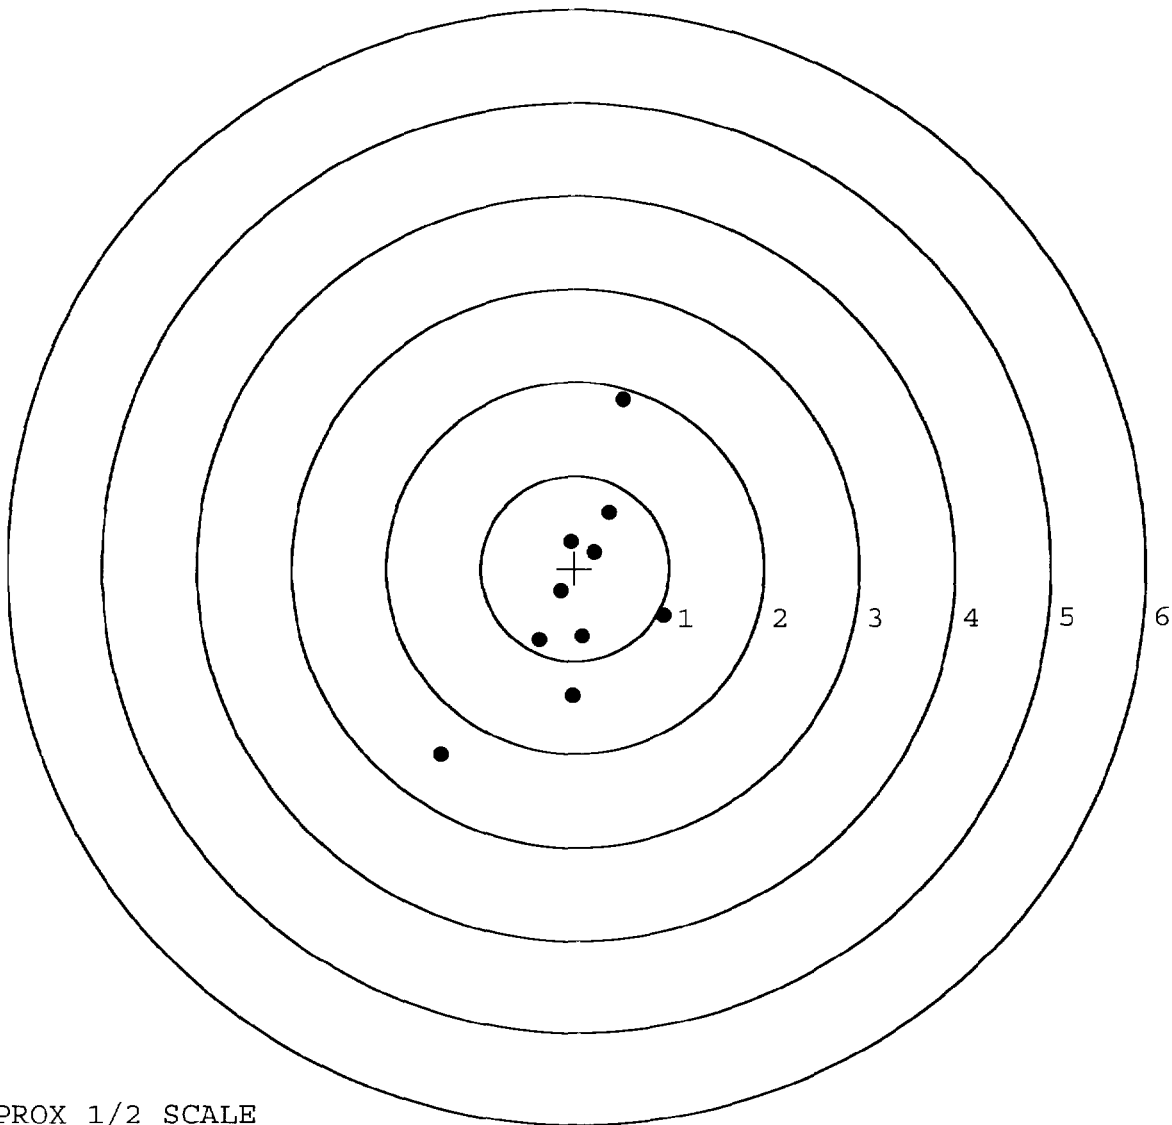


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6587643. 0
TARGET NUMBER: ~~BARBER - M24 0024313~~
FILE DATE: 11/01/2001
FILE TIME: 03:49

X CENTROID: 0.143
Y CENTROID: 0.351
POA TO CENTROID: 0.379
HORZ SPREAD: 4.250
VERT SPREAD: 2.732
GROUP SPREAD: 4.562
MIN RADIUS: 0.208
MAX RADIUS: 2.695
MEAN RADIUS: 1.109
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 7

POINT#	X	Y
1:	1.811	1.237
2:	0.653	0.861
3:	0.357	1.131
4:	-0.609	1.771
5:	-2.439	-0.422
6:	0.825	-0.961
7:	0.708	-0.053
8:	0.158	-0.209
9:	-0.049	-0.031
10:	0.016	0.186

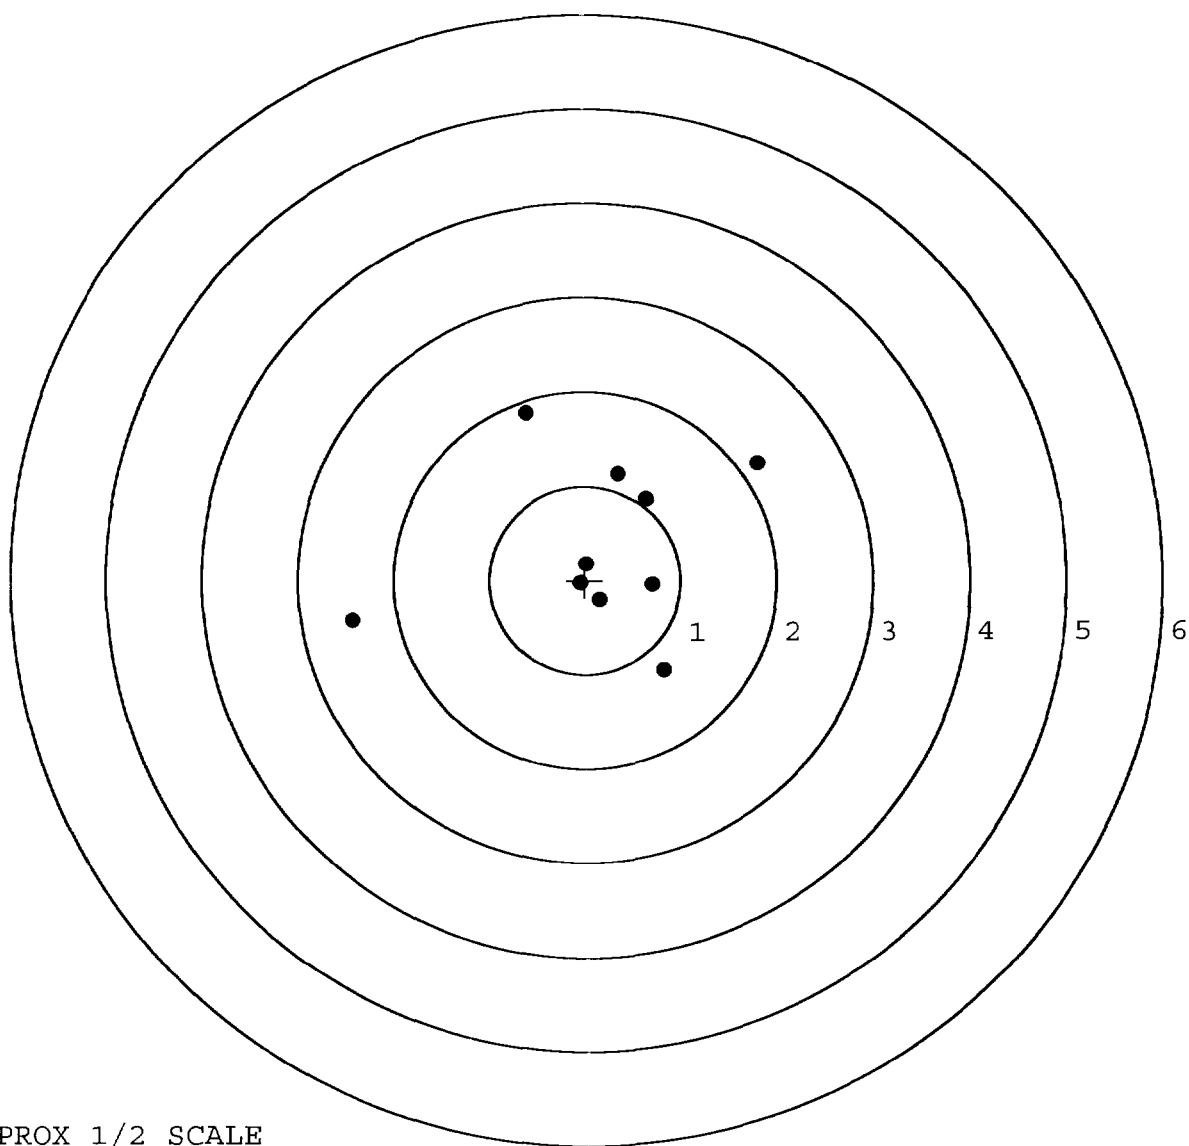


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6587643. 0
TARGET NUMBER: **BARBER - M24 0024314**
FILE DATE: 11/01/2001
FILE TIME: 03:49

X CENTROID: -0.061
Y CENTROID: -0.085
POA TO CENTROID: 0.105
HORZ SPREAD: 2.676
VERT SPREAD: 3.169
GROUP SPREAD: 3.197
MIN RADIUS: 0.291
MAX RADIUS: 1.861
MEAN RADIUS: 0.991
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 4
in 3 IN DIAMETER: 8

POINT#	X	Y
1:	0.451	1.704
2:	-0.575	0.844
3:	-1.260	-0.148
4:	-0.879	-0.727
5:	-0.146	-0.364
6:	0.284	0.562
7:	0.259	-0.483
8:	0.029	-1.465
9:	1.416	-0.398
10:	-0.187	-0.378

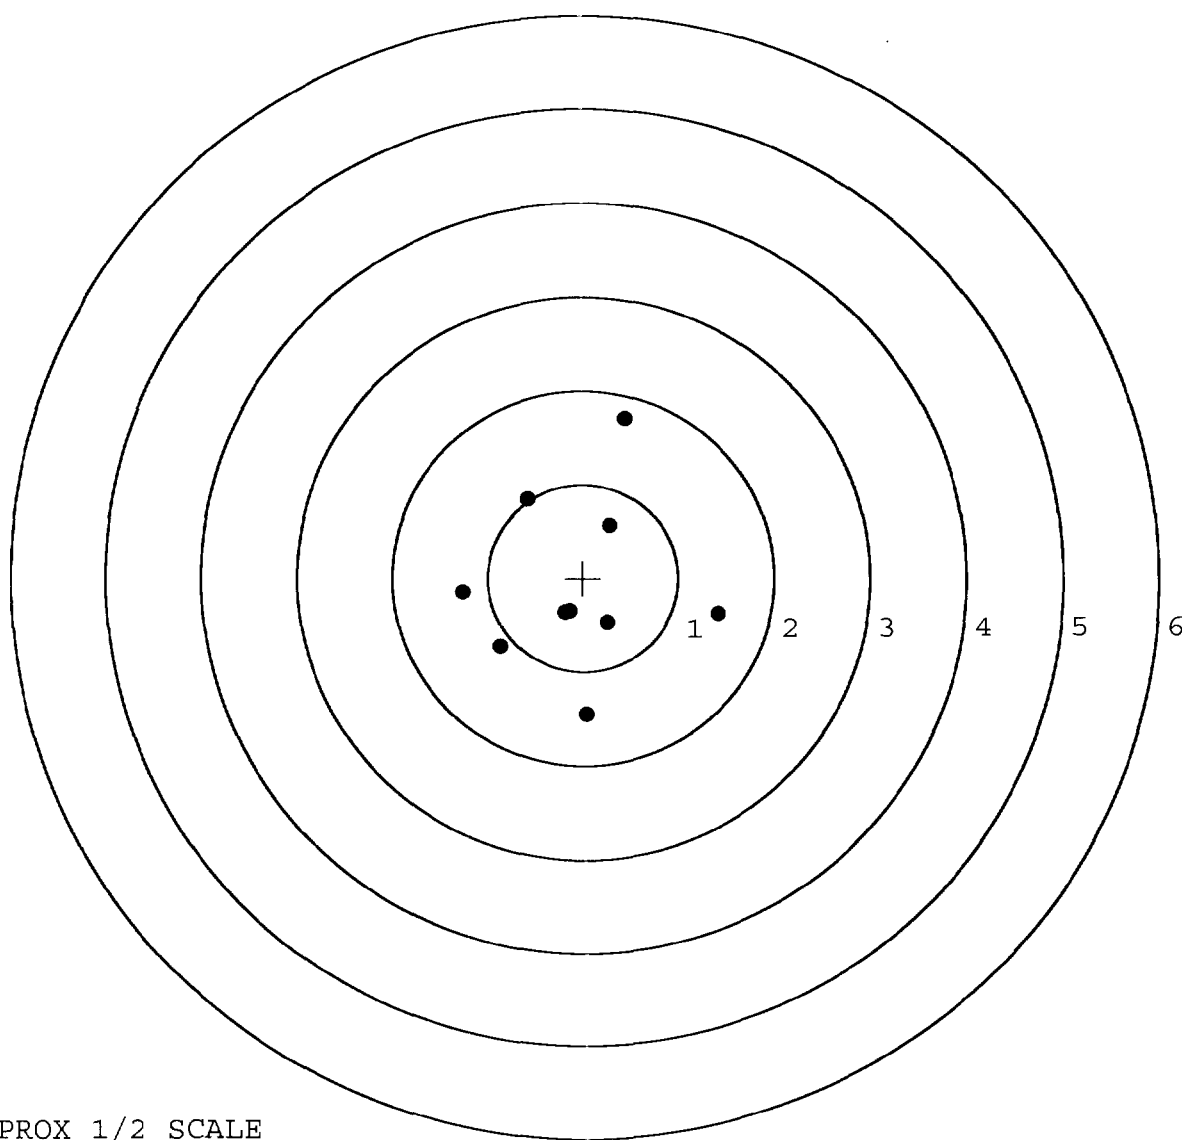

TARGET APPROX 1/2 SCALE

BARBER - M24 0024315

SERIAL NUMBER: C6587643. __0

TARGET NUMBER: 5

FILE DATE: 11/01/2001

FILE TIME: 03:49

X CENTROID: 0.125

Y CENTROID: 0.549

POA TO CENTROID: 0.563

HORZ SPREAD: 1.947

VERT SPREAD: 3.058

GROUP SPREAD: 3.143

MIN RADIUS: 0.558

MAX RADIUS: 2.041


MEAN RADIUS: 1.032

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.690	-1.412
2:	0.709	-0.439
3:	0.708	0.129
4:	0.775	1.092
5:	0.443	1.305
6:	-0.035	1.646
7:	0.010	1.095
8:	-0.487	1.298
9:	-0.394	0.926
10:	-1.172	-0.150

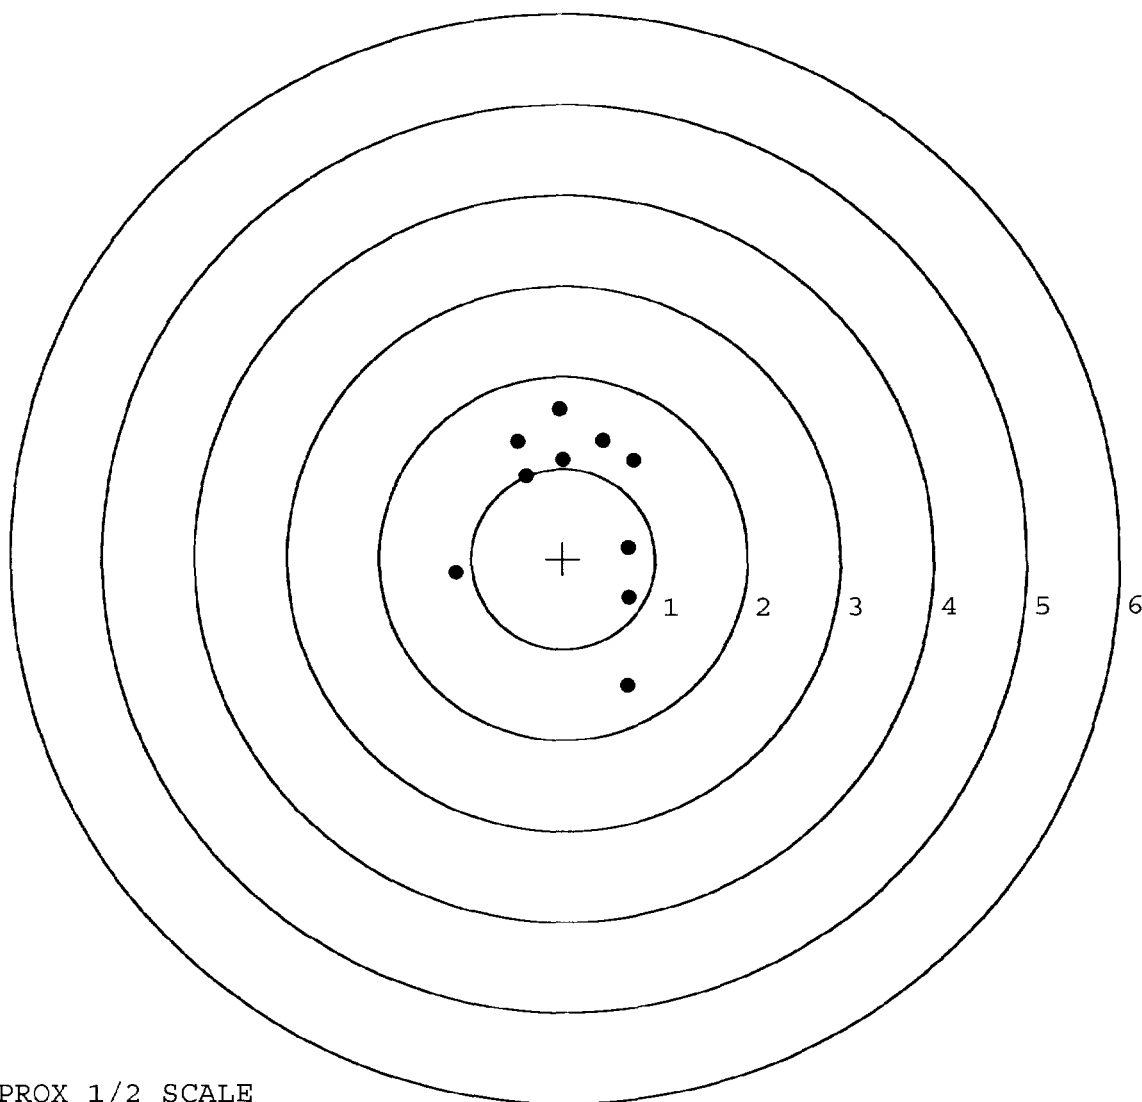

TARGET APPROX 1/2 SCALE

R & E NUMBER

34335

SERIAL NUMBER

C658 7643

LOG-IN DATE

10-22-01

INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	10-23-01	RH
560 A	RE-BARREL AT CUSTOM SHOP	10/24/01	BWT
B	DRILL AND TAP	10/24/01	BWT
C	POLISH		
575	ASSEMBLE	10-25-01	RH
600	PROOF	10-25-01	RH
605	CHECK HEADSPACE	10-26-01	RH
610	DIS-ASSEMBLE GUN	10-26-01	RH
612	MAGNAFLUX		AL
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS	10/30	AD
625 A	FINAL ASSEMBLY	10-31-01	RW
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	11-1-01	AC
655	FINAL INSPECT	11-2-01	RW
660	PACK	11-3-01	RA
		SHIP DATE	
		QAR INSPECTION DATE	

New Stock
Repair**GFM**

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6587643

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		2/18/93	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		2/18/93	RW
	C) Inspect Ejector Hole for Chamfer		2/18/93	RW
	D) Oil Firing Pin Ass'y		2/18/93	RW
	E) Adjust Trigger Pull to Min Setting and Stake		2/18/93	RW

Op. #	BARBER - M24 0024318 OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			2/18/93	RW
	G) Safety Off Force	3	2.5	2.5			2/18/93	RW
	H) Trigger Pull Test & Retainability						2/18/93	RW
	I) Firing Pin Indent							
	J) Assemble Stock						2/18/93	RW
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle						2/18/93	RW
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test						3/2/93	RW
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo						3/2/93	RW
655	Final Inspection							
	A) Headspace						3/2/93	RW
	B) Trigger Pull	2.23	2.27	2.21	2.19	2.16	3/2/93	RW
	C) Function						3/2/93	RW
660	Pack							

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6587643DATE 2/18/93TESTER RW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.60	2.50	2.59		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.60	2.52	2.45		
PULL #3	2.59	2.44	2.45		
PULL #4	2.55	2.45	2.60		
PULL #5	2.59	2.20	2.46		
TOTAL	12.93	12.11	12.55		
AVG.	2.59	2.42	2.51		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.14	3.28		
PULL #2	3.12	3.08		
PULL #3	3.21	3.24		
PULL #4	3.07	3.06		
PULL #5	3.20	3.27		
TOTAL	15.74	15.87		
AVG.	3.15	3.17		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.23	4.02		4.24
PULL #2	4.23	4.08		4.13
PULL #3	4.22	4.09		4.12
PULL #4	4.23	4.05		4.20
PULL #5	4.10	4.05		4.18
TOTAL	21.01	20.29		20.87
AVG.	4.20	4.06		4.17

BARBER - M24 0024320

ORDER
R 93-02457

WOC 8 OF 30 W/10X SCOPE & DEPLOYMENT KIT
H24

DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE
01/25/93	01/25/93	RK 11-90	C6587643		700 7-62 NATO
ACCESSORIES	W/STUDS	W/SWIVEL	SOFT CASE	SCOTCH CASE	

SHIP TO:

MCMALE, EDWARD J CPT, SF
HSC 3RD BN 3RD SFG (A)
FT BRAGG NO
28307

L

WRITE ☐ CLEAN ☒ ENT ☐

GUN CONDITION

REPAIR CHARGE
EXCISE
TAX
INSURANCE
UPS
PARCEL POST
TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

PARTS

COMMENTS

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE

AD-325 REV. 1-62

BARBER - M24 ~~0024320~~ **M2400024359**

VERY IMPORTANT
Instruction Book
enclosed to assure
safe use of this
weapon.

Remington
REG. U.S. PAT. & TM. OFF.


DUPONT

MODEL 700™ M24

SERIAL NO.
C6587643


ORDER NO.
5716

MADE IN LEON, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Deposee.



5716 C6587643

LPC



0

47700 25716

7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 6587643

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		10/24/90	Kd
600	Proof		10/24/90	Kd
607	Check Headspace		10/24/90	Kd
610	Dis-assemble Gun		10/24/90	Kd
612	Magnaflux Barrel Action		10/30/90	KR
	Magnaflux Bolt		11	KR
615	Rollmark Caliber		4	LS
617	Drill and Tap Sight Holes		11/6/90	K-B
618	Polish Barrel <i>W/B</i>		11/7/90	W/B
620	Apply Coatings (Barrel Action)		11-26-90	JA
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		12/5/90	KS
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		12/5/90	KS
	C) Inspect Ejector Hole for Chamfer		12/5/90	KS
	D) Oil Firing Pin Ass'y		12/5/90	KS
	E) Adjust Trigger Pull to Min Setting and Stake		12/6/90	JA

op. #	BARBER M24 0024323	READINGS			DATE	INIT
625 cont.	F) Safety On Force	6	6	6	12/6/90	WB
	G) Safety Off Force	2 3/4	2 3/4	2 3/4	12/6/90	WB
	H) Trigger Pull Test & Retainability				12/6/90	JL
	I) Firing Pin Indent	.022	.022	.022	12/6/90	WB
	J) Assemble Stock				12/7/90	KS
	K) Assemble Swivel Studs				12-8-90	JS
	L) Attach Front and Rear Sight Assemblies				12/7/90	KS
	M) Iron Sight Alignment				12/7/90	KS
	N) Detach Front & Rear Sights & place in numbered container				12/7/90	KS
	O) Attach Scope to Rifle				12/7/90	KS
	P) Detach & Attach Scope 20 Times				12/7/90	KS
640	Gallery Target & Test				12/7/90	VF
	A) Time				"	VF
	B) Malfunctions				"	VF
	C) Pierced Primers				"	VF
	D) Optical Clarity of Scope				"	VF
645	Inspect for Live Ammo				12/7/90	VF
655	Final Inspection					
	A) Headspace				12-8-90	JS
	B) Trigger Pull	233	223	222	12-8-90	JS
	C) Function				12-8-90	JS
660	Pack				12/19/90	VF

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO C6587643

DATE 12/6/80

TESTER JR

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.41	2.32	2.31	233	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.35	2.33	2.18	223	
PULL #3	2.32	2.42	2.19	222	
PULL #4	2.32	2.30	2.22	230	
PULL #5	2.30	2.15	2.21	224	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.22	3.22		
PULL #2	3.34	3.37		
PULL #3	3.21	3.31		
PULL #4	3.35	3.29		
PULL #5	3.15	3.31		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.14	4.16		4.27
PULL #2	4.39	4.26		4.30
PULL #3	4.31	4.32		4.22
PULL #4	4.34	4.25		4.35
PULL #5	4.40	4.12		4.31
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6587643
8 Dec 1990

CENTROIDAL DISTANCES

0 TO	1	.157537
1 TO	2	.588545
1 TO	3	.541569
1 TO	4	.284192
1 TO	5	.608547

f

<----POR

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1324
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .2082
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .246733
THE AMR FOR THIS RIFLE IS: .9664

8 Dec 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6587643

CENTERFIRE PATTERNS # 1

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 6

HS= 2.718

VS= 3.281

GS= 3.287


PATTERN #	1	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.894	.691	.682
MINIMUM X	-1.824	-.725	-.734
MAXIMUM Y	1.556	1.470	1.244
MINIMUM Y	-1.725	-1.811	-1.659
CENTROID X	-.013	.190	.199
CENTROID Y	-.157	-.071	.156
POA TO CENTROID in.	.158	.202	.252
MIN RADIUS	.479	.306	.234
MEAN RADIUS	1.207	1.071	.936
MAX RADIUS	1.983	1.813	1.814
HORIZONTAL SPREAD	2.718	1.416	1.416
VERTICAL SPREAD	3.281	3.281	2.903
EXTREME SPREAD	3.287	3.287	3.018
NUMBER IN ONE INCH CIRCLE	= 1		
NUMBER IN TWO INCH CIRCLE	= 4		
NUMBER IN THREE INCH CIRCLE	= 6		

8 Dec 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06587643

CENTERFIRE PATTERNS # 2

POA

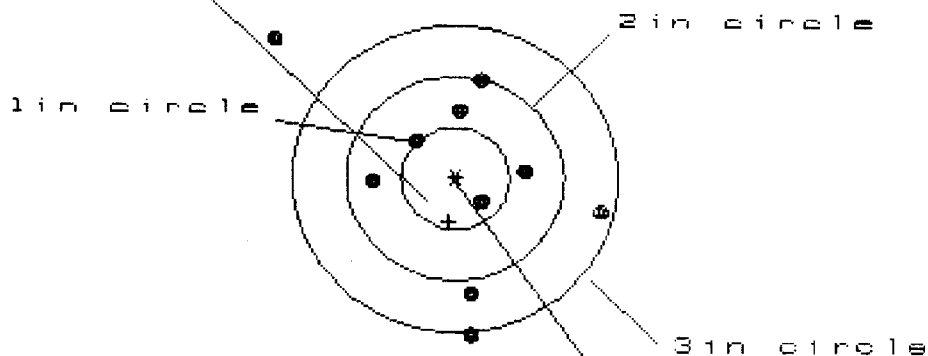

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 8

HS= 3.032

VS= 2.930

GS= 3.471


CENTROID *

PATTERN #	:	2	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.328	1.139	1.134
MINIMUM X	:	-1.704	-.950	-.955
MAXIMUM Y	:	1.383	1.081	.907
MINIMUM Y	:	-1.547	-1.394	-1.184
CENTROID X	:	.050	.249	.254
CENTROID Y	:	.427	.274	.448
POA TO CENTROID in.	:	.432	.370	.515
MIN RADIUS	:	.360	.118	.274
MEAN RADIUS	:	1.006	.851	.767
MAX RADIUS	:	2.194	1.394	1.185
HORIZONTAL SPREAD	:	3.032	2.089	2.089
VERTICAL SPREAD	:	2.930	2.475	2.091
EXTREME SPREAD	:	3.471	2.476	2.105
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	8		

8 Dec 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6587643

CENTERFIRE PATTERNS # 3

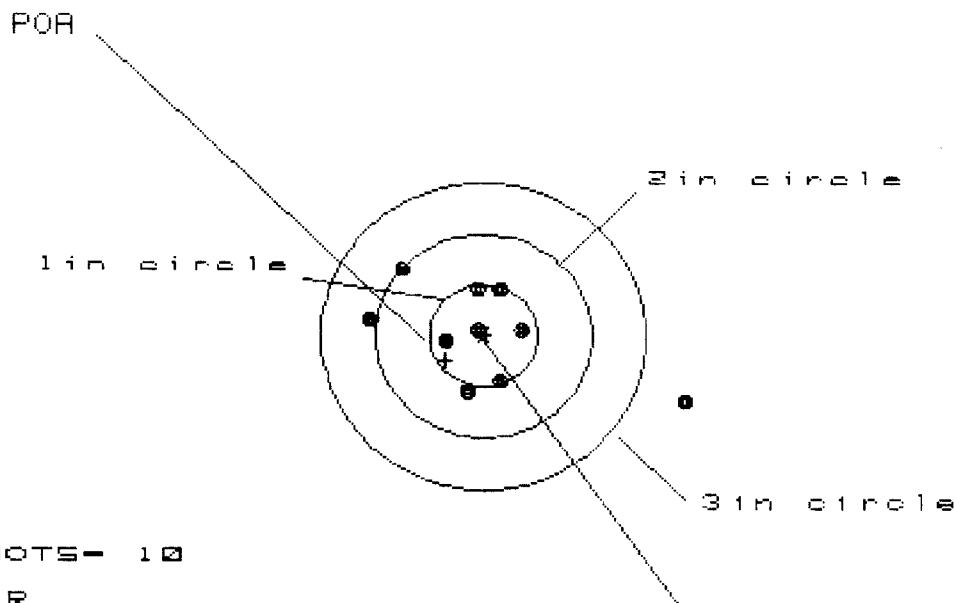

OF SHOTS- 10

IN CIR

1 in = 6

2 in = 8

3 in = 9

HS= 2.881

VS= 1.209

GS= 2.976

CENTROID #

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.821	.521	.414
MINIMUM X	:	-1.060	-.858	-.607
MAXIMUM Y	:	.612	.545	.556
MINIMUM Y	:	-.597	-.634	-.623
CENTROID X	:	.351	.149	.256
CENTROID Y	:	.244	.311	.300
POA TO CENTROID in.	:	.428	.345	.395
MIN RADIUS	:	.096	.117	.023
MEAN RADIUS	:	.660	.505	.437
MAX RADIUS	:	1.916	.862	.823
HORIZONTAL SPREAD	:	2.881	1.379	1.021
VERTICAL SPREAD	:	1.209	1.179	1.179
EXTREME SPREAD	:	2.976	1.380	1.365
NUMBER IN ONE INCH CIRCLE	=		6	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

8 Dec 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6587643

CENTERFIRE PATTERNS # 4

POA

1 in circle

2 in circle

3 in circle

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 9

CENTROID *

HS= 2.173

VS= 3.001


GS= 3.270

PATTERN #	1	4	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.010	1.038	1.016
MINIMUM X	-1.163	-1.051	-1.073
MAXIMUM Y	1.409	1.232	1.034
MINIMUM Y	-1.592	-1.335	-1.181
CENTROID X	.046	-.066	-.044
CENTROID Y	.121	.298	.144
POA TO CENTROID in.	.129	.305	.150
MIN RADIUS	.132	.291	.135
MEAN RADIUS	1.051	.947	.897
MAX RADIUS	1.885	1.474	1.346
HORIZONTAL SPREAD	2.173	2.089	2.089
VERTICAL SPREAD	3.001	2.567	2.215
EXTREME SPREAD	3.270	2.606	2.306
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		9	

8 Dec 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06587643

CENTERFIRE PATTERNS # 5

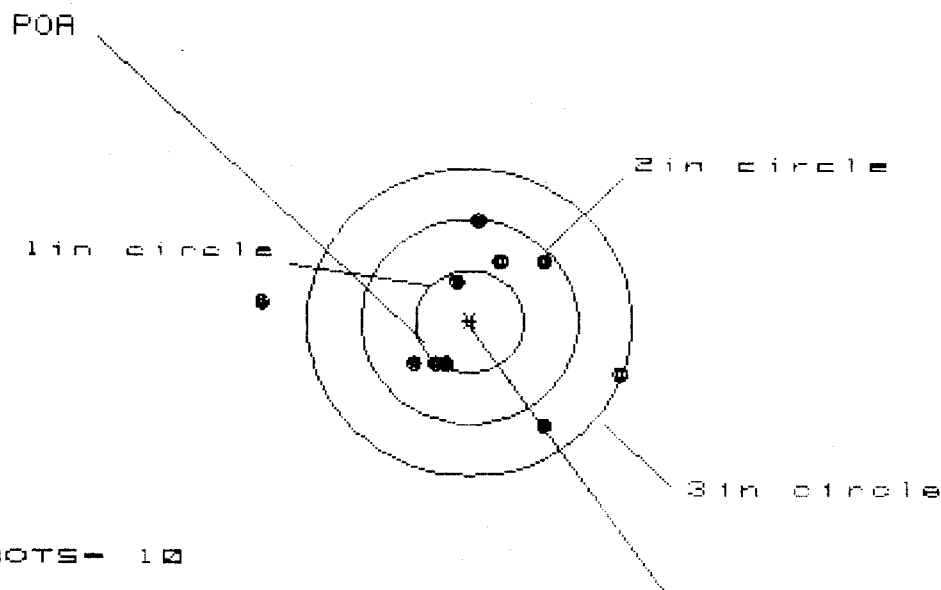

OF SHOTS- 10

IN CIR

1in = 2

2in = 7

3in = 9

HS= 3.245

VS= 1.965

GS= 3.336

CENTROID #

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.361	1.151	.630
MINIMUM X	:	-1.884	-.683	-.539
MAXIMUM Y	:	.999	1.024	.958
MINIMUM Y	:	-.966	-.941	-1.007
CENTROID X	:	.218	.428	.284
CENTROID Y	:	.406	.381	.447
POA TO CENTROID in.	:	.461	.573	.529
MIN RADIUS	:	.394	.529	.389
MEAN RADIUS	:	.908	.807	.718
MAX RADIUS	:	1.898	1.265	1.188
HORIZONTAL SPREAD	:	3.245	1.834	1.169
VERTICAL SPREAD	:	1.965	1.965	1.965
EXTREME SPREAD	:	3.336	2.073	2.073
NUMBER IN ONE INCH CIRCLE =	:	2		
NUMBER IN TWO INCH CIRCLE =	:	7		
NUMBER IN THREE INCH CIRCLE =	:	9		

RECEIVING AND ESTIMATING REPORT

BARBER - M24 0024331

COMMENTS

ORDER
R 93-02457

INITIAL FPS	CUSTOMER ORDER NO.		WOG 8 OF 30 W/10X SCOPE & DEPLOYMENT KIT M24			
DATE RECEIVED 01/25/93	DATE OPENED 01/25/93	DATE CODE RK 11-90	SERIAL NUMBER C6587643	NEW SERIAL NUMBER	MODEL AND GRADE 700 7-62	NATO
ACCESSORIES W/STUDS		W/SWIVELS		SOFT CASE	SCOPE BASE	

FROM:	SHIP TO:
MCHALE, EDWARD J CPT, SF HSC 3RD BN 3RD SFG (A) FT BRAGG NC 28307	MCHALE, EDWARD J CPT, SF HSC 3RD BN 3RD SFG (A) FT BRAGG NC 28307

CUST NO: 073985 C.O.D L

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐ CLEAN/TEST	PROM. DATE	ESTIMATED	VIA UPS
GUN CONDITION ☐ NEW ☐ LIGHTLY WORN ☐ WORN ☐ VERY WORN ☐ UNREPAIRABLE ☐ MARRED					REPAIR CHARGE EXCISE TAX INSURANCE UPS PARCEL POST TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT	Rust on Gun

PARTS	COMMENTS
Magazine Spring - 15677	Zinc phosphate Scope Base
Trigger Assy - 96024	Scope Rings, Swivels & Swivel Studs
Stock Assy - 96018	Re-powder coat Barrel Assy - 96001
	Front & Rear Sight Bases
REPAIRMAN RW	PROOF
GALLERY TESTER RW	DATE
CLEAN	TEST
TARGET	PATTERN
DATE	DATE
DATE	DATE
DATE	DATE

OFFICE COPY

RD6925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0024331