

C6587687

MODEL 700TM N24

Model **SWS** TM

Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.



Repair Inquiry

Repair Number: RE00120804

Serial: C6587687 Model M24 SWS Center Fire
Caliber: 7.62 NATO Produced: 12/18/1990

Repairman:

Status: New 11/28/2006 10:02:42 AM

Verify Repair

High Priority

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: RAMON VELAZQUEZ STTD

RAMON VELAZQUEZ STTD

Address 1: 1401 ARTILLERY CIRCLE

1401 ARTILLERY CIRCLE

Address 2: ATTN: SUPPLY BLDG 978

PO Box:

ATTN: SUPPLY BLDG 978

PO Box:

City: FT LEONARD WOOD

FT LEONARD WOOD

State: MD

Zip Code: 65473

Country:

State: MD

Zip Code: 65473

Country:

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NA

Fax:

Email:

Comments:

Received Condition

Fair

Condition

Notes:

CSR

Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A045	Bi Pod	1
A057	Fit and Rear Sgt Base	1

Repair Search

Refresh

Close

naglej

11/29/2006

7:34 AM

CAPS

NUM

INS

SCRL

start

5 M

Part...

Arm...

5 L

2 W

VAC...

SAP...

7:34 AM

Serial Number:

C6587687

Model: M24 SWS



RE00120804

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6587687.__0
FILE DATE AND TIME: 12/16/2006 06:12

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.080
The Average Y Centroid of the Five Target Set:	0.043
The Average Point of Impact of the Five Target Set:	0.091
The Average Mean Radius of the Five Target Set:	0.725
The Distance from POA to Centroid Target #1:	0.093
The Distance from Centroid Target #2 to Centroid Target #1:	0.131
The Distance from Centroid Target #3 to Centroid Target #1:	0.107
The Distance from Centroid Target #4 to Centroid Target #1:	0.102
The Distance from Centroid Target #5 to Centroid Target #1:	0.027

SERIAL NUMBER: C6587687. 0

TARGET NUMBER: 1

FILE DATE: 12/16/2006

FILE TIME: 06:12

X CENTROID: 0.049

Y CENTROID: 0.080

POA TO CENTROID: 0.093

HORZ SPREAD: 1.849

VERT SPREAD: 1.818

GROUP SPREAD: 2.441

MIN RADIUS: 0.157

MAX RADIUS: 1.319


MEAN RADIUS: 0.706

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.047	0.942
2:	0.038	0.673
3:	0.450	0.540
4:	0.452	0.203
5:	0.163	0.187
6:	-0.402	0.314
7:	-0.605	-0.052
8:	-0.802	-0.652
9:	-0.254	-0.484
10:	0.404	-0.876

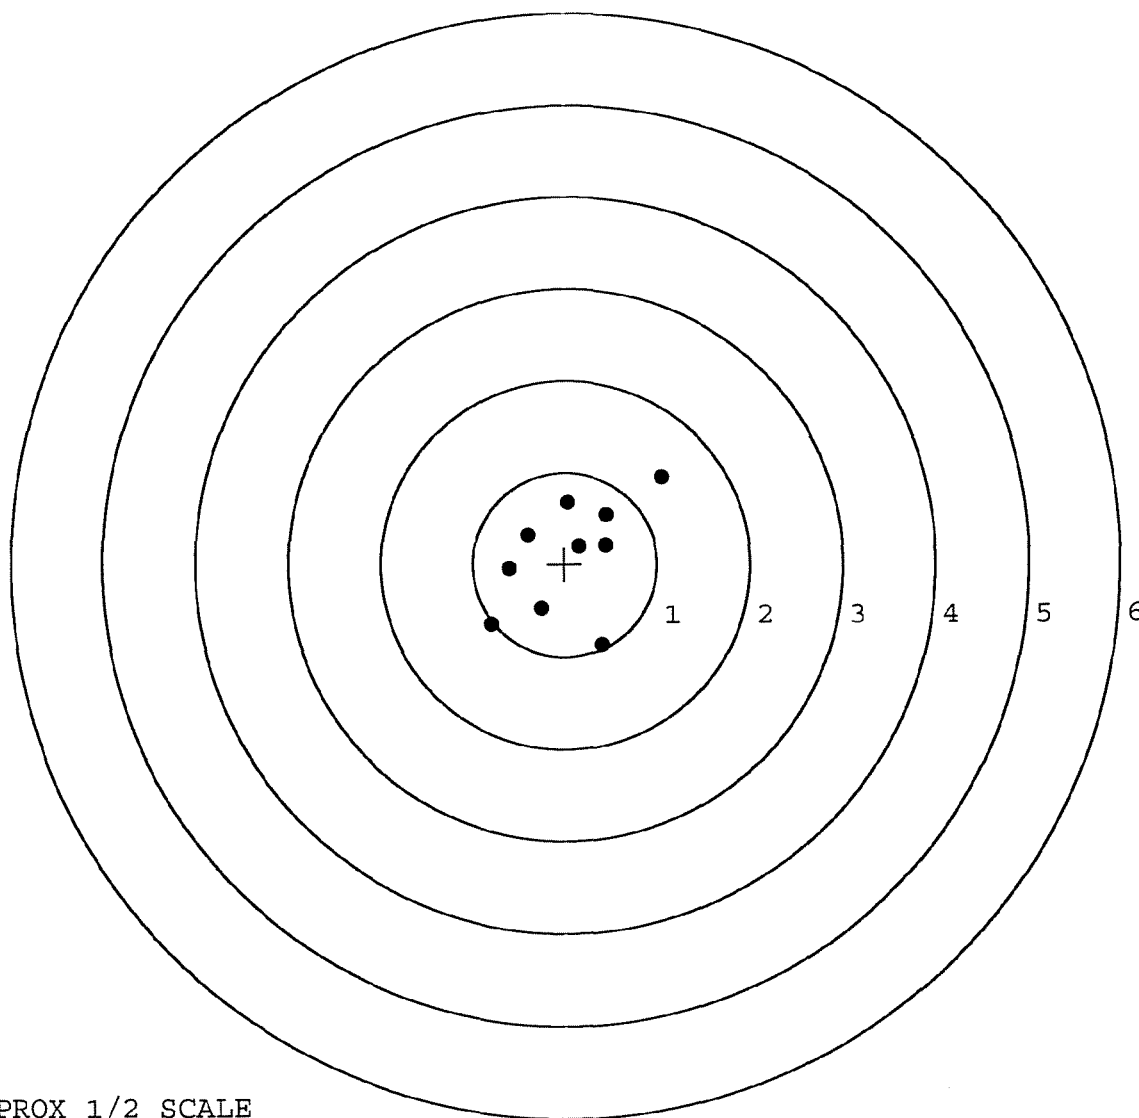


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6587687. __0
 TARGET NUMBER: 2
 FILE DATE: 12/16/2006
 FILE TIME: 06:12

POINT#	X	Y
1:	0.902	0.747
2:	0.926	-0.260
3:	0.325	0.108
4:	-0.194	-0.589
5:	-0.771	-0.540
6:	-0.224	0.051
7:	-0.285	0.443
8:	-0.854	0.009
9:	1.974	-2.496
10:	-0.195	2.624

X CENTROID: 0.160
 Y CENTROID: 0.010
 POA TO CENTROID: 0.161
 HORZ SPREAD: 2.828
 VERT SPREAD: 5.120
 GROUP SPREAD: 5.560
 MIN RADIUS: 0.192
 MAX RADIUS: 3.093
 MEAN RADIUS: 1.158
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 5
 # in 3 IN DIAMETER: 8

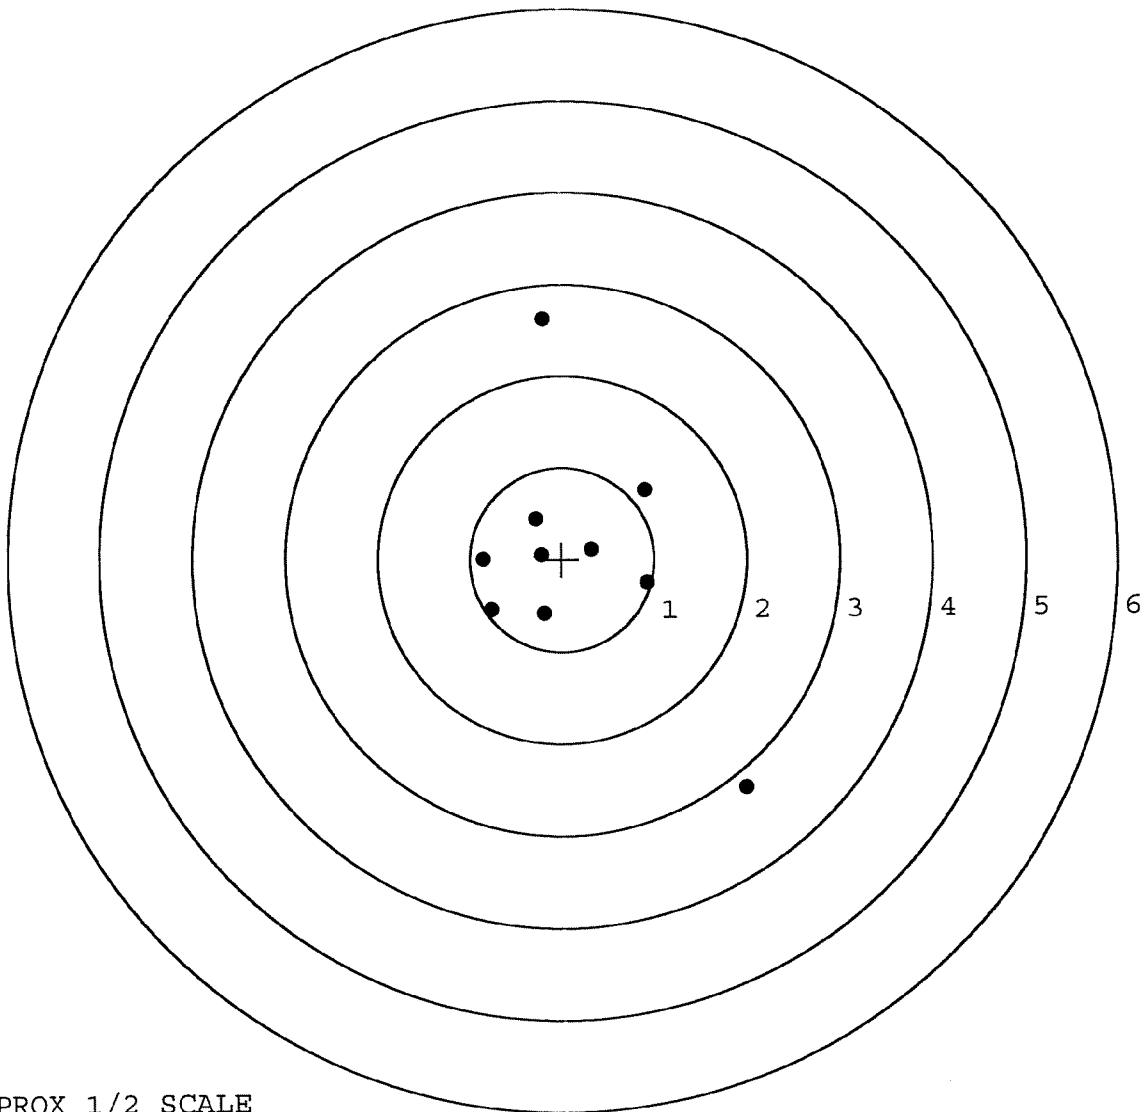

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6587687. __0

TARGET NUMBER: 3

FILE DATE: 12/16/2006

FILE TIME: 06:12

X CENTROID: 0.014

Y CENTROID: -0.021

POA TO CENTROID: 0.026

HORZ SPREAD: 1.226

VERT SPREAD: 1.843

GROUP SPREAD: 1.843

MIN RADIUS: 0.035

MAX RADIUS: 0.936


MEAN RADIUS: 0.589

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.100	0.911
2:	-0.199	0.805
3:	0.669	0.194
4:	-0.113	0.410
5:	0.076	-0.932
6:	0.194	-0.742
7:	0.159	-0.374
8:	-0.557	-0.243
9:	-0.203	-0.186
10:	0.019	-0.056

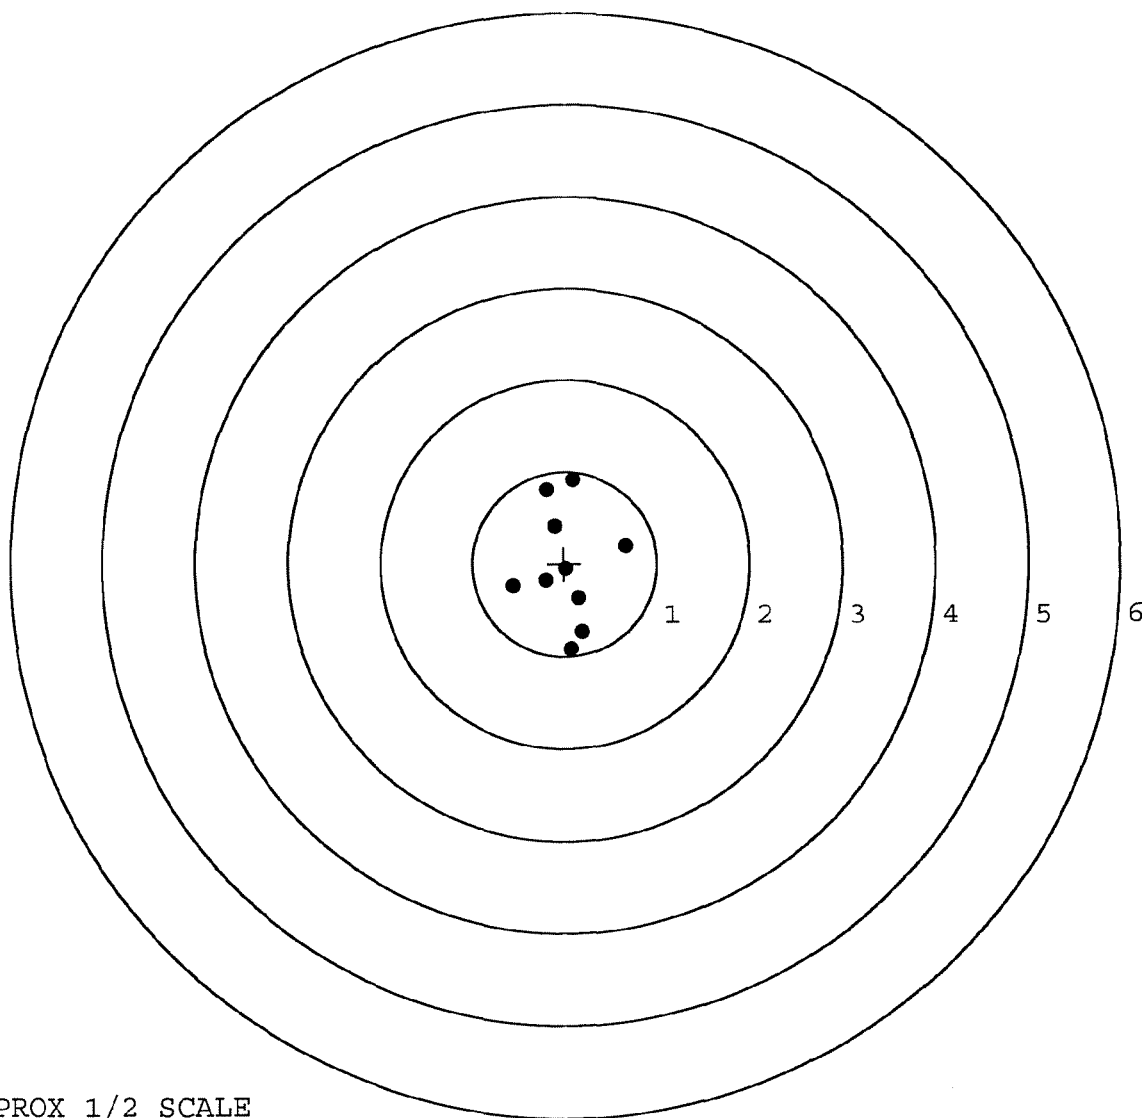


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6587687. 0
 TARGET NUMBER: 4
 FILE DATE: 12/16/2006
 FILE TIME: 06:12

POINT#	X	Y
1:	1.090	0.903
2:	0.070	-0.830
3:	0.101	-0.601
4:	0.646	-0.202
5:	0.492	0.079
6:	0.067	0.299
7:	-0.087	0.521
8:	-0.484	0.218
9:	-0.812	-0.041
10:	0.377	0.131

X CENTROID: 0.146
 Y CENTROID: 0.048
 POA TO CENTROID: 0.154
 HORZ SPREAD: 1.902
 VERT SPREAD: 1.733
 GROUP SPREAD: 2.123
 MIN RADIUS: 0.246
 MAX RADIUS: 1.274
 MEAN RADIUS: 0.636
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

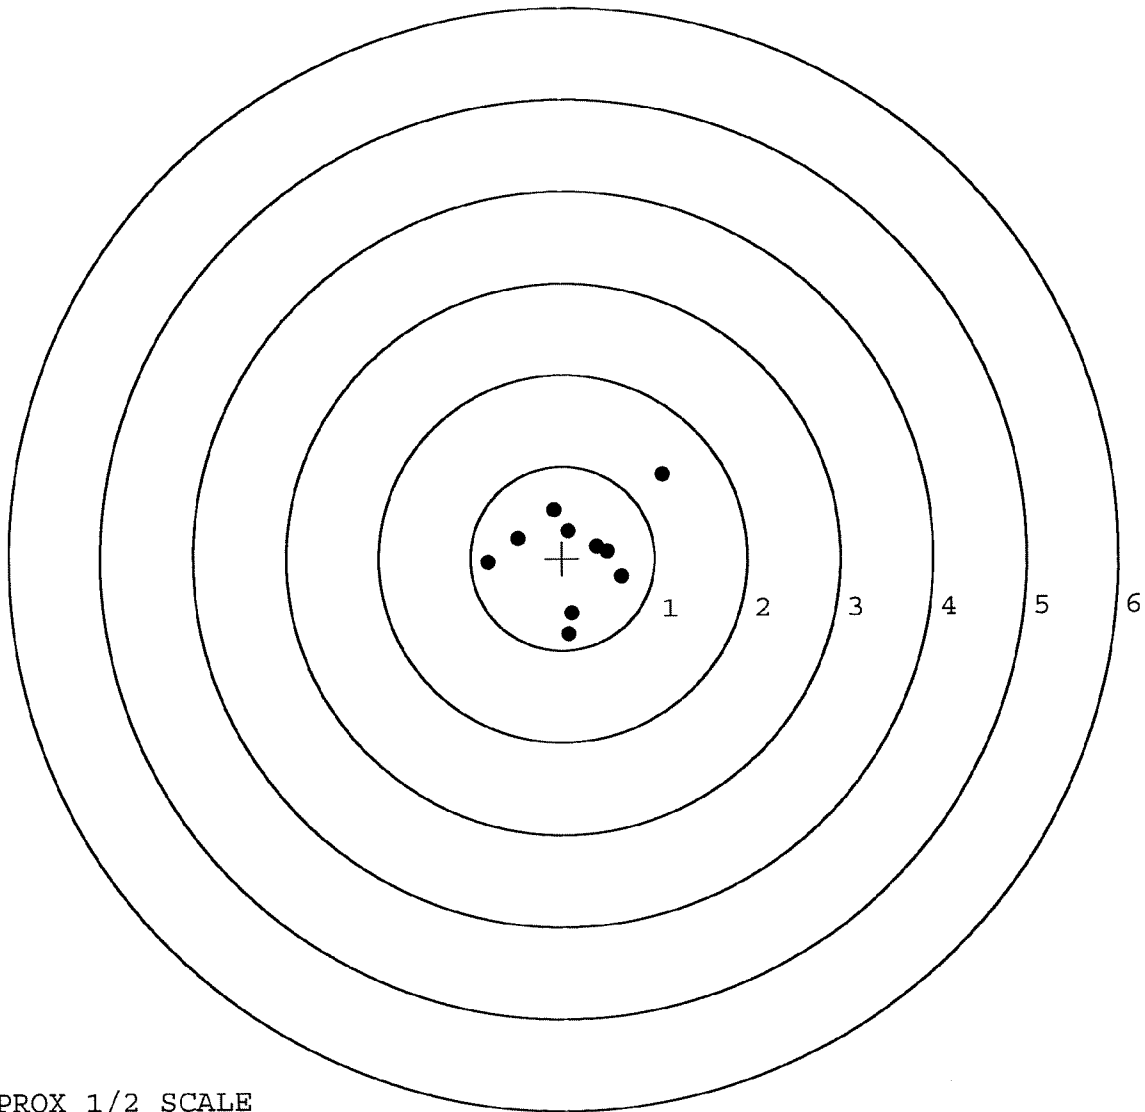


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6587687. __0
 TARGET NUMBER: 5
 FILE DATE: 12/16/2006
 FILE TIME: 06:12

POINT#	X	Y
1:	-0.913	0.460
2:	-0.139	-0.569
3:	-0.055	-0.420
4:	-0.371	0.099
5:	0.483	-0.285
6:	0.617	0.168
7:	0.135	0.165
8:	0.102	0.654
9:	0.010	0.548
10:	0.435	0.173

X CENTROID: 0.030
 Y CENTROID: 0.099
 POA TO CENTROID: 0.104
 HORZ SPREAD: 1.530
 VERT SPREAD: 1.223
 GROUP SPREAD: 1.582
 MIN RADIUS: 0.124
 MAX RADIUS: 1.010
 MEAN RADIUS: 0.535
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

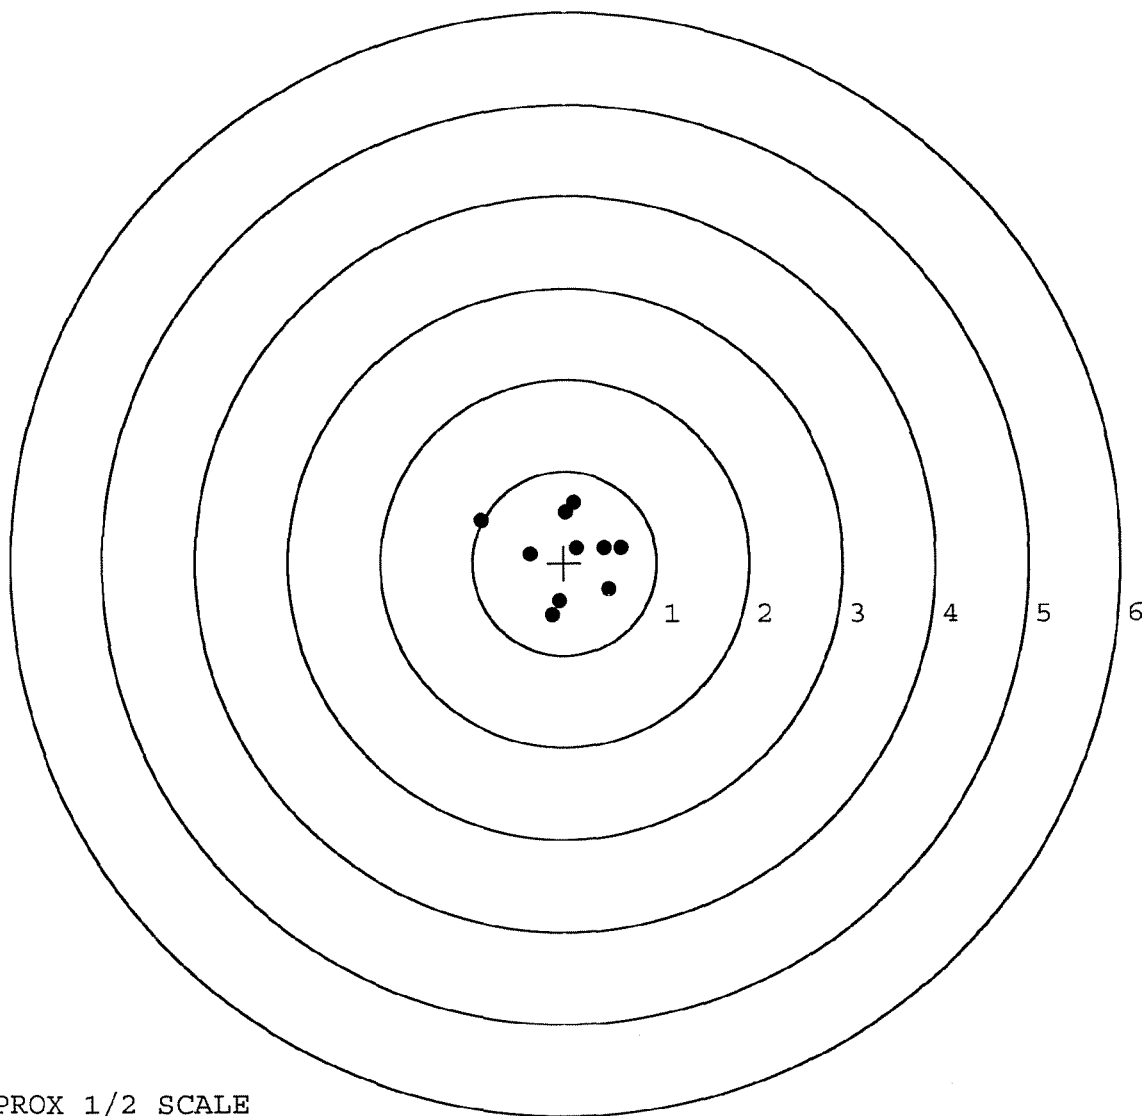

TARGET APPROX 1/2 SCALE

US ARMY & FLW

REMINGTON ARMS CO.,INC.
ATTN: SERVICE DEPT
14 HOEFLE AVE
ILION, NY 13357-1816
CONTRACT NO. DAAE20-02-C-0149
PH. 800-243-9700



RAMON VELAZQUEZ
STTD
1401 ARTILLERY CIRCLE
ATTN: SUPPLY, BLDG 978
FT. LEONARD WOOD, MO. 65473
(573) 596-3420

US ARMY & FLW

REMINGTON ARMS CO.,INC.
ATTN: SERVICE DEPT
14 HOEFLE AVE
ILION, NY 13357-1816
CONTRACT NO. DAAE20-02-C-0149
PH. 800-243-9700



RAMON VELAZQUEZ
STTD
1401 ARTILLERY CIRCLE
ATTN: SUPPLY, BLDG 978
FT. LEONARD WOOD, MO. 65473
(573) 596-3420

INSPECTION CHECKLIST - REPAIRS

CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER	120804		
SERIAL NUMBER	C6587687		
LOG-IN DATE	11-28-06		
OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	11-29-06	RTZ
505	RE-BARREL	11-30-06	RTZ
420	ASSEMBLE	12-4-06	RTZ
440	PROOF	MAGNA-FLUX INSPECTED DEC 15 2006 OPERATOR (APD)	TRW
460	CHECK HEADSPACE	12-4-06	TRW
470	DIS-ASSEMBLE GUN	12-4-06	BLG
480	MAGNAFLUX	12-3-06	APD
510	DRILL AND TAP	12-4-06	SD
500	ROLLMARK CALIBER	12-5-06	CW
520	GOFF BLAST BBL / REC	12-5-06	(K)
530 & 540	APPLY COATINGS	12-7-06	FB
560	FINAL ASSEMBLY	12-13-06	RTZ
640	FUNCTION TEST AND	(PASS) FAIL	TRW
650	TARGET	(PASS) FAIL	TRW
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION		WR
	A) HEADSPACE	(PASS) FAIL	12-18-06 BLG
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS 2.44 2.42 2.48 2.54 2.36	12-16-06 DA
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX 4.0 4.0 4.0	12-16-06 DA
	G) SAFETY OFF FORCE	2 LBS MIN 2.0 2.0 2.0	12-16-06 DA
	I) FIRING PIN INDENT	.020 .022 .021 .022	12-16-06 DA
690	PACK		12-18-06 DA

F006 REV 5/2006

FINAL INSPECTION CHECKLIST

BARREL ASSEMBLY

BARREL_____
RECEIVER_____
FRONT SIGHT BASE_____
REAR SIGHT BASE_____
SCREWS_____
FINISH

SCOPE ASSEMBLY

SCOPE_____
SCOPE RINGS_____
MOUNTING SCREWS_____
MOUNTING BASE_____
SCREWS_____
FINISH_____
CLARITY

STOCK ASSEMBLY

STOCK_____
SLING SWIVEL STUDS_____
BUTT PATE_____
LOCK NUTS_____
BARREL CLEARANCE_____
COLOR / FINISH

SYSTEM CASE

SCOPE CASE_____
IRON SIGHTS_____
DEPLOYMENT KIT

TRIGGER ASSEMBLY

SAFETY OPERATION_____
RE-SET TO FACTORY
SPECS

COMMENTS: _____

F006 REV 5/2006

BARBER - M24 0025298 RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 94-18097

INITIAL FDC
CUSTOMER ORDER NO. DAAA09-92-C-0834
DATE RECEIVED 06/09/94
DATE OPENED 06/09/94
DATE CODE
ACCESSORIES SLING STRAP HARD CASE SCOPE MNTS SCOPE BASE

W/10X SCOPE M-24 SNIPER, W/DEPLOYMENT KIT
ATTN: FRED MARTIN

Scope # 90-0723

SERIAL NUMBER C6587688
NEW SERIAL NUMBER
MODEL AND GRADE 700 7-62 NATO

FROM:

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON AL 36201-5025

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON AL 36201-5025

CUST NO: 098397 C.O.D.

ACCOUNT NUMBER ACCOUNT NUMBER N/C PROM. DATE ESTIMATED VIA FRT

GUN CONDITION
☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE
EXCISE
TAX
INSURANCE
UPS
PARCEL POST
TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				F
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

✓ Barrel
✓ Trigger Assy
✓ Front Sight Assy
✓ Rear Sight Assy

REPAIRMAN PROOF CLEAN TEST TARGET PATTERN
GALLERY TESTER DATE DATE DATE DATE DATE
3/21 3/21

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0025298

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6587688DATE 2-29-96TESTER DA

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.60	2.53	2.52	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.53	2.60	2.52	
PULL #3	2.33	2.58	2.54	
PULL #4	2.45	2.56	2.52	
PULL #5	2.45	2.39	2.53	
TOTAL	1236	1266	1263	
AVG.	2.47	2.53	2.52	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.34	3.10	
PULL #2	3.21	3.04	
PULL #3	3.25	3.04	
PULL #4	3.27	3.04	
PULL #5	3.25	3.05	
TOTAL	1732	1527	
AVG.	3.26	3.05	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.13	4.11		4.16
PULL #2	4.12	4.17		4.24
PULL #3	4.14	4.20		4.22
PULL #4	4.14	4.19		4.03
PULL #5	4.06	4.10		4.22
TOTAL	2061	2077		2087
AVG.	4.12	4.15		4.17

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6587688
22 Jan 1980

CENTROIDAL DISTANCES

0 TO	1	1.06604
1 TO	2	.211436
1 TO	3	.0944299
1 TO	4	.51782
1 TO	5	.302576

2 3
4


+ <-----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1168
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .9188
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .926194
THE AMR FOR THIS RIFLE IS: 1.005

22 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8587688

CENTERFIRE PATTERNS # 1

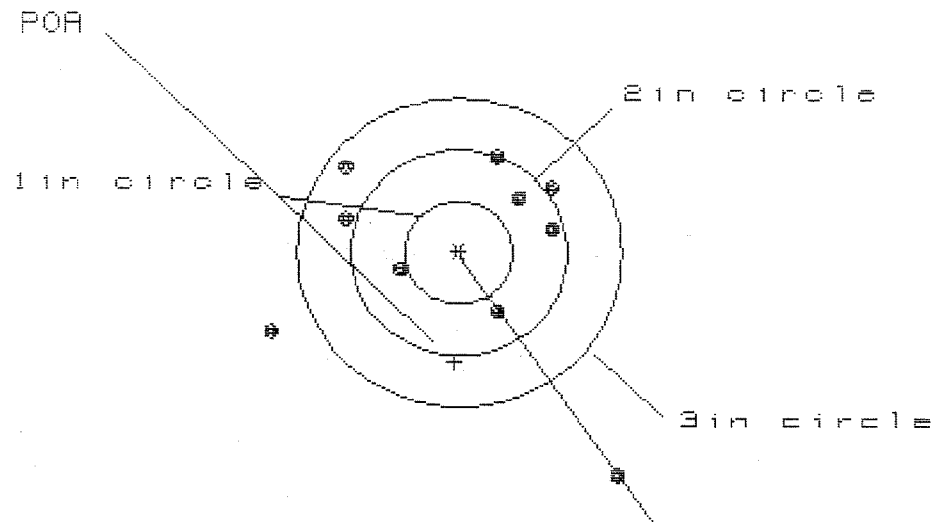

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 4

3 in = 8

HS= 3.127

VS= 3.070

GS= 3.883


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.410	1.008	.813
MINIMUM X	-1.717	-1.560	-1.119
MAXIMUM Y	.948	.712	.590
MINIMUM Y	-2.122	-.982	-.909
CENTROID X	.047	-.110	.085
CENTROID Y	1.065	1.301	1.423
POA TO CENTROID in.	1.066	1.305	1.426
MIN RADIUS	.560	.551	.541
MEAN RADIUS	1.183	1.008	.866
MAX RADIUS	2.548	1.843	1.225
HORIZONTAL SPREAD	3.127	2.568	1.932
VERTICAL SPREAD	3.070	1.694	1.499
EXTREME SPREAD	3.883	2.932	2.013
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	8		

22 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8587688

CENTERFIRE PATTERNS # 2

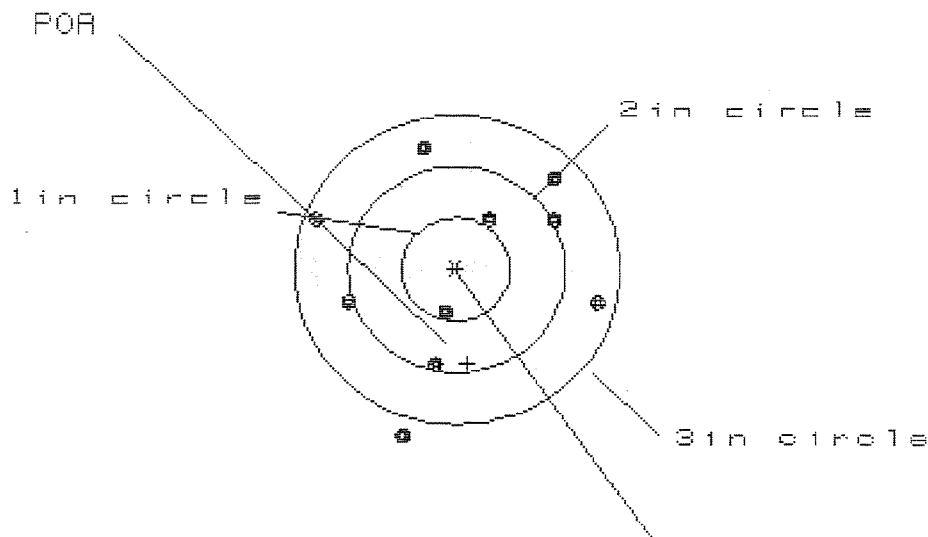

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 3

3 in = 8

HS= 2.644

VS= 2.842


CS= 2.855

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.339	1.284	1.114
MINIMUM X	:	-1.384	-1.360	-1.266
MAXIMUM Y	:	1.216	1.036	1.071
MINIMUM Y	:	-1.626	-1.076	-1.041
CENTROID X	:	-.101	-.046	.124
CENTROID Y	:	.914	1.094	1.059
POA TO CENTROID in.	:	.919	1.095	1.066
MIN RADIUS	:	.450	.424	.370
MEAN RADIUS	:	1.105	1.024	.957
MAX RADIUS	:	1.701	1.390	1.348
HORIZONTAL SPREAD	:	2.644	2.644	2.380
VERTICAL SPREAD	:	2.842	2.112	2.112
EXTREME SPREAD	:	2.855	2.751	2.380
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		9	

22-Jan-1988

FILE:/PATTERNING/CENTERFIRE_PATT/C65876B8

CENTERFIRE PATTERNS # 3

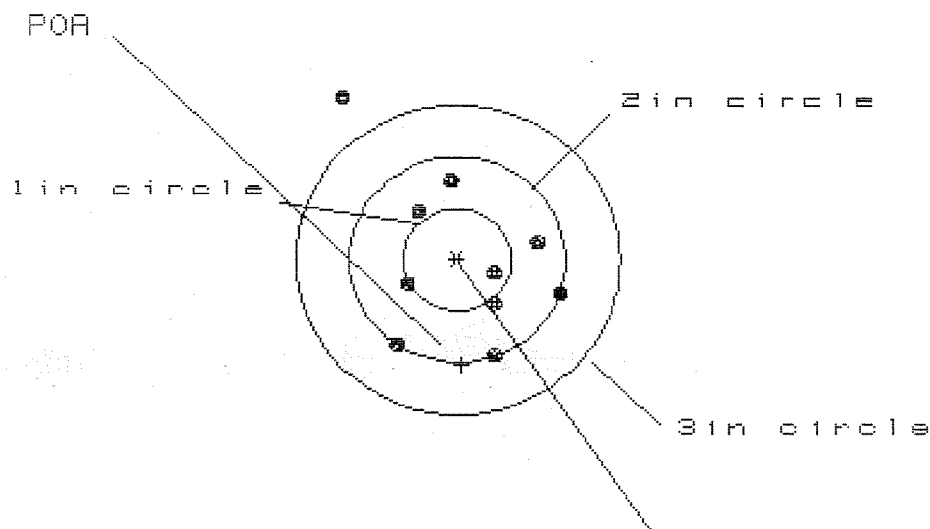

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 8

3 in = 9

VS = 2.520


GS = 2.885

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.920	.801	.714
MINIMUM X	:	-1.066	-.697	-.683
MAXIMUM Y	:	1.617	.957	.873
MINIMUM Y	:	-.903	-.723	-.807
CENTROID X	:	-.039	.080	.167
CENTROID Y	:	1.026	.846	.930
POA TO CENTROID in.	:	1.026	.850	.945
MIN RADIUS	:	.362	.208	.136
MEAN RADIUS	:	.848	.684	.635
MAX RADIUS	:	1.937	.982	.925
HORIZONTAL SPREAD	:	1.986	1.498	1.397
VERTICAL SPREAD	:	2.520	1.680	1.680
EXTREME SPREAD	:	2.885	1.736	1.736
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

22 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6587688

CENTERFIRE PATTERNS # 4

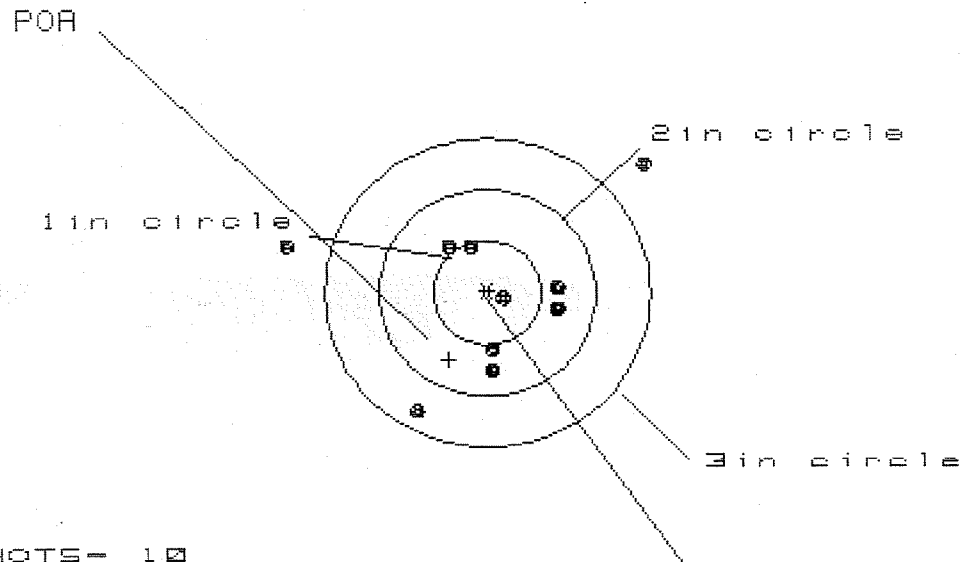

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 7

3 in = 8

HS= 3.378

VS= 2.371

GS= 3.472


CENTROID #

PATTERN #	4
SHOTS (BEST OF)	10
MAXIMUM X	1.475
MINIMUM X	-1.903
MAXIMUM Y	1.263
MINIMUM Y	-1.108
CENTROID X	.354
CENTROID Y	.648
POA TO CENTROID in.	.738
MIN RADIUS	.202
MEAN RADIUS	.905
MAX RADIUS	1.958
HORIZONTAL SPREAD	3.378
VERTICAL SPREAD	2.371
EXTREME SPREAD	3.472
NUMBER IN ONE INCH CIRCLE =	2
NUMBER IN TWO INCH CIRCLE =	7
NUMBER IN THREE INCH CIRCLE =	8

22 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06587688

CENTERFIRE PATTERNS # 5

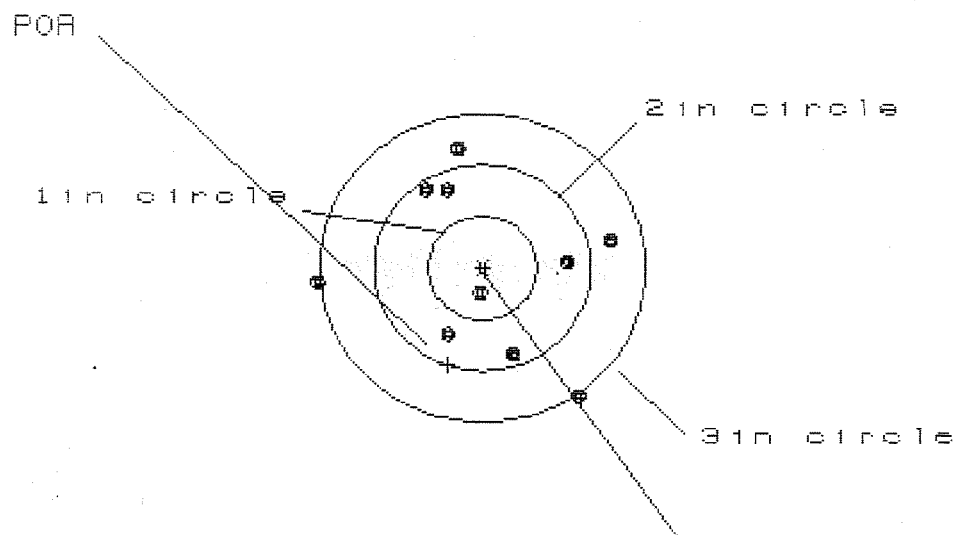

OF SHOTS- 10

IN CIP

1 in = 1

2 in = 6

3 in = 8

HS= 2.744

VS= 2.425

GS= 2.772

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.178
MINIMUM X	-1.566
MAXIMUM Y	1.201
MINIMUM Y	-1.224
CENTROID X	.323
CENTROID Y	.941
POA TO CENTROID in.	.995
MIN RADIUS	.225
MEAN RADIUS	.983
MAX RADIUS	1.569
HORIZONTAL SPREAD	2.744
VERTICAL SPREAD	2.425
EXTREME SPREAD	2.772
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	6
NUMBER IN THREE INCH CIRCLE =	8

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6587688

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	BARBER - M24 0025268 OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6 1/2	6 1/2	6 1/4			5/3/96	WB
	G) Safety Off Force	3	3	3			5/3/96	WB
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	2.27	2.27	2.29	2.29	2.24	7/18/96	WB
	C) Function							
660	Pack							

Remington  REG. U.S. PAT. & TM. OFF.

MODEL 700™ M24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

01

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

SERIAL NO. C6587687
ORDER NO. 5716



5716 C6587687

UPC



0 47700 25716 7

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			11/15/90	WB
	G) Safety Off Force	2	2	2			11/15/90	WB
	H) Trigger Pull Test & Retainability						11-15-90	JH
	I) Firing Pin Indent	0205	020	020			11/15/90	WB
	J) Assemble Stock						11/15/90	RW
	K) Assemble Swivel Studs						11-26-90	JS
	L) Attach Front and Rear Sight Assemblies						11/15/90	RW
	M) Iron Sight Alignment						11/15/90	RW
	N) Detach Front & Rear Sights & place in numbered container						11/15/90	RW
	O) Attach Scope to Rifle						11/15/90	RW
	P) Detach & Attach Scope 20 Times						11/15/90	RW
640	Gallery Target & Test						11-21-90	DH
	A) Time						11-21-90	DH
	B) Malfunctions						11-21-90	DH
	C) Pierced Primers						11-21-90	DH
	D) Optical Clarity of Scope						11-21-90	DH
645	Inspect for Live Ammo						11-21-90	DH
655	Final Inspection							
	A) Headspace						11-26-90	JS
	B) Trigger Pull	243	241	238	241	241	11-26-90	JS
	C) Function						11-26-90	JS
660	Pack						12-17-90	DH

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6587687

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	10 9	90	RW
600	Proof	10 9	90	RW
607	Check Headspace	10 9	90	RW
610	Dis-assemble Gun	10 9	90	RW
612	Magnaflux Barrel Action		10/17/90	KR
	Magnaflux Bolt		"	KR
615	Rollmark Caliber		"	LS
617	Drill and Tap Sight Holes		10/18/90	FB
618	Polish Barrel RB		10/19/90	WB
620	Apply Coatings (Barrel Action)		11-5-90	TH
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		11/7/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		11/7/90	RW
	C) Inspect Ejector Hole for Chamfer		11/7/90	RW
	D) Oil Firing Pin Ass'y		11/7/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		11/15/90	TH

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. 06587687DATE 11-15-90TESTER Jel.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.28	2.46	2.36	2.43	MIN. SETTING,
PULL #2	2.15	2.37	2.39	2.41	NO AVG. OF 5
PULL #3	2.19	2.37	2.39	2.38	READINGS ACCEPT-
PULL #4	2.45	2.31	2.45	2.41	ABLE LESS THAN 2#
PULL #5	2.50	2.40	2.46	2.41	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.50	3.35		
PULL #2	3.38	3.45		
PULL #3	3.46	3.45		
PULL #4	3.44	3.50		
PULL #5	3.47	3.49		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.28	4.26		4.27
PULL #2	4.26	4.26		4.26
PULL #3	4.26	4.30		4.30
PULL #4	4.27	4.29		4.27
PULL #5	4.27	4.26		4.28
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6587687
26 Nov 1990

CENTROIDAL DISTANCES

0 TO	1	.271442
1 TO	2	.0904268
1 TO	3	.250785
1 TO	4	.273031
1 TO	5	.37727

$\bar{x}$ <----POB

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1942
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .061
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .203555
THE AMR FOR THIS RIFLE IS: .8332

26 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8587687

CENTERFIRE PATTERNS

1

POA

1 in circle

2 in circle

3 in circle

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 6

3 in = 9

HS= 2.260

VS= 2.249

GS= 2.777


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.205	1.088	.834
MINIMUM X	-1.055	-.811	-.675
MAXIMUM Y	.891	.740	.754
MINIMUM Y	-1.358	-.995	-.982
CENTROID X	.220	.337	.201
CENTROID Y	.159	.310	.296
POA TO CENTROID in.	.271	.458	.358
MIN RADIUS	.262	.073	.203
MEAN RADIUS	.833	.693	.637
MAX RADIUS	1.719	1.215	1.288
HORIZONTAL SPREAD	2.260	1.899	1.509
VERTICAL SPREAD	2.249	1.735	1.735
EXTREME SPREAD	2.777	2.201	2.201
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		9	

26 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8587687

CENTERFIRE PATTERNS # 2

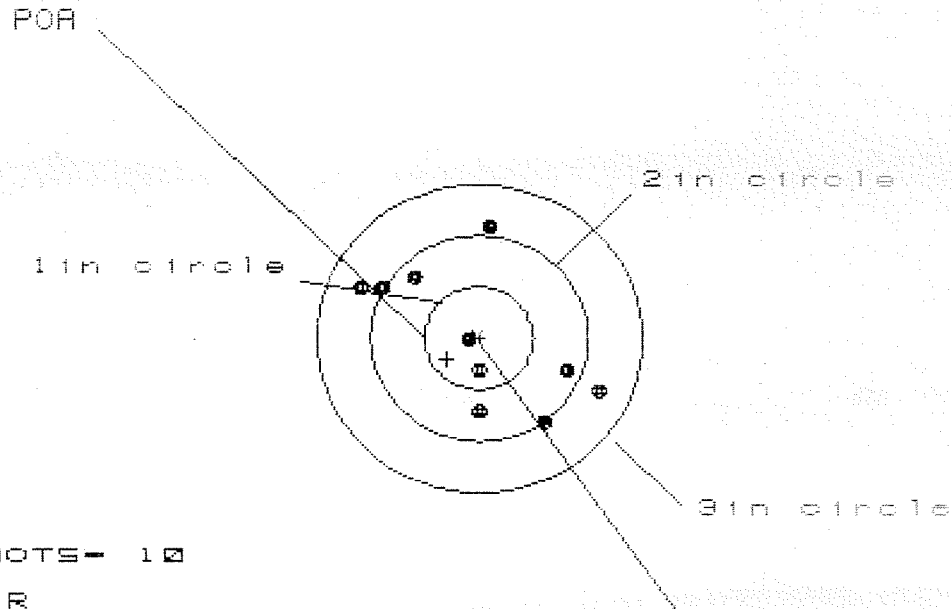

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 10

HS= 2.216

VS= 1.877

GS= 2.402


CENTROID *

PATTERN #	2	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.148	.945	.828
MINIMUM X	-1.068	-.941	-.836
MAXIMUM Y	1.056	1.005	1.056
MINIMUM Y	-.821	-.872	-.821
CENTROID X	.296	.169	.286
CENTROID Y	.208	.259	.208
POA TO CENTROID in.	.362	.309	.354
MIN RADIUS	.138	.068	.128
MEAN RADIUS	.834	.777	.741
MAX RADIUS	1.237	1.154	1.058
HORIZONTAL SPREAD	2.216	1.886	1.664
VERTICAL SPREAD	1.877	1.877	1.877
EXTREME SPREAD	2.402	2.129	1.962
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

26 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8587687

CENTERFIRE PATTERNS # 3

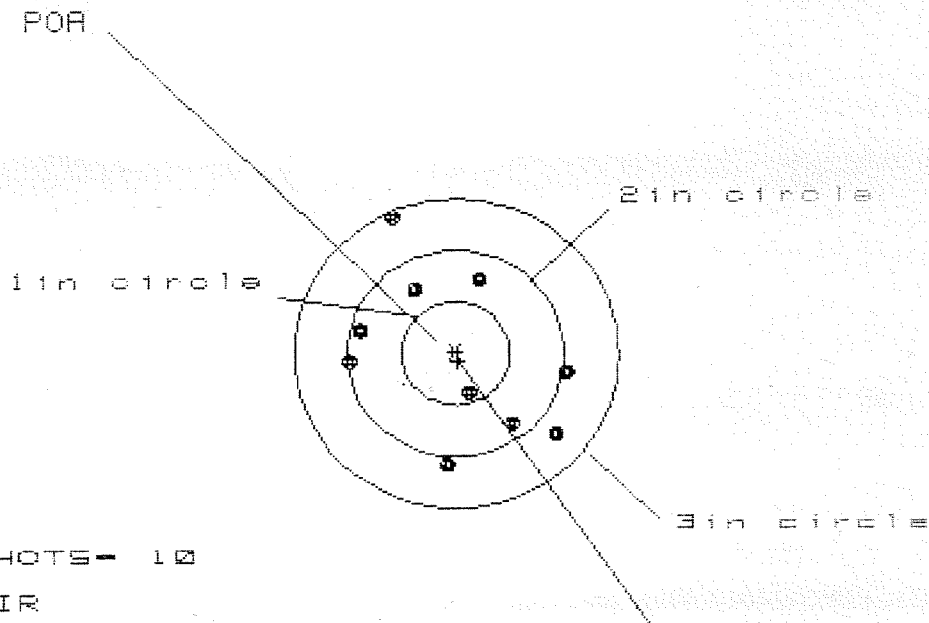

OF SHOTS - 10

IN CIR

1 in = 1

2 in = 6

3 in = 10

HS = 2.045

VS = 2.398

GS = 2.582


CENTROID *

PATTERN #	3
SHOTS (BEST OF)	10
MAXIMUM X	1.047
MINIMUM X	-0.998
MAXIMUM Y	1.366
MINIMUM Y	-1.032
CENTROID X	-0.017
CENTROID Y	0.077
POA TO CENTROID in.	0.079
MIN RADIUS	0.358
MEAN RADIUS	0.945
MAX RADIUS	1.486
HORIZONTAL SPREAD	2.045
VERTICAL SPREAD	2.398
EXTREME SPREAD	2.582
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	6
NUMBER IN THREE INCH CIRCLE =	10

26 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6587687

CENTERFIRE PATTERNS # 4

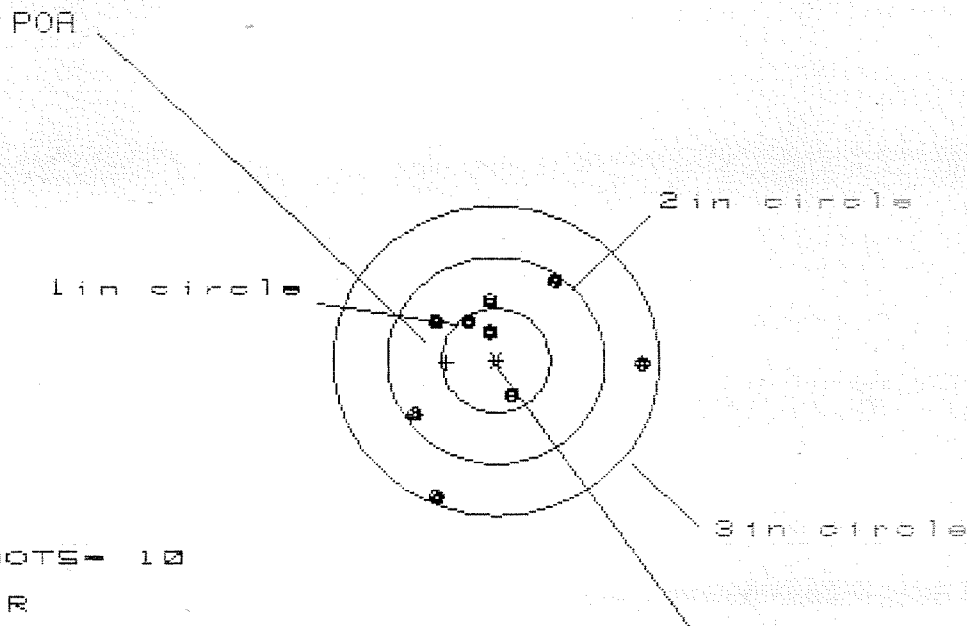

OF SHOTS- 10

IN CIR

1in = 4

2in = 8

3in = 10

HS= 2.133

VS= 2.083

GS= 2.336

PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.379	1.319	.619
MINIMUM X	-.754	-.814	-.649
MAXIMUM Y	.810	.669	.654
MINIMUM Y	-1.272	-.654	-.669
CENTROID X	.455	.515	.350
CENTROID Y	.020	.162	.177
POA TO CENTROID in.	.455	.540	.392
MIN RADIUS	.244	.158	.086
MEAN RADIUS	.718	.629	.513
MAX RADIUS	1.383	1.324	.932
HORIZONTAL SPREAD	2.133	2.133	1.268
VERTICAL SPREAD	2.083	1.323	1.323
EXTREME SPREAD	2.336	2.199	1.833
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	8		
NUMBER IN THREE INCH CIRCLE =	10		

28 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6587887

CENTERFIRE PATTERNS # 5

POR

1in circle

2in circle

3in circle

CENTROID #

OF SHOTS - 10

IN CIR

1in = 3

2in = 7

3in = 8

HS = 2.628

VS = 2.675

GS = 2.677

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.090
MINIMUM X	-1.538
MAXIMUM Y	.847
MINIMUM Y	-1.827
CENTROID X	.017
CENTROID Y	-.159
POR TO CENTROID in.	.159
MIN RADIUS	.045
MEAN RADIUS	.836
MAX RADIUS	1.828
HORIZONTAL SPREAD	2.628
VERTICAL SPREAD	2.675
EXTREME SPREAD	2.677
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	7
NUMBER IN THREE INCH CIRCLE =	8