

C6587712

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00087068** Serial: C6587712 Model M24 SWS Center Fire Caliber: 7.62 NATO Repairman: Status: Closed 10/27/2004 9:31:01 AM

Verify Repair

Address Information

Customer: ☒ Received From: ☐ Return To: ☐ Received From: ☐

Name: **ELECTRONIC MAIN SHOP GSC 10TH DIV** **ELECTRONIC MAIN SHOP GSC 10TH DIV**

Address 1: **ATTN MSG BARTRON SPC LAUBAUGH** **ATTN MSG BARTRON SPC LAUBAUGH**

Address 2: **BLDG 7426 RM 203 BAD TOELZ** PO Box: **BLDG 7426 RM 203 BAD TOELZ** PO Box:

City: **FORT CARSON** **FORT CARSON**

State: **CO** Zip Code: **80913** Country: **US** State: **CO** Zip Code: **80913** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Good

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
A026	Scope	1
C000	F AND R SGT BASES	1

Repair Search Refresh Close

loglet 10/27/2004 12:00 PM CAPS NUM INS SCPL

start 2 3 2

Serial Number: **C6587712**

Model: **M24 SWS**



RE00087068

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6587712.___0
FILE DATE AND TIME: 11/17/2004 09:06


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.129
The Average Y Centroid of the Five Target Set:	-0.064
The Average Point of Impact of the Five Target Set:	0.144
The Average Mean Radius of the Five Target Set:	0.719
The Distance from POA to Centroid Target #1:	0.285
The Distance from Centroid Target #2 to Centroid Target #1:	0.233
The Distance from Centroid Target #3 to Centroid Target #1:	0.193
The Distance from Centroid Target #4 to Centroid Target #1:	0.370
The Distance from Centroid Target #5 to Centroid Target #1:	0.192

SERIAL NUMBER: C6587712. __0
 TARGET NUMBER: 1
 FILE DATE: 11/17/2004
 FILE TIME: 09:06

POINT#	X	Y
1:	1.185	-1.241
2:	1.048	-0.590
3:	0.431	-0.661
4:	0.648	0.186
5:	-0.400	0.523
6:	-1.610	-0.040
7:	-1.106	-0.114
8:	-0.893	-0.367
9:	-0.455	-0.288
10:	-0.129	0.048

X CENTROID: -0.128
 Y CENTROID: -0.254
 POA TO CENTROID: 0.285
 HORZ SPREAD: 2.795
 VERT SPREAD: 1.764
 GROUP SPREAD: 3.042
 MIN RADIUS: 0.302
 MAX RADIUS: 1.642
 MEAN RADIUS: 0.916
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 9

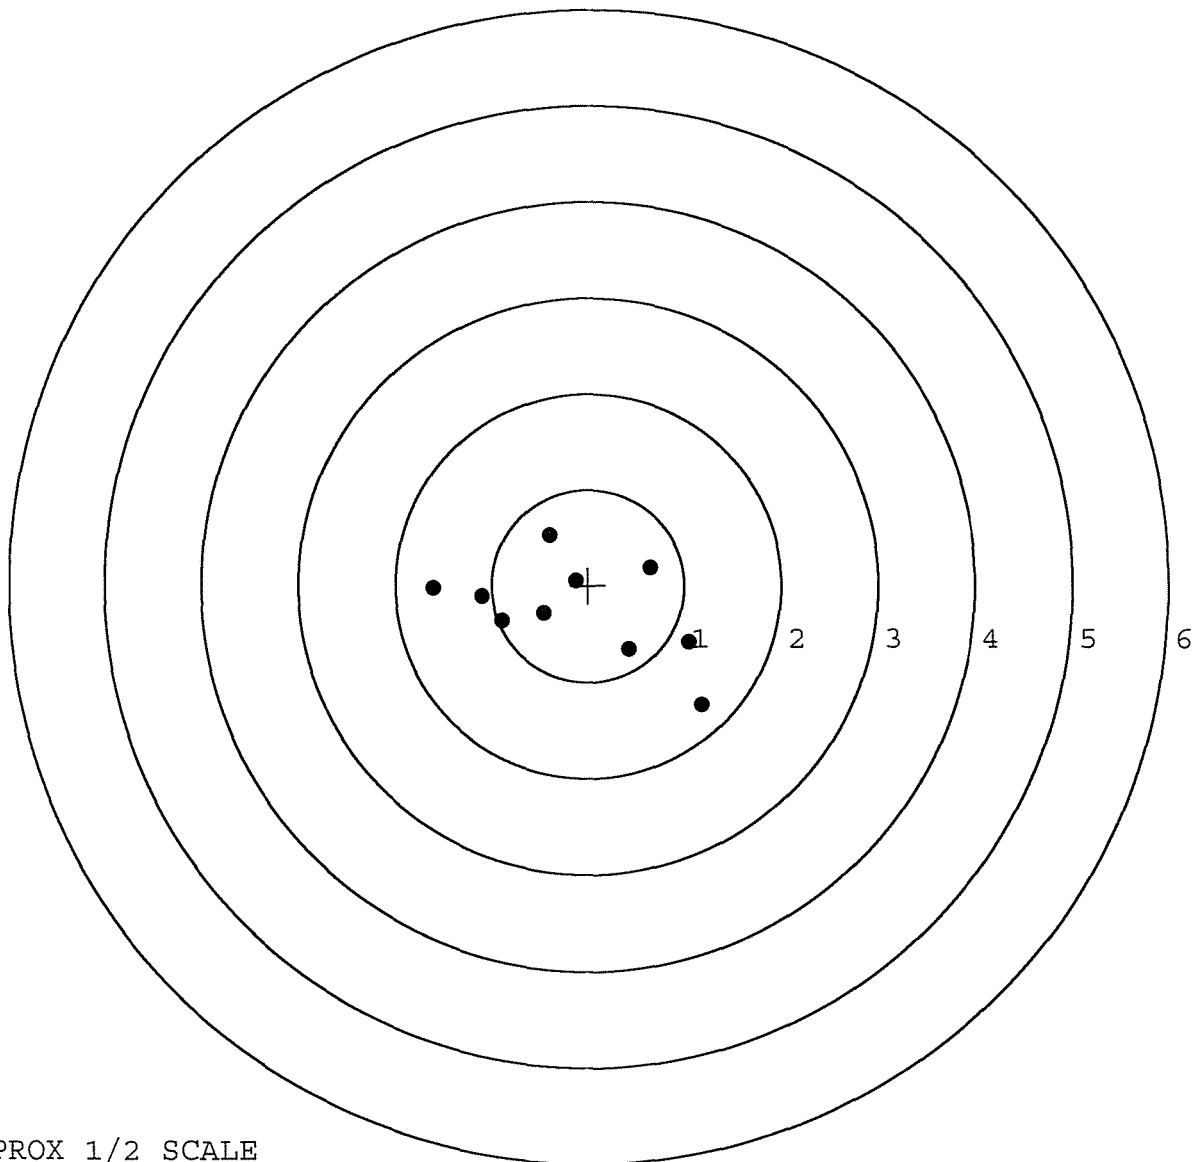


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6587712. __0
 TARGET NUMBER: 2
 FILE DATE: 11/17/2004
 FILE TIME: 09:06

X CENTROID: -0.061
 Y CENTROID: -0.031
 POA TO CENTROID: 0.069
 HORZ SPREAD: 1.286
 VERT SPREAD: 1.361
 GROUP SPREAD: 1.856
 MIN RADIUS: 0.145
 MAX RADIUS: 1.010
 MEAN RADIUS: 0.547

POINT#	X	Y
1:	0.595	-0.799
2:	0.121	-0.611
3:	-0.204	-0.544
4:	0.033	-0.141
5:	0.398	0.562
6:	-0.148	0.269
7:	-0.373	0.206
8:	-0.691	0.539
9:	-0.287	0.515
10:	-0.057	-0.309

IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

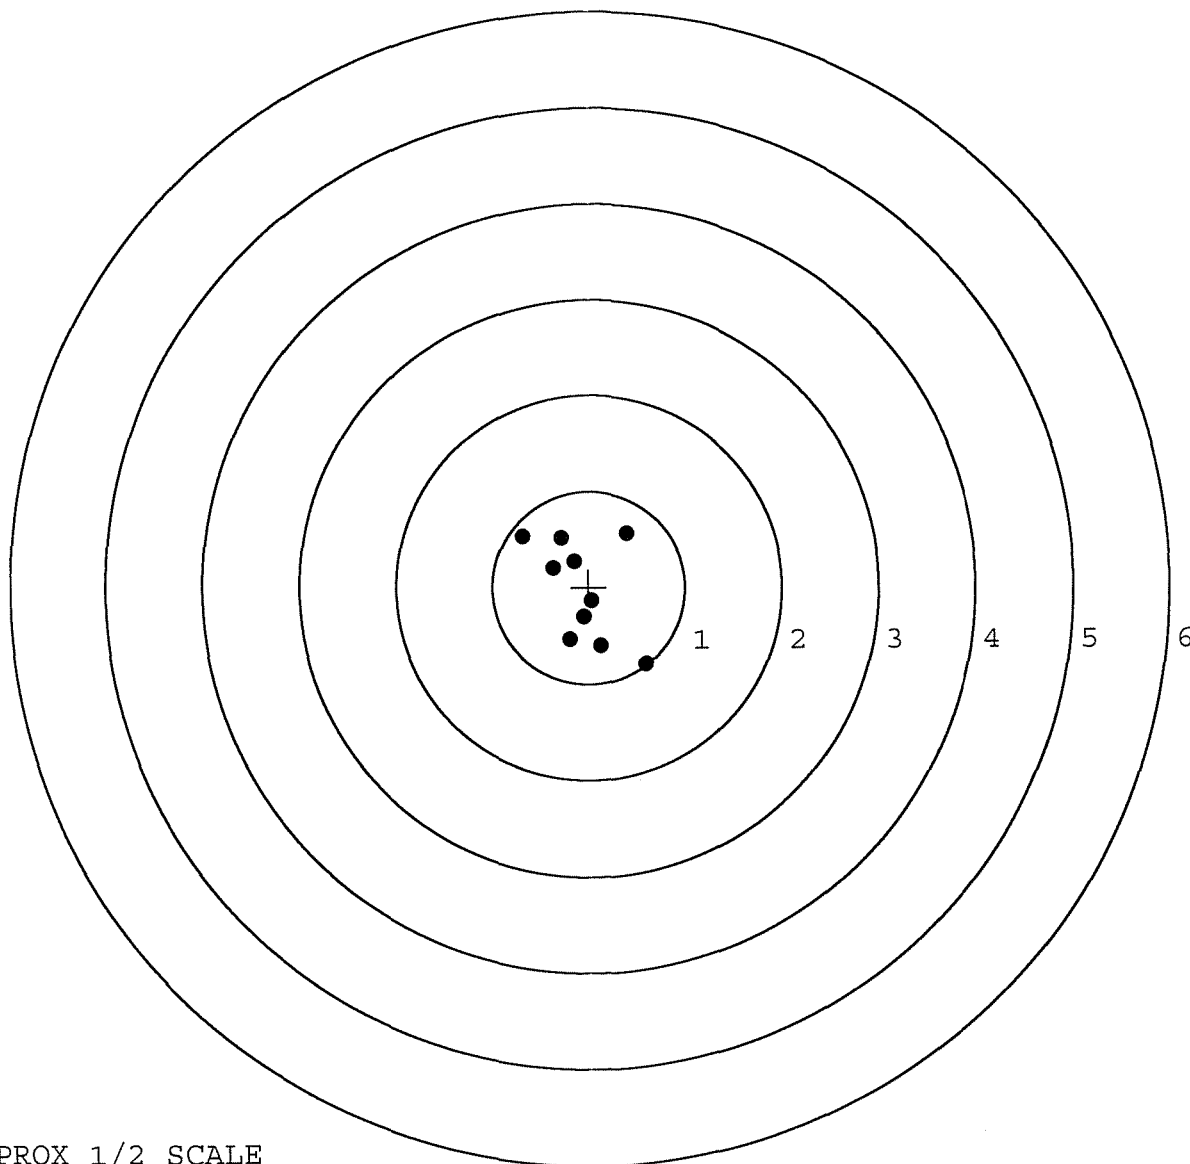

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6587712. __0

TARGET NUMBER: 3

FILE DATE: 11/17/2004

FILE TIME: 09:06

X CENTROID: -0.072

Y CENTROID: -0.070

POA TO CENTROID: 0.100

HORZ SPREAD: 1.406

VERT SPREAD: 1.669

GROUP SPREAD: 1.986

MIN RADIUS: 0.214

MAX RADIUS: 1.110


MEAN RADIUS: 0.662

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.596	-0.957
2:	0.484	-0.717
3:	-0.008	-0.619
4:	0.205	-0.191
5:	-0.261	0.029
6:	-0.186	0.209
7:	-0.810	-0.167
8:	-0.452	0.511
9:	-0.766	0.488
10:	0.480	0.712

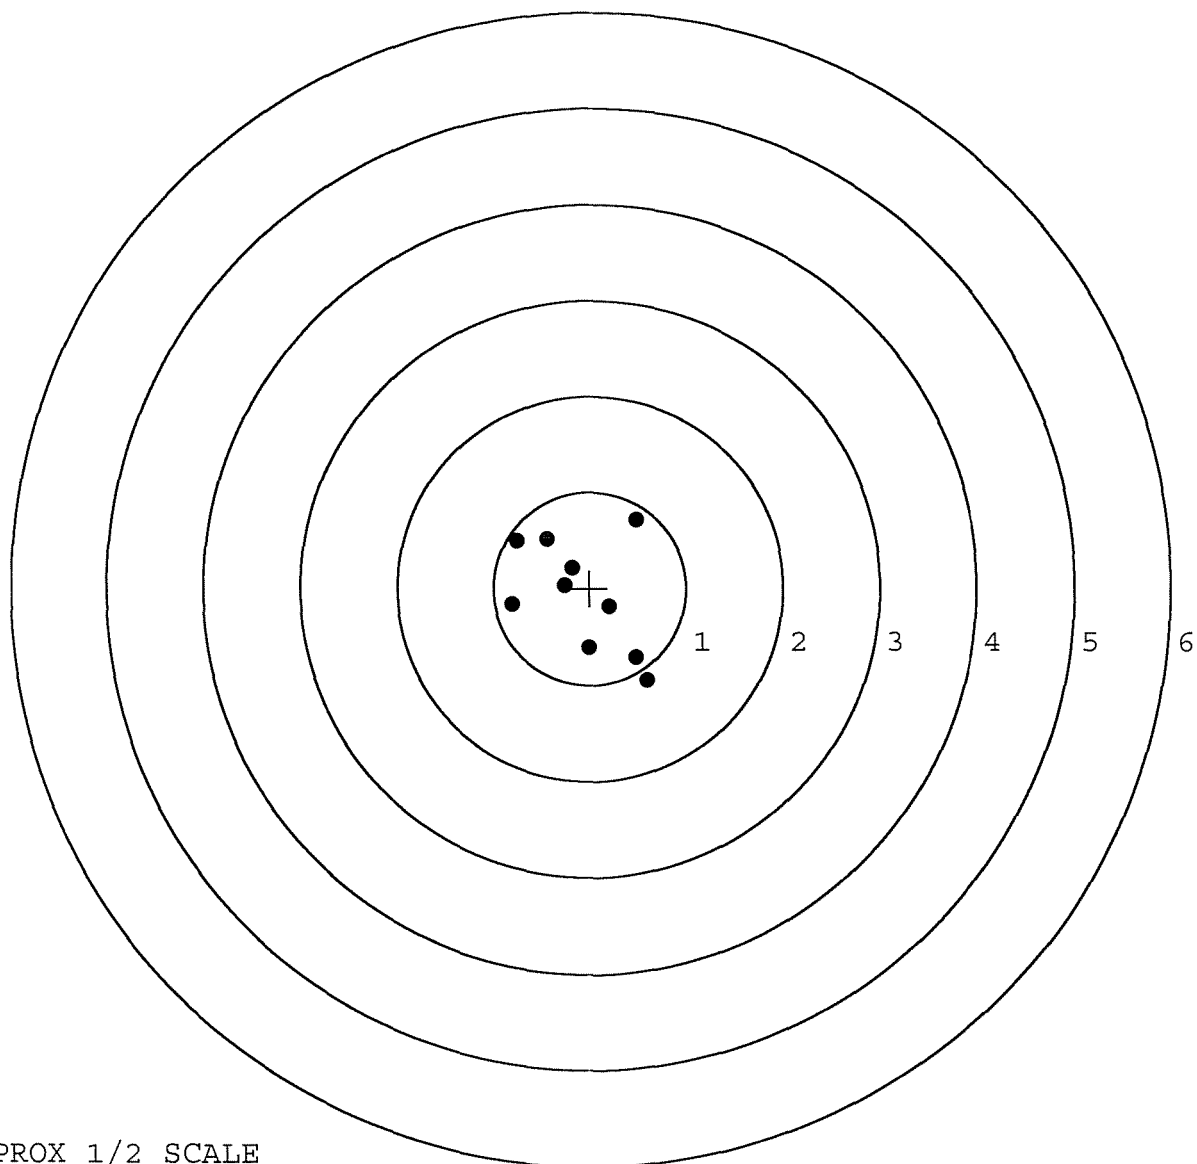

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6587712. __0

TARGET NUMBER: 4

FILE DATE: 11/17/2004

FILE TIME: 09:06

POINT#	X	Y
1:	0.428	-0.763
2:	0.533	-0.030
3:	-1.370	0.856
4:	-1.076	0.857
5:	-0.274	0.403
6:	-0.198	0.203
7:	0.193	-0.001
8:	-0.435	-0.167
9:	-0.154	-0.351
10:	-0.086	-0.034

X CENTROID: -0.244

Y CENTROID: 0.097

POA TO CENTROID: 0.263

HORZ SPREAD: 1.903

VERT SPREAD: 1.620

GROUP SPREAD: 2.419

MIN RADIUS: 0.115


MAX RADIUS: 1.358

MEAN RADIUS: 0.622

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

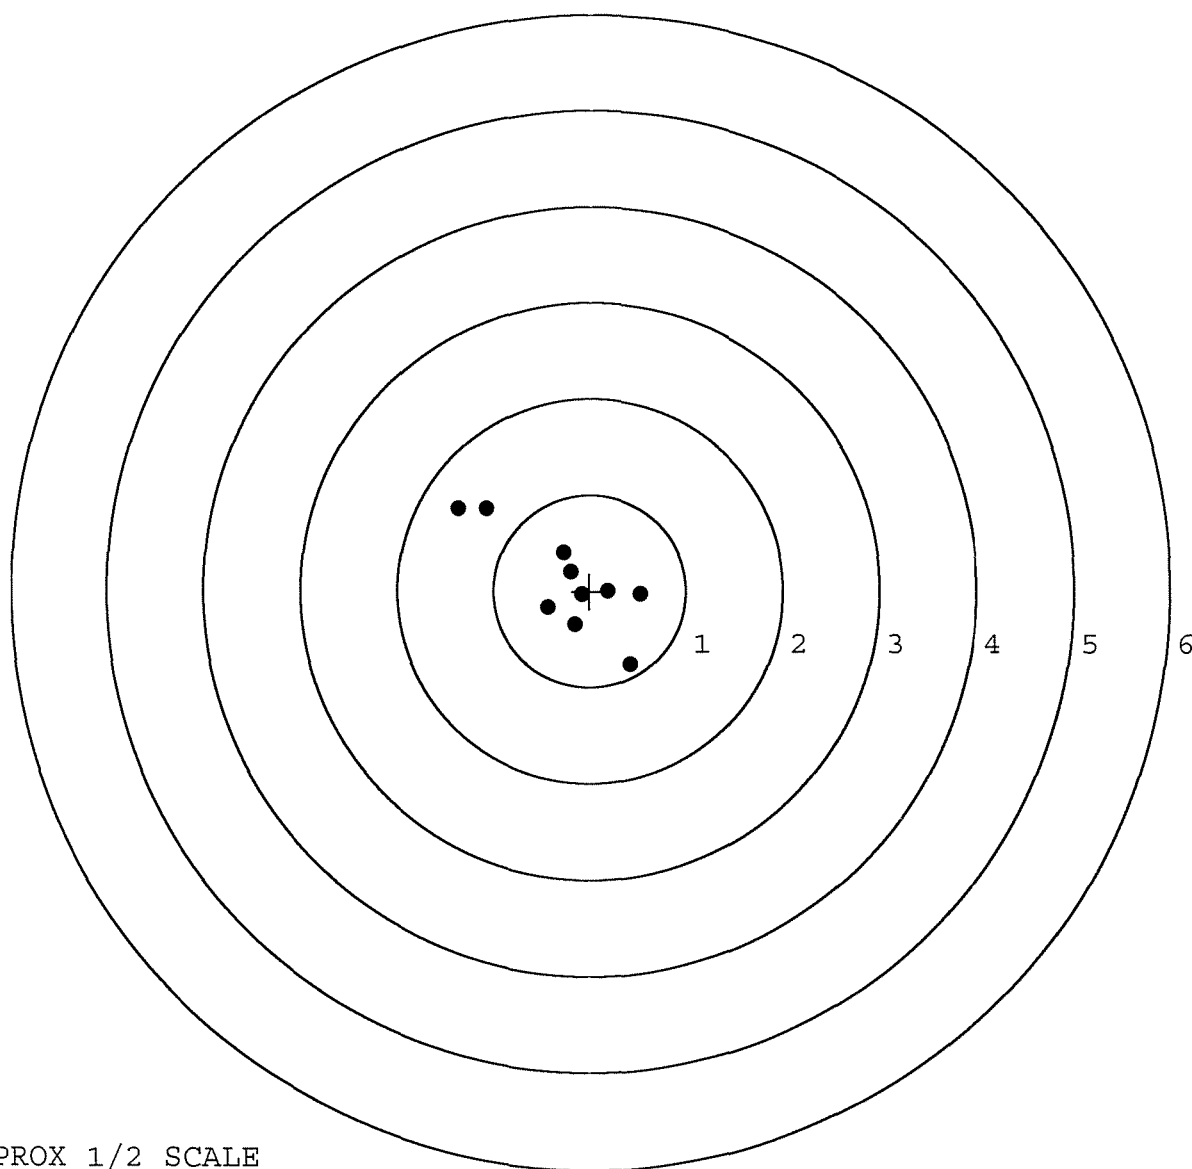


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6587712. __0
 TARGET NUMBER: 5
 FILE DATE: 11/17/2004
 FILE TIME: 09:06

X CENTROID: -0.139
 Y CENTROID: -0.062
 POA TO CENTROID: 0.153
 HORZ SPREAD: 2.021
 VERT SPREAD: 1.905
 GROUP SPREAD: 2.306
 MIN RADIUS: 0.233
 MAX RADIUS: 1.267
 MEAN RADIUS: 0.849
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 6
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.338	-1.135
2:	0.631	-0.738
3:	0.759	0.007
4:	-1.129	-0.800
5:	-0.038	0.732
6:	-0.064	0.468
7:	-0.672	0.770
8:	-1.262	0.526
9:	-0.132	-0.295
10:	0.175	-0.158

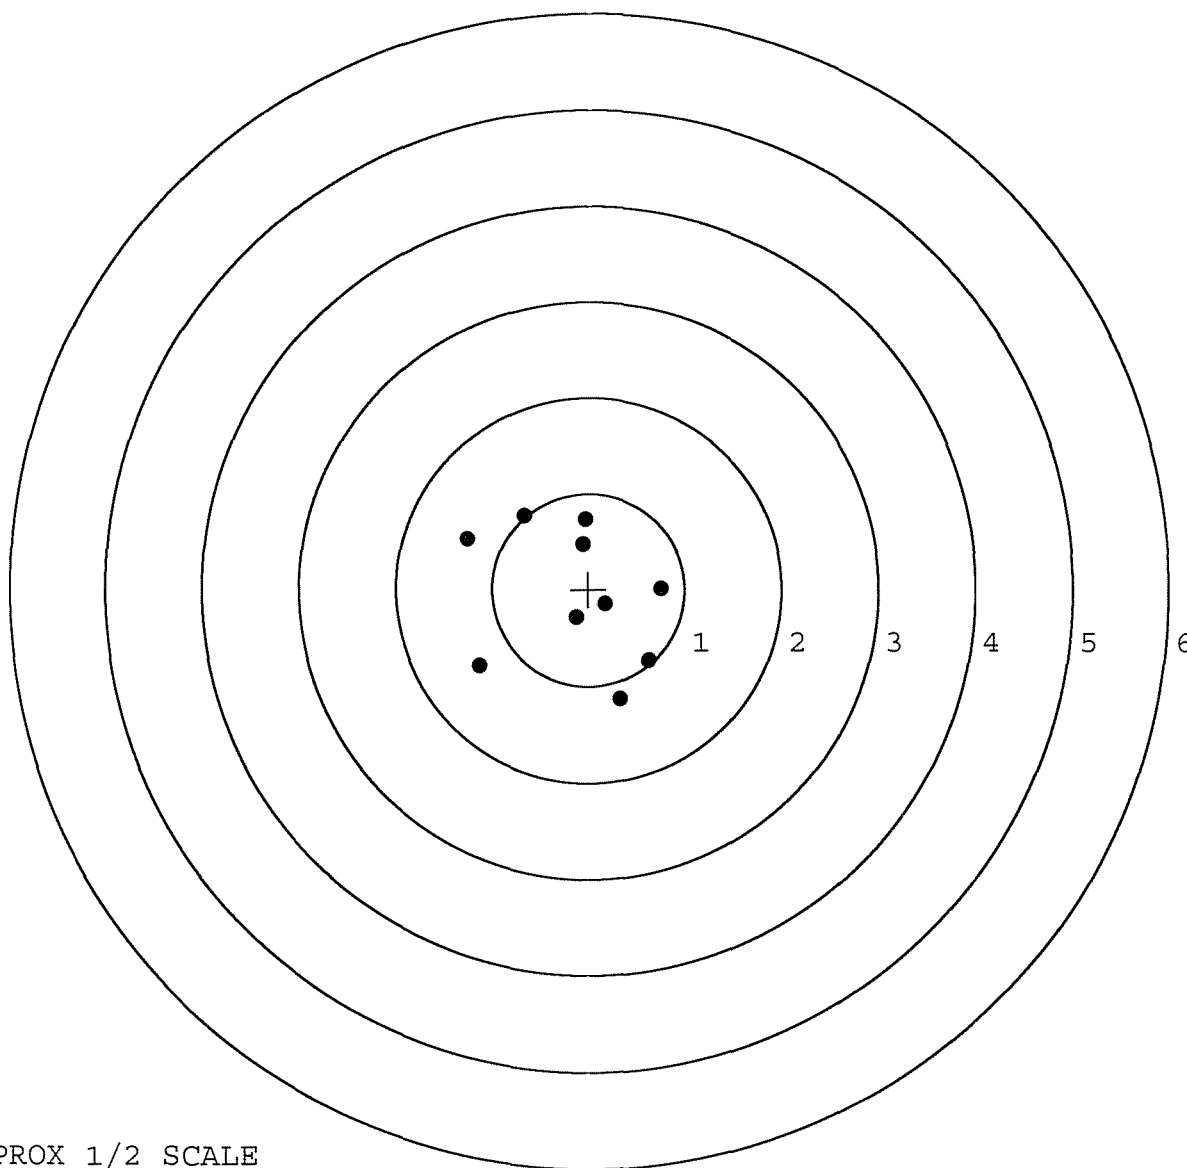

TARGET APPROX 1/2 SCALE

INITIAL BARBER - M24-0025697
 2.50 LBS (plus or minus 0.50 LBS)
 3.00 LBS (plus or minus 0.75 LBS)
 4.00 LBS (plus or minus 1.00 LBS)

DATE 10-21-04
 TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.39	2.28		2.13	
PULL #2	2.33	2.43		2.07	
PULL #3	2.37	2.46		2.10	
PULL #4	2.42	2.38		2.11	
PULL #5	2.39	2.40		2.11	
TOTAL	11.90	11.95		10.52	
AVERAGE	2.38	2.39		2.10	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.35	3.33		
PULL #2	3.39	3.48		
PULL #3	3.32	3.39		
PULL #4	3.29	3.42		
PULL #5	3.20	3.34		
TOTAL	16.55	16.96		
AVERAGE	3.31	3.39		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.04	4.03		4.23
PULL #2	4.13	4.03		4.27
PULL #3	4.31	4.21		4.18
PULL #4	4.27	4.32		4.20
PULL #5	4.32	4.11		4.22
TOTAL	21.07	20.70		21.10
AVERAGE	4.21	4.14		4.22

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	87068		
SERIAL NUMBER	C6587712		
LOG-IN DATE	10-27-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	11-1-04	RTZ
560 A	RE-BARREL	11-2-04	RTZ
B	DRILL AND TAP	11-4-04	TRW
575	ASSEMBLE	11-2-04	RTZ
600	PROOF	11-3-04	RTZ
605	CHECK HEADSPACE	11-3-04	RTZ
610	DIS-ASSEMBLE GUN	11-4-04	RTZ
612	MAGNAFLUX	OPERATOR	RTZ
615	ROLLMARK CALIBER	11/5/04	RTZ
618	ROTO-BLAST	11-6-04	LB
620	APPLY COATINGS	11/9	HP
625 A	FINAL ASSEMBLY	11-16-04	RTZ
B	TRIGGER PULL TEST	N/A	N/A
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	11-17-04	TRW
655	FINAL INSPECT	11-18-04	AC
660	PACK	11-18-04	DA
		SHIP DATE	
		QAR INSPECTION DATE	

RECEIVING AND ESTIMATING REPORT

ORDER
R 95-20463

INITIAL	CUSTOMER ORDER NO.	W/ULTRA 10X-M3A SCOPE			
FPS		M24	Scope S/N		90-0529
DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE
08/16/95	08/17/95	EK 10-90	C6587712		700 7.62 NATO
ACCESSORIES	SLING STRAP	W/STUDS	W/SWIVELS	HARD CASE	SCOPE MNTS
W/SCOPE BASE					

FROM:

SHIP TO:

MASON & HANGER-SILAS MASON CO
NEWPORT ARMY AMMUNITION PLANT
P O BOX 458
NEWPORT

IN GOVTU

MASON & HANGER-SILAS MASON CO
NEWPORT ARMY AMMUNITION PLANT
P O BOX 458
NEWPORT

IN
GOVTU

CUST NO: 124296 C.O.D.L

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA
					R23596786

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS	COMMENTS
-------	----------

✓ Trigger Assy
✓ Front & Rear Sight Assy

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE
			8/23/96		

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

BARRER . M24 M2400025738

BARBER - M24 0025700

SHIPPING CONTAINER TALLY 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50

REQUISITION AND INVOICE/SHIPPING DOCUMENT																																																																									
1. FROM: (Include ZIP Code) MASON&HANGER-SILAS MASON CO., INC., NEWPORT CHEMICAL ACTIVITY, NEWPORT, IN, 47966 CONTRACT NO. DAAA09-90-Z-0002					SHEET NO. 1		NO. OF SHEETS 1		5. REQUISITION DATE 14 Aug 95		6. REQUISITION NUMBER																																																														
2. TO: (Include ZIP Code) REMINGTON ARMS CO., INC. 14 HOEFLER AVENUE ELION, NY 13357					7. DATE MATERIAL REQUIRED				8. PRIORITY																																																																
3. SHIP TO-MARK FOR					9. AUTHORITY OR PURPOSE DOC. NO. W53HOP-5088-0004				10. SIGNATURE <i>[Signature]</i>																																																																
					11. VOUCHER NUMBER AND DATE 118-95				12. DATE SHIPPED																																																																
					13. MODE OF SHIPMENT PARCEL POST				14. BILL OF LADING NUMBER																																																																
					15. AIR MOVEMENT ORIGINATOR OR PORT REFERENCE NO.																																																																				
4. APPROPRIATION SYMBOL AND SUBHEAD					OBJECT CLASS		EXPENDITURE ACCOUNT (From) (To)		CHARGEABLE ACTIVITY		BUREAU CONTROL ACTIVITY NO.																																																														
											BUREAU CONTROL NO.																																																														
											AMOUNT																																																														
16. TRANSPORTATION VIA MATS OR MATS CHARGEABLE TO												17. SPECIAL HANDLING																																																													
<table border="1"> <thead> <tr> <th>ITEM NO. (a)</th> <th>FEDERAL STOCK NUMBER, DESCRIPTION, AND CODING OF MATERIAL AND/OR SERVICES (b)</th> <th>UNIT OF ISSUE (c)</th> <th>QUANTITY REQUESTED (d)</th> <th>SUPPLY ACTION (e)</th> <th>TYPE CON-TAINER (f)</th> <th>CON-TAINER NOS. (g)</th> <th>UNIT PRICE (h)</th> <th>TOTAL COST (i)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7.62 MM M24 SNIPER WEAPON SYSTEM NSN: 1005-01-240-2136 USA PROPERTY NO. 776001 USA PROPERTY NO. 776002 SERIAL NO. C6587712 SERIAL NO. C6587712</td> <td>EA</td> <td>2</td> <td></td> <td></td> <td></td> <td>5145.00</td> <td>10,290.00</td> </tr> </tbody> </table>														ITEM NO. (a)	FEDERAL STOCK NUMBER, DESCRIPTION, AND CODING OF MATERIAL AND/OR SERVICES (b)	UNIT OF ISSUE (c)	QUANTITY REQUESTED (d)	SUPPLY ACTION (e)	TYPE CON-TAINER (f)	CON-TAINER NOS. (g)	UNIT PRICE (h)	TOTAL COST (i)	1	7.62 MM M24 SNIPER WEAPON SYSTEM NSN: 1005-01-240-2136 USA PROPERTY NO. 776001 USA PROPERTY NO. 776002 SERIAL NO. C6587712 SERIAL NO. C6587712	EA	2				5145.00	10,290.00																																										
ITEM NO. (a)	FEDERAL STOCK NUMBER, DESCRIPTION, AND CODING OF MATERIAL AND/OR SERVICES (b)	UNIT OF ISSUE (c)	QUANTITY REQUESTED (d)	SUPPLY ACTION (e)	TYPE CON-TAINER (f)	CON-TAINER NOS. (g)	UNIT PRICE (h)	TOTAL COST (i)																																																																	
1	7.62 MM M24 SNIPER WEAPON SYSTEM NSN: 1005-01-240-2136 USA PROPERTY NO. 776001 USA PROPERTY NO. 776002 SERIAL NO. C6587712 SERIAL NO. C6587712	EA	2				5145.00	10,290.00																																																																	
<table border="1"> <thead> <tr> <th colspan="2">18. RECAPITULATION OF SHIPMENT</th> <th>TOTAL CONTAINERS</th> <th>TYPE CON-TAINER</th> <th>DESCRIPTION</th> <th>TOTAL WEIGHT</th> <th>TOTAL CUBE</th> <th colspan="2">19. RECEIPT</th> <th>DATE</th> <th>BY</th> <th>SHEET TOTAL</th> </tr> </thead> <tbody> <tr> <td>ISSUED BY</td> <td></td> <td>2</td> <td>CASE</td> <td>FIBERGLAS 50"X12"X17"</td> <td>120</td> <td>11.8</td> <td>CONTAINERS RECEIVED EXCEPT AS NOTED</td> <td></td> <td></td> <td></td> <td>\$10,290.00</td> </tr> <tr> <td>CHECKED BY</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>QUANTITIES RECEIVED EXCEPT AS NOTED</td> <td></td> <td></td> <td></td> <td>GRAND TOTAL</td> </tr> <tr> <td>PACKED BY</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>\$10,290.00</td> </tr> <tr> <td colspan="7"></td> <td>POSTED</td> <td></td> <td></td> <td></td> <td>20. RECEIVER'S VOUCHER NO.</td> </tr> </tbody> </table>														18. RECAPITULATION OF SHIPMENT		TOTAL CONTAINERS	TYPE CON-TAINER	DESCRIPTION	TOTAL WEIGHT	TOTAL CUBE	19. RECEIPT		DATE	BY	SHEET TOTAL	ISSUED BY		2	CASE	FIBERGLAS 50"X12"X17"	120	11.8	CONTAINERS RECEIVED EXCEPT AS NOTED				\$10,290.00	CHECKED BY							QUANTITIES RECEIVED EXCEPT AS NOTED				GRAND TOTAL	PACKED BY											\$10,290.00								POSTED				20. RECEIVER'S VOUCHER NO.
18. RECAPITULATION OF SHIPMENT		TOTAL CONTAINERS	TYPE CON-TAINER	DESCRIPTION	TOTAL WEIGHT	TOTAL CUBE	19. RECEIPT		DATE	BY	SHEET TOTAL																																																														
ISSUED BY		2	CASE	FIBERGLAS 50"X12"X17"	120	11.8	CONTAINERS RECEIVED EXCEPT AS NOTED				\$10,290.00																																																														
CHECKED BY							QUANTITIES RECEIVED EXCEPT AS NOTED				GRAND TOTAL																																																														
PACKED BY											\$10,290.00																																																														
							POSTED				20. RECEIVER'S VOUCHER NO.																																																														

DD FORM 1149

51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

BARBER - M24 0025700

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6587712
~~C6587712~~DATE 1/25/94TESTER RW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.54	2.40	2.62		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.54	2.34	2.63		
PULL #3	2.51	2.26	2.68		
PULL #4	2.46	2.22	2.57		
PULL #5	2.44	2.27	2.49		
TOTAL	12.49	11.49	12.99		
AVG.	2.50	2.30	2.60		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.10	3.08		
PULL #2	3.09	3.13		
PULL #3	3.25	3.18		
PULL #4	3.27	3.16		
PULL #5	3.14	3.10		
TOTAL	15.95	15.65		
AVG.	3.19	3.13		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.12	4.00		4.19
PULL #2	4.13	4.05		4.25
PULL #3	4.11	4.16		4.15
PULL #4	4.07	4.23		4.22
PULL #5	4.05	4.14		4.08
TOTAL	20.48	20.58		20.89
AVG.	4.10	4.12		4.18

BARBER - M24 0025702								
op. #	OP. NAME	READINGS			DATE	INIT		
625 cont.	F) Safety On Force	5	5.25	5	8/2	SF		
	G) Safety Off Force	5	5	4.5	8/2	SF		
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent	.021	.0215	.0205	8/2	SF		
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	2.86	2.88	2.81	2.73	2.91	8/2	SF
	C) Function							
660	Pack							

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

Remington®
REG. U.S. PAT. & TM. OFF.

DUPONT

MODEL 700™ H24

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

SERIAL NO.
C6587712

ORDER NO.
5716


Ø1

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5716 C6587712

UPC



0

47700 25716

7

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 6587712

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		10/18/90	KJ
600	Proof		10/18/90	KJ
607	Check Headspace		10/18/90	KJ
610	Dis-assemble Gun		10/18/90	KJ
612	Magnaflux Barrel Action		10/22/90	KR
	Magnaflux Bolt		10/22	KR
615	Rollmark Caliber		10/22	JH
617	Drill and Tap Sight Holes		10/23/90	LB
618	Polish Barrel <i>PB</i>		10/24/90	WB
620	Apply Coatings (Barrel Action)		10/26/90	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		11-6-90	KS
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		11-6-90	KS
	C) Inspect Ejector Hole for Chamfer		11-6-90	KS
	D) Oil Firing Pin Ass'y		11-6-90	KS
	E) Adjust Trigger Pull to Min Setting and Stake		11-13-90	JH

op. #	OP. NAME	READINGS			DATE	INIT		
625 cont.	F) Safety On Force	6.0	5.3/4	5.3/4	11/7/90	KS		
	G) Safety Off Force	3.0	2.3/4	3.0	11/7/90	KS		
	H) Trigger Pull Test & Retainability				11-13-90	JH		
	I) Firing Pin Indent	.022	.021	.020	11/7/90	KS		
	J) Assemble Stock				11/13/90	KS		
	K) Assemble Swivel Studs				11-26-90	JH		
	L) Attach Front and Rear Sight Assemblies				11/13/90	KS		
	M) Iron Sight Alignment				11/13/90	KS		
	N) Detach Front & Rear Sights & place in numbered container				11/13/90	KS		
	O) Attach Scope to Rifle				11/13/90	KS		
	P) Detach & Attach Scope 20 Times				11/13/90	KS		
640	Gallery Target & Test				11-14-90	AC		
	A) Time				11-14-90	AC		
	B) Malfunctions				11-14-90	AC		
	C) Pierced Primers				11-14-90	AC		
	D) Optical Clarity of Scope				11-14-90	AC		
645	Inspect for Live Ammo				11-14-90	AC		
655	Final Inspection							
	A) Headspace				11-26-90	JH		
	B) Trigger Pull	254	219	240	237	239	11-26-90	JH
	C) Function						11-26-90	JH
660	Pack						12-17-90	DH

MOD. _____		GA. CAL. _____	GUN # <u>C.6587912</u>
# TEST	DATE	MALFUNCTION/DEFECT	ASSEM. #
	1st	<i>Bolt Rd.</i>	<i>KS</i>
	2nd	<i>Repaired 11/16/90</i>	<i>KS.</i>
	3rd	<i>Safe hits Stock</i>	<i>KS</i>
	4th	<i>Repaired 11/21/90 Filled Stock by Safety</i>	<i>RW</i>
		FUNCTION	RD 6654 Rev 1

TEST INIT. ACTION TO CORRECT		ASSEM. #
PROOF		
TEST		
TGT		
PROOF		
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. 06587712DATE 11-13-90TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.39	2.29	2.44	2.54	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.38	2.50	2.26	2.19	
PULL #3	2.38	2.49	2.38	2.40	
PULL #4	2.36	2.39	2.45	2.37	
PULL #5	2.42	2.44	2.44	2.39	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.23	3.41		
PULL #2	3.30	2.29		
PULL #3	3.21	3.40		
PULL #4	3.41	3.27		
PULL #5	3.37	3.30		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.34	4.31		4.19
PULL #2	4.38	4.33		4.33
PULL #3	4.31	4.33		4.15
PULL #4	4.17	4.16		4.26
PULL #5	4.28	4.31		4.19
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06587712
14 Nov 1990

CENTROIDAL DISTANCES

0 TO	1	.185068
1 TO	2	.259141
1 TO	3	.0800562
1 TO	4	.243023
1 TO	5	.404772

#5 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0312
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0714
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0779192
THE AMR FOR THIS RIFLE IS: .8266

14 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8587712

CENTERFIRE PATTERNS # 1

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS- 10

IN CIR

1in = 3

2in = 6

3in = 9

HS= 1.951

VS= 2.774

GS= 2.910

PATTERN #	:	1	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.784	.824	.684
MINIMUM X	:	-1.167	-1.127	-.839
MAXIMUM Y	:	1.074	.885	.958
MINIMUM Y	:	-1.700	-.881	-.808
CENTROID X	:	-.047	-.087	.053
CENTROID Y	:	-.179	.010	-.063
POA TO CENTROID in.	:	.185	.088	.083
MIN RADIUS	:	.171	.043	.115
MEAN RADIUS	:	.852	.715	.637
MAX RADIUS	:	1.738	1.270	1.165
HORIZONTAL SPREAD	:	1.951	1.951	1.523
VERTICAL SPREAD	:	2.774	1.766	1.766
EXTREME SPREAD	:	2.910	2.352	1.905
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

14 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06587712

CENTERFIRE PATTERNS # 2

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS- 10

IN CIR

1in = 5

2in = 5

3in = 10

HS= 2.433

VS= 1.968

GS= 2.738


PATTERN #	:	2	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.144	1.098	.953
MINIMUM X	:	-1.289	-1.162	-1.094
MAXIMUM Y	:	1.024	.919	.945
MINIMUM Y	:	-.944	-.654	-.629
CENTROID X	:	.078	-.049	.096
CENTROID Y	:	.048	.153	.128
POA TO CENTROID in.	:	.092	.161	.160
MIN RADIUS	:	.061	.104	.074
MEAN RADIUS	:	.701	.648	.529
MAX RADIUS	:	1.483	1.180	1.262
HORIZONTAL SPREAD	:	2.433	2.260	2.047
VERTICAL SPREAD	:	1.968	1.573	1.573
EXTREME SPREAD	:	2.738	2.261	2.197
NUMBER IN ONE INCH CIRCLE	=		5	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

14 Nov 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C6587712

CENTERFIRE PATTERNS # 3

POA

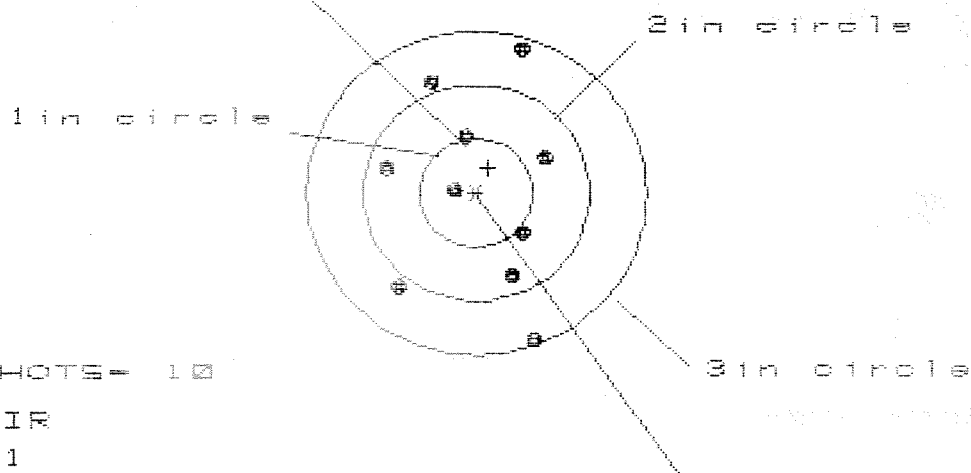

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 5

3 in = 10

HS= 1.366

VS= 2.700

CS= 2.702

CENTROID *


PATTERN #	:	3	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.612	.664	.716
MINIMUM X	:	-.754	-.702	-.650
MAXIMUM Y	:	1.284	1.126	.974
MINIMUM Y	:	-1.416	-.992	-.851
CENTROID X	:	-.107	-.159	-.211
CENTROID Y	:	-.232	-.074	-.215
POA TO CENTROID in.	:	.255	.176	.301
MIN RADIUS	:	.211	.181	.107
MEAN RADIUS	:	.862	.772	.711
MAX RADIUS	:	1.494	1.199	1.039
HORIZONTAL SPREAD	:	1.366	1.366	1.366
VERTICAL SPREAD	:	2.700	2.118	1.825
EXTREME SPREAD	:	2.702	2.368	1.902
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	10		

14 Nov 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C8587712

CENTERFIRE PATTERNS

4

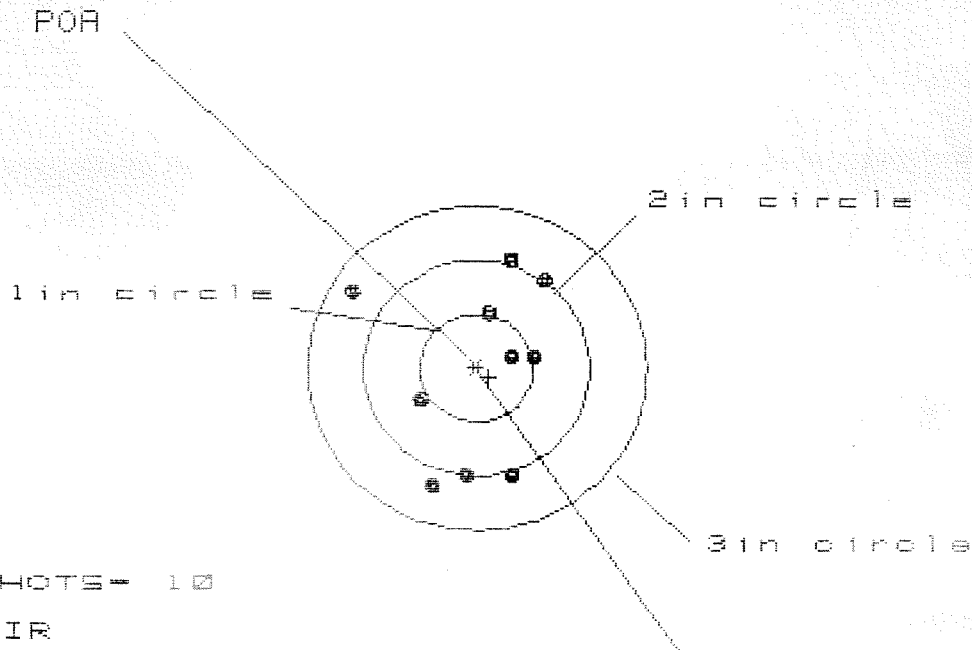

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 6

3 in = 10

HS= 1.645

VS= 2.131

GS= 2.226

PATTERN #	:	4	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.563	.443	.380
MINIMUM X	:	-1.082	-.602	-.665
MAXIMUM Y	:	.998	1.083	.952
MINIMUM Y	:	-1.133	-1.048	-1.016
CENTROID X	:	-.105	.015	.078
CENTROID Y	:	.087	.002	.133
POA TO CENTROID in.	:	.136	.015	.154
MIN RADIUS	:	.269	.214	.081
MEAN RADIUS	:	.844	.777	.693
MAX RADIUS	:	1.323	1.163	1.042
HORIZONTAL SPREAD	:	1.645	1.045	1.045
VERTICAL SPREAD	:	2.131	2.131	1.968
EXTREME SPREAD	:	2.226	2.226	1.991
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	10		

14 Nov 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C8587712

CENTERFIRE PATTERNS

5

POA

1 in circle

2 in circle

3 in circle

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 7

3 in = 9

HS = 2.421

VS = 1.741

GS = 2.863

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.503	1.081	.987
MINIMUM X	:	-.918	-.751	-.694
MAXIMUM Y	:	.810	.883	.784
MINIMUM Y	:	-.931	-.858	-.957
CENTROID X	:	.337	.170	.264
CENTROID Y	:	-.051	-.124	-.025
POA TO CENTROID in.	:	.341	.211	.265
MIN RADIUS	:	.208	.344	.284
MEAN RADIUS	:	.874	.782	.730
MAX RADIUS	:	1.642	1.151	1.121
HORIZONTAL SPREAD	:	2.421	1.832	1.681
VERTICAL SPREAD	:	1.741	1.741	1.741
EXTREME SPREAD	:	2.863	2.184	2.009
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		9	