

C6523385

MODEL 700<sup>TM</sup> M24

Model **SMS**<sup>TM</sup>

Action

Barrel Length

Capacity

Order No. **5716**

\*Includes 1 in chamber.

*Remington*

**Remington**  
REG. U.S. PAT. & TM. OFF.

**MODEL 700™ H24**

**VERY IMPORTANT:**  
Instruction Book  
enclosed to assure  
safe use of this  
firearm.

**SERIAL NO.**  
C6523385

**ORDER NO.**  
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

Ø1

5716 C6523385

**UPC**

0 47700 25716 7

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # *C6523385*

| OP. #        | OP. NAME                                                       | READINGS | DATE     | INIT      |
|--------------|----------------------------------------------------------------|----------|----------|-----------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   | 9 24     | 90       | <i>RW</i> |
| 600          | Proof                                                          | 9 24     | 90       | <i>RW</i> |
| 607          | Check Headspace                                                | 9 24     | 90       | <i>RW</i> |
| 610          | Dis-assemble Gun                                               | 9 24     | 90       | <i>RW</i> |
| 612          | Magnaflux Barrel<br>Action                                     |          | 9-25-90  | KR        |
|              | Magnaflux Bolt                                                 |          | 9-25-90  | KR        |
| 615          | Rollmark Caliber                                               |          | 9-25-90  | <i>GA</i> |
| 617          | Drill and Tap Sight Holes                                      |          | 9-25-90  | FB        |
| 618          | Polish Barrel <i>AB</i>                                        |          | 9-25-90  | <i>WB</i> |
| 620          | Apply Coatings<br>(Barrel Action)                              |          | 10-2-90  | <i>TS</i> |
|              | Apply Coating (Bolt)                                           |          |          |           |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          | 10/8/90  | <i>RW</i> |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          | 10/8/90  | <i>RW</i> |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          | 10/8/90  | <i>RW</i> |
|              | D) Oil Firing Pin Ass'y                                        |          | 10/8/90  | <i>RW</i> |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          | 10/10/90 | <i>WB</i> |

| op. #      | OP. NAME                                                    | READINGS |       |       |     |     | DATE     | INIT |
|------------|-------------------------------------------------------------|----------|-------|-------|-----|-----|----------|------|
| 625<br>nt. | F) Safety On Force                                          | 4        | 4     | 4     |     |     | 10/10/90 | WB   |
|            | G) Safety Off Force                                         | 2 1/4    | 2 1/4 | 2 1/4 |     |     | 10/10/90 | WB   |
|            | H) Trigger Pull Test & Retainability                        |          |       |       |     |     | 10/10/90 | WB   |
|            | I) Firing Pin Indent                                        | .021     | .0215 | .0215 |     |     | 10/10/90 | WB   |
|            | J) Assemble Stock                                           |          |       |       |     |     | 10/10/90 | RW   |
|            | K) Assemble Swivel Studs                                    |          |       |       |     |     | 2/15/90  | DS   |
|            | L) Attach Front and Rear Sight Assemblies                   |          |       |       |     |     | 10/10/90 | RW   |
|            | M) Iron Sight Alignment                                     |          |       |       |     |     | 10/10/90 | RW   |
|            | N) Detach Front & Rear Sights & place in numbered container |          |       |       |     |     | 10/10/90 | RW   |
|            | O) Attach Scope to Rifle                                    |          |       |       |     |     | 10/10/90 | RW   |
|            | P) Detach & Attach Scope 20 Times                           |          |       |       |     |     | 10/10/90 | RW   |
| 640        | Gallery Target & Test                                       |          |       |       |     |     | 10-11-90 | AC   |
|            | A) Time                                                     |          |       |       |     |     | 10-11-90 | AC   |
|            | B) Malfunctions                                             |          |       |       |     |     | 10-11-90 | AC   |
|            | C) Pierced Primers                                          |          |       |       |     |     | 10-11-90 | AC   |
|            | D) Optical Clarity of Scope                                 |          |       |       |     |     | 10-11-90 | AC   |
| 645        | Inspect for Live Ammo                                       |          |       |       |     |     | 10-11-90 | AC   |
| 655        | Final Inspection                                            |          |       |       |     |     |          |      |
|            | A) Headspace                                                |          |       |       |     |     | 2/15/90  | DS   |
|            | B) Trigger Pull                                             | 220      | 217   | 207   | 219 | 220 | 2/15/90  | DS   |
|            | C) Function                                                 |          |       |       |     |     | 2/15/90  | DS   |
| 660        | Pack                                                        |          |       |       |     |     | 12-17-90 | DH   |

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6523385

DATE 10/10/90

TESTER WB

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# |      | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|------|------------------------------------------------------------------------|
| PULL #1 | 2.31             | 2.31                     | 2.47                           | 2.20 | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.30             | 2.20                     | 2.52                           | 2.17 |                                                                        |
| PULL #3 | 2.31             | 2.47                     | 2.51                           | 2.07 |                                                                        |
| PULL #4 | 2.44             | 2.46                     | 2.49                           | 2.19 |                                                                        |
| PULL #5 | 2.44             | 2.52                     | 2.22                           | 2.20 |                                                                        |
| TOTAL   | 11.80            | 11.96                    | 12.21                          |      |                                                                        |
| AVG.    | 2.36             | 2.39                     | 2.44                           |      |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES |  | COMMENTS |
|---------|------------------|--------------------------|--|----------|
| PULL #1 | 3.09             | 3.06                     |  |          |
| PULL #2 | 3.03             | 3.05                     |  |          |
| PULL #3 | 3.10             | 3.11                     |  |          |
| PULL #4 | 3.00             | 3.09                     |  |          |
| PULL #5 | 3.03             | 3.00                     |  |          |
| TOTAL   | 15.25            | 15.31                    |  |          |
| AVG.    | 3.05             | 3.06                     |  |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.24             | 4.09                     |                                | 4.05                                 |
| PULL #2 | 4.21             | 4.03                     |                                | 3.95                                 |
| PULL #3 | 4.14             | 4.12                     |                                | 3.91                                 |
| PULL #4 | 4.00             | 4.09                     |                                | 4.05                                 |
| PULL #5 | 4.11             | 4.01                     |                                | 4.00                                 |
| TOTAL   | 20.70            | 20.34                    |                                | 19.96                                |
| AVG.    | 4.14             | 4.07                     |                                | 3.99                                 |

CENTROIDAL DISTANCE CALCULATIONS  
FOR RIFLE # C6523385  
12 Oct 1990

CENTROIDAL DISTANCES

|      |   |         |
|------|---|---------|
| 0 TO | 1 | .401045 |
| 1 TO | 2 | .1678   |
| 1 TO | 3 | .154548 |
| 1 TO | 4 | .512625 |
| 1 TO | 5 | .325281 |



 <----POI

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.4704  
 THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0762  
 THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .476532  
 THE AMR FOR THIS RIFLE IS: .9438

12 Oct 1990

FILE:/PATTERNING/CENTERFIRE\_PATT/C6523385

## CENTERFIRE PATTERNS # 1

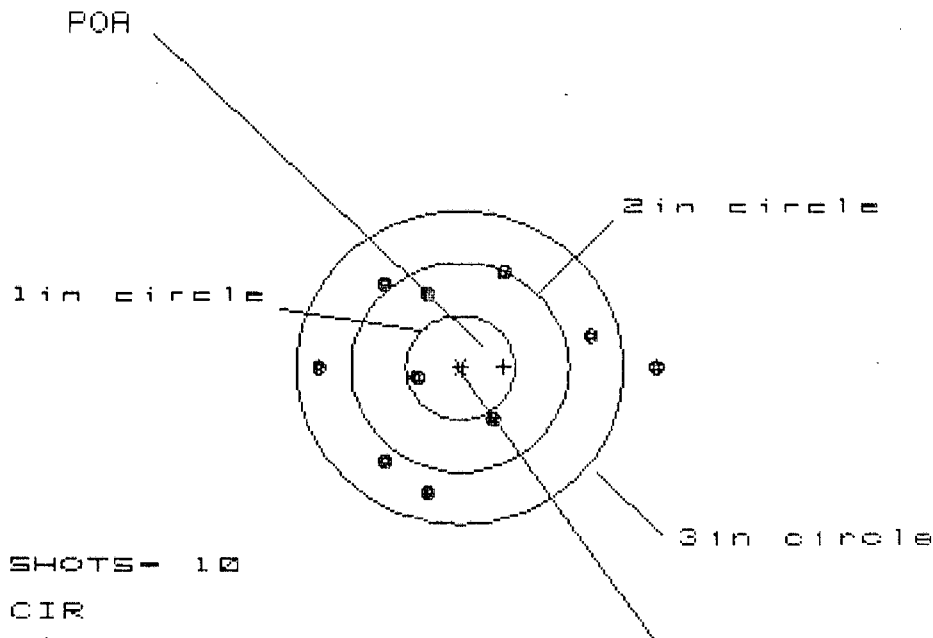

# OF SHOTS- 10

# IN CIR

1 in = 1

2 in = 4

3 in = 9

HS= 3.147

VS= 2.092

GS= 3.148


CENTROID #

| PATTERN #                     | 1      | 2      | 3      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | 1.811  | 1.394  | 1.252  |
| MINIMUM X                     | -1.336 | -1.134 | -.629  |
| MAXIMUM Y                     | .862   | .865   | .861   |
| MINIMUM Y                     | -1.230 | -1.227 | -1.232 |
| CENTROID X                    | -.401  | -.603  | -.461  |
| CENTROID Y                    | -.006  | -.009  | -.005  |
| POA TO CENTROID in.           | .401   | .603   | .461   |
| MIN RADIUS                    | .416   | .224   | .359   |
| MEAN RADIUS                   | 1.058  | .943   | .923   |
| MAX RADIUS                    | 1.812  | 1.435  | 1.297  |
| HORIZONTAL SPREAD             | 3.147  | 2.528  | 1.881  |
| VERTICAL SPREAD               | 2.092  | 2.092  | 2.092  |
| EXTREME SPREAD                | 3.148  | 2.556  | 2.256  |
| NUMBER IN ONE INCH CIRCLE =   | 1      |        |        |
| NUMBER IN TWO INCH CIRCLE =   | 4      |        |        |
| NUMBER IN THREE INCH CIRCLE = | 9      |        |        |

12 Oct 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/C6523385

## CENTERFIRE PATTERNS # 2

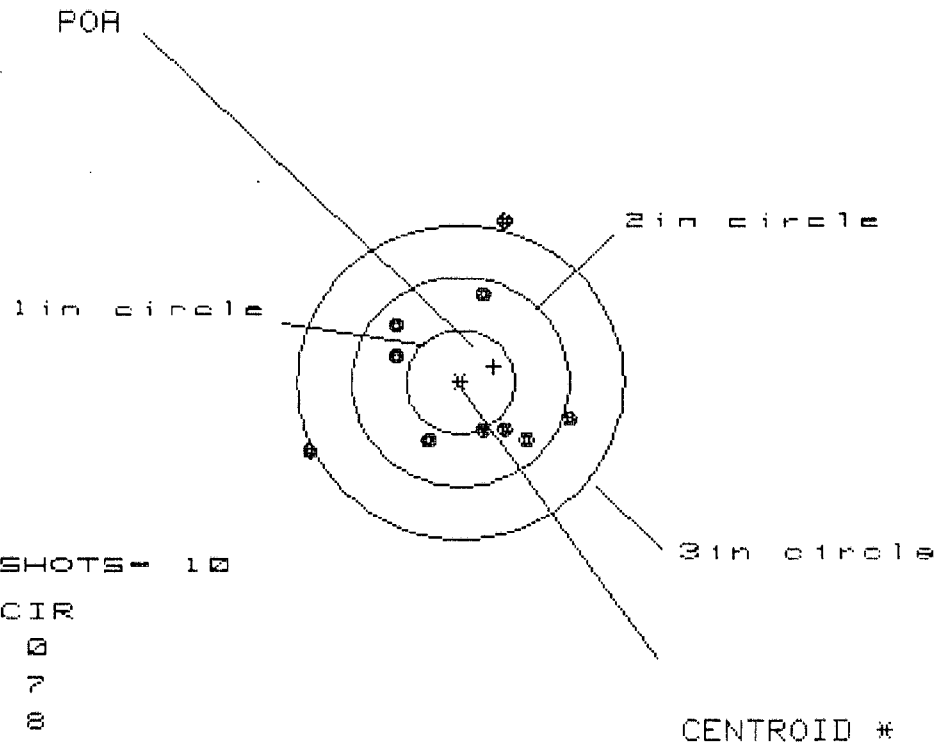

# OF SHOTS- 10

# IN CIR

1 in = 0

2 in = 7

3 in = 8

HS= 2.378

VS= 2.180


GS= 2.786

| PATTERN #                     | 2      |        |       |
|-------------------------------|--------|--------|-------|
| SHOTS (BEST OF)               | 10     | 9      | 8     |
| MAXIMUM X                     | 1.027  | 1.071  | .908  |
| MINIMUM X                     | -1.351 | -1.307 | -.743 |
| MAXIMUM Y                     | 1.501  | .994   | .930  |
| MINIMUM Y                     | -.679  | -.512  | -.488 |
| CENTROID X                    | -.307  | -.351  | -.188 |
| CENTROID Y                    | -.145  | -.312  | -.248 |
| POR TO CENTROID in.           | .339   | .470   | .311  |
| MIN RADIUS                    | .512   | .391   | .376  |
| MEAN RADIUS                   | .903   | .806   | .719  |
| MAX RADIUS                    | 1.553  | 1.404  | .973  |
| HORIZONTAL SPREAD             | 2.378  | 2.378  | 1.651 |
| VERTICAL SPREAD               | 2.180  | 1.506  | 1.418 |
| EXTREME SPREAD                | 2.796  | 2.401  | 1.868 |
| NUMBER IN ONE INCH CIRCLE =   |        | 0      |       |
| NUMBER IN TWO INCH CIRCLE =   |        | 7      |       |
| NUMBER IN THREE INCH CIRCLE = |        | 8      |       |

12 Oct 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/C6523385

## CENTERFIRE PATTERNS # 3

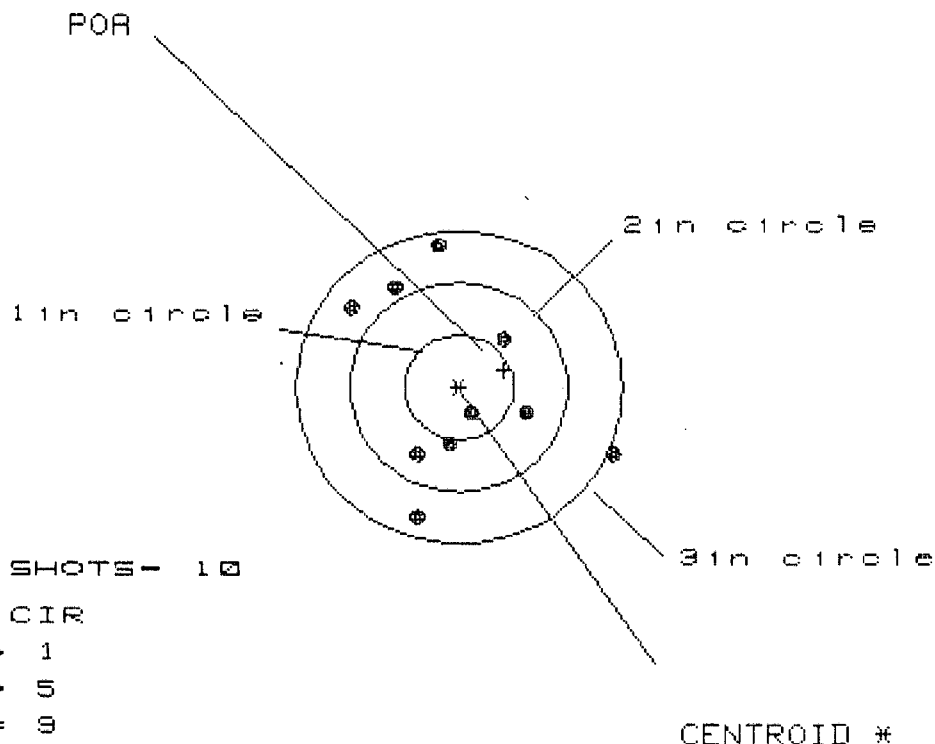

# OF SHOTS- 10

# IN CIR

1in = 1

2in = 5

3in = 9

HS= 2.402

VS= 2.635

GS= 2.781


| PATTERN #                   | : | 3      |        |        |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | 1.449  | .794   | .796   |
| MINIMUM X                   | : | -.953  | -.792  | -.790  |
| MAXIMUM Y                   | : | 1.350  | 1.283  | 1.041  |
| MINIMUM Y                   | : | -1.285 | -1.352 | -1.192 |
| CENTROID X                  | : | -.414  | -.575  | -.577  |
| CENTROID Y                  | : | -.160  | -.093  | -.253  |
| POA TO CENTROID in.         | : | .444   | .583   | .630   |
| MIN RADIUS                  | : | .237   | .380   | .280   |
| MEAN RADIUS                 | : | .954   | .898   | .819   |
| MAX RADIUS                  | : | 1.571  | 1.371  | 1.213  |
| HORIZONTAL SPREAD           | : | 2.402  | 1.586  | 1.586  |
| VERTICAL SPREAD             | : | 2.635  | 2.635  | 2.233  |
| EXTREME SPREAD              | : | 2.781  | 2.646  | 2.244  |
| NUMBER IN ONE INCH CIRCLE   | = |        | 1      |        |
| NUMBER IN TWO INCH CIRCLE   | = |        | 5      |        |
| NUMBER IN THREE INCH CIRCLE | = |        | 9      |        |

12 Oct 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/C6523385

## CENTERFIRE PATTERNS

# 4

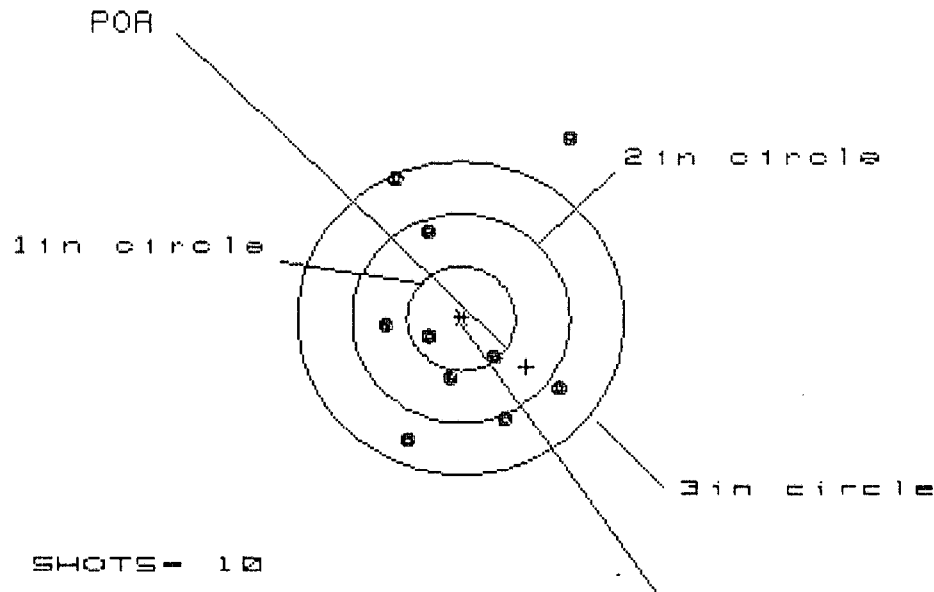

# OF SHOTS- 10

# IN CIR

1in = 2

2in = 5

3in = 9

HS= 1.768

VS= 2.859

GS= 3.243


CENTROID \*

| PATTERN #                   | : | 4      |       |       |
|-----------------------------|---|--------|-------|-------|
| SHOTS (BEST OF)             | : | 10     | 9     | 8     |
| MAXIMUM X                   | : | 1.023  | 1.053 | .986  |
| MINIMUM X                   | : | -.745  | -.631 | -.698 |
| MAXIMUM Y                   | : | 1.738  | 1.482 | 1.218 |
| MINIMUM Y                   | : | -1.121 | -.928 | -.743 |
| CENTROID X                  | : | -.601  | -.715 | -.648 |
| CENTROID Y                  | : | .466   | .273  | .087  |
| POA TO CENTROID in.         | : | .760   | .765  | .654  |
| MIN RADIUS                  | : | .366   | .237  | .240  |
| MEAN RADIUS                 | : | 1.000  | .833  | .710  |
| MAX RADIUS                  | : | 2.017  | 1.576 | 1.249 |
| HORIZONTAL SPREAD           | : | 1.768  | 1.684 | 1.684 |
| VERTICAL SPREAD             | : | 2.859  | 2.410 | 1.960 |
| EXTREME SPREAD              | : | 3.243  | 2.521 | 1.969 |
| NUMBER IN ONE INCH CIRCLE   | = |        | 2     |       |
| NUMBER IN TWO INCH CIRCLE   | = |        | 5     |       |
| NUMBER IN THREE INCH CIRCLE | = |        | 9     |       |

12 Oct 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/C6523385

## CENTERFIRE PATTERNS # 5

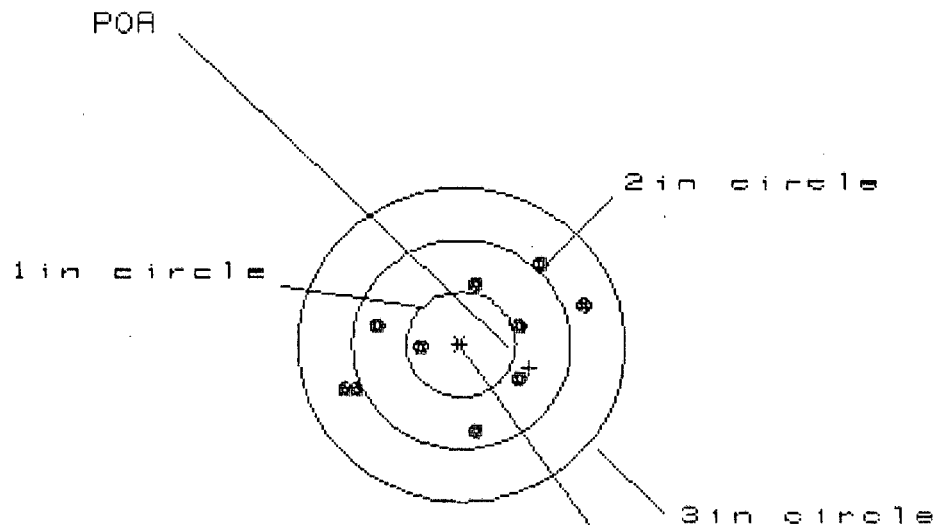

# OF SHOTS- 10

# IN CIR

1 in = 1

2 in = 5

3 in = 10

HS = 2.115

VS = 1.564

GS = 2.261

| PATTERN #                     | 5      | 9     | 8     |
|-------------------------------|--------|-------|-------|
| SHOTS (BEST OF)               | 10     | 9     | 8     |
| MAXIMUM X                     | 1.088  | .871  | .758  |
| MINIMUM X                     | -1.027 | -.906 | -.945 |
| MAXIMUM Y                     | .766   | .806  | .756  |
| MINIMUM Y                     | -.798  | -.758 | -.808 |
| CENTROID X                    | -.629  | -.750 | -.637 |
| CENTROID Y                    | .226   | .186  | .236  |
| POA TO CENTROID in.           | .668   | .773  | .679  |
| MIN RADIUS                    | .408   | .287  | .401  |
| MEAN RADIUS                   | .804   | .757  | .722  |
| MAX RADIUS                    | 1.146  | 1.187 | 1.070 |
| HORIZONTAL SPREAD             | 2.115  | 1.777 | 1.703 |
| VERTICAL SPREAD               | 1.564  | 1.564 | 1.564 |
| EXTREME SPREAD                | 2.261  | 2.147 | 2.063 |
| NUMBER IN ONE INCH CIRCLE =   | 1      |       |       |
| NUMBER IN TWO INCH CIRCLE =   | 6      |       |       |
| NUMBER IN THREE INCH CIRCLE = | 10     |       |       |

# RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 94-18829

INITIAL CUSTOMER ORDER NO.

JJM DAAA09-92-C-0834

W/10X SCOPE M-24 SNIPER W/DEPLOYMENT KIT  
ATTN FRED MARTIN

SCOPE 90 0394

DATE RECEIVED DATE OPENED DATE CODE

06/14/94 06/15/94

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

C6523385

700 7.62

NATO

ACCESSORIES

HARD CASE

SCOPE MNTS

SCOPE BASE

SLING STRAP

FROM:

SHIP TO:

COMMANDER (W52H094138H226)  
DEFENSE DIST DEPOT ANNISTON  
ATTN DDAA-UR BLDG 112  
ANNISTON

AL 36201-5025

COMMANDER (W52H094138H226)  
DEFENSE DIST DEPOT ANNISTON  
ATTN DDAA-UR BLDG 112  
ANNISTON

AL  
36201-5025

CUST NO: 098397 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

| CUSTOMER CONCERN | AMMO | FUNCTION | FINISH | ACCURACY | FIT | INSPECT |
|------------------|------|----------|--------|----------|-----|---------|
| CYCLE            | A1   | B1       |        |          |     |         |
| TRIGGER GROUP    |      | B2       |        |          | E1  | F1      |
| BOLT ASSY.       |      | B3       |        |          | E2  | F2      |
| BARREL ASSY.     |      | B4       |        | D1       | E3  | F3      |
| REC. ASSY.       |      | B5       |        | D2       | E4  | F4      |
| WOOD             |      |          | C1     | D3       | E5  | F5      |
| METAL            |      |          | C2     |          |     |         |

MAIN FAULT

PARTS

COMMENTS

Trigger Assy 173.31  
✓ Stock 471.11  
✓ Filing pin Assy 9.96  
✓ Mag Box 2.06  
CTI 50.00  
706.44

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

BARBER - M24 0027199

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. 06523385

DATE 2-8-96

TESTER DA

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|------------------------------------------------------------------------|
| PULL #1 | 2.71             | 2.84                     | 2.68                           | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.83             | 2.84                     | 2.81                           |                                                                        |
| PULL #3 | 2.85             | 2.81                     | 2.67                           |                                                                        |
| PULL #4 | 2.80             | 2.84                     | 2.78                           |                                                                        |
| PULL #5 | 2.80             | 2.83                     | 2.80                           |                                                                        |
| TOTAL   | 13.99            | 14.16                    | 13.74                          |                                                                        |
| AVG.    | 2.79             | 2.83                     | 2.74                           |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES | COMMENTS |
|---------|------------------|--------------------------|----------|
| PULL #1 | 3.13             | 3.05                     |          |
| PULL #2 | 3.13             | 3.02                     |          |
| PULL #3 | 3.11             | 3.00                     |          |
| PULL #4 | 3.10             | 3.15                     |          |
| PULL #5 | 3.00             | 3.08                     |          |
| TOTAL   | 15.47            | 15.30                    |          |
| AVG.    | 3.09             | 3.06                     |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.14             | 4.00                     | L                              | 4.34                                 |
| PULL #2 | 4.13             | 4.15                     |                                | 4.34                                 |
| PULL #3 | 4.16             | 4.00                     |                                | 4.44                                 |
| PULL #4 | 4.16             | 4.06                     |                                | 4.20                                 |
| PULL #5 | 4.21             | 4.10                     |                                | 4.01                                 |
| TOTAL   | 20.80            | 20.31                    |                                | 21.33                                |
| AVG.    | 4.16             | 4.06                     |                                | 4.26                                 |

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6523385

| OP. #        | OP. NAME                                                       | READINGS | DATE | INITIAL |
|--------------|----------------------------------------------------------------|----------|------|---------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   |          |      |         |
| 600          | Proof                                                          |          |      |         |
| 607.         | Check Headspace                                                |          |      |         |
| 610          | Dis-assemble Gun                                               |          |      |         |
| 612          | Magnaflux Barrel<br>Action                                     |          |      |         |
|              | Magnaflux Bolt                                                 |          |      |         |
| 615          | Rollmark Caliber                                               |          |      |         |
| 617          | Drill and Tap Sight Holes                                      |          |      |         |
| 618          | Polish Barrel                                                  |          |      |         |
| 620          | Apply Coatings<br>(Barrel Action)                              |          |      |         |
|              | Apply Coating (Bolt)                                           |          |      |         |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          |      |         |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          |      |         |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          |      |         |
|              | D) Oil Firing Pin Ass'y                                        |          |      |         |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          |      |         |

**BARBER - M24 0027163**

| op. #        | OP. NAME                                                    | READINGS |       |       |      |      | DATE    | INIT |
|--------------|-------------------------------------------------------------|----------|-------|-------|------|------|---------|------|
| 625<br>cont. | F) Safety On Force                                          | 7        | 7     | 6 1/2 |      |      | 2/23/96 | WB   |
|              | G) Safety Off Force                                         | 3 1/2    | 3 1/2 | 3 1/2 |      |      | 2/23/96 | WB   |
|              | H) Trigger Pull Test & Retainability                        |          |       |       |      |      |         |      |
|              | I) Firing Pin Indent                                        | .024     | .023  | .023  |      |      | 2/23/96 | WB   |
|              | J) Assemble Stock                                           |          |       |       |      |      | 2/14/96 | RW   |
|              | K) Assemble Swivel Studs                                    |          |       |       |      |      |         |      |
|              | L) Attach Front and Rear Sight Assemblies                   |          |       |       |      |      |         |      |
|              | M) Iron Sight Alignment                                     |          |       |       |      |      |         |      |
|              | N) Detach Front & Rear Sights & place in numbered container |          |       |       |      |      |         |      |
|              | O) Attach Scope to Rifle                                    |          |       |       |      |      |         |      |
|              | P) Detach & Attach Scope 20 Times                           |          |       |       |      |      |         |      |
| 640          | Gallery <del>Target</del> & Test                            |          |       |       |      |      | 2/23/96 | AC   |
|              | A) Time                                                     |          |       |       |      |      |         |      |
|              | B) Malfunctions                                             |          |       |       |      |      |         |      |
|              | C) Pierced Primers                                          |          |       |       |      |      |         |      |
|              | D) Optical Clarity of Scope                                 |          |       |       |      |      |         |      |
| 645          | Inspect for Live Ammo                                       |          |       |       |      |      |         |      |
| 655          | Final Inspection                                            |          |       |       |      |      |         |      |
|              | A) Headspace                                                |          |       |       |      |      | 2/24/96 | RW   |
|              | B) Trigger Pull                                             | 2.66     | 2.78  | 2.78  | 2.72 | 2.78 | 2/23/96 | WB   |
|              | C) Function                                                 |          |       |       |      |      | 2/24/96 | RW   |
| 660          | Pack                                                        |          |       |       |      |      |         |      |