

C6523434

MODEL 700TM M24

Model **SWS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Repair Inquiry

Repair Number: RE00076017

Serial: C6523434 Model 700 Center Fire Caliber 7.62 NATO M24 SWS

Repairman:

Verify Repair

Status:

Closed 1/21/2004 8:00:18 AM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: BN 161 INF

BN 161 INF

Address 1: 81ST BRIGADE ATTN S4

81ST BRIGADE ATTN S4

Address 2: BOX 339548

PO Box:

BOX 339548

PO Box:

City: FORT LEWIS

FORT LEWIS

State: WA

Zip Code: 98433

Country: US

State: WA

Zip Code: 98433

Country: US

FFL

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Fair

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Studs	3
A017	Scope Bases	2
A026	Scope	1

Repair Search

Refresh

Close

naglej

1/21/2004

8:04 AM

CAPS

NUM

INS

SCPL

start

2

Serial Number:

C6523434

Model: 700



RE00076017

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6523434.___0
FILE DATE AND TIME: 02/02/2004 07:13

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.053
The Average Y Centroid of the Five Target Set:	-0.011
The Average Point of Impact of the Five Target Set:	0.054
The Average Mean Radius of the Five Target Set:	0.610
The Distance from POA to Centroid Target #1:	0.037
The Distance from Centroid Target #2 to Centroid Target #1:	0.202
The Distance from Centroid Target #3 to Centroid Target #1:	0.052
The Distance from Centroid Target #4 to Centroid Target #1:	0.160
The Distance from Centroid Target #5 to Centroid Target #1:	0.167

SERIAL NUMBER: C6523434. __0

TARGET NUMBER: 1

FILE DATE: 02/02/2004

FILE TIME: 07:13

X CENTROID: -0.030

Y CENTROID: 0.022

POA TO CENTROID: 0.037

HORZ SPREAD: 1.676

VERT SPREAD: 1.505

GROUP SPREAD: 1.801

MIN RADIUS: 0.261

MAX RADIUS: 0.987


MEAN RADIUS: 0.681

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.544	-0.740
2:	0.205	-0.825
3:	0.418	-0.299
4:	0.672	0.159
5:	0.286	0.429
6:	-0.170	0.242
7:	-0.196	0.680
8:	-0.554	0.574
9:	-0.496	-0.185
10:	-1.004	0.181

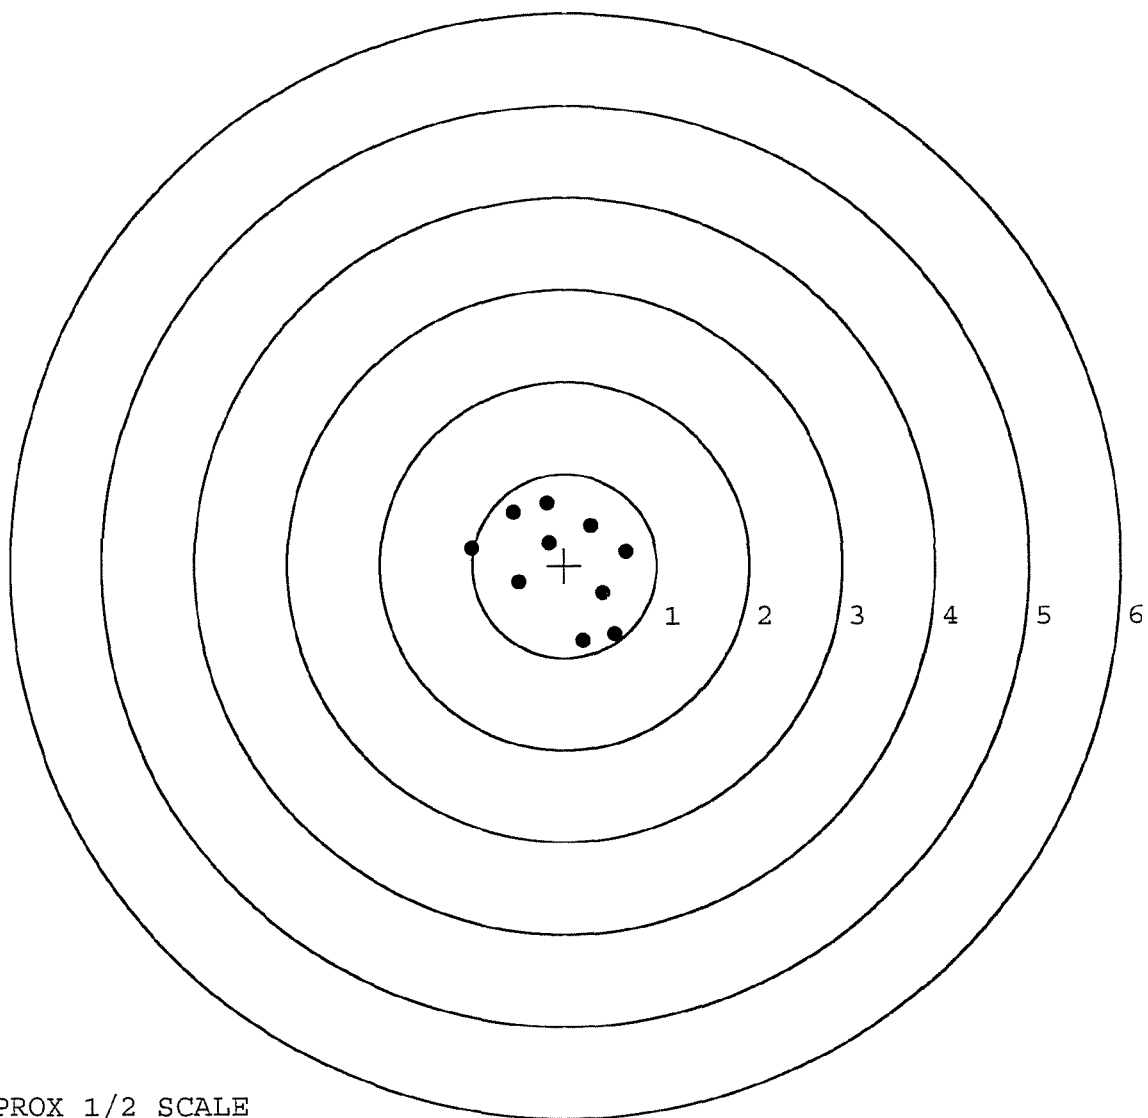

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523434. 0

TARGET NUMBER: 2

FILE DATE: 02/02/2004

FILE TIME: 07:13

X CENTROID: 0.159

Y CENTROID: 0.094

POA TO CENTROID: 0.185

HORZ SPREAD: 1.686

VERT SPREAD: 1.244

GROUP SPREAD: 1.768

MIN RADIUS: 0.170

MAX RADIUS: 0.913


MEAN RADIUS: 0.605

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.497	-0.626
2:	0.833	0.229
3:	1.013	0.418
4:	0.662	0.618
5:	-0.441	0.540
6:	-0.673	-0.113
7:	-0.014	-0.283
8:	0.130	-0.073
9:	-0.066	0.157
10:	-0.349	0.076

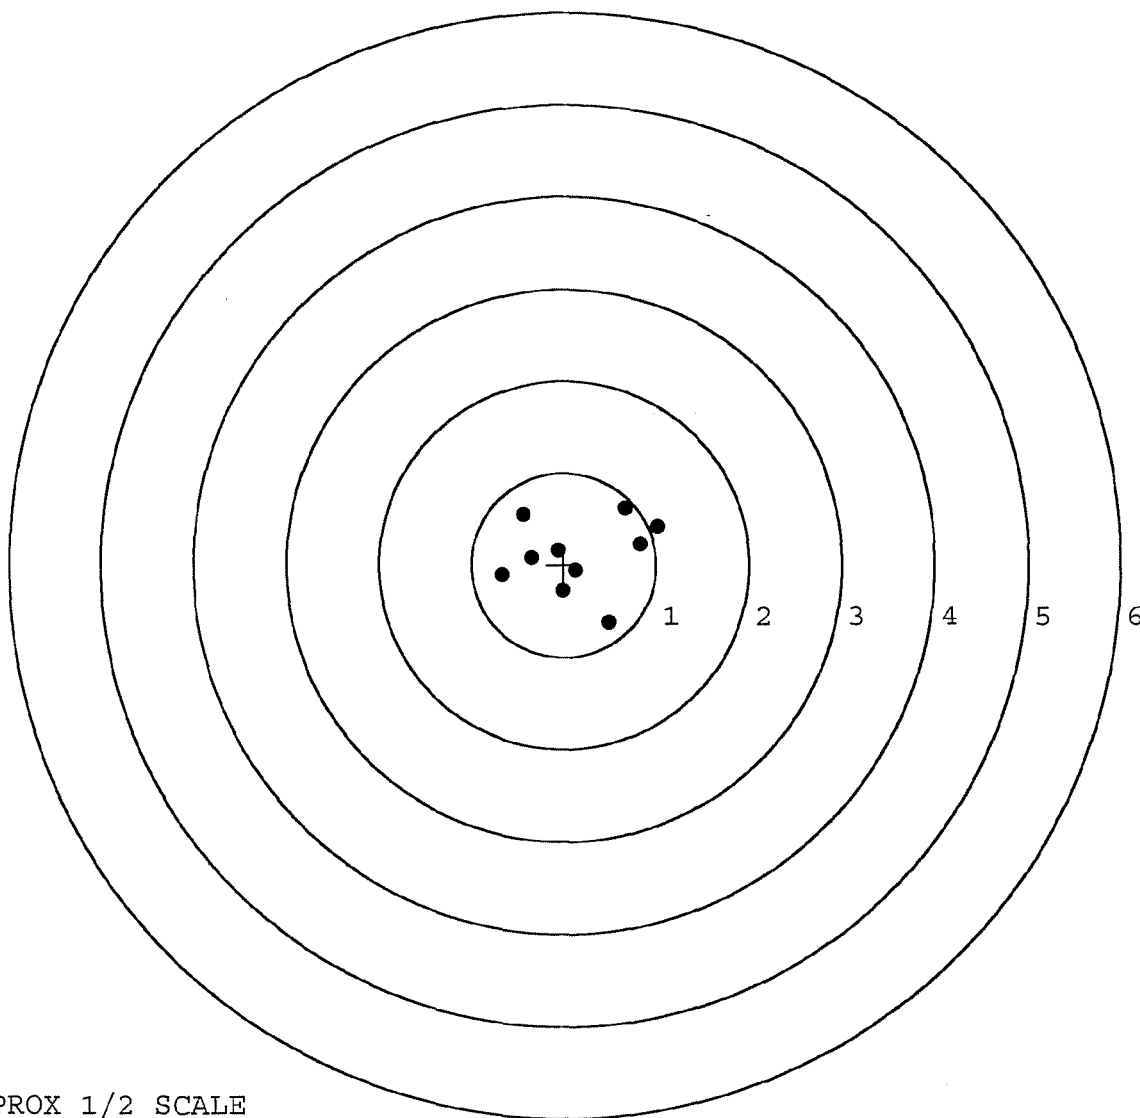

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523434. __0

TARGET NUMBER: 3

FILE DATE: 02/02/2004

FILE TIME: 07:13

X CENTROID: -0.051

Y CENTROID: -0.025

POA TO CENTROID: 0.057

HORZ SPREAD: 2.426

VERT SPREAD: 1.099

GROUP SPREAD: 2.595

MIN RADIUS: 0.179

MAX RADIUS: 1.407


MEAN RADIUS: 0.642

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.773	-0.316
2:	1.237	0.541
3:	0.163	-0.558
4:	-1.189	-0.381
5:	-0.826	0.396
6:	-0.412	0.358
7:	0.111	0.171
8:	0.107	-0.109
9:	-0.262	-0.048
10:	-0.210	-0.307

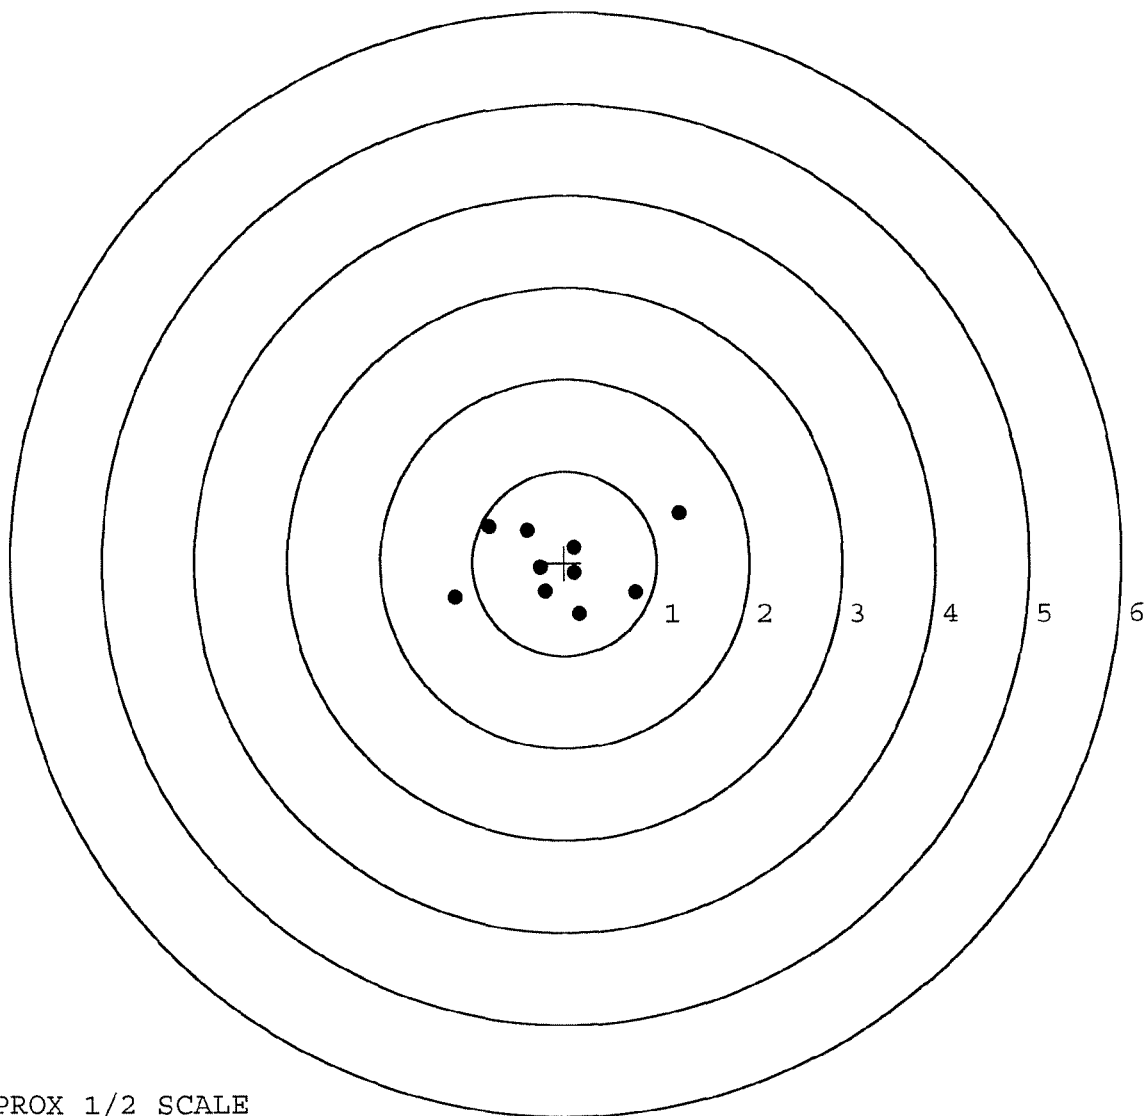

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523434. __0

TARGET NUMBER: 4

FILE DATE: 02/02/2004

FILE TIME: 07:13

POINT#	X	Y
1:	-0.036	-0.751
2:	0.070	-0.468
3:	-0.498	-0.626
4:	-0.245	-0.210
5:	-0.765	0.030
6:	0.647	-0.125
7:	0.597	0.139
8:	0.509	0.232
9:	0.225	0.198
10:	0.080	0.455

X CENTROID: 0.058

Y CENTROID: -0.113

POA TO CENTROID: 0.127

HORZ SPREAD: 1.412

VERT SPREAD: 1.206

GROUP SPREAD: 1.420

MIN RADIUS: 0.319


MAX RADIUS: 0.836

MEAN RADIUS: 0.558

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

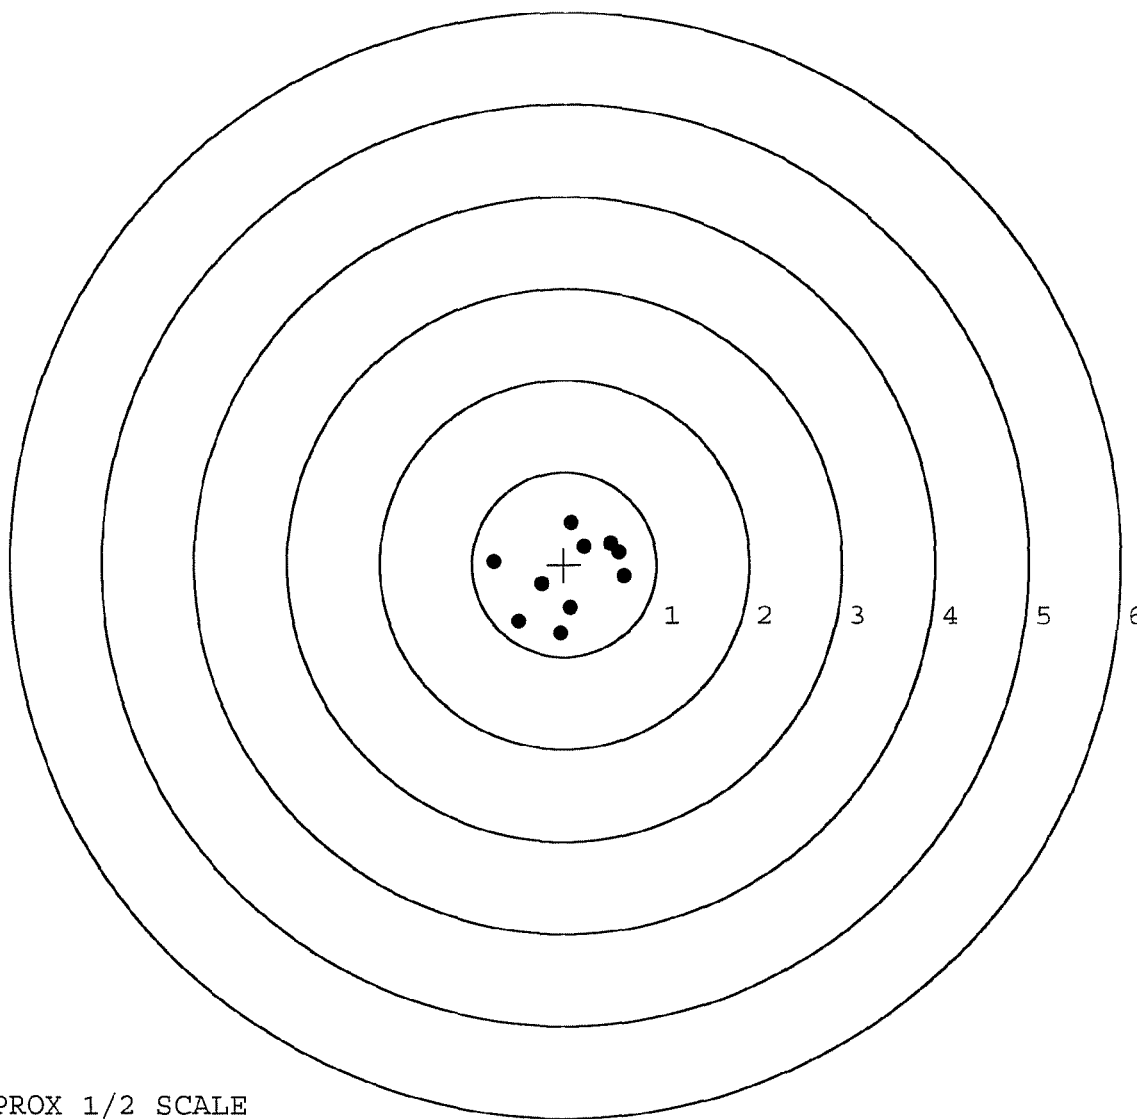

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523434. 0

TARGET NUMBER: 5

FILE DATE: 02/02/2004

FILE TIME: 07:13

POINT#	X	Y
1:	-0.280	-0.877
2:	-0.910	-0.159
3:	0.074	0.628
4:	0.448	0.738
5:	0.312	0.149
6:	-0.123	0.075
7:	0.445	0.064
8:	0.443	-0.166
9:	0.533	-0.339
10:	0.343	-0.430

X CENTROID: 0.128

Y CENTROID: -0.032

POA TO CENTROID: 0.132

HORZ SPREAD: 1.443

VERT SPREAD: 1.615

GROUP SPREAD: 1.628

MIN RADIUS: 0.258


MAX RADIUS: 1.046

MEAN RADIUS: 0.564

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

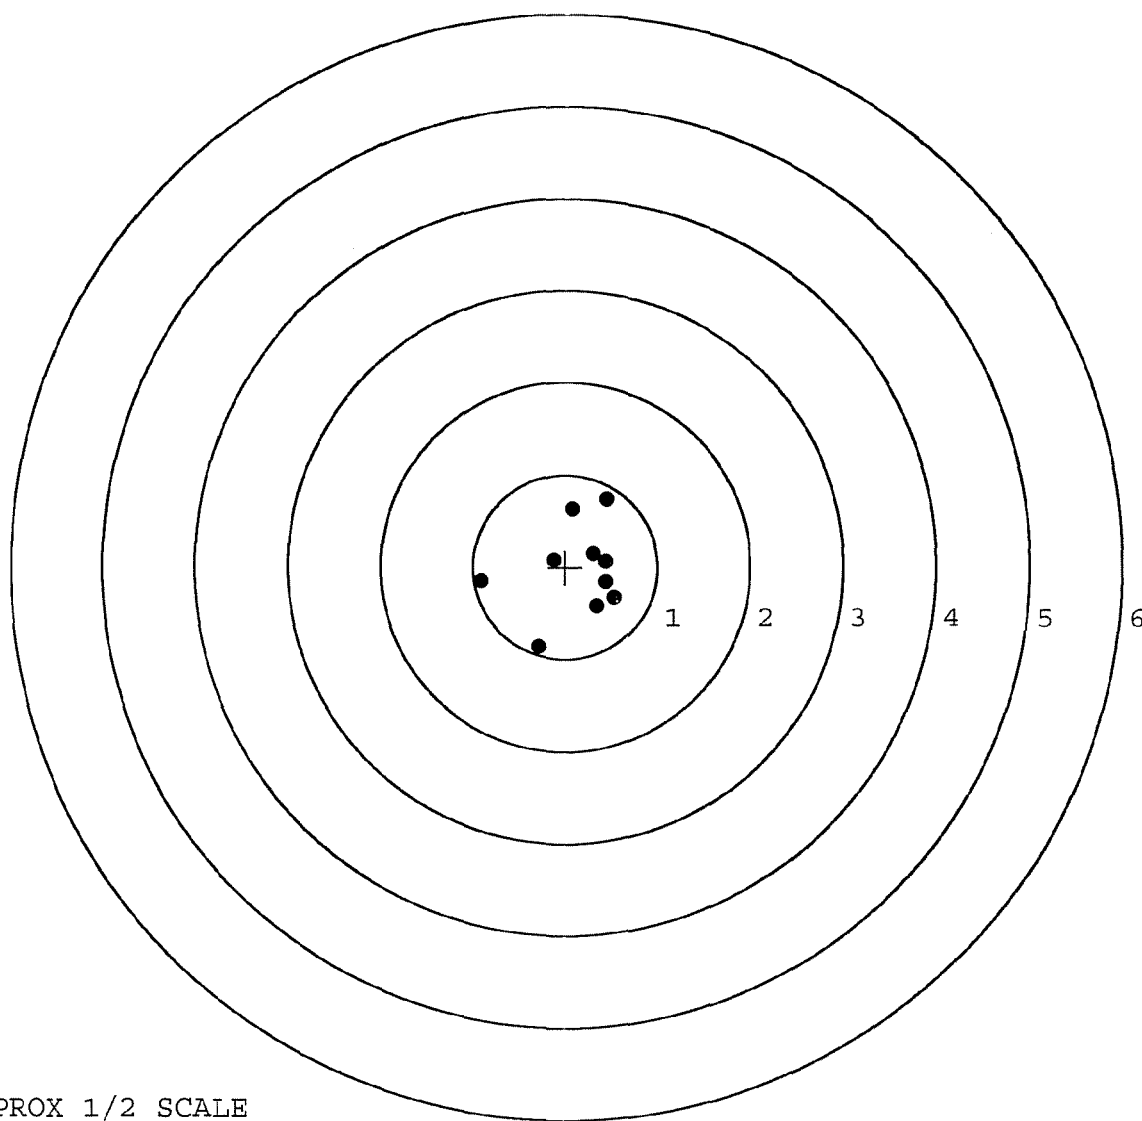

TARGET APPROX 1/2 SCALE

BARBER - M24 0028032

R & E NUMBER	76017		
SERIAL NUMBER	C6523434		
LOG-IN DATE	1-21-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	1-21-04	RJC
560 A	RE-BARREL	1-22-04	RJC
B	DRILL AND TAP	1-23-04	TRW
575	ASSEMBLE	1-22-04	RJC
600	PROOF	1-22-04	RW
605	CHECK HEADSPACE	1-22-04	RW
610	DIS-ASSEMBLE GUN	1-22-04	RW
612	MAGNAFLUX	1-22-04	RJC
615	ROLLMARK CALIBER	1/27/04	AB
618	ROTO-BLAST	1/27/2004	DMS
620	APPLY COATINGS	1-29	TA
625 A	FINAL ASSEMBLY	1-30-04	RW
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	2-2-04	TRW
655	FINAL INSPECT	2-3-04	RJC
660	PACK	2-16-04	DA
		SHIP DATE	
QAR INSPECTION DATE			

Remington
REG. U.S. PAT. & TM. OFF.

DU PONT
REG. U.S. PAT. & TM. OFF.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ H24	SERIAL NO. C6523434
MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off. Marca Registrada Marque Deposee.	ORDER NO. 5716

Ø1


5716 C6523434

UPC


0 47700 25716 7

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6523434

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	10 3	90	Rw
600	Proof	10 3	90	Rw
607	Check Headspace	10 3	90	Rw
610	Dis-assemble Gun	10 3	90	Rw
612	Magnaflux Barrel Action		10/11/90	KR
	Magnaflux Bolt		10/11/90	KR
615	Rollmark Caliber		10/11/90	GL
617	Drill and Tap Sight Holes		10/11/90	FB
618	Polish Barrel RWB		10/12/90	WB
620	Apply Coatings (Barrel Action)		10-18-90	TH
	Apply Coating (Bolt)		10-18-90	TH
625	Final Assembly			
	A) Clean inside of Bolt Assembly		10/22/90	Rw
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		10/22/90	Rw
	C) Inspect Ejector Hole for Chamfer		10/22/90	Rw
	D) Oil Firing Pin Ass'y		10/22/90	Rw
	E) Adjust Trigger Pull to Min Setting and Stake		11/5/90	TH

op. #	OP. NAME	READINGS			DATE	INIT
625 cont.	F) Safety On Force	3 1/2	3 1/2	3 1/2	4/5/90	WB
	G) Safety Off Force	2	2	2	4/5/90	WB
	H) Trigger Pull Test & Retainability				11/5/90	JH
	I) Firing Pin Indent	.0215	.020	.0215	4/5/90	WB
	J) Assemble Stock				11/5/90	RW
	K) Assemble Swivel Studs				11/19/90	928
	L) Attach Front and Rear Sight Assemblies				11/5/90	RW
	M) Iron Sight Alignment				11/5/90	RW
	N) Detach Front & Rear Sights & place in numbered container				11/5/90	RW
	O) Attach Scope to Rifle				11/5/90	RW
	P) Detach & Attach Scope 20 Times				11/5/90	RW
640	Gallery Target & Test				11-8-90	AC
	A) Time				11-8-90	AC
	B) Malfunctions				11-8-90	AC
	C) Pierced Primers				11-8-90	AC
	D) Optical Clarity of Scope				11-8-90	AC
645	Inspect for Live Ammo				11-8-90	AC
655	Final Inspection					
	A) Headspace				11/19/90	928
	B) Trigger Pull	2.12	2.12	2.09	11/19/90	928
	C) Function				11/19/90	928
660	Pack				12/18/90	AF

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO C6523434

DATE 11-5-90

TESTER JJA

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.46	2.48	2.41	2.12	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.49	2.46	2.46	2.12	
PULL #3	2.44	2.44	2.44	2.09	
PULL #4	2.51	2.39	2.46	2.02	
PULL #5	2.51	2.40	2.43	2.12	
TOTAL	12.41	12.17	12.2		
AVG.	2.482	2.434	2.44		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.47	3.48		
PULL #2	3.50	3.47		
PULL #3	3.31	3.48		
PULL #4	3.51	3.50		
PULL #5	3.41	3.16		
TOTAL	17.2	17.09		
AVG.	3.44	3.418		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.38	4.32		4.24
PULL #2	4.19	4.35		4.25
PULL #3	4.24	4.29		4.28
PULL #4	4.27	4.30		4.26
PULL #5	4.33	4.18		4.30
TOTAL	21.41	21.44		21.33
AVG.	4.282	4.288		4.266

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06528434
8 Nov 1990

CENTROIDAL DISTANCES

```
0 TO 1 .184815
1 TO 2 .214894
1 TO 3 .189589
1 TO 4 .198275
1 TO 5 .10373
```

FOIA

```

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS:  .0032
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0552
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS:  .0552927


THE AMP FOR THIS RIFLE IS:  .9172

```

8 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08523434

CENTERFIRE PATTERNS # 1

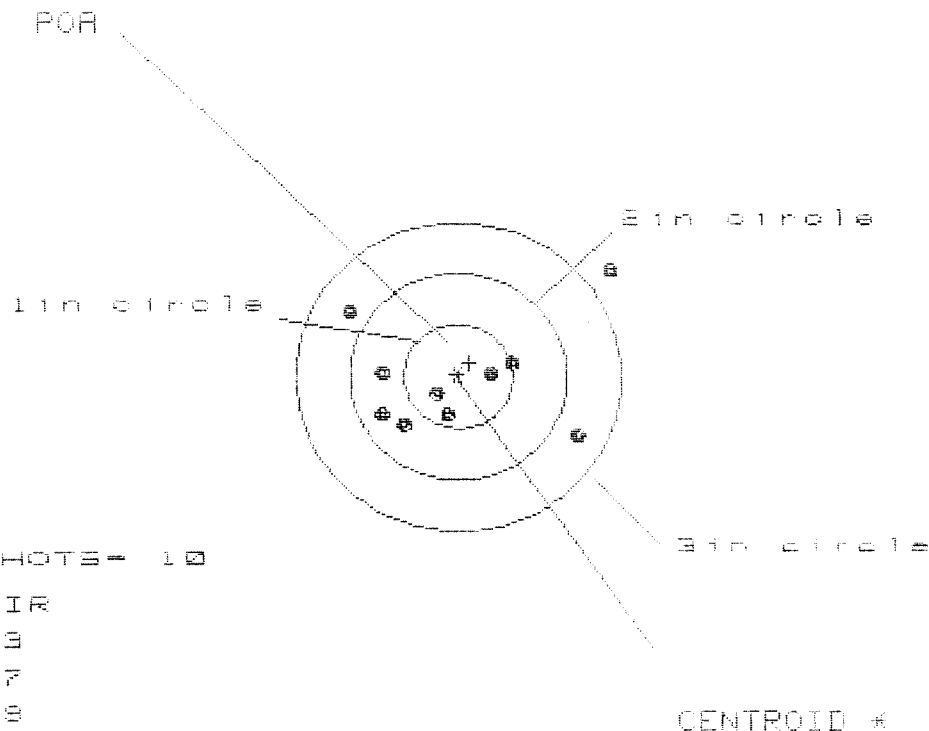

OF SHOTS = 10

IN CIR

1 in = 3

2 in = 7

3 in = 9

IS = 2.447

VS = 1.556


CS = 2.563

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.427	1.219	.797
MINIMUM X	-1.020	-.861	-.709
MAXIMUM Y	1.024	.702	.650
MINIMUM Y	-.532	-.418	-.404
CENTROID X	-.097	-.256	-.408
CENTROID Y	-.133	-.247	-.195
POR TO CENTROID in.	.165	.356	.452
MIN RADIUS	.228	.035	.134
MEAN RADIUS	.770	.612	.528
MAX RADIUS	1.757	1.288	.962
HORIZONTAL SPREAD	2.447	2.080	1.506
VERTICAL SPREAD	1.556	1.120	1.054
EXTREME SPREAD	2.563	2.362	1.566
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	9		

8 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06583434

CENTERFIRE PATTERNS # 2

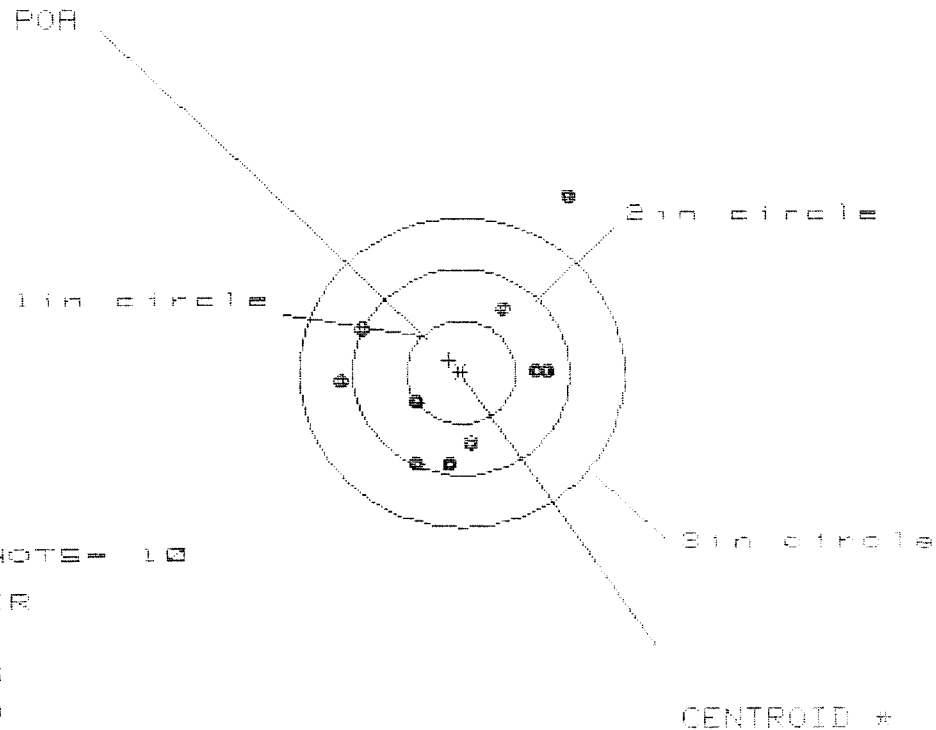

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 9

HS= 2.101

VS= 2.677


GS= 3.018

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.013	.859	.737
MINIMUM X	:	-1.088	-.975	-.967
MAXIMUM Y	:	1.752	.820	.832
MINIMUM Y	:	-.925	-.731	-.719
CENTROID X	:	.117	.004	.126
CENTROID Y	:	-.120	-.314	-.326
POA TO CENTROID in.	:	.167	.314	.349
MIN RADIUS	:	.497	.295	.405
MEAN RADIUS	:	.938	.773	.740
MAX RADIUS	:	2.024	1.027	1.135
HORIZONTAL SPREAD	:	2.101	1.834	1.704
VERTICAL SPREAD	:	2.677	1.551	1.551
EXTREME SPREAD	:	3.018	1.841	1.743
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

8 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08523434

CENTERFIRE PATTERNS # 3

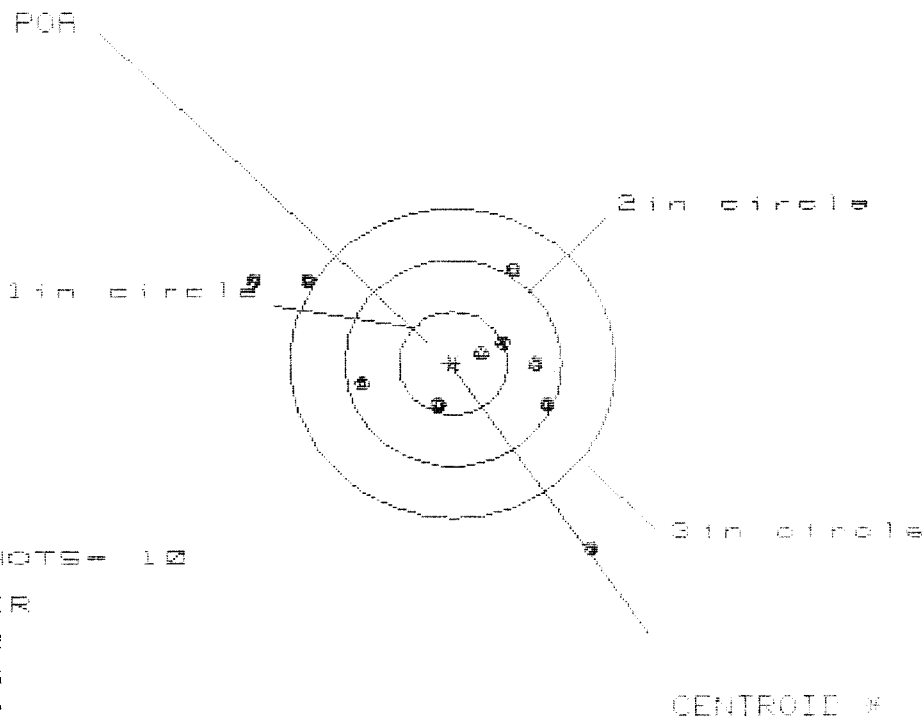

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 6

3 in = 7

HS = 3.114

VS = 2.690

GS = 4.081


PATTERN #	3
SHOTS (BEST OF)	10
MAXIMUM X	1.246
MINIMUM X	-1.868
MAXIMUM Y	.864
MINIMUM Y	-1.826
CENTROID X	.041
CENTROID Y	-.003
POA TO CENTROID IN.	.041
MIN RADIUS	.246
MEAN RADIUS	1.067
MAX RADIUS	2.211
HORIZONTAL SPREAD	3.114
VERTICAL SPREAD	2.690
EXTREME SPREAD	4.081
NUMBER IN ONE INCH CIRCLE	2
NUMBER IN TWO INCH CIRCLE	6
NUMBER IN THREE INCH CIRCLE	7

8 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08523434

CENTERFIRE PATTERNS # 4

FOR

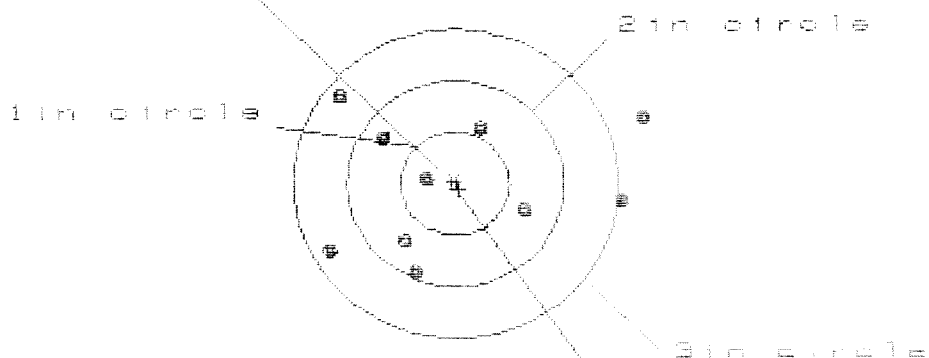

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 6

3 in = 9

HS= 0.931

VS= 1.710

GS= 3.196

CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.714	1.677	1.030
MINIMUM X	:	-1.207	-1.016	-0.807
MAXIMUM Y	:	.818	.886	.872
MINIMUM Y	:	-.892	-.824	-.838
CENTROID X	:	-.034	-.225	-.434
CENTROID Y	:	.055	-.014	.000
FOR TO CENTROID in.	:	.064	.225	.435
MIN RADIUS	:	.273	.165	.194
MEAN RADIUS	:	1.015	.892	.775
MAX RADIUS	:	1.823	1.681	1.111
HORIZONTAL SPREAD	:	2.921	2.693	1.837
VERTICAL SPREAD	:	1.710	1.710	1.710
EXTREME SPREAD	:	3.196	2.764	2.032
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

8 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6523+34

CENTERFIRE PATTERNS # 5

POA

1 in circle

2 in circle

3 in circle

CENTROID +

OF SHOTS= 10

IN CIR

1 in = 4

2 in = 7

3 in = 9

HE= 1.371

VE= 3.052

GE= 3.253

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.465	1.364	1.379
MINIMUM X	-1.906	-1.774	-1.759
MAXIMUM Y	1.617	1.141	1.984
MINIMUM Y	-1.435	-1.256	-1.743
CENTROID X	-1.011	1.090	1.075
CENTROID Y	-1.075	-1.254	-1.097
POA TO CENTROID in.	1.075	1.270	1.123
MIN RADIUS	1.309	1.147	1.224
MEAN RADIUS	1.796	1.635	1.563
MAX RADIUS	1.853	1.375	1.243
HORIZONTAL SPREAD	1.371	1.138	1.138
VERTICAL SPREAD	3.052	2.397	1.727
EXTREME SPREAD	3.253	2.558	2.068
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	9		

RECEIVED BARBER - M24 0028043 REPORT

COMMENTS

ORDER

R 97-08710

INITIAL CUSTOMER ORDER NO.

W/ULTRA 10X-M3A SCOPE

Scope 3/N 90 0261

LIM

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

04/25/97

04/28/97

EK 10-90

C6523434

700

7.62

NATO

ACCESSORIES

HARD CASE

SCOPE MNTS

SCOPE BASE

W/STUDS

W/SWIVELS

FROM:

SHIP TO:

U S ARMY
CO A 3/161 INF
24410 MILITARY RD
KENT

WA 98032

U S ARMY
CO A 3/161 INF
24410 MILITARY RD
KENT

WA

98032

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

CUST NO: 166221 C.T.D.

FROM DATE

ESTIMATED

VIA

WRITE

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

TRIGGER GROUP

BOLT ASSY.

BARREL ASSY.

REC. ASSY.

WOOD

METAL

MAIN FAULT

Scope Needs Repair
Butt Stock Adj Screw Broken
Rough & long Trigger pull
7160H

PARTS

COMMENTS

Scope Sent back To Lenoid
for Repair

Repaired Butt Stock Adjustment

Readjust Trigger pull
Clean & ~~inspect~~ Inspect Trigger

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

RW
A

6/5/97

OFFICE COPY

RD8925 REV. 11/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0028043 28082

RETURN TO: CO A 3/161 INF
24410 MILITARY RD
KENT, WA98032
ANY QUESTIONS DIRECT TO:
SFC TOM GRIFFIN
(253) 512-8919 ARMORMENT SHOP

DATE: 24-APR-97

MAINTENANCE REQUEST

DA FORM 5990-E

----- CUSTOMER DATA -----
UIC: WOYJA0 A 3/161 IN (M)-OMS 5 PHONE: (206)839-0932
UTIL CODE: 7----- ACTIVITY DATA -----
SUP WON: CSMS PHONE: 512-8282
SUP UIC: WTDX99 SHOP SEC:

----- EQUIPMENT DATA -----

TYPE MNT REQ: 1 ID: A NSN: 1005012402136 MODEL: M24

NOUN: SNIPER RIFLE *w/SCOPE* SER NUM: C6523434 QTY: 00001
w/CASE

ORG WON: QYJA01700068 PRIORITY: 03 FAILURE DETECTED: F

MI/KM: ----- HOURS: ----- ROUNDS:

IN WARRANTY: LEVEL OF WORK: F ADMIN NUM:

DEFICIENCY: SHIPREMTN.TGRDRAG/SCPINOP

PD AUTHENTICATING SIGNATURE: _____

----- SIGNATURE DATA -----
SUBMITTED BY: *[Signature]* ORD DATE: 97114 MIL TIME: 1022
ACCEPTED BY: *[Signature]* STATUS: _____ ORD DATE: 97114 MIL TIME: 1030----- ACTION DATA -----
WORK STARTED BY: _____ STATUS: _____ ORD DATE: _____ MIL TIME: _____
INSPECTED BY: _____ STATUS: _____ ORD DATE: _____ MIL TIME: _____
PICKED UP BY: _____ STATUS: _____ ORD DATE: _____ MIL TIME: _____----- COMPLETION DATA -----
QTY RPR: _____ QTY CONDEMNED: _____ ARTS: _____
EVAC WON: _____ EVAC UNIT NAME: _____

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET									
For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG									
1. ORGANIZATION <i>A Co 3/16/1 Int Mech.</i>					2. NOMENCLATURE AND MODEL <i>M-24 SWS</i>				
3. REGISTRATION/SERIAL/NSN <i>C6523434</i>		4a. MILES	b. HOURS	c. ROUNDS FIRED	d. HOT STARTS	5. DATE		6. TYPE INSPECTION <i>PMCS</i>	
7. APPLICABLE REFERENCE									
TM NUMBER		TM DATE		TM NUMBER		TM DATE			
COLUMN a - Enter TM item number.				COLUMN d - Show corrective action for deficiency or shortcoming listed in Column c.					
COLUMN b - Enter the applicable condition status symbol.				COLUMN e - Individual ascertaining completed corrective action initial in this column.					
COLUMN c - Enter deficiencies and shortcomings.									
STATUS SYMBOLS									
"X"-Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X"-Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH ("-")-Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.					DIAGONAL "(/)"-Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL-Indicates that a completely satisfactory condition exists. FOR AIRCRAFT-Status symbols will be recorded in red.				
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.									
8a. SIGNATURE (Person(s) performing inspection)			8b. TIME		9a. SIGNATURE (Maintenance Supervisor)		9b. TIME		10. MANHOURS REQUIRED
TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c			CORRECTIVE ACTION d			INITIAL WHEN CORRECTED e	
	X	scope drop compensator slips							
		Windage knob on scope does not click			These are the discrepancies				
		Trigger rough and has a long draw							
		Butt stock adjustment screw does not hold							
	(M)	Missing sling swivels							
	(M)	Deployment case							
	(M)	Firing pin assembly							
	(M)	Front guard screw							
	(M)	rear guard screw							
	(M)	Front right base screw							
	(M)	rear right base screw							
	(M)	trigger pull adj. screw							
	(M)	socket wrench attachment, 3/8" drive, 5/32"							
	(M)	1/16", 5/64", 3/32", 7/64", 1/8", 5/32" socket head screw							

DA FORM 2404
1 APR 79

Replaces edition of 1 Jan 64, which will be used

TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c	CORRECTIVE ACTION d	INITIAL WHEN CORRECTED e
	(M)	T-handle comb. wrench		
	(M)	Day optic sight windage dial w/screws		
	(M)	Day optic sight elevation dial w/screws		
	(M)	Day optic focus dial w/screws		
	(M)	Day optic sight adj dial dust cover		
	(M)	Day optic sight ring screws		
	(M)	Day optic sight base screws		
	(M)	Day optic sight base rear		
	(M)	Brush, chamber		
	(M)	Brush, bore		
	(M)	oil bottle		
	(M)	Magazine spring		
	(M)	Magazine follower		
	(M)	Socket, socket wrench Head screw 1/2"		
	(M)	T-handle torque wrench		
	(M)	wrench, box and open 1/2"		
	(M)	rear sight base plug screw		
	(M)	swabs, cleaning, small arms		
	(M)	cleaning rod kit		

*U.S. Government Printing Office; 1994 — 381-865

ULTRA

10X-M3A

SN 900261

C-6523434

SENT BACK 4-29-97

A.M.M.

1. SHIP W/ITEM (PACKING LIST)
2. A/P (LOCAL)
3. STORES
4. REGIONAL PUR.
5. SITE SUSPENSE

Remington Arms Co., Inc.
14 Hoefler Ave.
Ilion, NY 13357

LOCAL
CONTROL # M17411
P.O. # _____
ROM/ROC # _____
PKG. LIST # _____
DATE: Apr 29 1997

REC'D FROM/RETURN TO (VENDOR)

REASON FOR RETURN ☐ DAMAGED ☐ OVERAGE ☐ SHORTAGE ☐ NOT AS ORDERED ☐ PACKING LIST DISCREPANCY ☐ OFF-PLANT SHIPMENT

☐ OTHER

MATERIAL ORDERED

ITEM/STORES #	QUANTITY	DESCRIPTION	UNIT PRICE (FROM P.O.)

MATERIAL RECEIVED AND/OR MATERIAL TO BE RETURNED—OR MATERIAL TO BE SHIPPED OFF SITE

[illegible]

MATERIAL _____ ACCEPTABLE ☐ AS SUBSTITUTE ☐ ORIGINAL ITEM _____ REQUIRED
(Is - Is Not) ☐ AS OVERAGE (Is - Is Not)

☐ AS SUBSTITUTE
☐ AS OVERAGE
☐ AS ADDITIONAL ITEM

(Is ~ Is Not)

REQUISITIONER OR REC'G. SUPERVISOR
SITE APPROVAL:

DISPOSITION

Basis FOR TEST AND COST OF REPAIR QUOT?

Date _____

☐ RETURN FOR CREDIT ONLY
(SITE ROM REQUIRED) ☐ RETURN FOR REPLACEMENT ONLY ☐ RETURN FOR CREDIT AND REPLACEMENT
(SITE ROM REQUIRED) ☒ OFF PLANT SHIPMENT ☐ REPAIR AND RETURN ☐ OTHER

SHIP TO LEUPOLD & STEVENS CHARGE TO _____
STREET AND NO. 14400 N.W. GREENBAUM PIKE STREET AND NO. _____
CITY AND STATE BEAVERTON, OR 97075 CITY AND STATE _____
ATTENTION OF ROSS ANDERSON AUTHORIZED BY: _____ LETTER/VERBAL, DATE: _____
MARK PACKAGE _____
ROUTE VIA _____ PPD. CHGS. _____ F.O.B. _____ CASH TERMS _____
☒ PREPAID ☐ COLLECT ☒ CHARGE TRANSPORTATION TO 14400

X

(Signature of Carrier)

(Initials - Security)

ID # 7022

STORES

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 **M2400028087**

STEVE MORRIS

Final Inspection

Sn: C6523434

DATE REC'D: 4-25-97

DATE RET'D:

AUDITOR: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ Looseness☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ Stock☒ Sling Swivel Studs☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ Iron SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

LEUPOLD & STEVENS, INC.

MAILING: PO BOX 688
BEAVERTON OR 97075-0688
(503) 646-9171 FAX

SHIPPING: 14400 NW GREENBRIER PARKWAY
BEAVERTON OR 97006-5934
03) 526-1455 TELEX 15-1227

MAIL REMITTANCE IN U.S.
FUNDS TO:

LEUPOLD & STEVENS, INC.
PO BOX 4985
BEAVERTON OR 97076-4985 USA

B
I
L
L

REMINGTON ARMS COMPANY INC
Attn:
14 HOEFLE AVE
PO BOX 179
ILION, NY 13357

S
H
I
P

REMINGTON ARMS COMPANY INC
Attn:
14 HOEFLER AVE
PO BOX 179
ILION, NY 13357

[illegible]

For Customer Use Only:		
Charge/Debit Card Payment:	☐ Visa ☐ Master Card	Card # _____
Expiration Date: _____		Signature: _____
VALUE FOR CUSTOMS PURPOSES ONLY \$ _____ THESE COMMODITIES ARE EXITING THE U.S.A. UNDER GENERAL LICENSE _____		
"THESE COMMODITIES LICENSED BY THE UNITED STATES FOR ULTIMATE DESTINATION <u>USA</u> DIVERSION CONTRARY TO UNITED STATES LAW PROHIBITED."		
EXPORTER/MANUFACTURER: LEUPOLD & STEVENS INC. PLACE: BEAVERTON, OREGON USA		ECCN: 0A985
SIGNATURE: _____		I.D. 93-0372974
NAME: _____		EXPORT/INVOICING SPECIALIST

Final Inspection

Sn: C6523434

DATE REC'D: 4/25/97

DATE RET'D:

AUDITOR: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ SCOPE☒ SCOPE RINGS☒ MOUNTING SCREWS☒ MOUNTING BASE☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ SCOPE CASE☐ IRON SIGHTS☐ DEPLOYMENT KIT

Trigger

☒ SAFETY OPERATION☒ SET☒

Comments: