

C6611807

MODEL 700™ M24

Model **SWS**™

Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.



Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00092207** Serial: C6611807 Model: M24 SWS Center Fire Caliber: 7.62 NATO Produced: 03/18/1991 Repairman: Status: Closed 2/1/2005 7:03:30 AM

Verify Repair

Address Information

Customer: ☒ Received From Return To ☐ Received From

Name: DEF DIST DEPOT ANNISTON DEF DIST DEPOT ANNISTON

Address 1: Address 2: PO Box: PO Box:

City: ANNISTON ANNISTON

State: AL Zip Code: 362014199 Country: US State: AL Zip Code: 362014199 Country: US

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information: Phone: Fax: Email: Comments:

Received Condition: Good Condition Notes: CSR Notes:

Accessories Received:

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
A026	Scope	1
A057	Fit and Rear Sgt Base	1

Repair Search Refresh Close

macletj 2/7/2005 11:07 AM CAPS NUM INS SCRL

start 3 Arms Services P 3

Serial Number: **C6611807**

Model: **M24 SWS**



RE00092207

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6611807.___0
FILE DATE AND TIME: 06/17/2005 01:44

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.219
The Average Y Centroid of the Five Target Set:	0.072
The Average Point of Impact of the Five Target Set:	0.231
The Average Mean Radius of the Five Target Set:	0.906
The Distance from POA to Centroid Target #1:	0.164
The Distance from Centroid Target #2 to Centroid Target #1:	0.077
The Distance from Centroid Target #3 to Centroid Target #1:	0.503
The Distance from Centroid Target #4 to Centroid Target #1:	0.056
The Distance from Centroid Target #5 to Centroid Target #1:	0.293

SERIAL NUMBER: 6611807. __0

TARGET NUMBER: 1

FILE DATE: 06/17/2005

FILE TIME: 01:44

X CENTROID: -0.161

Y CENTROID: -0.029

POA TO CENTROID: 0.164

HORZ SPREAD: 3.049

VERT SPREAD: 2.099

GROUP SPREAD: 3.072

MIN RADIUS: 0.523

MAX RADIUS: 1.725


MEAN RADIUS: 1.007

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 8

POINT#	X	Y
1:	0.531	1.254
2:	-0.005	0.684
3:	-0.665	0.724
4:	-0.877	0.488
5:	-0.860	-0.472
6:	0.271	-0.372
7:	-0.218	-0.549
8:	0.221	-0.845
9:	1.521	-0.413
10:	-1.528	-0.791

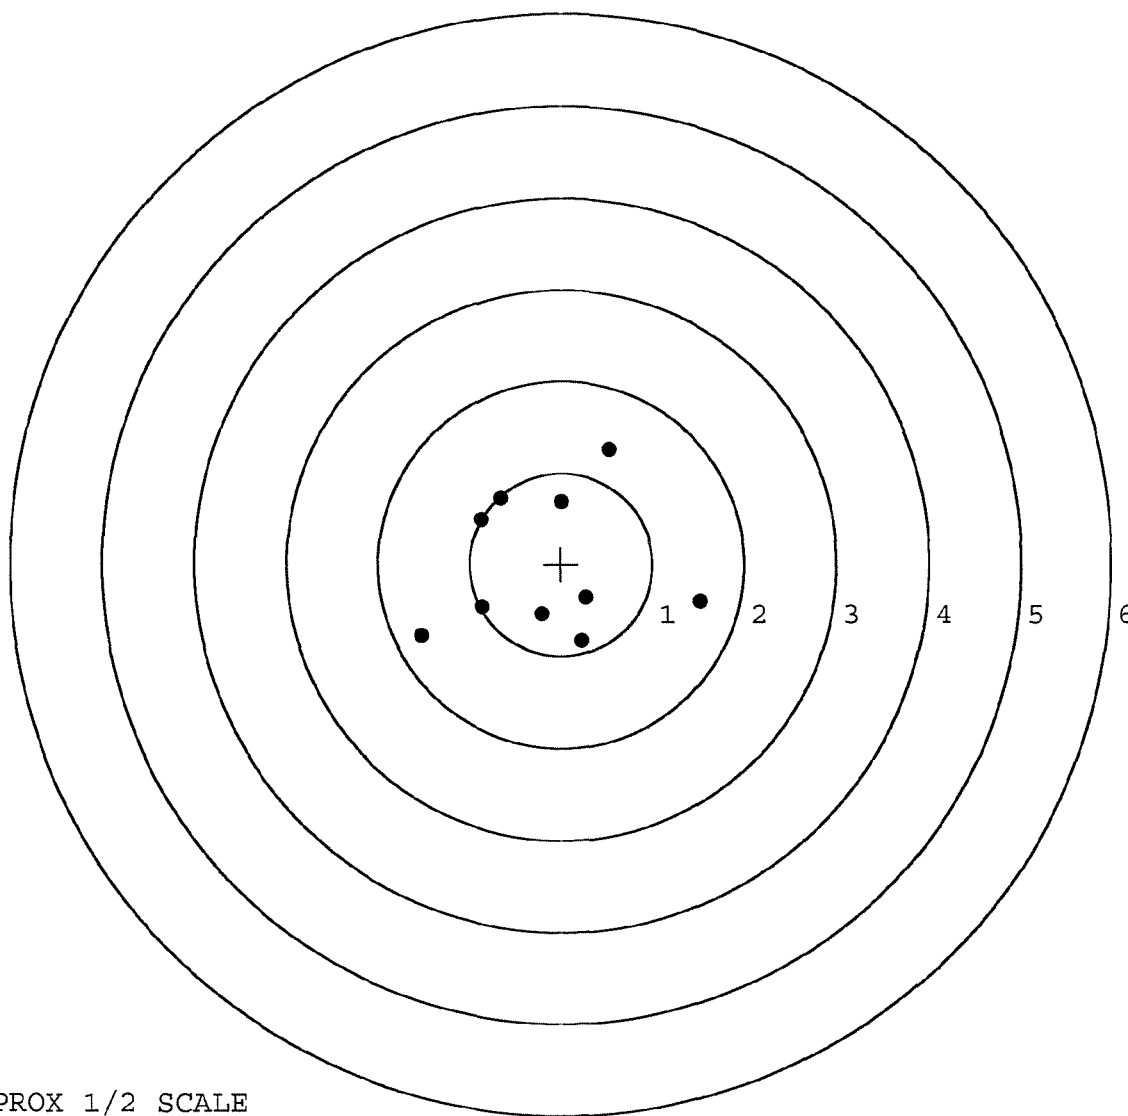

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: 6611807. __0

TARGET NUMBER: 2

FILE DATE: 06/17/2005

FILE TIME: 01:44

X CENTROID: -0.099

Y CENTROID: -0.075

POA TO CENTROID: 0.124

HORZ SPREAD: 2.627

VERT SPREAD: 2.558

GROUP SPREAD: 3.459

MIN RADIUS: 0.245

MAX RADIUS: 1.963


MEAN RADIUS: 0.901

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 8

POINT#	X	Y
1:	1.169	0.760
2:	0.909	-0.751
3:	0.307	0.448
4:	-0.335	0.509
5:	-0.477	0.133
6:	-0.130	-0.318
7:	-0.429	-0.382
8:	-0.484	-0.723
9:	-1.458	-1.491
10:	-0.065	1.067

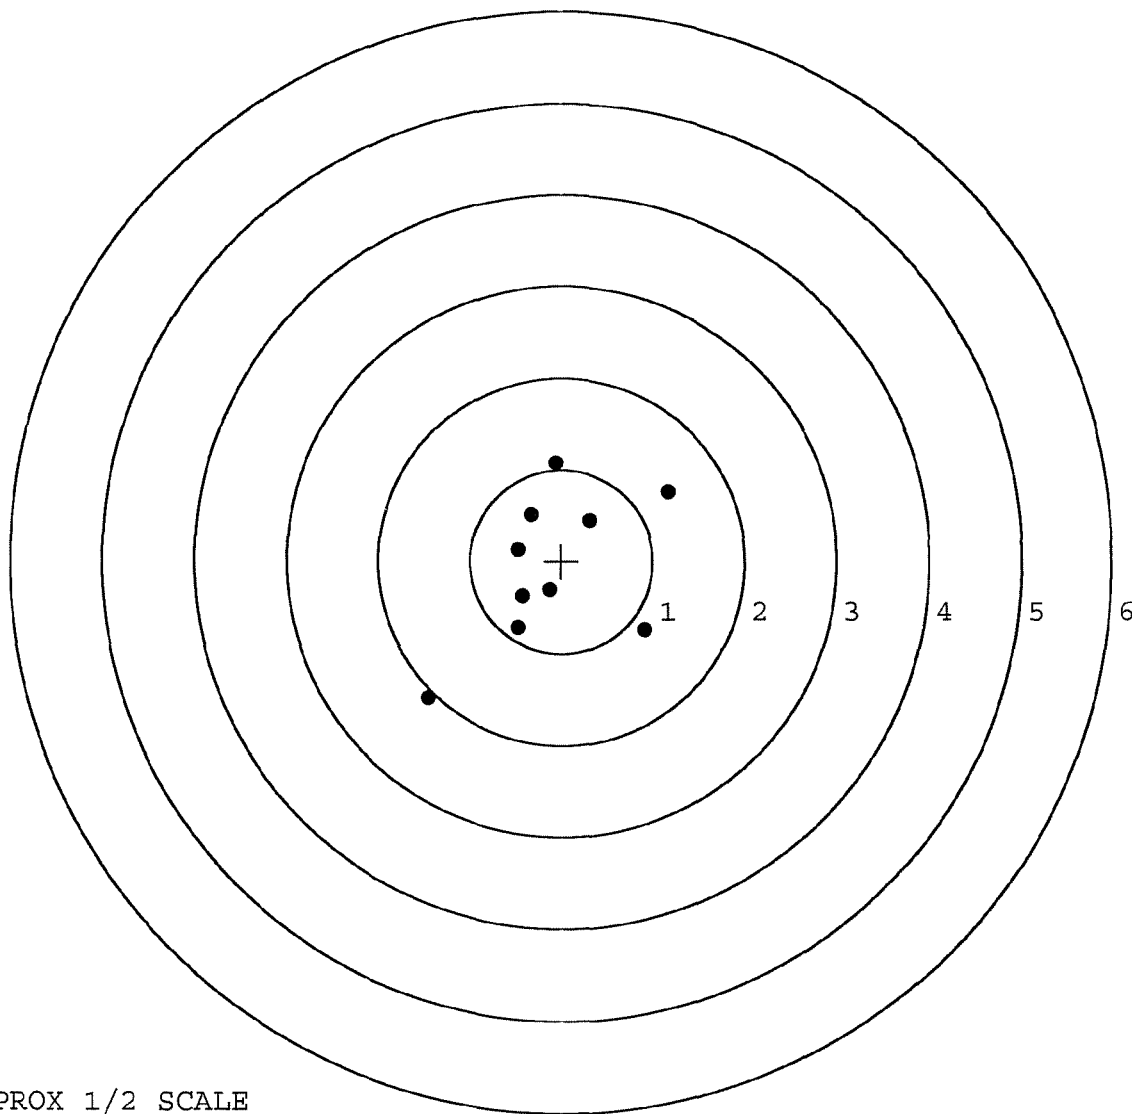

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: 6611807. __0

TARGET NUMBER: 3

FILE DATE: 06/17/2005

FILE TIME: 01:44

X CENTROID: -0.572

Y CENTROID: 0.260

POA TO CENTROID: 0.628

HORZ SPREAD: 2.777

VERT SPREAD: 1.252

GROUP SPREAD: 2.852

MIN RADIUS: 0.476

MAX RADIUS: 1.510


MEAN RADIUS: 0.926

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	-0.008	0.798
2:	-0.072	0.315
3:	-0.160	-0.078
4:	-0.468	-0.205
5:	0.702	-0.248
6:	0.388	-0.250
7:	-0.964	0.853
8:	-1.205	1.002
9:	-2.075	0.403
10:	-1.859	0.007

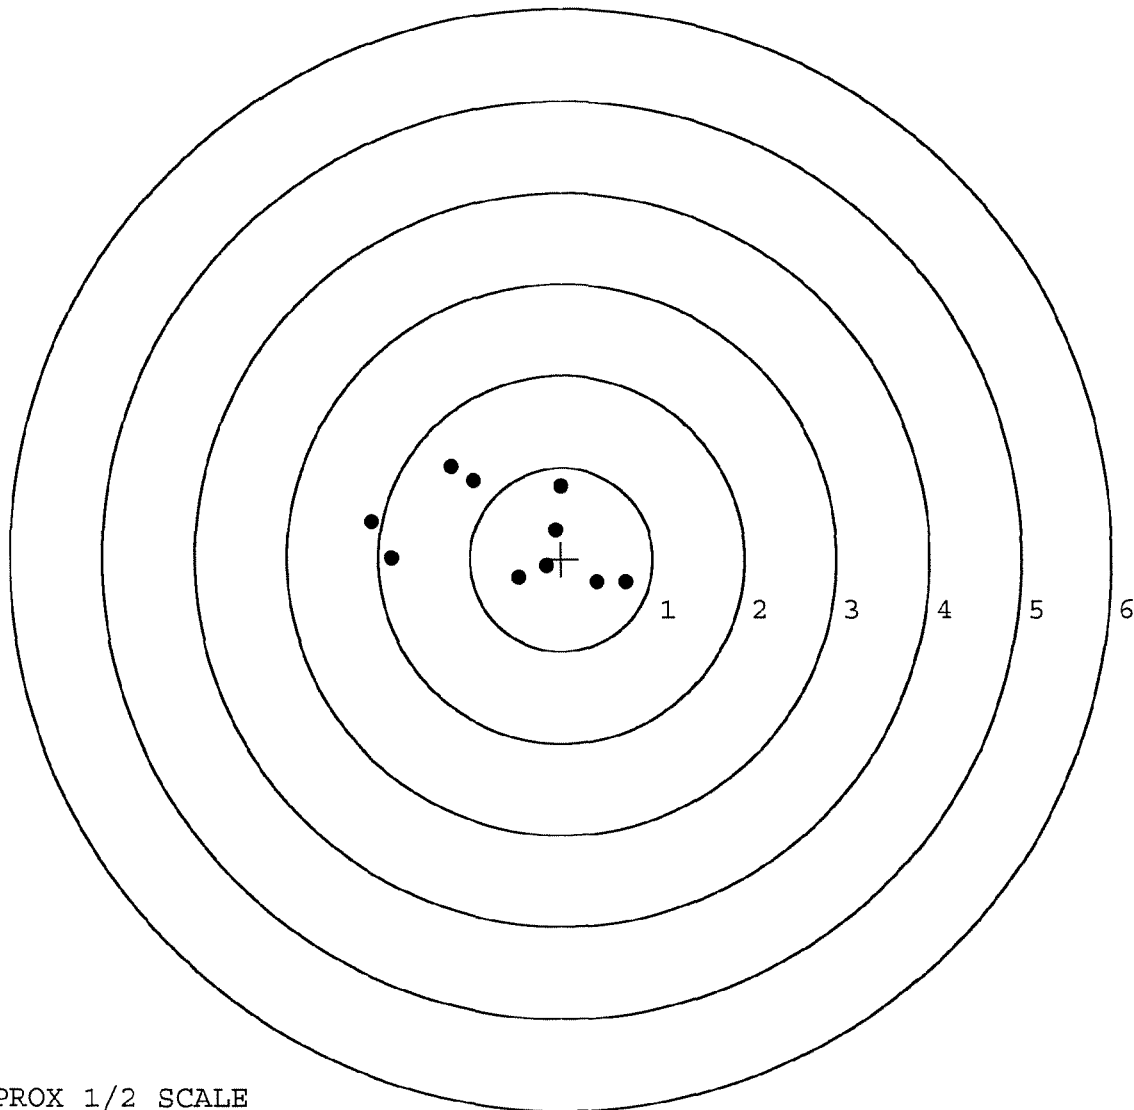

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: 6611807. 0

TARGET NUMBER: 4

FILE DATE: 06/17/2005

FILE TIME: 01:44

X CENTROID: -0.112

Y CENTROID: -0.057

POA TO CENTROID: 0.126

HORZ SPREAD: 2.281

VERT SPREAD: 2.299

GROUP SPREAD: 3.057

MIN RADIUS: 0.136

MAX RADIUS: 1.649


MEAN RADIUS: 0.862

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.293	0.805
2:	-0.021	1.068
3:	0.795	0.115
4:	0.164	-0.632
5:	-0.859	-1.090
6:	-0.988	-1.231
7:	-0.395	0.293
8:	-0.613	0.074
9:	-0.491	0.171
10:	-0.007	-0.143

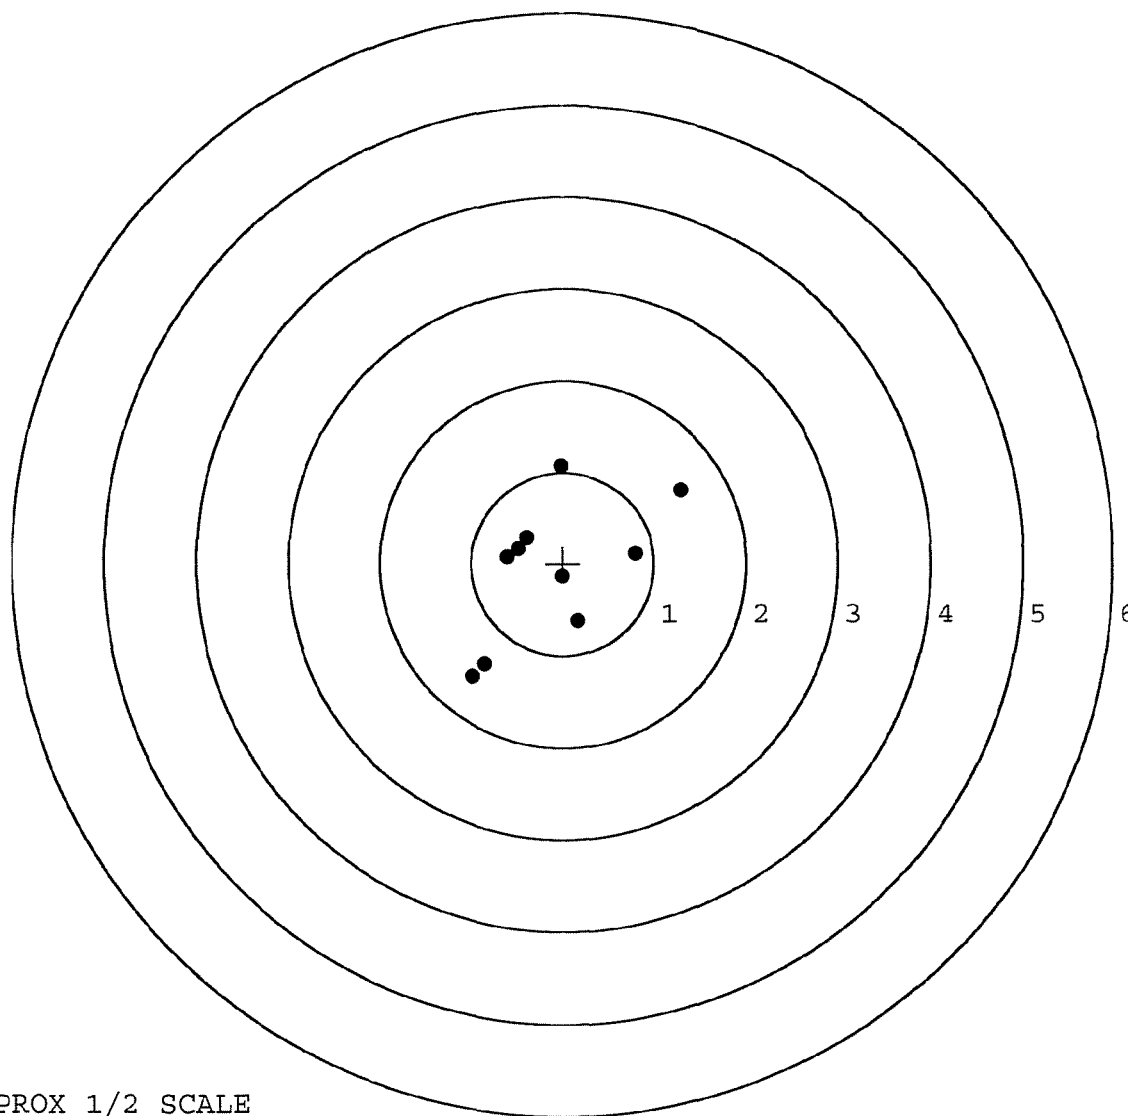

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: 6611807. 0

TARGET NUMBER: 5

FILE DATE: 06/17/2005

FILE TIME: 01:44

X CENTROID: -0.151

Y CENTROID: 0.264

POA TO CENTROID: 0.304

HORZ SPREAD: 1.311

VERT SPREAD: 2.962

GROUP SPREAD: 3.016

MIN RADIUS: 0.138

MAX RADIUS: 1.638


MEAN RADIUS: 0.836

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 6


in 3 IN DIAMETER: 8

POINT#	X	Y
1:	0.366	-0.142
2:	0.617	-0.551
3:	0.093	-1.103
4:	-0.424	-0.501
5:	-0.016	0.239
6:	-0.390	0.140
7:	-0.490	0.652
8:	-0.202	1.859
9:	-0.694	1.809
10:	-0.373	0.236

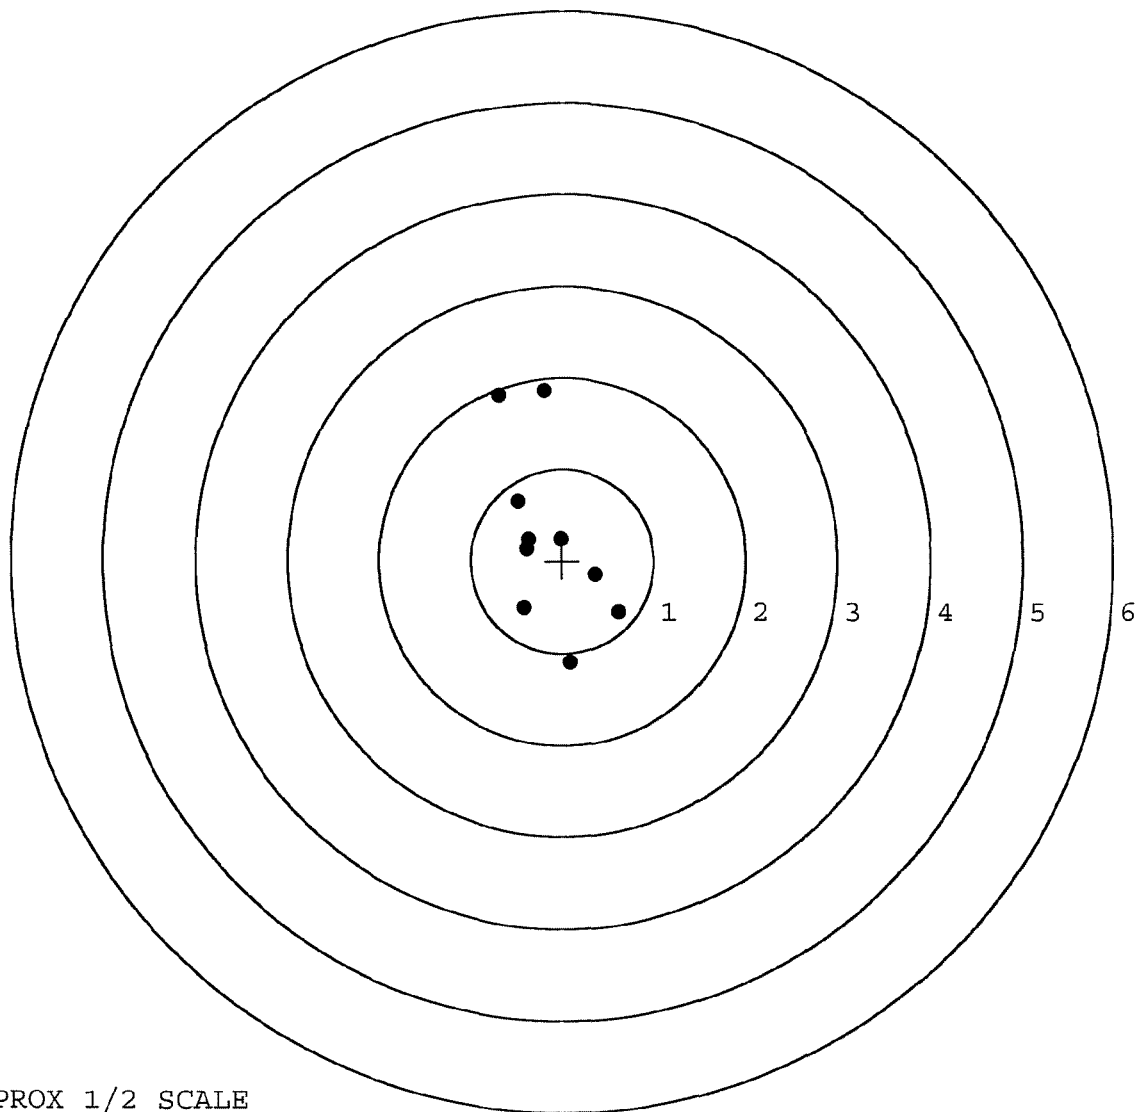

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

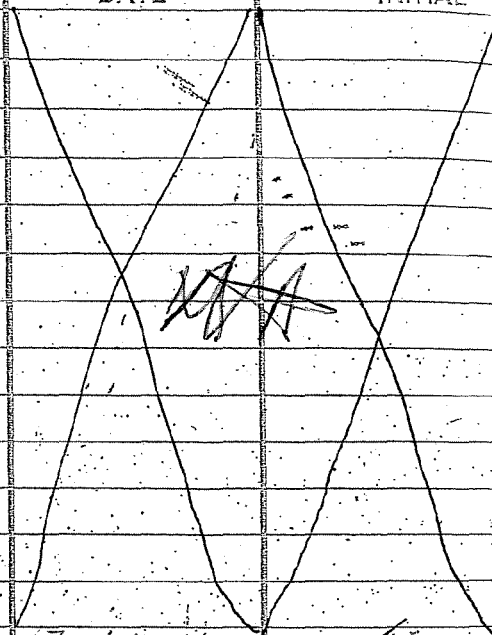R. & E NUMBER	92207				
SERIAL NUMBER	C6611807				
LOG-IN DATE	2-1-05				
INSPECT AND VERIFY:					
OPERATION #	OPERATION NAME	DATE	INITIAL		
550	DIS-ASSEMBLE GUN				
560 A	RE-BARREL				
B	DRILL AND TAP				
575	ASSEMBLE				
600	PROOF				
605	CHECK HEADSPACE				
610	DIS-ASSEMBLE GUN				
612	MAGNAFLUX				
615	ROLLMARK CALIBER				
618	ROTO-BLAST				
620	APPLY COATINGS				
625 A	FINAL ASSEMBLY				
B	TRIGGER PULL TEST				
C	SAFETY "ON" FORCE			7-14-05	AC
D	SAFETY "OFF" FORCE			7-14-05	AC
E	FIRING PIN INDENT	7-14-05	AC		
640	TARGET TEST	6-16-05	AC		
655	FINAL INSPECT	7-14-05	AC		
660	PACK	9-7-05	DA		
		SHIP DATE			
		QAR INSPECTION DATE			

Remington REG. U.S. PAT. & TM. OFF.		VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.
MODEL 700™ M24		SERIAL NO. C6611807
MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off. Marca Registrada. Marque Deposee.		ORDER NO. 5716



5716 C6611807

UPC



0 47700 25716 7

CKM

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6611807

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		1/22/91	KS
600	Proof		1/22/91	KS
607	Check Headspace		1/22/91	KS
610	Dis-assemble Gun		1/22/91	KS
612	Magnaflux Barrel Action		1/29/91	KR
	Magnaflux Bolt		"	KR
615	Rollmark Caliber		"	GL
617	Drill and Tap Sight Holes	2 2	91	LB
618	Polish Barrel <i>ABB</i>	2 2	91	WB
620	Apply Coatings (Barrel Action)		2-11-91	LB
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		2/18/91	KA
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		2/18/91	KA
	C) Inspect Ejector Hole for Chamfer		2/18/91	KA
	D) Oil Firing Pin Ass'y		2/18/91	KA
	E) Adjust Trigger Pull to Min Setting and Stake		2/19/91	KA

op. #	BARBER - M24 0036334	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	6	6			2/19/91	WB
	G) Safety Off Force	3	3	3			2/19/91	WB
	H) Trigger Pull Test & Retainability						2/19/91	JJ
	I) Firing Pin Indent	.022	.022	.022			2/19/91	WB
	J) Assemble Stock						2/20/91	KL
	K) Assemble Swivel Studs						2-25-91	AC
	L) Attach Front and Rear Sight Assemblies						2/20/91	KL
	M) Iron Sight Alignment						2/20/91	KL
	N) Detach Front & Rear Sights & place in numbered container						2/20/91	KL
	O) Attach Scope to Rifle						2/20/91	KL
	P) Detach & Attach Scope 20 Times						2/20/91	KL
640	Gallery Target & Test						2-22-91	NF
	A) Time						"	NF
	B) Malfunctions						"	NF
	C) Pierced Primers						"	NF
	D) Optical Clarity of Scope						"	NF
645	Inspect for Live Ammo						2-22-91	NF
655	Final Inspection							
	A) Headspace						2-22-91	AC
	B) Trigger Pull	2.22	2.38	2.35	2.26	2.38	2/25/91	JJ
	C) Function						2-22-91	AC
660	Pack						3-18-91	NF

MOD. _____		GA. CAL. _____	GUN # <u>1807</u>
# TEST	DATE	MALFUNCTION/DEFECT	ASSEM. #
✓	1st	Magazine not feeding properly!	KS
	2/22		
	2nd	Repaired 2-22-91	KS
	3rd		
	4th		
		FUNCTION	RD 6554 Rev 1

TEST INIT. ACTION TO CORRECT		ASSEM. #
PROOF		
TEST		
TGT		
PROOF		
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. 06611807

DATE 2/19/81

TESTER 921

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.42	2.53	2.48	2.22	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.33	2.27	2.49	2.38	
PULL #3	2.30	2.42	2.40	2.35	
PULL #4	2.27	2.33	2.30	2.36	
PULL #5	2.28	2.50	2.31	2.38	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.55	3.15		
PULL #2	3.41	3.35		
PULL #3	3.47	3.44		
PULL #4	3.46	3.48		
PULL #5	3.44	3.41		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.20	4.19		4.44
PULL #2	4.22	4.23		4.16
PULL #3	4.25	4.18		4.35
PULL #4	4.26	4.11		4.25
PULL #5	4.26	4.18		4.18
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6611887
22 Feb 1991

CENTROIDAL DISTANCES

0 TO	1	.0740345
1 TO	2	.052345
1 TO	3	.301443
1 TO	4	.154548
1 TO	5	.242528


45 (----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0206
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0276
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0344401
THE AMR FOR THIS RIFLE IS: .989

22 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6611887

CENTERFIRE PATTERNS # 1

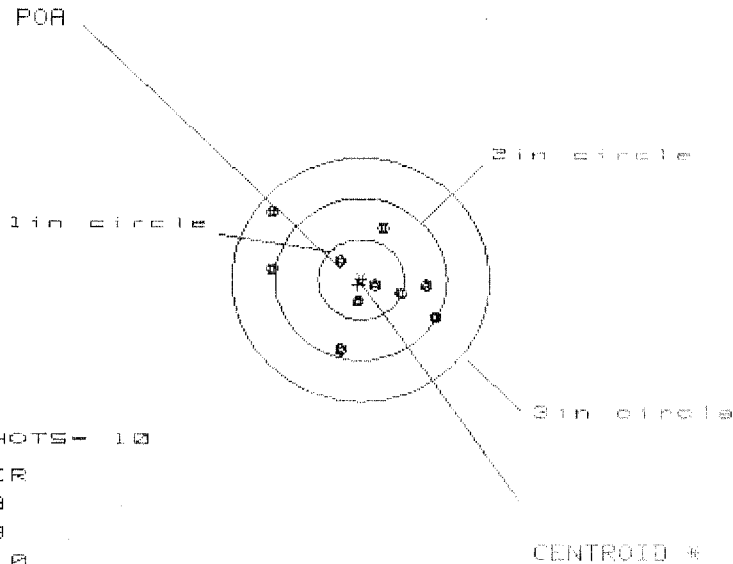

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 8

3 in = 10

HS= 1.950

VS= 1.677

GS= 2.345

PATTERN #	:	1	2	3
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.889	.771	.632
MINIMUM X	:	-1.061	-1.112	-.537
MAXIMUM Y	:	.855	.756	.783
MINIMUM Y	:	-.822	-.727	-.700
CENTROID X	:	.039	.157	.296
CENTROID Y	:	.063	-.032	-.060
POA TO CENTROID in.	:	.074	.160	.302
MIN RADIUS	:	.202	.059	.084
MEAN RADIUS	:	.709	.605	.527
MAX RADIUS	:	1.363	1.134	.858

HORIZONTAL SPREAD	:	1.950	1.883	1.169
VERTICAL SPREAD	:	1.677	1.483	1.483
EXTREME SPREAD	:	2.345	1.968	1.578
NUMBER IN ONE INCH CIRCLE	=	3		
NUMBER IN TWO INCH CIRCLE	=	8		
NUMBER IN THREE INCH CIRCLE	=	10		

22 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08611887

CENTERFIRE PATTERNS # 2

POA

1 in circle

2 in circle

3 in circle

OF SHOTS - 10

IN CIR

1 in = 1

2 in = 8

3 in = 9

HS = 2.595

VS = 1.519

GS = 2.598


CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.466	1.008	.887
MINIMUM X	:	-1.129	-.966	-.615
MAXIMUM Y	:	.916	.864	.783
MINIMUM Y	:	-.603	-.655	-.736
CENTROID X	:	.001	-.162	-.041
CENTROID Y	:	.027	.079	.160
POA TO CENTROID in.	:	.027	.180	.165
MIN RADIUS	:	.237	.225	.103
MEAN RADIUS	:	.848	.735	.676
MAX RADIUS	:	1.541	1.160	.895
HORIZONTAL SPREAD	:	2.595	1.974	1.502
VERTICAL SPREAD	:	1.519	1.519	1.519
EXTREME SPREAD	:	2.598	2.170	1.718
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

22 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06611887

CENTERFIRE PATTERNS # 3

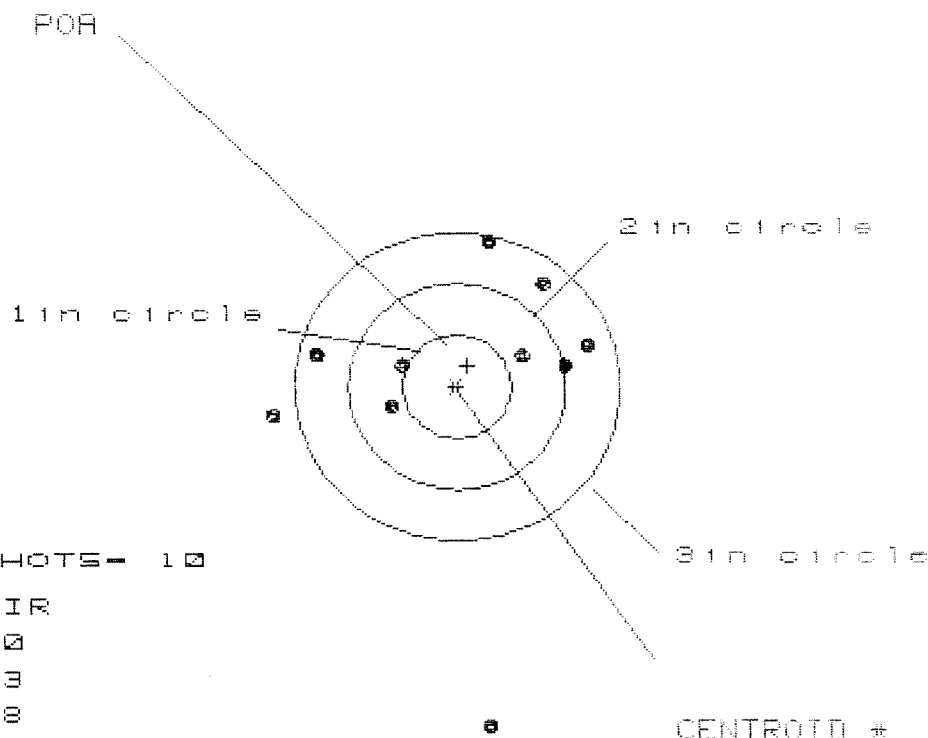

OF SHOTS - 10

IN CIR

1in - 0

2in - 3

3in - 8

HS - 2.957

VS - 4.781


GS - 4.781

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.232	1.262	1.050
MINIMUM X	:	-1.725	-1.695	-1.486
MAXIMUM Y	:	1.450	1.080	.995
MINIMUM Y	:	-3.331	-.680	-.649
CENTROID X	:	-.099	-.129	.083
CENTROID Y	:	-.205	.165	.250
POA TO CENTROID in.	:	.228	.209	.263
MIN RADIUS	:	.552	.525	.479
MEAN RADIUS	:	1.342	1.065	.936
MAX RADIUS	:	3.341	1.826	1.494
HORIZONTAL SPREAD	:	2.957	2.957	2.536
VERTICAL SPREAD	:	4.781	1.760	1.644
EXTREME SPREAD	:	4.781	3.041	2.538
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		8	


22 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06811887

CENTERFIRE PATTERNS # 4

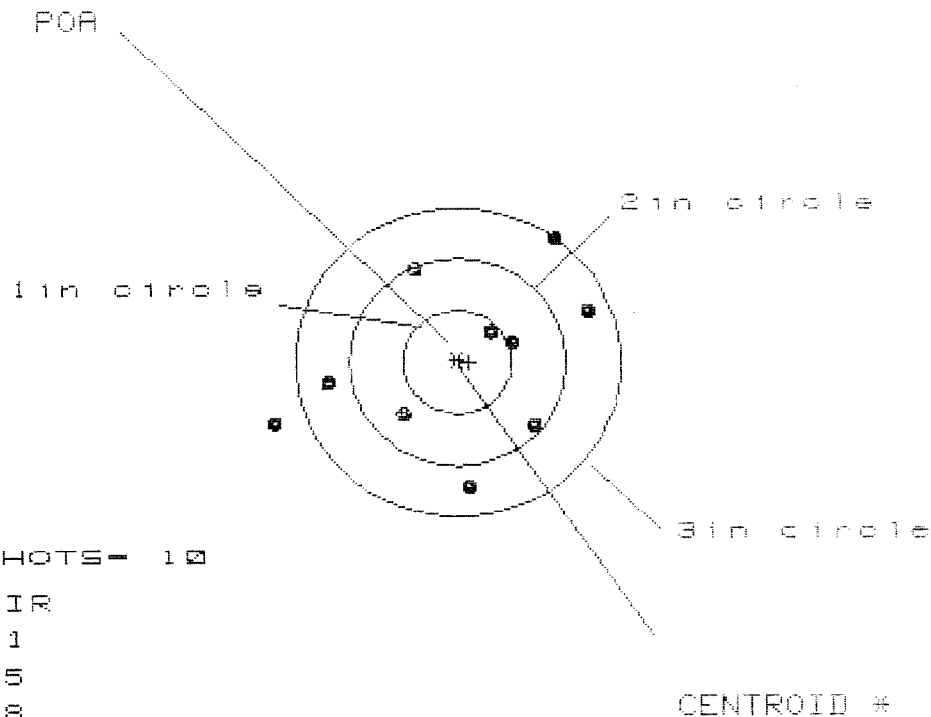

PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.205	1.012	1.105
MINIMUM X	-1.730	-1.422	-1.329
MAXIMUM Y	1.214	1.143	.975
MINIMUM Y	-1.241	-1.312	-1.170
CENTROID X	-.103	.090	-.003
CENTROID Y	.002	.073	-.070
POA TO CENTROID in.	.103	.116	.070
MIN RADIUS	.422	.273	.437
MEAN RADIUS	1.081	.960	.920
MAX RADIUS	1.845	1.445	1.334
HORIZONTAL SPREAD	2.935	2.434	2.434
VERTICAL SPREAD	2.455	2.455	2.144
EXTREME SPREAD	3.247	2.579	2.535
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

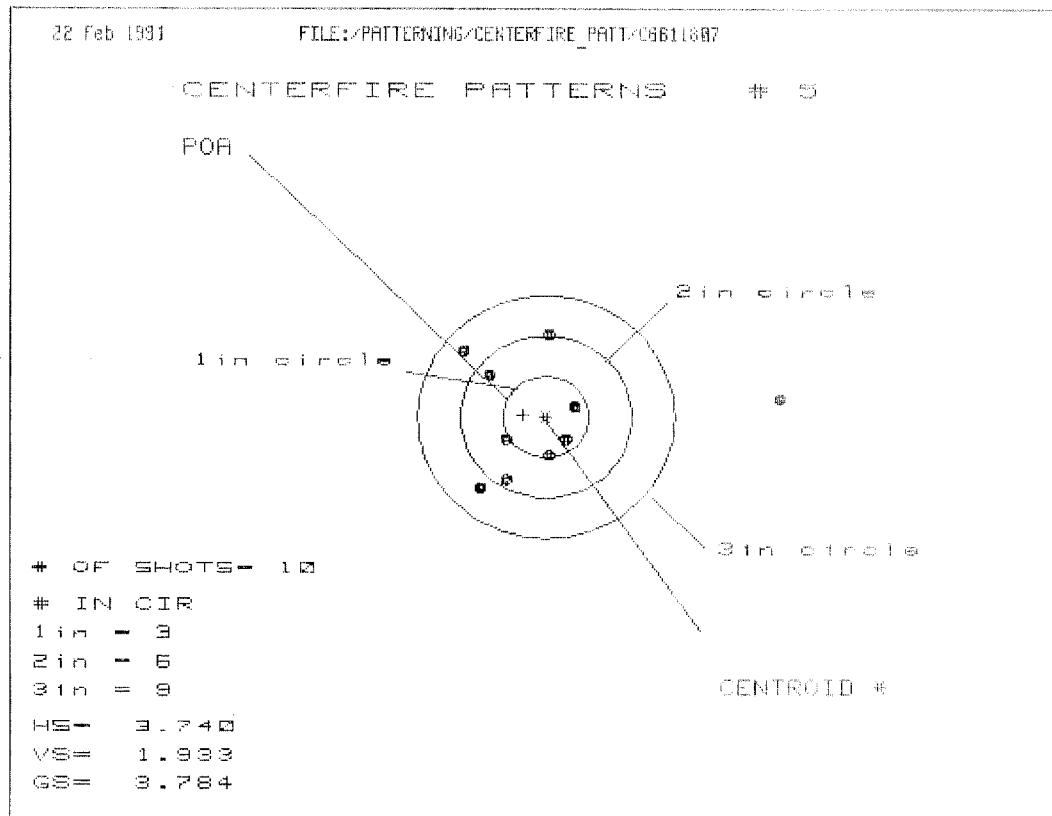

PATTERN #	5		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	2.760	.649	.565
MINIMUM X	-.980	-.674	-.505
MAXIMUM Y	1.020	1.043	1.143
MINIMUM Y	-.913	-.890	-.790
CENTROID X	.265	-.041	.043
CENTROID Y	-.025	-.048	-.148
POA TO CENTROID in.	.267	.063	.154
MIN RADIUS	.380	.304	.302
MEAN RADIUS	.973	.740	.676
MAX RADIUS	2.767	1.084	1.162
HORIZONTAL SPREAD	3.740	1.323	1.070
VERTICAL SPREAD	1.933	1.933	1.933
EXTREME SPREAD	3.784	2.061	2.061
NUMBER IN ONE INCH CIRCLE	= 3		
NUMBER IN TWO INCH CIRCLE	= 6		
NUMBER IN THREE INCH CIRCLE	= 9		