

C6636199

MODEL 700™ M24

Model S&S™

Action _____

Barrel Length _____

Capacity _____

Order No. 5715

*Includes 1 in chamber.

Remington

Remington
 MODEL 700TM M24

VERY IMPORTANT:
 Instruction Book
 enclosed to assure
 safe use of this
 firearm.

REG. U.S. PAT. & TM. OFF.

SERIAL NO.
 C6636199

ORDER NO.
 5716


46

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Deposee.



5716 C6636199

UPC



0 47700 25716 7

Repaired
Stock

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6636199

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	3 28	91	RW
600	Proof	3 28	91	RW
607	Check Headspace	3 28	91	RW
610	Dis-assemble Gun	3 28	91	RW
612	Magnaflux Barrel Action	APR	2 1991	K.R
	Magnaflux Bolt	APR	2 1991	U
615	Rollmark Caliber	APR	2 1991	LS
617	Drill and Tap Sight Holes	APR	5 1991	LB
618	Polish Barrel	APR	5 1991	WB
620	Apply Coatings (Barrel Action)		4-10-91	JH
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		4/10/91	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/10/91	RW
	C) Inspect Ejector Hole for Chamfer		4/10/91	RW
	D) Oil Firing Pin Ass'y		4/10/91	RW
	E) Adjust Trigger Pull to Min Setting and Stake		4-16-91	DH

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	6	6			4-16-91	AC
	G) Safety Off Force	3	4	3			4-16-91	AC
	H) Trigger Pull Test & Retainability						4-16-91	D/H
	I) Firing Pin Indent	.022	.022	.021			4-16-91	AC
	J) Assemble Stock						4/17/91	RW
	K) Assemble Swivel Studs						5-2-91	
	L) Attach Front and Rear Sight Assemblies						4/17/91	RW
	M) Iron Sight Alignment						4/17/91	RW
	N) Detach Front & Rear Sights & place in numbered container						4/17/91	RW
	O) Attach Scope to Rifle						4/17/91	RW
	P) Detach & Attach Scope 20 Times						4/17/91	RW
640	Gallery Target & Test						4-17-91	NF
	A) Time						"	NF
	B) Malfunctions						"	NF
	C) Pierced Primers						"	NF
	D) Optical Clarity of Scope						"	NF
645	Inspect for Live Ammo						4-17-91	NF
655	Final Inspection							
	A) Headspace						5-2-91	D/H
	B) Trigger Pull	2.58	262	260	251	252	4/24/91	RW
	C) Function						5-2-91	D/H
660	Pack						6-19-91	NF

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6636199

DATE 4-16-91

TESTER DH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.48	2.60	2.60	2.58	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.56	2.48	2.45	2.42	
PULL #3	2.56	2.50	2.50	2.60	
PULL #4	2.58	2.49	2.56	2.51	
PULL #5	2.52	2.40	2.52	2.52	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.10	3.06		
PULL #2	3.16	3.07		
PULL #3	3.07	3.01		
PULL #4	3.14	3.09		
PULL #5	3.13	3.04		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.15	4.33		4.04
PULL #2	4.19	4.38		3.99
PULL #3	4.13	4.32		4.01
PULL #4	4.08	4.40		4.12
PULL #5	4.14	4.23		4.10
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06636199
23 Apr 1991

CENTROIDAL DISTANCES

0	TO	1	.191207
1	TO	2	.370591
1	TO	3	.346619
1	TO	4	.239535
1	TO	5	.309555

8
10


-----FOR

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0104
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0194
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0211356
THE AMR FOR THIS RIFLE IS: .9700

23 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06636189.1

CENTERFIRE PATTERNS # 1

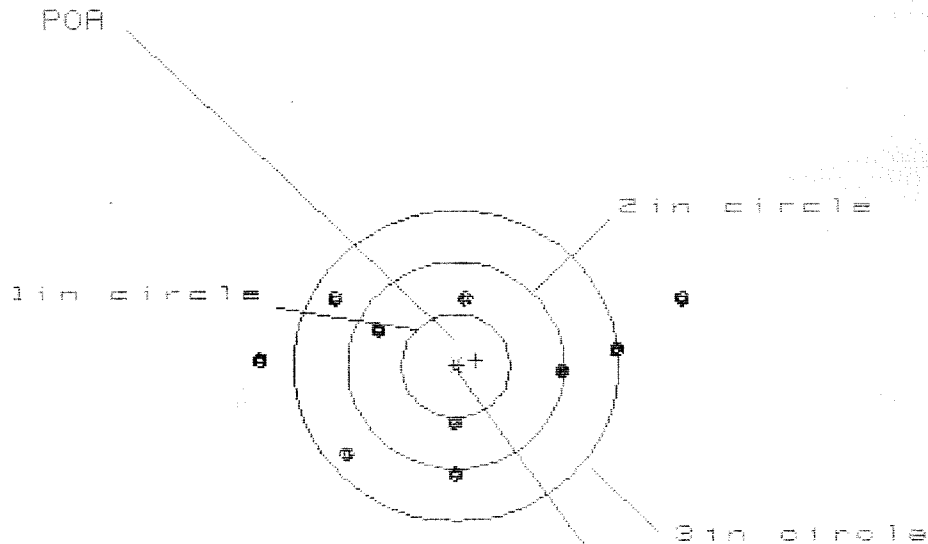

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 3

3 in = 8

HS= 3.821

VS= 1.767

GS= 3.877


CENTROID #

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	2.046	1.706	1.512
MINIMUM X	:	-1.774	-1.547	-1.095
MAXIMUM Y	:	.683	.757	.767
MINIMUM Y	:	-1.084	-1.010	-1.000
CENTROID X	:	-.184	-.411	-.217
CENTROID Y	:	-.052	-.126	-.136
POA TO CENTROID in.	:	.191	.430	.256
MIN RADIUS	:	.516	.480	.431
MEAN RADIUS	:	1.210	1.081	1.015
MAX RADIUS	:	2.151	1.727	1.538
HORIZONTAL SPREAD	:	3.821	3.253	2.608
VERTICAL SPREAD	:	1.767	1.767	1.767
EXTREME SPREAD	:	3.877	3.259	2.702
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		8	

23 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8636199.1

CENTERFIRE PATTERNS # 2

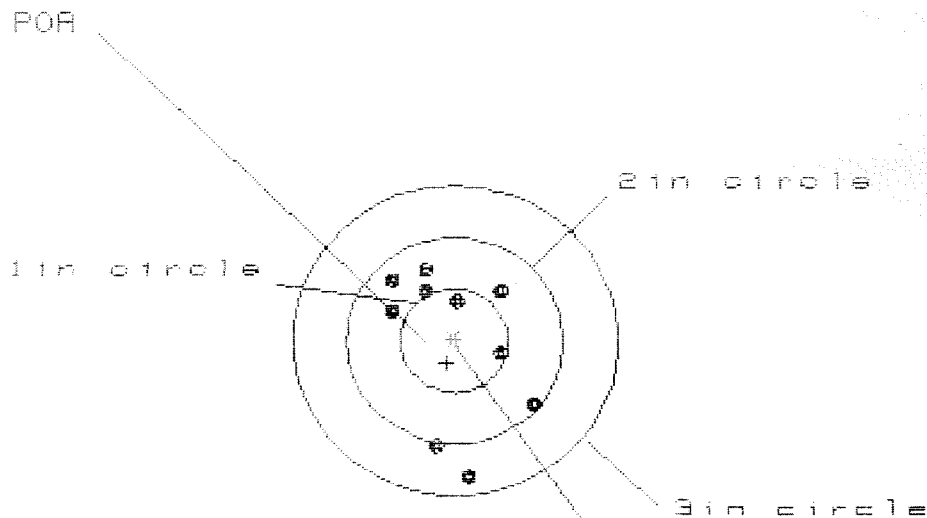

OF SHOTS- 10

IN CIR

1in = 2

2in = 8

3in = 10

HS= 1.331

VS= 2.014

GS= 2.063

CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.748	.763	.747
MINIMUM X	:	-.583	-.568	-.584
MAXIMUM Y	:	.729	.587	.441
MINIMUM Y	:	-1.285	-1.162	-.854
CENTROID X	:	.073	.058	.074
CENTROID Y	:	.215	.357	.503
POA TO CENTROID in.	:	.227	.362	.508
MIN RADIUS	:	.367	.228	.083
MEAN RADIUS	:	.757	.658	.549
MAX RADIUS	:	1.292	1.169	1.135
HORIZONTAL SPREAD	:	1.331	1.331	1.331
VERTICAL SPREAD	:	2.014	1.749	1.295
EXTREME SPREAD	:	2.063	1.757	1.713
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		10	

23 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8636199.1

CENTERFIRE PATTERNS # 3

POA

1 in circle

2 in circle

3 in circle

CENTROID #

OF SHOTS - 10

IN CIR

1 in = 2

2 in = 5

3 in = 9

HS = 3.011

VS = 2.027

GS = 3.122

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	9
MAXIMUM X	:	1.629	1.483	1.333
MINIMUM X	:	-1.382	-1.201	-1.963
MAXIMUM Y	:	.908	.673	.607
MINIMUM Y	:	-1.219	-.713	-.779
CENTROID X	:	.124	-.057	.093
CENTROID Y	:	-.211	-.076	-.010
POA TO CENTROID in.	:	.245	.095	.093
MIN RADIUS	:	.160	.321	.254
MEAN RADIUS	:	.959	.803	.745
MAX RADIUS	:	2.035	1.646	1.544
HORIZONTAL SPREAD	:	3.011	2.684	2.316
VERTICAL SPREAD	:	2.027	1.386	1.386
EXTREME SPREAD	:	3.122	2.690	2.431
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		9	

23 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8638199.1

CENTERFIRE PATTERNS

4

POA

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 10

HS= 2.323

VS= 2.150

GS= 2.929


CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.088	.951	.793
MINIMUM X	:	-1.235	-1.349	-1.230
MAXIMUM Y	:	1.181	1.271	1.161
MINIMUM Y	:	-.969	-.879	-.726
CENTROID X	:	.055	.192	.073
CENTROID Y	:	-.068	-.158	-.048
POA TO CENTROID in.	:	.087	.249	.088
MIN RADIUS	:	.420	.473	.430
MEAN RADIUS	:	.938	.874	.804
MAX RADIUS	:	1.479	1.483	1.428
HORIZONTAL SPREAD	:	2.323	2.300	2.023
VERTICAL SPREAD	:	2.150	2.150	1.887
EXTREME SPREAD	:	2.929	2.506	2.506
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		10	

23 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08696199.1

CENTERFIRE PATTERNS # 5

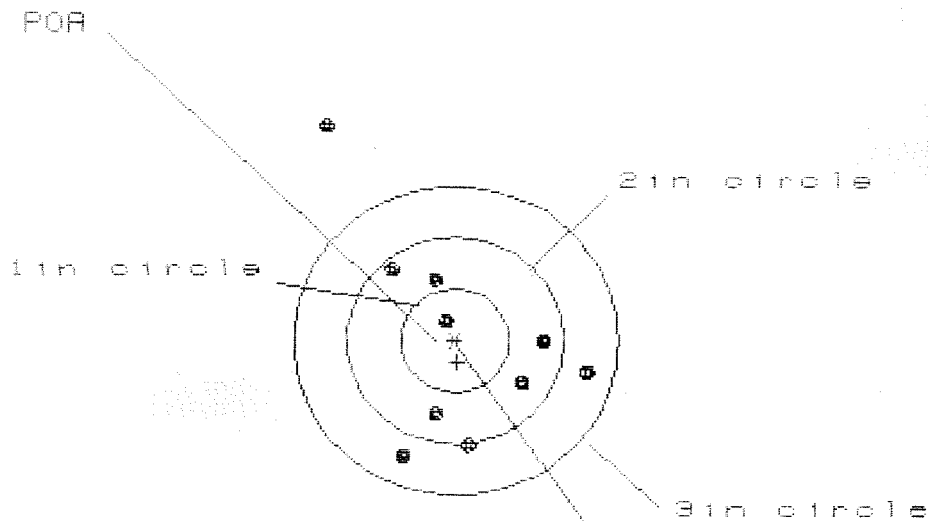

OF SHOTS- 10

IN CIR

1in = 1

2in = 6

3in = 9

HS= 2.356

VS= 3.246

GS= 3.377

CENTROID *

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.193	1.064	.985
MINIMUM X	:	-1.163	-.686	-.765
MAXIMUM Y	:	2.106	.895	.782
MINIMUM Y	:	-1.140	-.906	-.886
CENTROID X	:	-.016	.113	.192
CENTROID Y	:	.208	-.026	.087
POA TO CENTROID in.	:	.209	.116	.211
MIN RADIUS	:	.240	.496	.467
MEAN RADIUS	:	.990	.806	.759
MAX RADIUS	:	2.406	1.128	1.094
HORIZONTAL SPREAD	:	2.356	1.750	1.750
VERTICAL SPREAD	:	3.246	1.801	1.668
EXTREME SPREAD	:	3.377	1.983	1.983
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6636199
17 Apr 1991

CENTROIDAL DISTANCES

0 TO	1	.331929
1 TO	2	.520289
1 TO	3	.144516
1 TO	4	.502961
1 TO	5	.18132

0000

-----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0232
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0712
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0748844
THE AMR FOR THIS RIFLE IS: 1.21

Retarget / Reload


17 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6836199

CENTERFIRE PATTERNS

1

POA

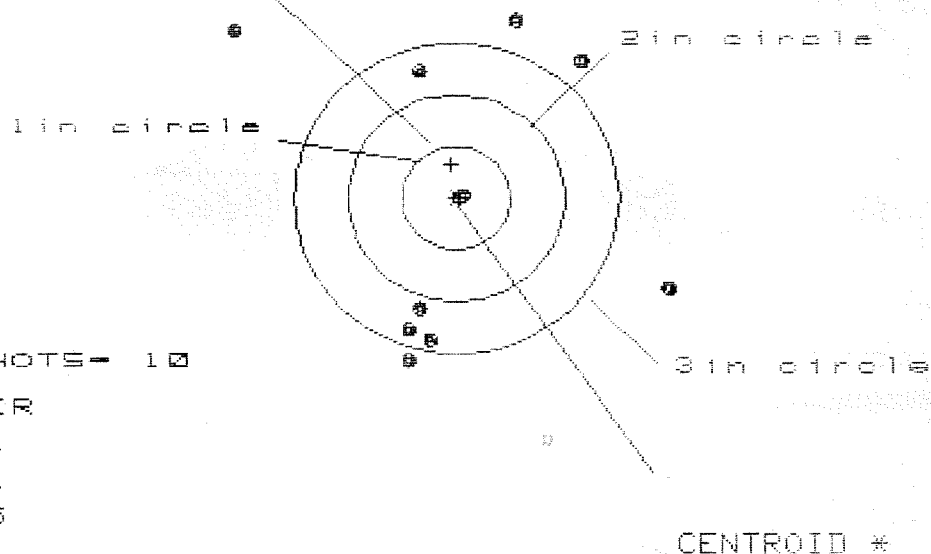

OF SHOTS- 10

IN CIR

1in = 1

2in = 1

3in = 5

HS= 3.986

VS= 3.312

GS= 4.706


CENTROID #

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.947	1.720	1.142
MINIMUM X	:	-2.040	-.646	-.431
MAXIMUM Y	:	1.728	1.915	1.835
MINIMUM Y	:	-1.584	-1.397	-1.477
CENTROID X	:	.044	.271	.056
CENTROID Y	:	-.329	-.516	-.436
POA TO CENTROID in.	:	.332	.583	.440
MIN RADIUS	:	.119	.295	.200
MEAN RADIUS	:	1.512	1.377	1.291
MAX RADIUS	:	2.641	1.941	1.911
HORIZONTAL SPREAD	:	3.986	2.366	1.573
VERTICAL SPREAD	:	3.312	3.312	3.312
EXTREME SPREAD	:	4.706	3.447	3.447
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		1	
NUMBER IN THREE INCH CIRCLE	=		5	

17 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8636199

CENTERFIRE PATTERNS # 2

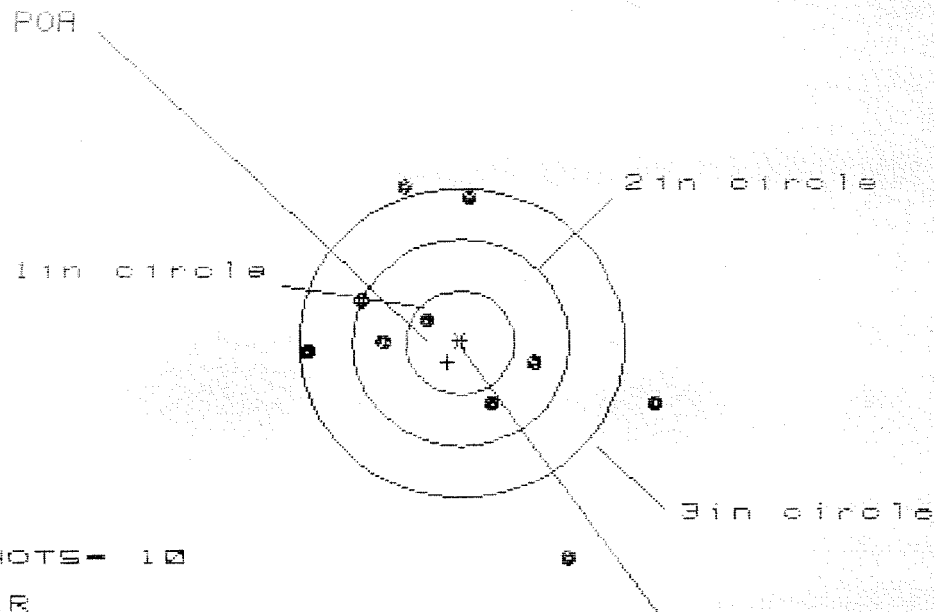

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 7

HS= 3.241

VS= 3.517

GS= 3.824

CENTROID #


PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.838	1.941	1.083
MINIMUM X	:	-1.411	-1.300	-1.057
MAXIMUM Y	:	1.465	1.237	1.135
MINIMUM Y	:	-2.052	-0.815	-0.903
CENTROID X	:	.118	.007	-.236
CENTROID Y	:	.186	.414	.516
POR TO CENTROID in.	:	.220	.414	.567
MIN RADIUS	:	.419	.248	.114
MEAN RADIUS	:	1.213	1.056	.867
MAX RADIUS	:	2.284	2.105	1.189
HORIZONTAL SPREAD	:	3.241	3.241	2.140
VERTICAL SPREAD	:	3.517	2.052	2.038
EXTREME SPREAD	:	3.824	3.273	2.189
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		7	

17 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06636193

CENTERFIRE PATTERNS # 3

POA

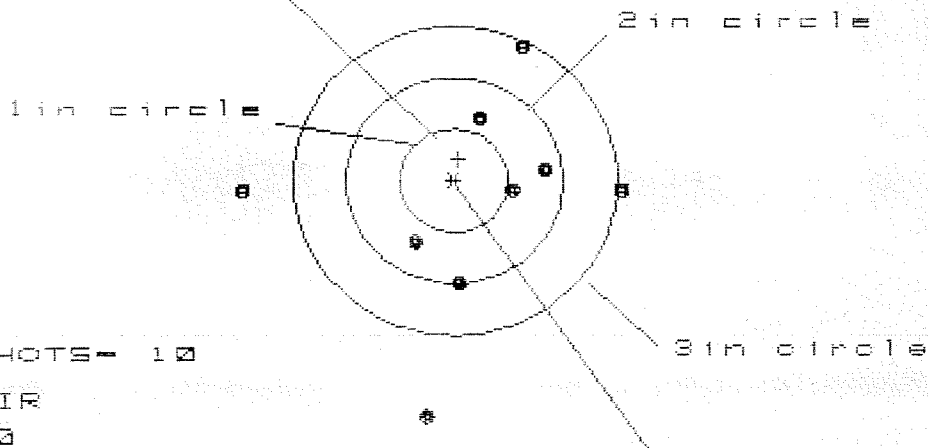

OF SHOTS = 10

IN CIR

1in = 0

2in = 4

3in = 6

HS = 3.457

VS = 4.413

GS = 4.501

CENTROID *

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.539	1.407	1.352
MINIMUM X	:	-1.918	-2.050	-2.105
MAXIMUM Y	:	2.144	1.598	1.344
MINIMUM Y	:	-2.269	-2.030	-1.033
CENTROID X	:	-.038	.094	.149
CENTROID Y	:	-.210	-.449	-.195
POA TO CENTROID in.	:	.214	.458	.245
MIN RADIUS	:	.518	.383	.346
MEAN RADIUS	:	1.352	1.192	1.054
MAX RADIUS	:	2.454	2.077	2.110
HORIZONTAL SPREAD	:	3.457	3.457	3.457
VERTICAL SPREAD	:	4.413	3.628	2.377
EXTREME SPREAD	:	4.501	3.737	3.457
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		6	


17 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8636199

CENTERFIRE PATTERNS

4

POA

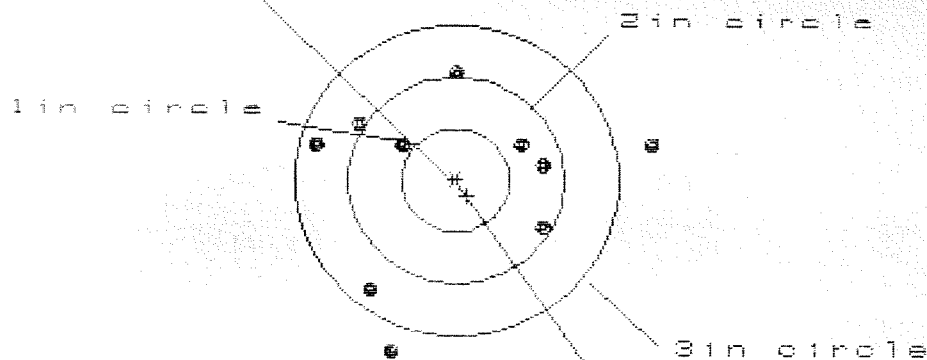

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 4

3 in = 8

HS= 2.150

VS= 2.713

GS= 3.150

CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.825	1.041	.995
MINIMUM X	:	-1.325	-1.122	-1.168
MAXIMUM Y	:	1.047	1.087	.884
MINIMUM Y	:	-1.666	-1.626	-1.241
CENTROID X	:	-.103	-.306	-.260
CENTROID Y	:	.152	.112	.315
POA TO CENTROID in.	:	.184	.326	.408
MIN RADIUS	:	.644	.513	.428
MEAN RADIUS	:	1.155	1.071	.957
MAX RADIUS	:	1.861	1.668	1.386
HORIZONTAL SPREAD	:	3.150	2.163	2.163
VERTICAL SPREAD	:	2.713	2.713	2.125
EXTREME SPREAD	:	3.150	2.779	2.322
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		8	

17 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08838193

CENTERFIRE PATTERNS # 5

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS = 10

IN CIR

1in = 2

2in = 7

3in = 9

HS = 2.414

VS = 2.155

GS = 2.889

PATTERN #	5		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.276	1.041	.917
MINIMUM X	-1.137	-.996	-.630
MAXIMUM Y	.674	.509	.473
MINIMUM Y	-1.481	-.514	-.550
CENTROID X	.095	-.047	.077
CENTROID Y	-.155	.010	.046
POA TO CENTROID in.	.181	.048	.090
MIN RADIUS	.313	.225	.190
MEAN RADIUS	.819	.649	.602
MAX RADIUS	1.955	1.114	.985
HORIZONTAL SPREAD	2.414	2.037	1.547
VERTICAL SPREAD	2.155	1.023	1.023
EXTREME SPREAD	2.889	2.149	1.602
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		9	

BARBER - M24 0038839 RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 94-18363

INITIAL	CUSTOMER ORDER NO.		W/10X SCOPE, M-24 SNIPER, W/DEPLOYMENT KIT		
FDC	DAAA09-92-C-0834		ATTN: FRED MARTIN		
DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE
06/11/94	06/11/94		C6636199		700 7.62 NATO
ACCESSORIES SLING STRAP HARD CASE SCOPE MNTS SCOPE BASE					

FROM:

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL 36201-5025

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL
36201-5025

CUST NO: 098397 C.B.D L

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA
					FRT

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

RTS

COMMENTS

Trigger Assy 175.31
✓ Front Sight Assy 56.75
✓ Rear Sight Assy 231.01
C/P/V \$50.00
571.07

REPAIRMAN PROOF CLEAN TEST TARGET PATTERN

GALLERY TESTER DATE DATE DATE DATE DATE DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 003883938878

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6636199DATE 2-19-96TESTER DA

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.60	2.74	2.75	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.65	2.85	2.85	
PULL #3	2.62	2.74	2.78	
PULL #4	2.71	2.90	2.84	
PULL #5	2.63	2.80	2.87	
TOTAL	13.21	14.03	14.03	
AVG.	2.64	2.80	2.80	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.27	3.31	
PULL #2	3.25	3.07	
PULL #3	3.25	3.08	
PULL #4	3.34	3.18	
PULL #5	3.34	3.11	
TOTAL	16.45	15.75	
AVG.	3.29	3.15	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.20	4.26		4.20
PULL #2	4.21	4.21		4.21
PULL #3	4.24	4.17		4.21
PULL #4	4.23	4.23		4.20
PULL #5	4.23	4.21		4.18
TOTAL	21.11	21.08		21.00
AVG.	4.22	4.21		4.20

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6636199

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

BARBER - M24 0038842

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	7	7	7			3/7	AC
	G) Safety Off Force	4	4	4			3/7	AC
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	2.64	2.55	2.66	2.57	2.63	3/7/96	W.B.
	C) Function							
660	Pack							