

C6348833

MODEL 700TM M24

Model **SMS** TM

Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.



Speed[®]

No. 2-152-5L

BBL- 96003

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00009409** Serial: **C6348833** Model **700** Center Fire Caliber: **7.62 NATO M-24 (SWS)** Repairman:
 Verify Repair Status: **New 5/18/00 8:51:09 AM**

Address Information

Customer: ☒ Received From Return To: ☒ Received From
 Name: **DEF DIST DEPOT ANNISTON** **DEF DIST DEPOT ANNISTON**
 Address 1:
 Address 2: PO Box: PO Box:
 City: **ANNISTON** **ANNISTON**
 State: **AL** Zip Code: **362014199** Country: **US** State: **AL** Zip Code: **362014199** Country: **US**
 FFL:

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information **Received Condition** **Accessories Received**

Phone: **Poor**
 Fax: Condition Notes:
 Email: CSR Notes:
 Comments:

Code	Desc	Qty
A007	With Stud	2
A008	With Swivel	2
A010	Hard Case	1
A017	Scope Base	1

Repair Search **Refresh** **Close**

nagletj 5/18/00 12:15 PM CAPS NUM INS SCRL

Start Inb... Micr... SA... Nag... Audit R&... Ar... Prin... Re... 12:15 PM

Serial Number: **C6348833**Model: **700****RE00009409**

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

[illegible]

Final Inspection

S.N.:

DATE REC'D:

DATE RET'D:

AUDITOR: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☐ Scope☐ Scope Rings☐ Mounting Screws☒ Mounting Base☒ Screws☒ Finish☐ Looseness☐ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ Stock☒ Sling Swivel Studs☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ Iron SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6348833
21 Jul 2000

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0142
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1382
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .138928

THE AMR FOR THIS RIFLE IS: 1.114

CENTROIDAL DISTANCES

0 TO 1	.562029
1 TO 2	.543232
1 TO 3	.613209
1 TO 4	.451976
1 TO 5	.657137

1

$\frac{4}{5}$ ³ <----POA

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .562

MIN RADIUS : .279

MEAN RADIUS : .921

MAX RADIUS : 2.179


CENTROID X : -.234

CENTROID Y : .511

20 Jul 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348833.1

CENTERFIRE PATTERN # 1

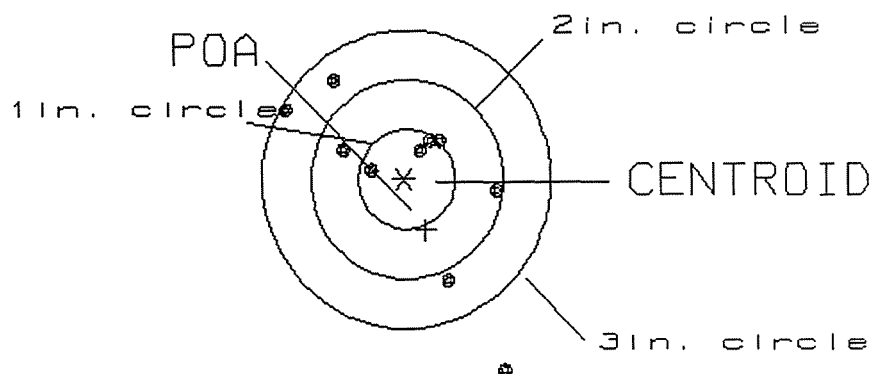

OF SHOTS= 10

IN CIRCLE

HS= 2.36

3

VS= 2.86

6

GS= 3.48

9

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .026

MIN RADIUS : .521

MEAN RADIUS : 1.350

MAX RADIUS : 2.288


CENTROID X : -.024

CENTROID Y : .010

20 Jul 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348833.1

CENTERFIRE PATTERN # 2

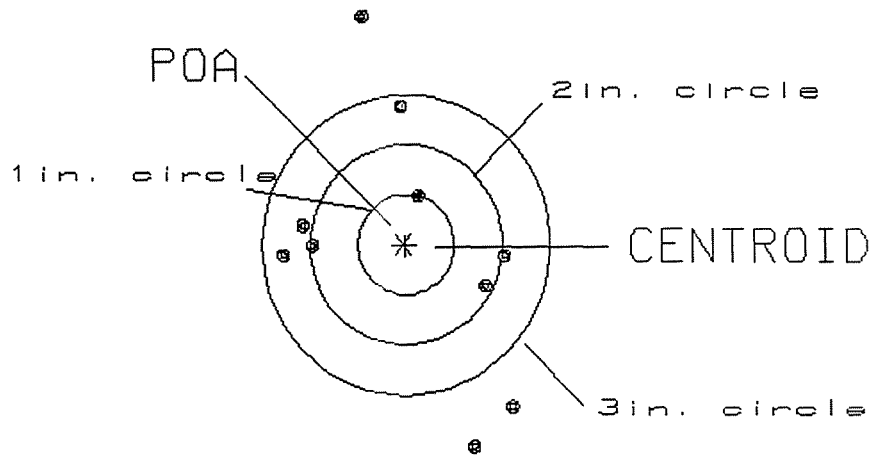

OF SHOTS= 10

IN CIRCLE

HS= 2.38

0

VS= 4.23

3

GS= 4.40

7

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .226

MIN RADIUS : .260

MEAN RADIUS : 1.283

MAX RADIUS : 2.180


CENTROID X : .209

CENTROID Y : .087

20 Jul 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348833.1

CENTERFIRE PATTERN # 3

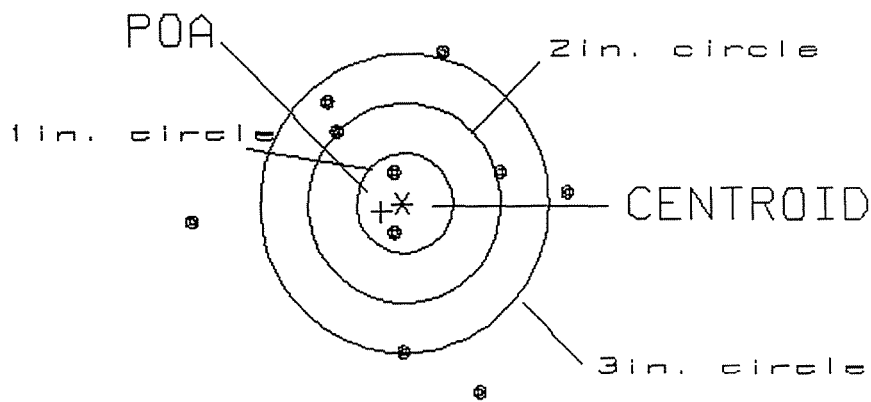

OF SHOTS= 10

IN CIRCLE

HS= 3.81

2

VS= 3.38

3

GS= 3.83

5

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .145

MIN RADIUS : .186

MEAN RADIUS : .867

MAX RADIUS : 1.352


CENTROID X : .027

CENTROID Y : .142

20 Jul 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348833.1

CENTERFIRE PATTERN # 4

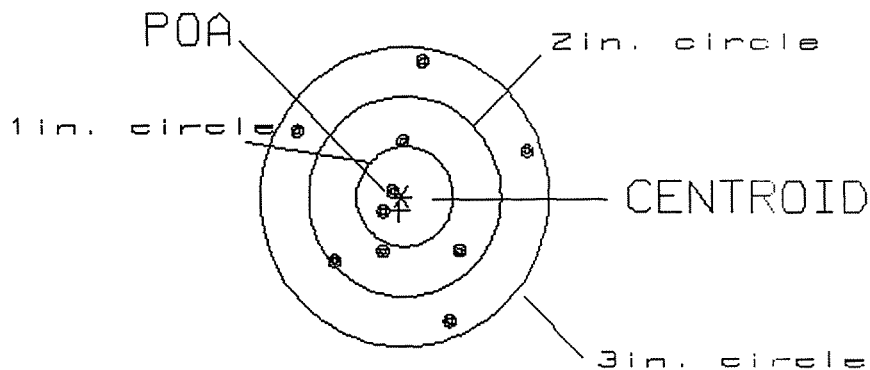

OF SHOTS= 10

IN CIRCLE

HS= 2.41

2

VS= 2.57

6

GS= 2.58

10


PATTERN #: ☐ 5 ☐

POA TO CENTROID: .111
MIN RADIUS : .357
MEAN RADIUS : 1.149
MAX RADIUS : 2.188
CENTROID X : .093
CENTROID Y : -.059

20 Jul 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348833.1

CENTERFIRE PATTERN # 5

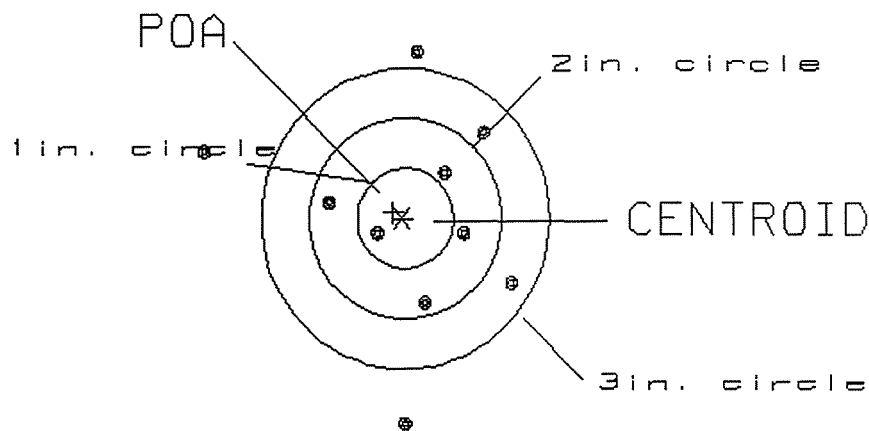

OF SHOTS= 10

IN CIRCLE

HS= 3.15

1

VS= 3.72

5

GS= 3.72

7

Remington®

MODEL 700™ H24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

DUPONT
REG. U.S. PAT. & T.M. OFF.

SERIAL NO.
C6348833


ORDER NO.
5716

Ø1



5716 C6348833

UPC



0 47700 25716 7

GUN SERIAL #

C6348833

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	QUALITY AUDIT	7 11 89	RW
600	Proof		7 11 89	RW
607	Check Headspace		7 11 89	RW
610	Dis-assemble Gun		7 11 89	RW
612	Magnaflux Barrel Action		7/13	KCR
	Magnaflux Bolt		7/13	KCR
615	Rollmark Caliber		7/13	MS.
617	Drill and Tap Sight Holes	7 13	89	78
618	Polish Barrel <i>ReB</i>	7 13	89	BT
620	Apply Coatings (Barrel Action)		7/21/89	TH
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		7/25/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		7/25/89	RW
	C) Inspect Ejector Hole for Chamfer		7/25/89	RW
	D) Oil Firing Pin Ass'y		7/25/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		2/26/89	JS

op. #	OP. NAME	READINGS			DATE	INIT		
625 cont.	F) Safety On Force	6	5	5	27/8/89	JS		
	G) Safety Off Force	4	7	7	27/8/89	JS		
	H) Trigger Pull Test & Retainability				27/8/89	JS		
	I) Firing Pin Indent	.021	.021	.021	27/8/89	JS		
	J) Assemble Stock				7/28/89	RW		
	K) Assemble Swivel Studs				3/28/89	JS		
	L) Attach Front and Rear Sight Assemblies				7/28/89	RW		
	M) Iron Sight Alignment				7/28/89	RW		
	N) Detach Front & Rear Sights & place in numbered container				7/28/89	RW		
	O) Attach Scope to Rifle				7/28/89	WB		
	P) Detach & Attach Scope 20 Times				7/28/89	WB		
640	Gallery Target & Test	67 R	90 L	7/28/89	DA			
	A) Time			7/28/89	AC			
	B) Malfunctions			7/28/89	AC			
	C) Pierced Primers			7/28/89	AC			
	D) Optical Clarity of Scope			7/28/89	AC			
645	Inspect for Live Ammo			7/28/89	AC			
655	Final Inspection							
	A) Headspace				30/8/89	JS		
	B) Trigger Pull	233	267	261	273	284	30/8/89	JS
	C) Function						30/8/89	JS
660	Pack				19/8/89	JS		

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6348833DATE 11/6/90TESTER WVB

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.34	2.43	2.29	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.40	2.45	2.30	
PULL #3	2.30	2.31	2.32	
PULL #4	2.26	2.25	2.31	
PULL #5	2.28	2.29	2.34	
TOTAL	11.58	11.73	11.56	
AVG.	2.31	2.34	2.31	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.18	3.06	
PULL #2	3.13	3.05	
PULL #3	3.10	3.11	
PULL #4	3.10	3.07	
PULL #5	3.15	3.09	
TOTAL	15.66	15.38	
AVG.	3.13	3.07	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.04	3.92		
PULL #2	4.07	3.95		
PULL #3	3.98	3.96		
PULL #4	4.01	3.93		
PULL #5	3.95	3.93		
TOTAL	20.05	19.69		
AVG.	4.01	3.94		

CENTROIDAL DISTANCE CALCULATIONS
 FOR RIFLE # C6348833
 28 Jul 1989

CENTROIDAL DISTANCES

0 TO	1	.422849
1 TO	2	.461088
1 TO	3	.366742
1 TO	4	.382692
1 TO	5	.889877


1
4
5 (----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.4134
 THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2132
 THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .465138
 THE AMR FOR THIS RIFLE IS: 1.01

28 JUL 1989

FILE: \PATTERNING\CENTERFIRE_PATT\0634B833

CENTERFIRE PATTERNS # 1

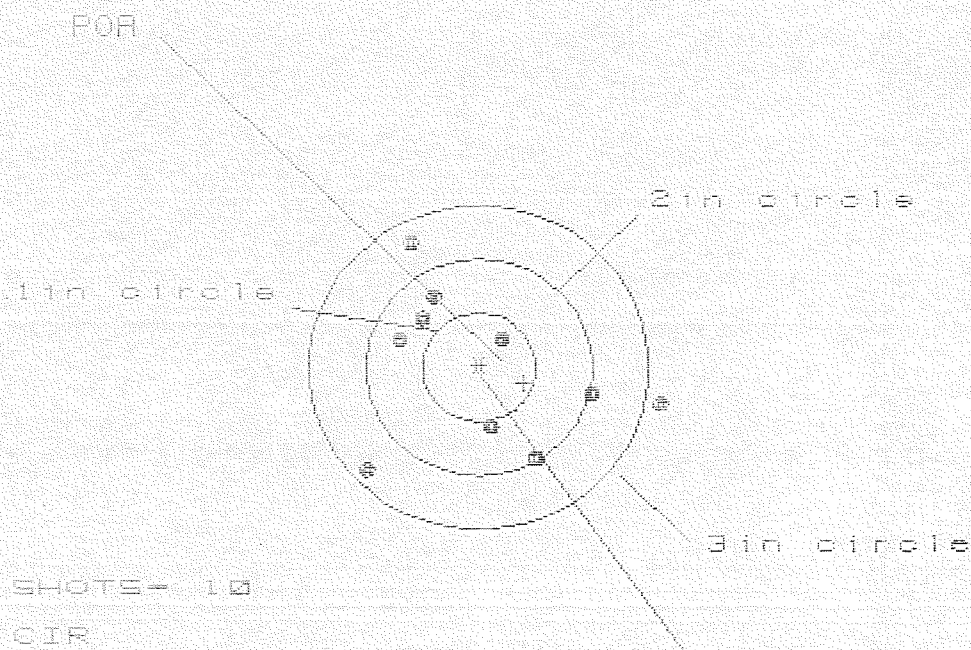

OF SHOTS= 10

IN CIR

1in = 1

2in = 6

3in = 9

HS= 2.572

VS= 2.034

GS= 2.651

CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.552	1.157	1.051
MINIMUM X	-1.020	-.847	-.669
MAXIMUM Y	1.140	1.099	.982
MINIMUM Y	-.894	-.935	-.948
CENTROID X	-.399	-.572	-.466
CENTROID Y	.140	.181	.298
POA TO CENTROID IN.	.423	.600	.553
MIN RADIUS	.338	.426	.273
MEAN RADIUS	.934	.843	.771
MAX RADIUS	1.596	1.262	1.130
HORIZONTAL SPREAD	2.572	2.004	1.720
VERTICAL SPREAD	2.034	2.034	1.930
EXTREME SPREAD	2.651	2.210	2.210
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	9		


28 JUL 1989

FILE: PATTERNING/CENTERFIRE_PATT/C6348833

CENTERFIRE PATTERNS

2

POR

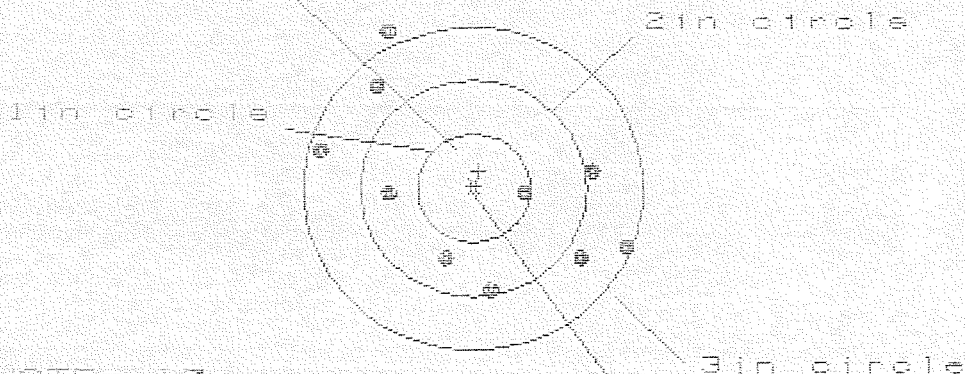

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 4

3 in = 9

HS= 2.720

VS= 2.316

GS= 2.882

CENTROID #


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.367	1.287	1.142
MINIMUM X	-1.353	-1.433	-1.273
MAXIMUM Y	1.415	1.118	1.066
MINIMUM Y	-.901	-.744	-.796
CENTROID X	-.048	.032	-.128
CENTROID Y	-.159	-.316	-.264
POR TO CENTROID in:	.166	.317	.294
MIN RADIUS	.452	.406	.544
MEAN RADIUS	1.076	.989	.948
MAX RADIUS	1.589	1.513	1.344
HORIZONTAL SPREAD	2.720	2.720	2.415
VERTICAL SPREAD	2.316	1.862	1.862
EXTREME SPREAD	2.882	2.864	2.463
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	9		

26 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C834B833

CENTERFIRE PATTERNS

3

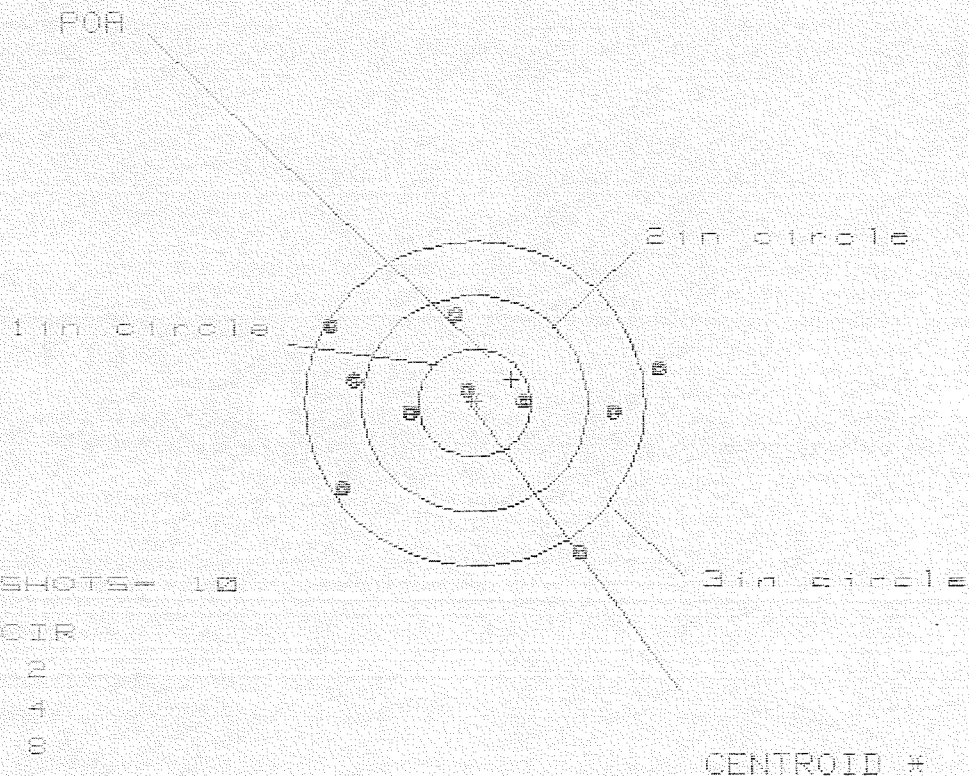

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 4

3 in = 8

HS= 2.858

VS= 2.222

GS= 3.057

CENTROID *


PATTERN #	3		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.600	1.705	1.538
MINIMUM X	-1.258	-1.153	-.940
MAXIMUM Y	.865	.714	.732
MINIMUM Y	-1.357	-.941	-.923
CENTROID X	-.329	-.434	-.647
CENTROID Y	-.220	-.069	-.087
FOR TO CENTROID in.	.396	.439	.653
MIN RADIUS	.106	.094	.296
MEAN RADIUS	1.042	.954	.848
MAX RADIUS	1.654	1.711	1.547
HORIZONTAL SPREAD	2.858	2.858	2.478
VERTICAL SPREAD	2.222	1.655	1.655
EXTREME SPREAD	3.057	2.982	2.603
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		8	

28 JUL 1989

FILE://PATTERNING/CENTERFIRE_PATT/09340833

CENTERFIRE PATTERNS

4

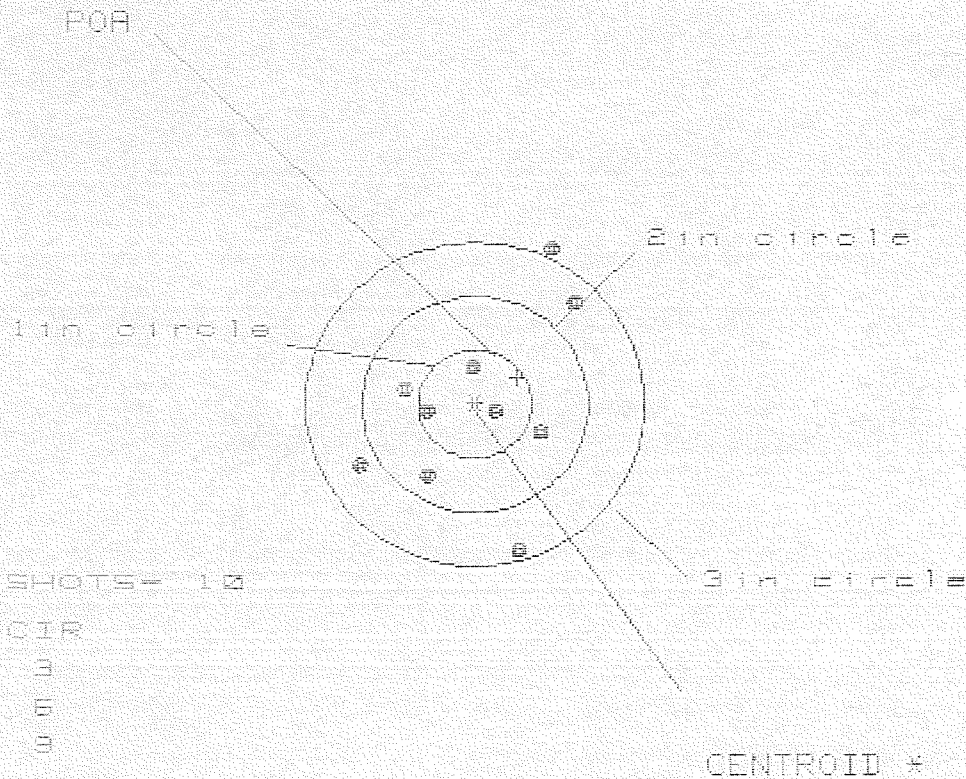

OF SHOTS= 10

IN CIR

1 in = 3

2 in = 6

3 in = 9

HS= 1.927

VS= 2.799

GS= 2.819

CENTROID *

PATTERN # : 4


SHOTS (BEST OF)	10	9	8
MAXIMUM X	.857	.931	.982
MINIMUM X	-1.070	-.996	-.945
MAXIMUM Y	1.457	1.064	.917
MINIMUM Y	-1.342	-1.180	-.622
CENTROID X	-.376	-.450	-.501
CENTROID Y	-.242	-.404	-.257
POA TO CENTROID in.	.448	.605	.563
MIN RADIUS	.194	.293	.262
MEAN RADIUS	.851	.759	.679
MAX RADIUS	1.603	1.414	1.344
HORIZONTAL SPREAD	1.927	1.927	1.927
VERTICAL SPREAD	2.799	2.244	1.539
EXTREME SPREAD	2.819	2.407	2.407
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		9	

28-JUL-1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6348833

CENTERFIRE PATTERNS

5

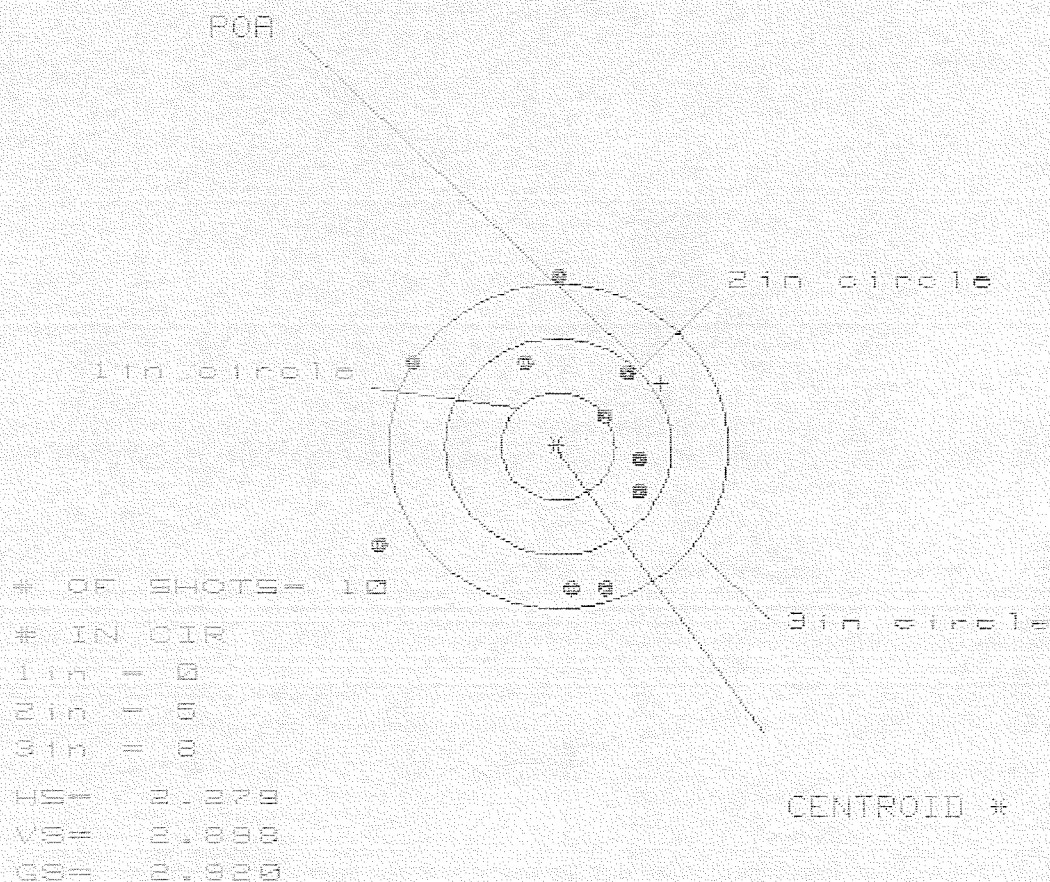

PATTERN #

5

SHOTS (BEST OF)	10	9	8
MAXIMUM X	.740	.569	.546
MINIMUM X	-1.539	-1.432	-1.455
MAXIMUM Y	1.542	1.437	.879
MINIMUM Y	-1.356	-1.461	-1.281
CENTROID X	-.915	-.744	-.721
CENTROID Y	-.585	-.480	-.660
POA TO CENTROID IN.	1.086	.886	.978
MIN RADIUS	.512	.312	.406
MEAN RADIUS	1.146	1.020	.963
MAX RADIUS	1.807	1.593	1.698
HORIZONTAL SPREAD	2.279	2.001	2.001
VERTICAL SPREAD	2.898	2.898	2.160
EXTREME SPREAD	2.920	2.900	2.696
NUMBER IN ONE INCH CIRCLE =		0	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		8	

INTERCHANGEABILITY

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06348833
15 Sep 1989

CENTROIDAL DISTANCES

0 TO	1	.147733
1 TO	2	.188298
1 TO	3	.187385
1 TO	4	.0526308
1 TO	5	.481877

#⁵ (----FOR

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1906
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .048
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .196551
THE AMR FOR THIS RIFLE IS: .3944


INTERCHANGEABILITY

15 Sep 1989

FILE: /PATTERNING/CENTERFIRE_PATT/08340833.1

CENTERFIRE PATTERNS

1

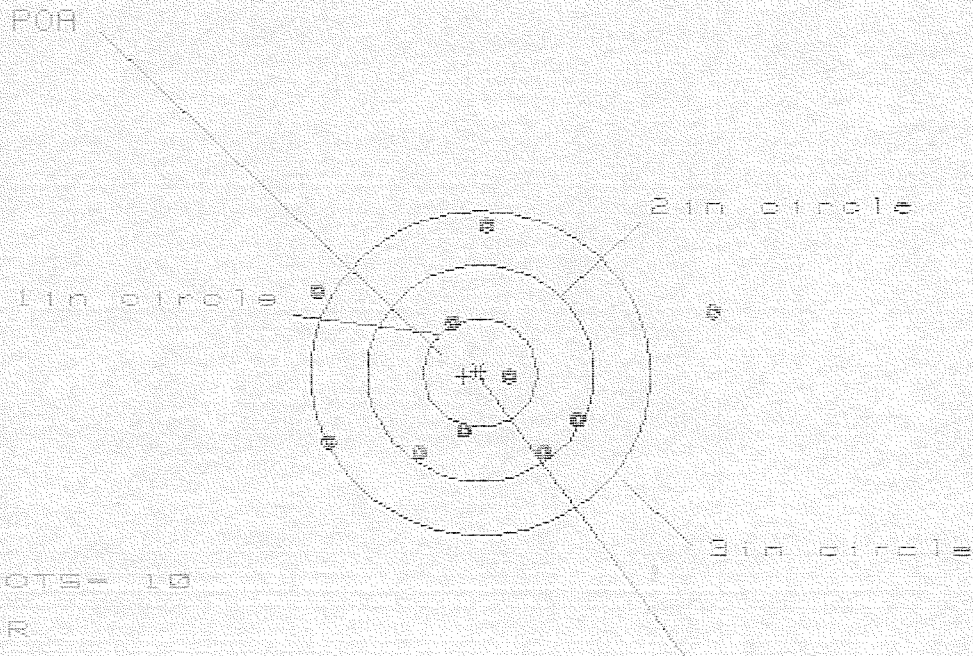

OF SHOTS= 10

IN CIR

1in = 1

2in = 6

3in = 7

HS= 3.528

VS= 2.086

GS= 3.656

CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	2.082	1.047	.895
MINIMUM X	-1.446	-1.215	-1.299
MAXIMUM Y	1.337	1.398	1.499
MINIMUM Y	-1.749	-1.688	-1.587
CENTROID X	.144	-.087	.065
CENTROID Y	.033	-.028	-.129
POA TO CENTROID in.	.148	.092	.144
MIN RADIUS	.213	.441	.318
MEAN RADIUS	1.063	.942	.839
MAX RADIUS	2.153	1.458	1.509
HORIZONTAL SPREAD	3.528	2.262	2.194
VERTICAL SPREAD	2.086	2.086	2.086
EXTREME SPREAD	3.656	2.560	2.463
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	7		

INTERCHANGEABILITY

15 Sep 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06340893.1

CENTERFIRE PATTERNS

2

POB

1in circle

2in circle

3in circle

CENTROID #

OF SHOTS = 10

IN CIR

1in = 2

2in = 6

3in = 9

HS = 2.965

VS = 2.311

GS = 2.967

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.906	.899	.851
MINIMUM X	:	-1.059	-.847	-.895
MAXIMUM Y	:	1.163	1.197	.499
MINIMUM Y	:	-1.148	-1.114	-.964
CENTROID X	:	.104	-.108	-.060
CENTROID Y	:	-.151	-.185	-.335
POB TO CENTROID IN.	:	.183	.214	.340
MIN RADIUS	:	.305	.280	.137
MEAN RADIUS	:	.917	.794	.718
MAX RADIUS	:	1.931	1.257	1.031
HORIZONTAL SPREAD	:	2.965	1.746	1.746
VERTICAL SPREAD	:	2.311	2.311	1.463
EXTREME SPREAD	:	2.967	2.312	1.911
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

INTERCHANGEABILITY

15 Sep 1989

FILE: \PATTERNING\CENTERFIRE_PATT\06340833.J

CENTERFIRE PATTERNS

3

POA

1 in circle

2 in circle

3 in circle

OF SHOTS= 10

IN CIE

1 in = 3

2 in = 5

3 in = 9

HS= 2.621

VS= 2.412

GS= 2.840

CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.149	1.274	1.106
MINIMUM X	-1.472	-1.347	-1.261
MAXIMUM Y	1.204	.963	1.003
MINIMUM Y	-1.208	-1.074	-1.034
CENTROID X	-.048	-.168	.000
CENTROID Y	.021	-.113	-.153
POA TO CENTROID in.	.048	.203	.153
MIN RADIUS	.301	.410	.268
MEAN RADIUS	.971	.897	.818
MAX RADIUS	1.649	1.384	1.281
HORIZONTAL SPREAD	2.621	2.621	2.367
VERTICAL SPREAD	2.412	2.037	2.037
EXTREME SPREAD	2.840	2.638	2.384
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		9	


INTERCHANGEABILITY

15 Sep 1989

FILE: PATTERNING/CENTERFIRE_PATT/C8348833.J

CENTERFIRE PATTERNS

4

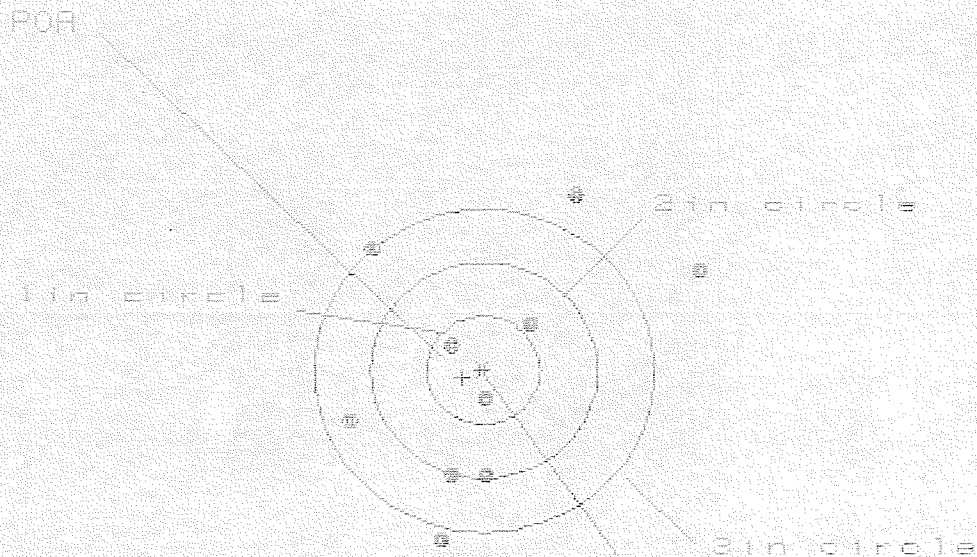

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 4

3 in = 2

HS= 3.049

VS= 3.144

GS= 3.366

CENTROID *


PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.867	1.043	.783
MINIMUM X	-1.183	-.975	-.845
MAXIMUM Y	1.586	1.689	1.403
MINIMUM Y	-1.558	-1.455	-1.244
CENTROID X	.185	-.022	-.152
CENTROID Y	-.066	-.037	-.248
POA TO CENTROID in.	.197	.043	.291
MIN RADIUS	.279	.247	.308
MEAN RADIUS	1.144	1.007	.867
MAX RADIUS	2.084	1.985	1.553
HORIZONTAL SPREAD	3.049	2.018	1.628
VERTICAL SPREAD	3.144	3.144	2.647
EXTREME SPREAD	3.366	3.366	2.724
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	7		

INTERCHANGEABILITY

15 Sep 1988

FILE: PATTERNING/CENTERFIRE_PATT/C634B693.1

CENTERFIRE PATTERNS # 5

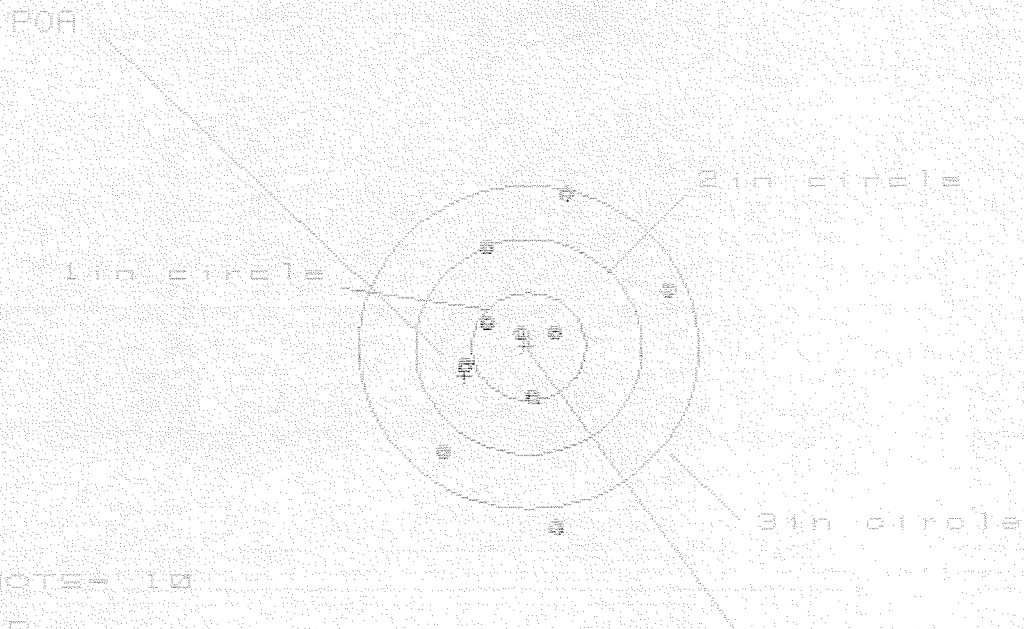

OF SHOTS= 10

IN CIR

1 in = 4

2 in = 5

3 in = 9

HS= 2.002

VS= 3.041

GS= 3.642

CENTROID *

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.284
MINIMUM X	-.723
MAXIMUM Y	1.384
MINIMUM Y	-1.657
CENTROID X	.553
CENTROID Y	-.271
POA TO CENTROID in	.624
MIN RADIUS	.154
MEAN RADIUS	.877
MAX RADIUS	1.678
HORIZONTAL SPREAD	2.007
VERTICAL SPREAD	3.041
EXTREME SPREAD	3.042
NUMBER IN ONE INCH CIRCLE	= 4
NUMBER IN TWO INCH CIRCLE	= 5
NUMBER IN THREE INCH CIRCLE	= 9

1. TYPE MNT REQ CODE		6. ID		7. NSN		15. FAILURE DETECTED DURING (Select one - use $\checkmark$ or X)									
2a. IF INTRANSIT CUSTOMER, ENTER DATA IN BLOCKS 2b. AND 2c.		2b. SAMS-2 UIC		2c. UTILIZATION CODE		4a. UIC SUPPORT		4b. SUPPORT UNIT NAME							
SECTION III - EQUIPMENT DATA															
3. MODEL		6. ID		7. NSN		☐ A Scheduled Maintenance		☐ C Test		☐ E Storage		☐ G Flight		☐ J Calibration	
11. NOUN		12. QTY		13. PD		☐ B Handling		☐ D Normal Op		☐ F Inspection		☐ H Other			
10a. ORG WON		10b. EIC		16a. MILES/KILOMETERS (enter $\checkmark$ or X)		16b. HOURS		16c. ROUNDS		17. PROJECT CODE (if assigned)		18. ACCOUNT PROCESSING CODE			
1. SERIAL NUMBER		12. QTY		13. PD		19. IN WARRANTY? (enter Y or N)		20. LEVEL OF WORK (Select one - use $\checkmark$ or X)		21. BUMPER NO./TAIL NO.		22. REIMBURSABLE CUSTOMER? (if Intransit Customer, enter Y or N)			
4. MALFUNCTION DESCRIPTION (for DSU/GSU use)		12. QTY		13. PD		☐ O Unit Level		☐ H Intermediate General Spt		☐ I Special Repair Activity					
4. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs)		12. QTY		13. PD		☐ F Intermediate Direct Spt		☐ D Depot							
4a. REMARKS		12. QTY		13. PD		23. PD AUTHENTICATING SIGNATURE (Payroll Signature)									

1. 1005012402136
3. M24
11. R.516 7.62 MM SNRCL
1. 6348833
4. MALFUNCTION DESCRIPTION (for DSU/GSU use)
4. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs)
4a. REMARKS ADV. DRY L&E # 90-6 No Faults Noted Scope SN 87-0244

5a. TA		25b. ORD DATE		25c. MIL TIME		25a. STA		25b. ORD DATE		25c. MIL TIME		26. TECHNICAL REFERENCES	

7a. FILE INPUT ACT CD		27b. TASK NO.		27c. ACT RQD		27d. TASK DESCRIPTION		27e. QTY TO BE RFR		27f. WORK CENTER		27g. FAILURE CODE		27h. MH RMN/PROJ	

7a. FILE INPUT ACT CD		27b. TASK NO.		27c. ACT RQD		27d. TASK DESCRIPTION		27e. QTY TO BE RFR		27f. WORK CENTER		27g. FAILURE CODE		27h. MH RMN/PROJ	

29. QTY RFR		30. QTY CONDEMN		31. QTY NRIS		32. EVAC WON		33. EVAC UNIT NAME	

34. SUBMITTED BY		35a. ACCEPTED BY		36a. WORK STARTED BY		37a. INSPECTED BY		38a. PICKED UP BY	
34b. ORD DATE		35b. STA		36b. ORD DATE		37b. STA		38b. STA	
34c. MIL TIME		35c. ORD DATE		36c. MIL TIME		37c. ORD DATE		38c. MIL TIME	
34d. STA		35d. ORD DATE		36d. MIL TIME		37d. STA		38d. MIL TIME	