

Remington

C6348840

MODEL 700™ M24

Model **SWS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington®

Serial Number:

C6348840

Model: 700



RE00038542

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER 38542			
SERIAL NUMBER C6348840			
LOG-IN DATE 1-2-02			
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	1-2-02	DL
560 A	RE-BARREL AT CUSTOM SHOP	1-3-02	BWT
B	DRILL AND TAP	1-3-02	BWT
C	POLISH		
575	ASSEMBLE	1-4-02	AC
600	PROOF	1-4-02	AC
605	CHECK HEADSPACE	1-4-02	AC
610	DIS-ASSEMBLE GUN	1-4-02	AC
612	MAGNAFLUX	OPERATOR AC	
615	ROLLMARK CALIBER	1-7-02	h3
618	ROTO-BLAST	1/7	HO
620	APPLY COATINGS	1/7	HO
625 A	FINAL ASSEMBLY	1-9-02	DL
B	TRIGGER PULL TEST	↑	
C	SAFETY "ON" FORCE	↑	
D	SAFETY "OFF" FORCE	↓	
E	FIRING PIN INDENT	↓	
640	TARGET	1-11-02	AC
655	FINAL INSPECT	1-12-02	DL
660	PACK	1-12-02	DL
		SHIP DATE	
		QAR INSPECTION DATE	

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION


FIREARM SERIAL NUMBER / DATASET NAME: C6348840.___0
FILE DATE AND TIME: 01/11/2002 04:22

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.003
The Average Y Centroid of the Five Target Set:	-0.004
The Average Point of Impact of the Five Target Set:	0.006
The Average Mean Radius of the Five Target Set:	0.549
The Distance from POA to Centroid Target #1:	0.172
The Distance from Centroid Target #2 to Centroid Target #1:	0.207
The Distance from Centroid Target #3 to Centroid Target #1:	0.249
The Distance from Centroid Target #4 to Centroid Target #1:	0.149
The Distance from Centroid Target #5 to Centroid Target #1:	0.310

BARBER - M24 0039504

SERIAL NUMBER: C6348840.0	POINT#	X	Y
TARGET NUMBER: 1	1:	1.140	-0.334
FILE DATE: 01/11/2002	2:	-0.006	-0.633
FILE TIME: 04:22	3:	-0.626	-0.299
	4:	-0.395	-0.138
X CENTROID: -0.167	5:	0.130	-0.053
Y CENTROID: 0.040	6:	-0.196	-0.027
POA TO CENTROID: 0.172	7:	-0.315	0.173
HORZ SPREAD: 1.952	8:	-0.313	0.420
VERT SPREAD: 1.333	9:	-0.279	0.591
GROUP SPREAD: 2.209	10:	-0.812	0.700
MIN RADIUS: 0.073			
MAX RADIUS: 1.360			
MEAN RADIUS: 0.539			
# IN 1 IN DIAMETER: 5			
# IN 2 IN DIAMETER: 9			
# in 3 IN DIAMETER: 10			

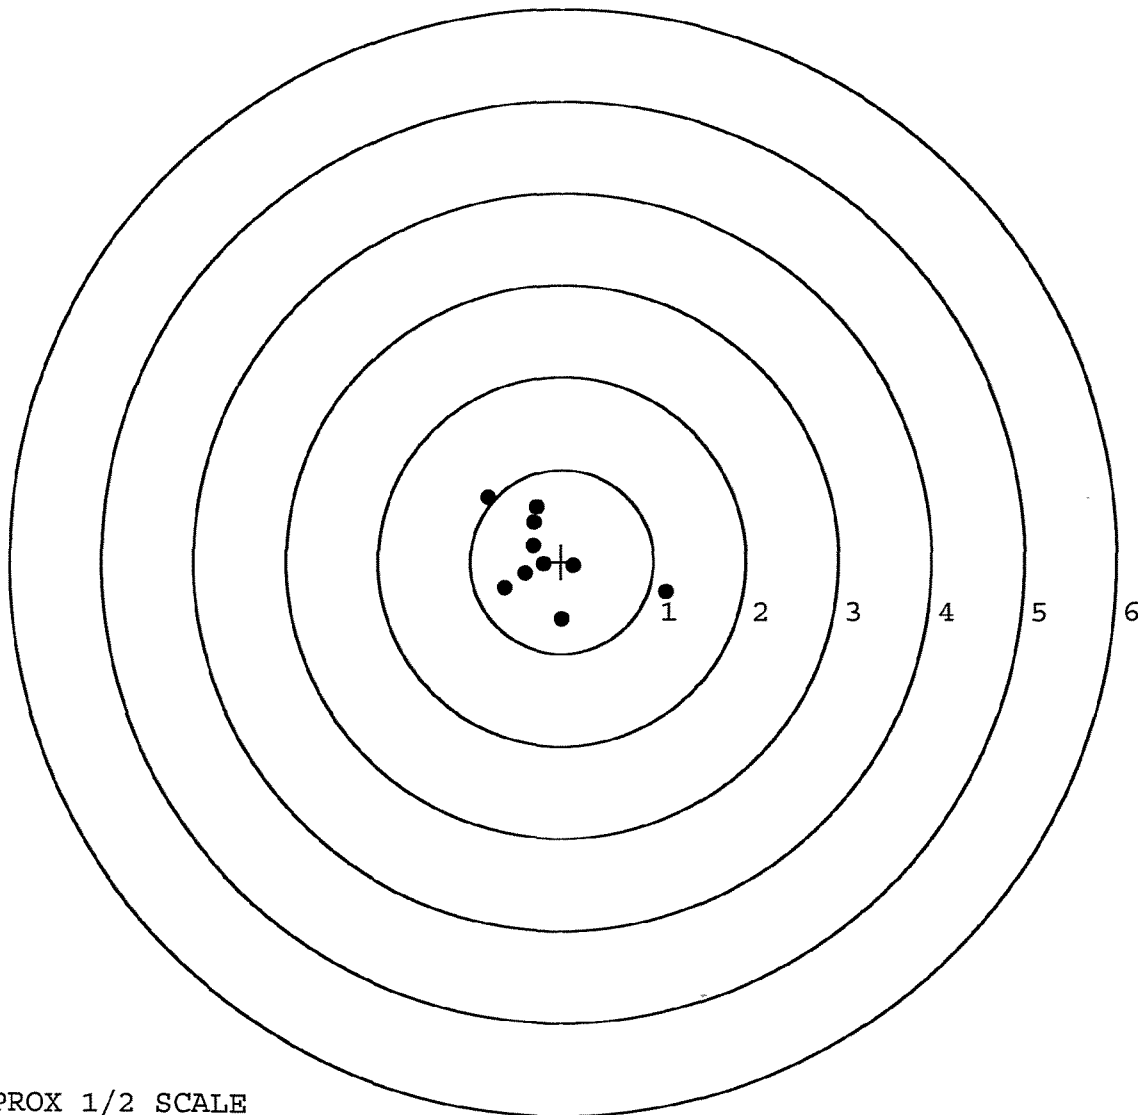

TARGET APPROX 1/2 SCALE

BARBER - M24 0039505

SERIAL NUMBER: C6348840. __ 0

TARGET NUMBER: 2

FILE DATE: 01/11/2002

FILE TIME: 04:22

POINT#	X	Y
1:	-0.485	-0.771
2:	0.772	-0.630
3:	0.534	-0.686
4:	0.710	0.877
5:	-0.477	0.786
6:	-0.245	-0.151
7:	-0.305	0.253
8:	-0.140	0.077
9:	-0.076	0.108
10:	0.089	0.239

X CENTROID: 0.038

Y CENTROID: 0.010

POA TO CENTROID: 0.039

HORZ SPREAD: 1.257

VERT SPREAD: 1.648

GROUP SPREAD: 2.036

MIN RADIUS: 0.150


MAX RADIUS: 1.097

MEAN RADIUS: 0.612

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

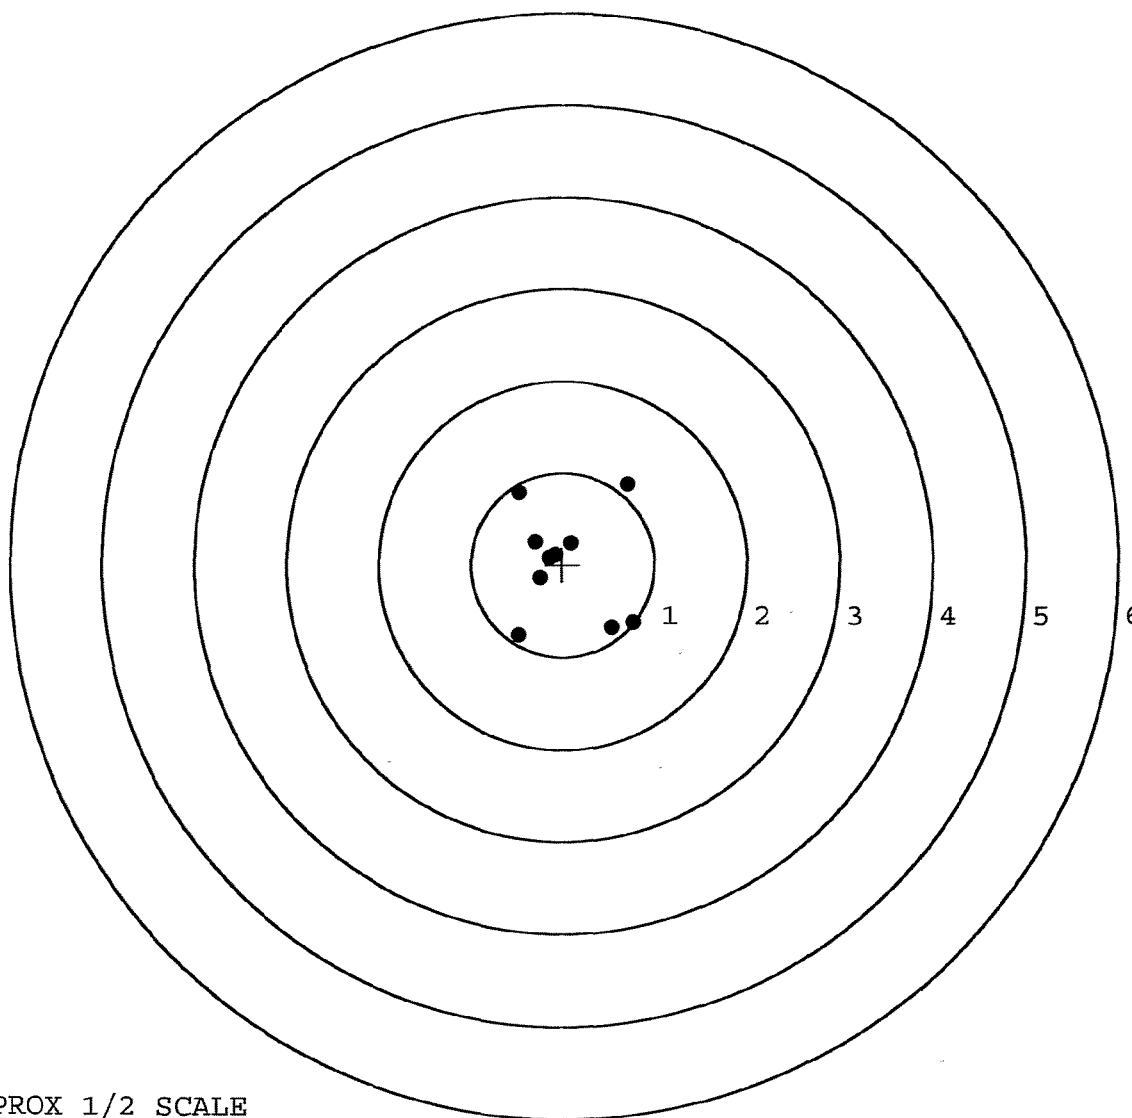

TARGET APPROX 1/2 SCALE

BARBER - M24 0039506

SERIAL NUMBER: C6348840. __0

TARGET NUMBER: 3

FILE DATE: 01/11/2002

FILE TIME: 04:22

POINT#	X	Y
1:	-0.261	-0.818
2:	-0.010	-0.661
3:	0.061	-0.261
4:	0.272	-0.236
5:	0.306	-0.076
6:	0.390	0.053
7:	0.338	0.699
8:	0.185	0.528
9:	-0.105	0.574
10:	-0.356	0.544

X CENTROID: 0.082

Y CENTROID: 0.035

POA TO CENTROID: 0.089

HORZ SPREAD: 0.746

VERT SPREAD: 1.517

GROUP SPREAD: 1.631

MIN RADIUS: 0.250


MAX RADIUS: 0.919

MEAN RADIUS: 0.526

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

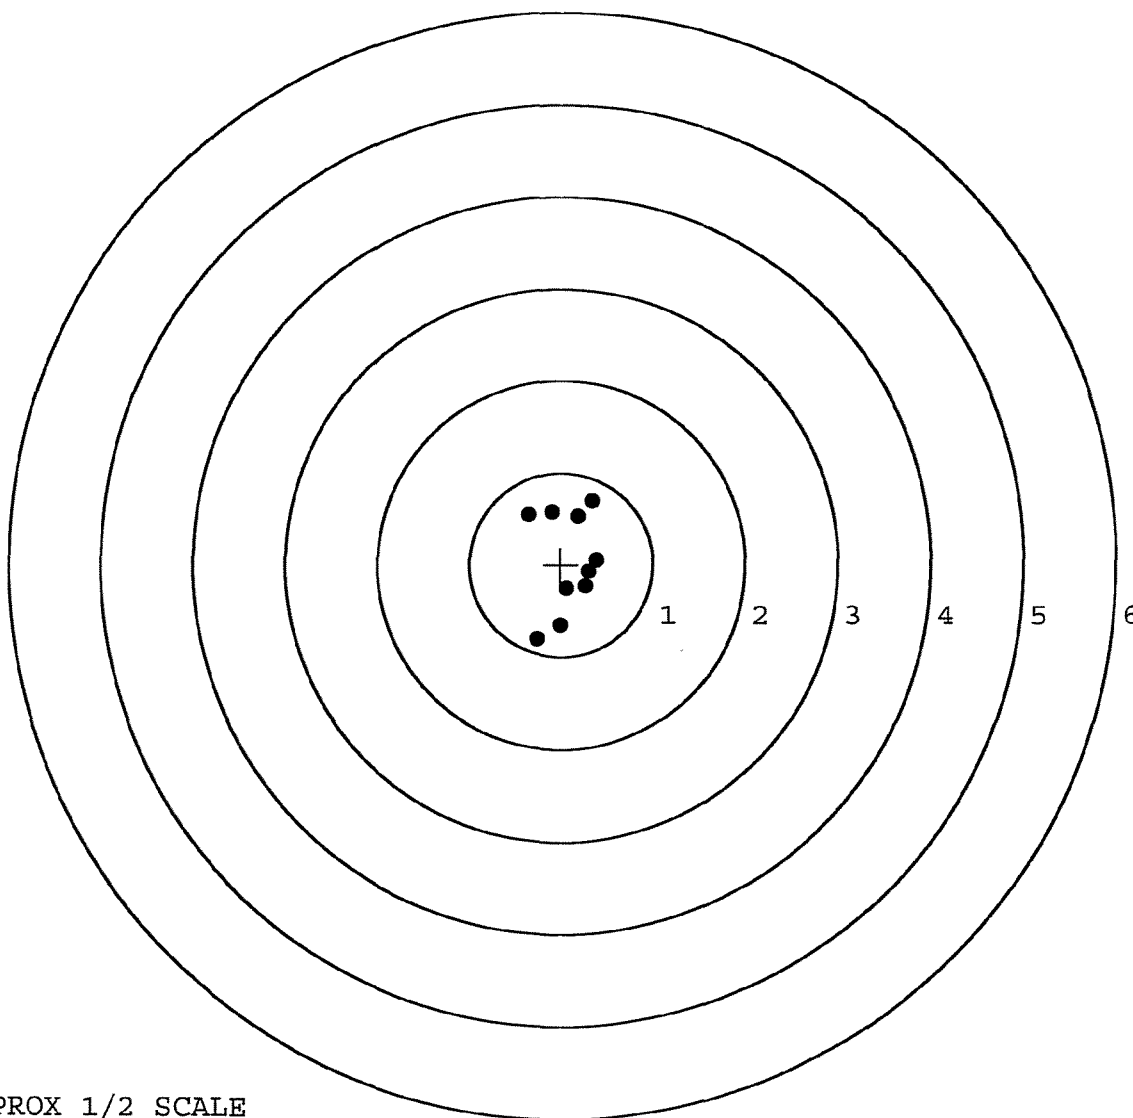

TARGET APPROX 1/2 SCALE

BARBER - M24 0039507

SERIAL NUMBER: C6348840. 0

TARGET NUMBER: 4

FILE DATE: 01/11/2002

FILE TIME: 04:22

POINT#	X	Y
1:	1.231	0.021
2:	0.178	0.829
3:	-1.054	0.273
4:	-0.379	0.137
5:	-0.290	-0.078
6:	0.058	-0.191
7:	-0.201	-0.283
8:	-0.188	-0.465
9:	-0.057	-0.613
10:	0.005	-0.359

X CENTROID: -0.070

Y CENTROID: -0.073

POA TO CENTROID: 0.101

HORZ SPREAD: 2.285

VERT SPREAD: 1.442

GROUP SPREAD: 2.299

MIN RADIUS: 0.174


MAX RADIUS: 1.304

MEAN RADIUS: 0.554

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

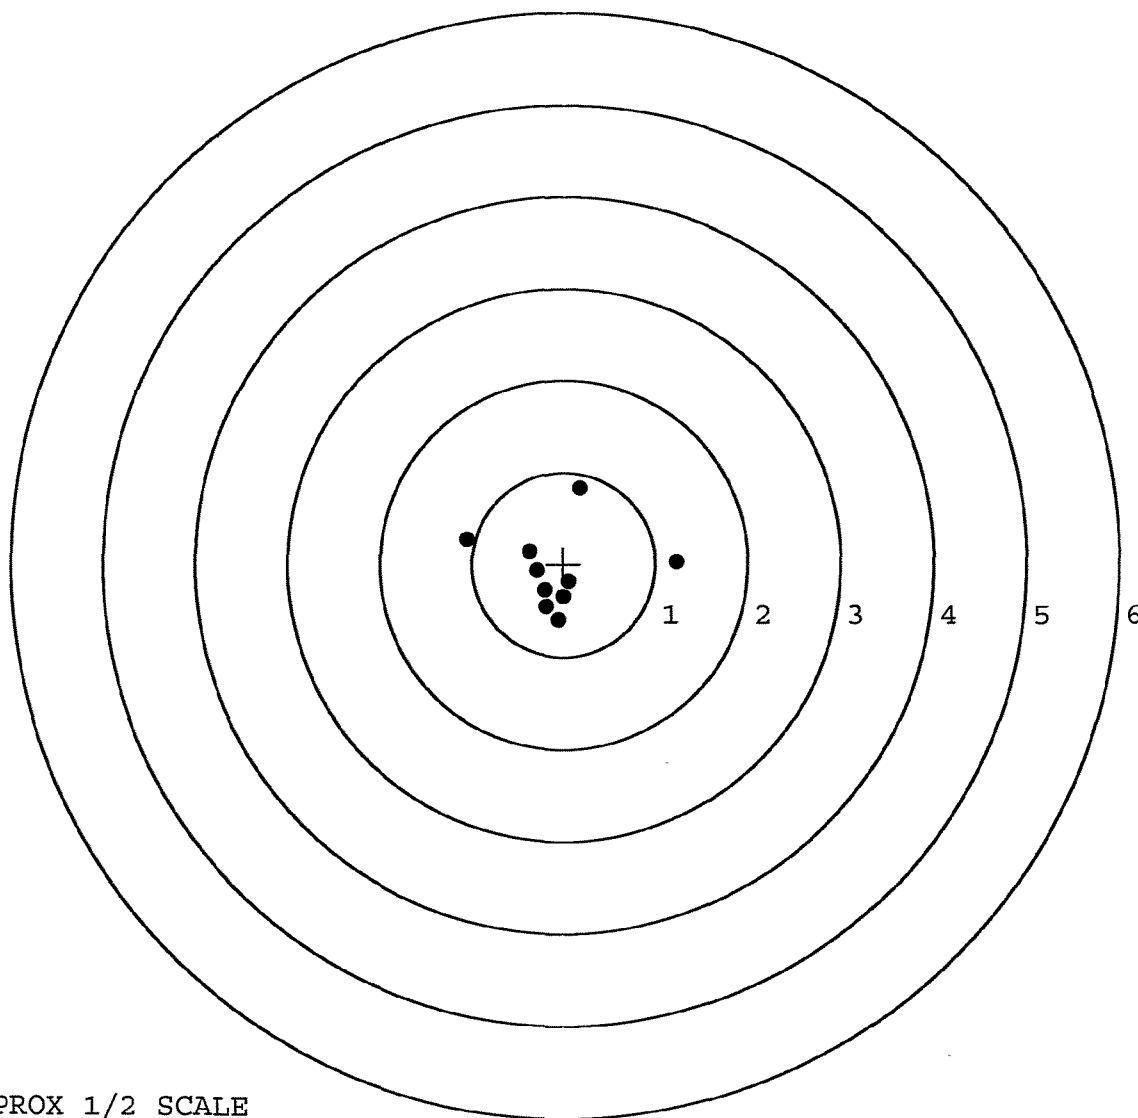


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348840. __0
 TARGET NUMBER: 5
 FILE DATE: 01/11/2002
 FILE TIME: 04:22

POINT#	X	Y
1:	0.749	-0.772
2:	0.786	-0.289
3:	0.474	-0.206
4:	0.086	-0.240
5:	-0.211	-0.439
6:	-0.532	0.444
7:	-0.148	0.419
8:	-0.053	0.675
9:	0.023	0.136
10:	0.163	-0.070

X CENTROID: 0.134
 Y CENTROID: -0.034
 POA TO CENTROID: 0.138
 HORZ SPREAD: 1.318
 VERT SPREAD: 1.447
 GROUP SPREAD: 1.766
 MIN RADIUS: 0.046
 MAX RADIUS: 0.961
 MEAN RADIUS: 0.512
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

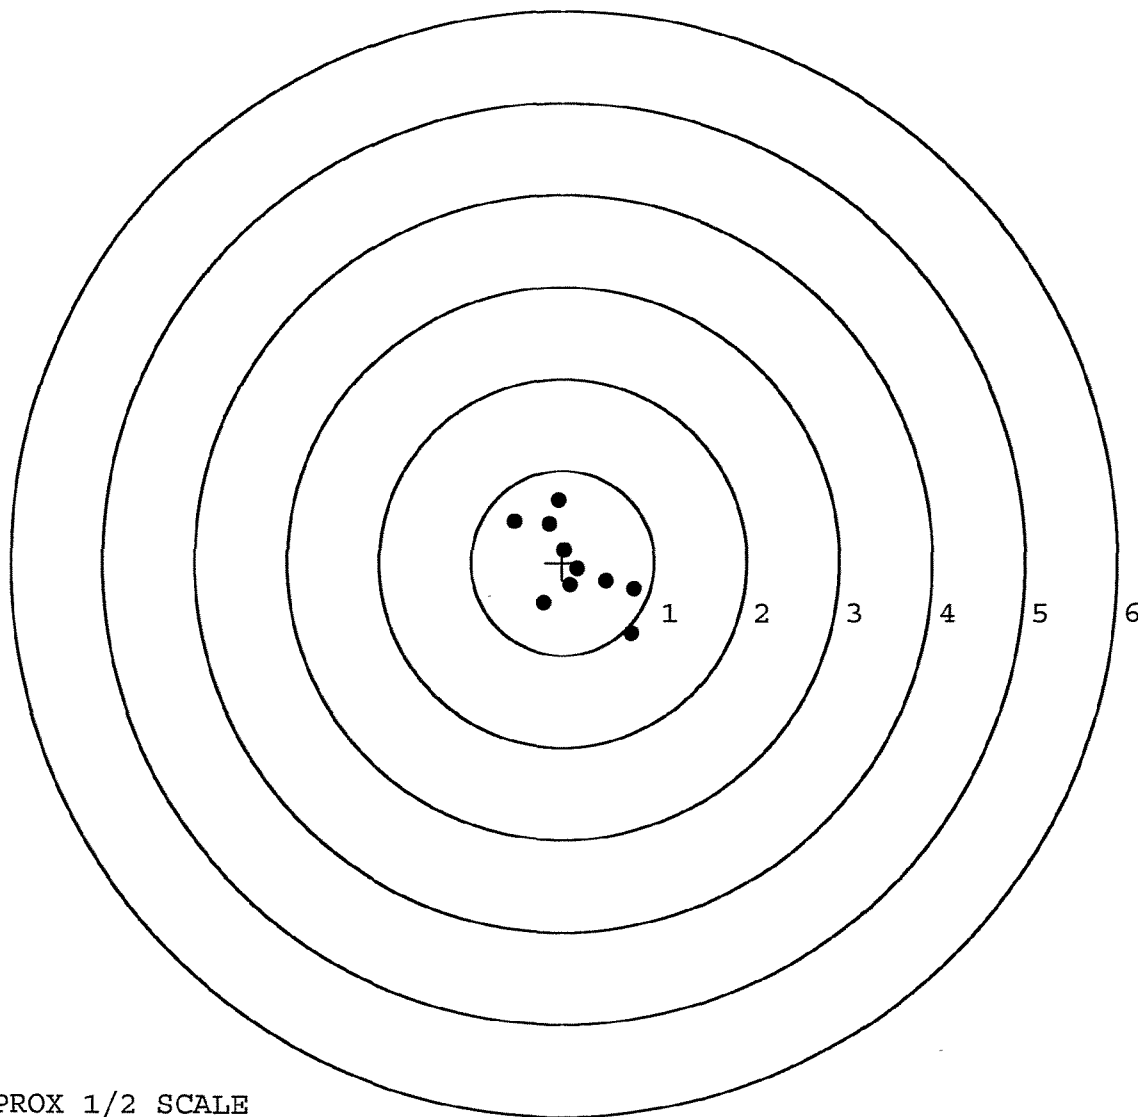

TARGET APPROX 1/2 SCALE

Remington®

MODEL 700™ H24

MADE IN ILION, N.Y., U.S.A. Reg. U.S. Pat. & Tm. Off; Marca Registrada Marque Deposee.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

REG. U.S. PAT. & T.M. OFF

SERIAL NO.
C6348840

ORDER NO.
5716

01

5716 C6348840

UPC

0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6348840

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	7 21	89	RW
600	Proof	7 21	89	RW
607	Check Headspace			RW
610	Dis-assemble Gun			RW
612	Magnaflux Barrel Action		7/25/89	RK
	Magnaflux Bolt		7/25/89	RK
615	Rollmark Caliber		7/25/89	RK
7	Drill and Tap Sight Holes		7/29/89	CCRC
618	Polish Barrel <i>del</i>		7/31/89	CCRC
620	Apply Coatings (Barrel Action)		8/7/89	TJA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		8/7/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		8/7/89	RW
	C) Inspect Ejector Hole for Chamfer		8/7/89	RW
	D) Oil Firing Pin Ass'y		8/7/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		9 Aug 89	RW

BARBER - M24 0039511		READINGS					DATE	INIT
op. #	OP. NAME							
625 cont.	F) Safety On Force	5	4	4			9 Aug 89	JS
	G) Safety Off Force	4	4	4			9 Aug 89	JS
	H) Trigger Pull Test & Retainability						9 Aug 89	JS
	I) Firing Pin Indent	.020	.0215	.021			9 Aug 89	JS
	J) Assemble Stock						8/9/89	RW
	K) Assemble Swivel Studs						16 Aug 89	JS
	L) Attach Front and Rear Sight Assemblies						8/9/89	RW
	M) Iron Sight Alignment						8/9/89	RW
	N) Detach Front & Rear Sights & place in numbered container						8/9/89	RW
	O) Attach Scope to Rifle						10 Aug 89	JS
	P) Detach & Attach Scope 20 Times						10 Aug 89	JS
640	Gallery Target & Test	75R	77L				8-15-89	D/H
	A) Time						8-15-89	D/H
	B) Malfunctions						8-15-89	D/H
	C) Pierced Primers						8-15-89	D/H
	D) Optical Clarity of Scope						8-15-89	D/H
645	Inspect for Live Ammo						8-15-89	D/H
655	Final Inspection							
	A) Headspace						16 Aug 89	JS
	B) Trigger Pull	2.85	2.82	2.61	2.66	2.52	16 Aug 89	JS
	C) Function						16 Aug 89	JS
660	Pack						20 Sept 89	JS

repaired stock at front Swivel 13 Sept 89

BARBER - M24 0039512

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. 8846DATE 3-22-90TESTER J. 28

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.41	2.40	2.54	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.43	2.51	2.56	
PULL #3	2.32	2.52	2.50	
PULL #4	2.40	2.57	2.46	
PULL #5	2.14	2.57	2.56	
TOTAL	11.40	12.57	12.62	
AVG.	2.28	2.514	2.524	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.38	3.43	
PULL #2	3.40	3.38	
PULL #3	3.41	3.25	
PULL #4	3.47	3.23	
PULL #5	3.49	3.25	
TOTAL	17.15	16.54	
AVG.	3.43	3.308	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.35	4.43		
PULL #2	4.41	4.37		
PULL #3	4.35	4.39		
PULL #4	4.36	4.33		
PULL #5	4.40	4.40		
TOTAL	21.87	21.92		
AVG.	4.374	4.384		

CENTROIDAL DISTANCE CALCULATIONS
 FOR RIFLE # C6348840
 16 Aug 1989

CENTROIDAL DISTANCES

0 TO	1	.760729
1 TO	2	1.11426
1 TO	3	.785871
1 TO	4	.606822
1 TO	5	.769384

2 + <----POA
 4 1

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.2524
 THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.4642
 THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .528382
 THE RMR FOR THIS RIFLE IS: .9654

16 Aug 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08348840

CENTERFIRE PATTERNS

1

FOR

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS = 10

IN CIR

1 in = 4

2 in = 5

3 in = 9

HE = 0.004

VE = 0.000


CE = 0.000

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.141	1.159	1.228
MINIMUM X	-1.063	-1.045	-0.976
MAXIMUM Y	1.169	0.996	0.592
MINIMUM Y	-1.561	-1.205	-1.080
CENTROID X	0.345	0.327	0.258
CENTROID Y	-0.678	-0.505	-0.630
FOR TO CENTROID IN	0.761	0.602	0.580
MIN RADIUS	0.357	0.259	0.259
MEAN RADIUS	0.851	0.713	0.679
MAX RADIUS	1.569	1.282	1.299
HORIZONTAL SPREAD	2.204	2.204	2.204
VERTICAL SPREAD	2.730	2.201	1.672
EXTREME SPREAD	2.756	2.324	2.216
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	9		

15 Aug 1989

FILE: PATTERNING/CENTERFIRE_PATT/06346840

CENTERFIRE PATTERNS # 2

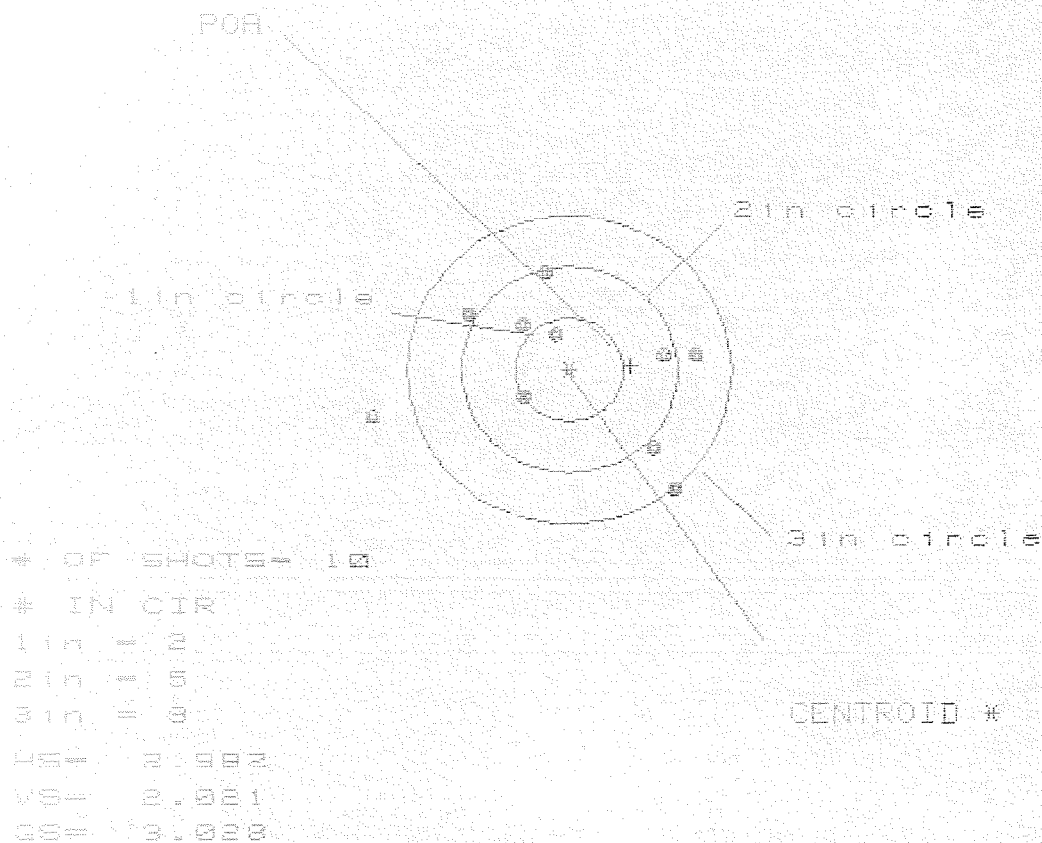

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.186	.906	1.083
MINIMUM X	-1.796	-1.111	-1.014
MAXIMUM Y	.909	.863	.710
MINIMUM Y	-1.112	-1.158	-.938
CENTROID X	-.572	-.372	-.469
CENTROID Y	-.045	.001	.146
POA TO CENTROID in.	.574	.372	.491
MIN RADIUS	.335	.399	.231
MEAN RADIUS	.981	.881	.782
MAX RADIUS	1.842	1.394	1.142
HORIZONTAL SPREAD	2.982	2.097	2.097
VERTICAL SPREAD	2.021	2.021	1.656
EXTREME SPREAD	3.028	2.522	2.144
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		9	

16 Aug 1988

FILE: \PATTERNING\CENTERFIRE_PATT\08348840

CENTERFIRE PATTERNS # 3

POA

1 in circle

2 in circle

3 in circle

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 4

3 in = 9

HE = 2.030

VS = 2.503

GS = 3.086

CENTROID *

PATTERN #	3	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.170	.936	.866
MINIMUM X	-.860	-.730	-.600
MAXIMUM Y	1.400	1.247	1.134
MINIMUM Y	-1.103	-.948	-1.061
CENTROID X	-.378	-.508	-.438
CENTROID Y	-.370	-.525	-.412
POA TO CENTROID in	.529	.731	.601
MIN RADIUS	.373	.368	.340
MEAN RADIUS	1.050	.940	.919
MAX RADIUS	1.824	1.295	1.246
HORIZONTAL SPREAD	2.030	1.686	1.666
VERTICAL SPREAD	2.503	2.195	2.195
EXTREME SPREAD	3.086	2.337	2.214
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		9	

16 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06340840

CENTERFIRE PATTERNS # 4

POR

2 in circle

1 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 8

HS= 3.147

VS= 2.218

GS= 3.174


PATTERN

	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.559	1.382	.893
MINIMUM X	-1.588	-.955	-.782
MAXIMUM Y	.976	1.024	1.033
MINIMUM Y	-1.242	-1.194	-1.185
CENTROID X	-.258	-.081	-.254
CENTROID Y	-.746	-.794	-.883
POR TO CENTROID in.	.789	.799	.843
MIN RADIUS	.215	.391	.220
MEAN RADIUS	.976	.913	.813
MAX RADIUS	1.647	1.384	1.255
HORIZONTAL SPREAD	3.147	2.337	1.675
VERTICAL SPREAD	2.218	2.218	2.218
EXTREME SPREAD	3.174	2.461	2.361
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

15 Aug 1985

FILE:/PATTERNING/CENTERFIRE_PATT/06348840

CENTERFIRE PATTERNS # 5

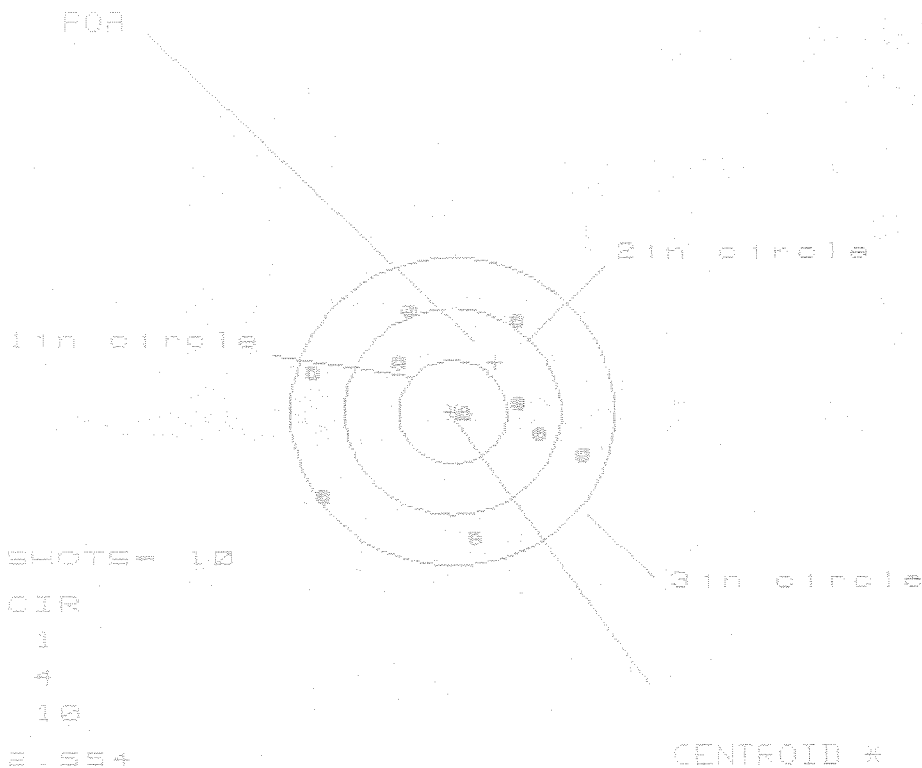

OF SHOTS = 10

IN CIR

1in = 1

2in = 4

3in = 10

HE = 2.554

VS = 2.205

GS = 2.674

CENTROID *

PATTERN

SHOTS (BEST OF)

	10	9	8
MAXIMUM X	1.241	1.183	.921
MINIMUM X	-1.313	-1.451	-.829
MAXIMUM Y	1.008	.919	.951
MINIMUM Y	-1.198	-1.286	-1.254
CENTROID X	-.399	-.261	-.019
CENTROID Y	-.482	-.393	-.425
POA TO CENTROID in.	.625	.472	.432
MIN RADIUS	.084	.160	.231
MEAN RADIUS	.969	.895	.799
MAX RADIUS	1.477	1.473	1.266
HORIZONTAL SPREAD	2.554	2.554	1.750
VERTICAL SPREAD	2.205	2.205	2.205
EXTREME SPREAD	2.674	2.674	2.271
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		10	

RECEIVING REPORT

COMMENTS

ORDER

R 97-04332

INITIAL CUSTOMER ORDER NO.

MOG 8 OF 9 W/LEUPOLD 10X SCOPE

RJJM

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

02/18/97

02/18/97

C6348840

700

7.62

NATO

ACCESSORIES

FROM:

SHIP TO:

DEPT OF THE ARMY
COMMANDER ATTN SFC BARTON
2ND BN 10TH SFG (A)
FT CARSON

CO 80913

DEPT OF THE ARMY
COMMANDER ATTN SFC BARTON
2ND BN 10TH SFG (A)
FT CARSON

CO

80913

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

CUST NO: 162097 C.O.D.

FROM DATE

ESTIMATED

VIA

WRITE ☐

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

TRIGGER GROUP

BOLT ASSY.

BARREL ASSY.

REC. ASSY.

WOOD

METAL

MAIN FAULT

WSS #097077 #242

PARTS

COMMENTS

Barrel 96003
Front Sight Base 96011

Recoat Trigger Guard
Assy & Rear Sight Base

Re-line Scope Base, Rings &
Swivel Studs

Scope Sent Back TO Factory
for Inspect.

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

2/17/97

3/13/97

3/13/97

3/13/97

OFFICE COPY

RD6925 REV. 11/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 00399939558

Final Inspection

S.N. C6348840

DATE REC'D: 2/13/97

DATE RET'D:

AUDITOR: *AW*

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ Looseness☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ Stock☒ Sling Swivel Studs☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ Iron SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

21 DAY TURN - AROUND

Barre 1

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO. C6348840

LOG IN DATE: / /

DATE

INIT.

INSPECT & VERIFY:

OP. #	OP. NAME
550	DIS-ASSEMBLE GUN
560 A	RE-BARREL AT CUSTOM SHOP
B	DRILL & TAP
C	POLISH
575	ASSEMBLE
600	PROOF
605	CHECK HEADSPACE
610	DIS-ASSEMBLE
612	MAGNAFLUX
615	ROLLMARK CALIBER
618	ROTO-BLAST
620	APPLY COATINGS
625 A	FINAL ASSEMBLY
B	TRIGGER PULL TEST
C	SAFETY ON FORCE
D	SAFETY OFF FORCE
E	FIRING PIN INDENT
640	TARGET
655	FINAL INSPECT
660	PACK
	QAR INSPECTION

2/17/97

3/13/97
3/17/97

RW

SHIP DATE

BARBER - M24 0039522

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6348840
21 Mar 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.159
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0424
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .164556

THE AMR FOR THIS RIFLE IS: 1.062

CENTROIDAL DISTANCES

Ø TO	1	.271007
1 TO	2	1.03707
1 TO	3	.403001
1 TO	4	.383275
1 TO	5	.389102


5 1 3
4 ←---POA
2

PATTERN #: 1
 POA TO CENTROID: .271
 MIN RADIUS : .322
 MEAN RADIUS : 1.128
 MAX RADIUS : 1.983
 CENTROID X : .002
 CENTROID Y : .271

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348840

CENTERFIRE PATTERN # 1

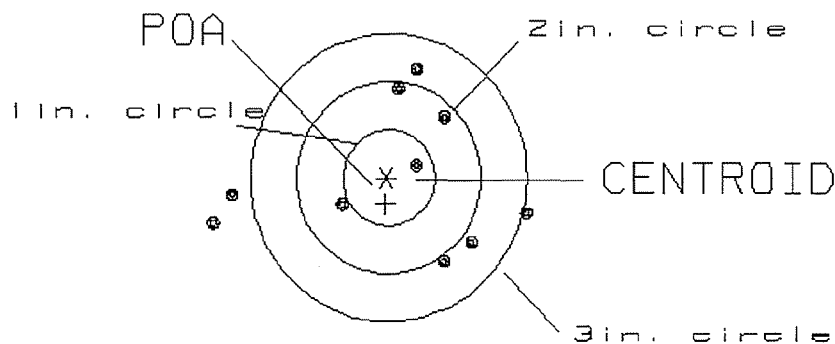

OF SHOTS= 10

IN CIRCLE

HS= 3.37

1

VS= 2.09

4

GS= 3.37


8

PATTERN #: 2
 POA TO CENTROID: .879
 MIN RADIUS : .502
 MEAN RADIUS : 1.020
 MAX RADIUS : 1.599
 CENTROID X : -.774
 CENTROID Y : -.417

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348840

CENTERFIRE PATTERN # 2

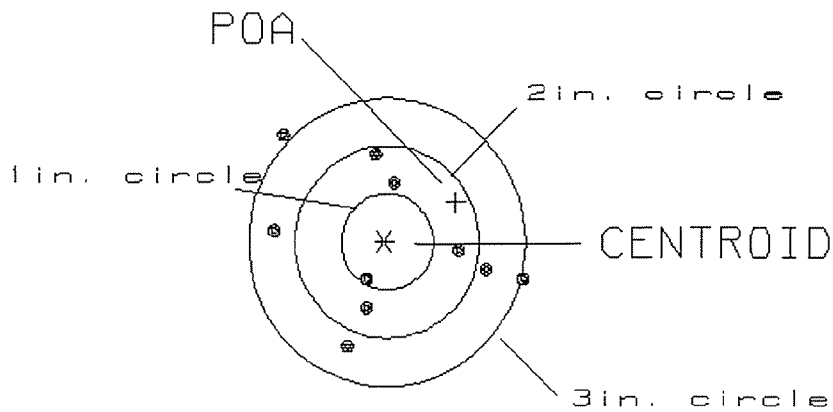

OF SHOTS= 10

IN CIRCLE

HS= 2.71
 VS= 2.20
 GS= 3.01


0
 5
 8

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .487
 MIN RADIUS : .149
 MEAN RADIUS : 1.060
 MAX RADIUS : 2.111
 CENTROID X : .405
 CENTROID Y : .270

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C634884B

CENTERFIRE PATTERN # 3

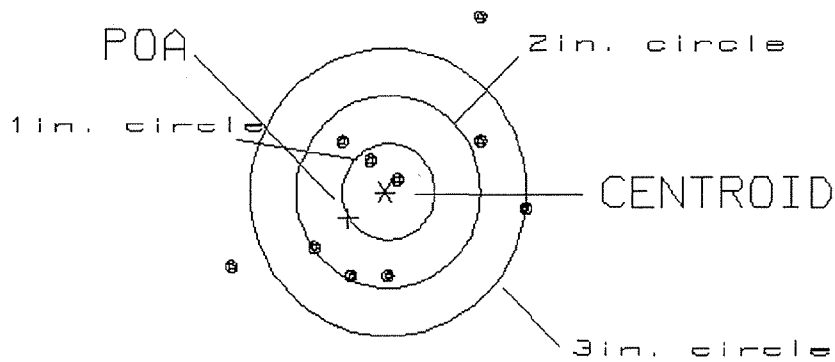

OF SHOTS= 10

IN CIRCLE

HS= 3.15

2

VS= 2.73

6

GS= 3.80


8

PATTERN #: ☐ 4 ☐
 POA TO CENTROID: .119
 MIN RADIUS : .284
 MEAN RADIUS : .968
 MAX RADIUS : 1.745
 CENTROID X : -.048
 CENTROID Y : -.109

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348848

CENTERFIRE PATTERN # 4

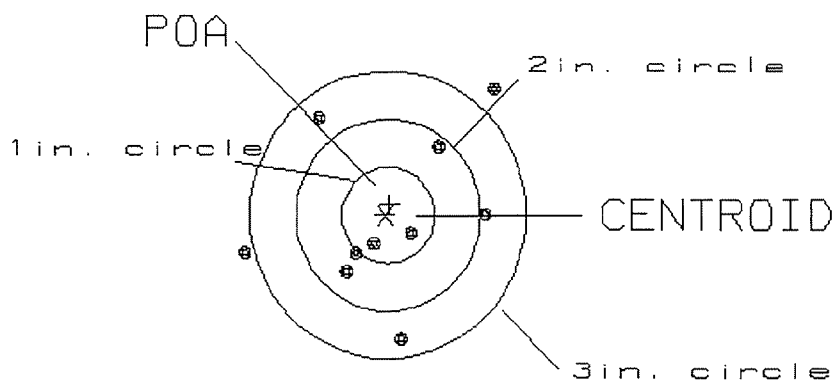

OF SHOTS= 10

IN CIRCLE

HS= 2.66

2

VS= 2.64

5

GS= 3.17


8

PATTERN #: 5
 POA TO CENTROID: .428
 MIN RADIUS : .307
 MEAN RADIUS : 1.136
 MAX RADIUS : 2.345
 CENTROID X : -.380
 CENTROID Y : .197

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348840

CENTERFIRE PATTERN # 5

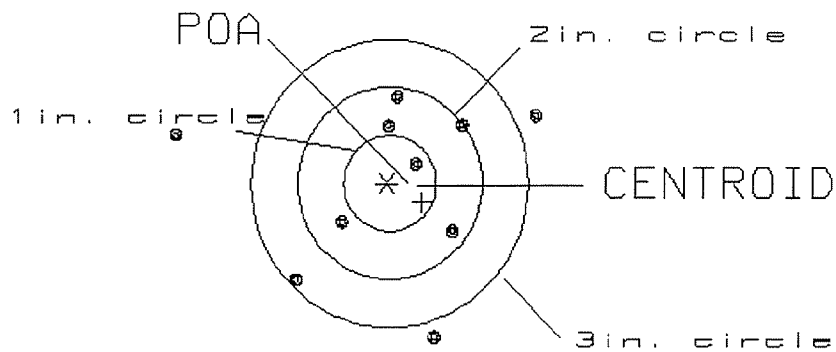

OF SHOTS= 10

IN CIRCLE

HS= 3.89

1

VS= 2.52

6

GS= 3.89

7