

C6348844

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington®

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: RE00144413

Serial: C6348844 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Verify Repair

Status:

Closed 4/14/2008 1:19:23 PM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: BROCK BUDDLES

BROCK BUDDLES

Address 1: C CO 1ST BN

C CO 1ST BN

Address 2: 7TH SFG (A)

PO Box:

7TH SFG (A)

PO Box:

City: FT. BRAGG

FT. BRAGG

State: NC

Zip Code: 28310

Country: US

State: NC

Zip Code: 28310

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A008	With Swivel	1
A010	Hard Case	1
A057	Fit and Rear Sgt Base	1
D000	DRAG BAG	1

Repair Search

Refresh

Close

naglelj

4/14/2008

3:27 PM

NUM



Serial Number: C6348844

Model: M24 SWS



RE00144413

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348844.____0
FILE DATE AND TIME: 05/07/2008 04:56

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.110
The Average Y Centroid of the Five Target Set:	-0.114
The Average Point of Impact of the Five Target Set:	0.158
The Average Mean Radius of the Five Target Set:	0.568
The Distance from POA to Centroid Target #1:	0.255
The Distance from Centroid Target #2 to Centroid Target #1:	0.220
The Distance from Centroid Target #3 to Centroid Target #1:	0.241
The Distance from Centroid Target #4 to Centroid Target #1:	0.255
The Distance from Centroid Target #5 to Centroid Target #1:	0.146

BARBER - M24 0039592

SERIAL NUMBER: C6348844. __ 0

TARGET NUMBER: 1

FILE DATE: 05/07/2008

FILE TIME: 04:56

POINT#	X	Y
1:	0.018	-0.828
2:	0.425	-0.291
3:	0.666	-0.068
4:	-0.084	0.044
5:	-0.236	0.261
6:	-0.808	0.275
7:	-0.816	0.160
8:	-0.694	0.147
9:	-0.544	0.160
10:	-0.466	-0.054

X CENTROID: -0.254

Y CENTROID: -0.019

POA TO CENTROID: 0.255

HORZ SPREAD: 1.482

VERT SPREAD: 1.103

GROUP SPREAD: 1.513

MIN RADIUS: 0.181


MAX RADIUS: 0.921

MEAN RADIUS: 0.521

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

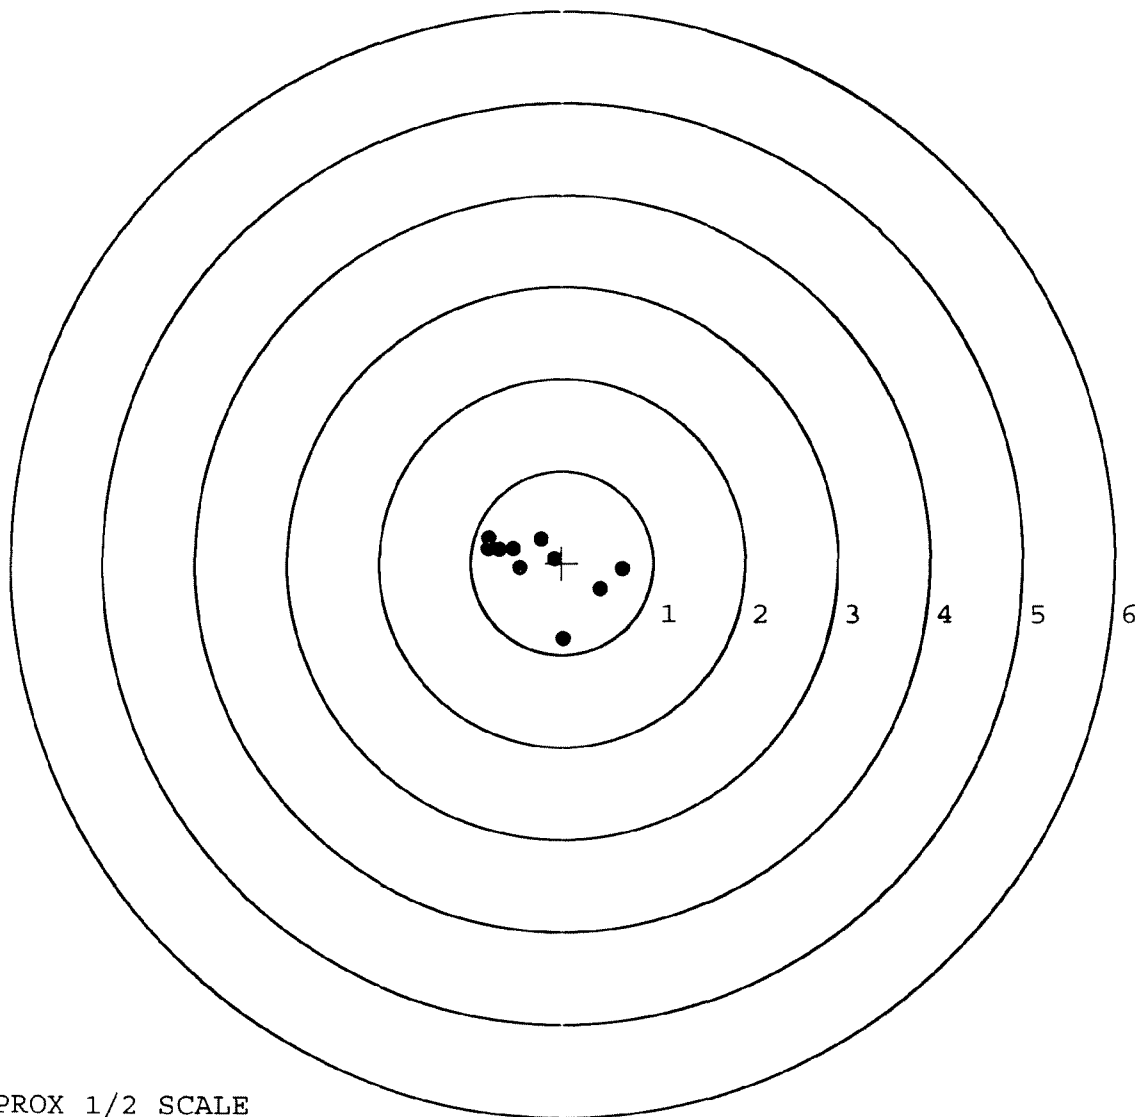


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348844. __0
 TARGET NUMBER: 2
 FILE DATE: 05/07/2008
 FILE TIME: 04:56

POINT#	X	Y
1:	-0.166	-1.148
2:	0.402	-0.568
3:	-0.769	-0.522
4:	-0.648	0.898
5:	0.244	0.482
6:	0.233	0.031
7:	-0.165	0.051
8:	0.122	-0.325
9:	-0.086	-0.386
10:	0.053	-0.035

X CENTROID: -0.078
 Y CENTROID: -0.152
 POA TO CENTROID: 0.171
 HORZ SPREAD: 1.171
 VERT SPREAD: 2.046
 GROUP SPREAD: 2.102
 MIN RADIUS: 0.176
 MAX RADIUS: 1.195
 MEAN RADIUS: 0.558
 # IN 1 IN DIAMETER: 5
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

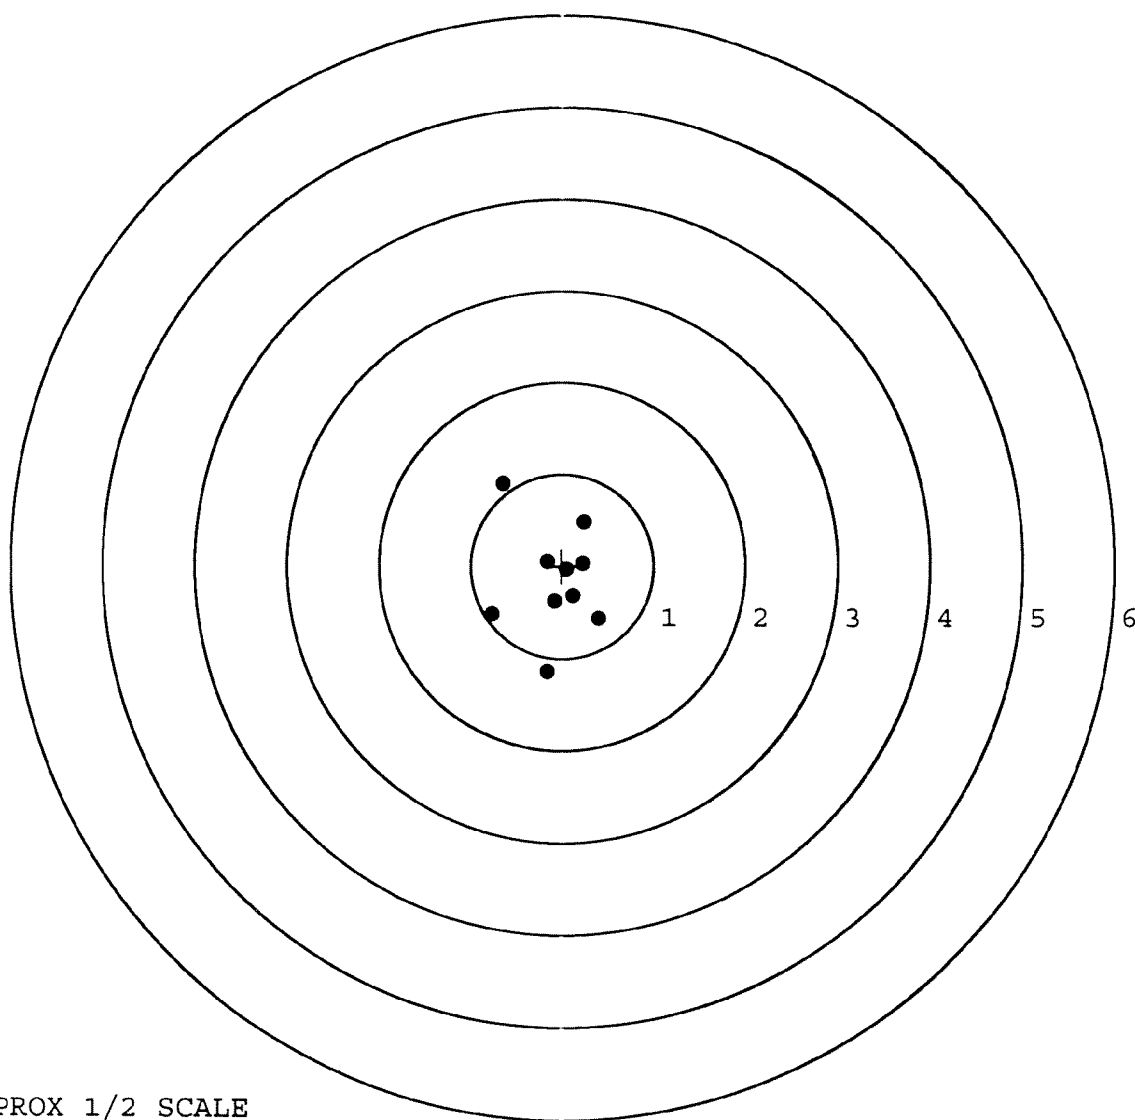

TARGET APPROX 1/2 SCALE

BARBER - M24 0039594

SERIAL NUMBER: C6348844. __0

TARGET NUMBER: 3

FILE DATE: 05/07/2008

FILE TIME: 04:56

POINT#	X	Y
1:	-0.812	-0.221
2:	-0.711	-1.054
3:	0.235	-0.873
4:	0.179	-0.395
5:	-0.140	-0.248
6:	-0.079	-0.011
7:	0.253	0.129
8:	-0.165	0.435
9:	0.246	0.220
10:	0.411	0.412

X CENTROID: -0.058

Y CENTROID: -0.161

POA TO CENTROID: 0.171

HORZ SPREAD: 1.223

VERT SPREAD: 1.489

GROUP SPREAD: 1.846

MIN RADIUS: 0.120


MAX RADIUS: 1.106

MEAN RADIUS: 0.550

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

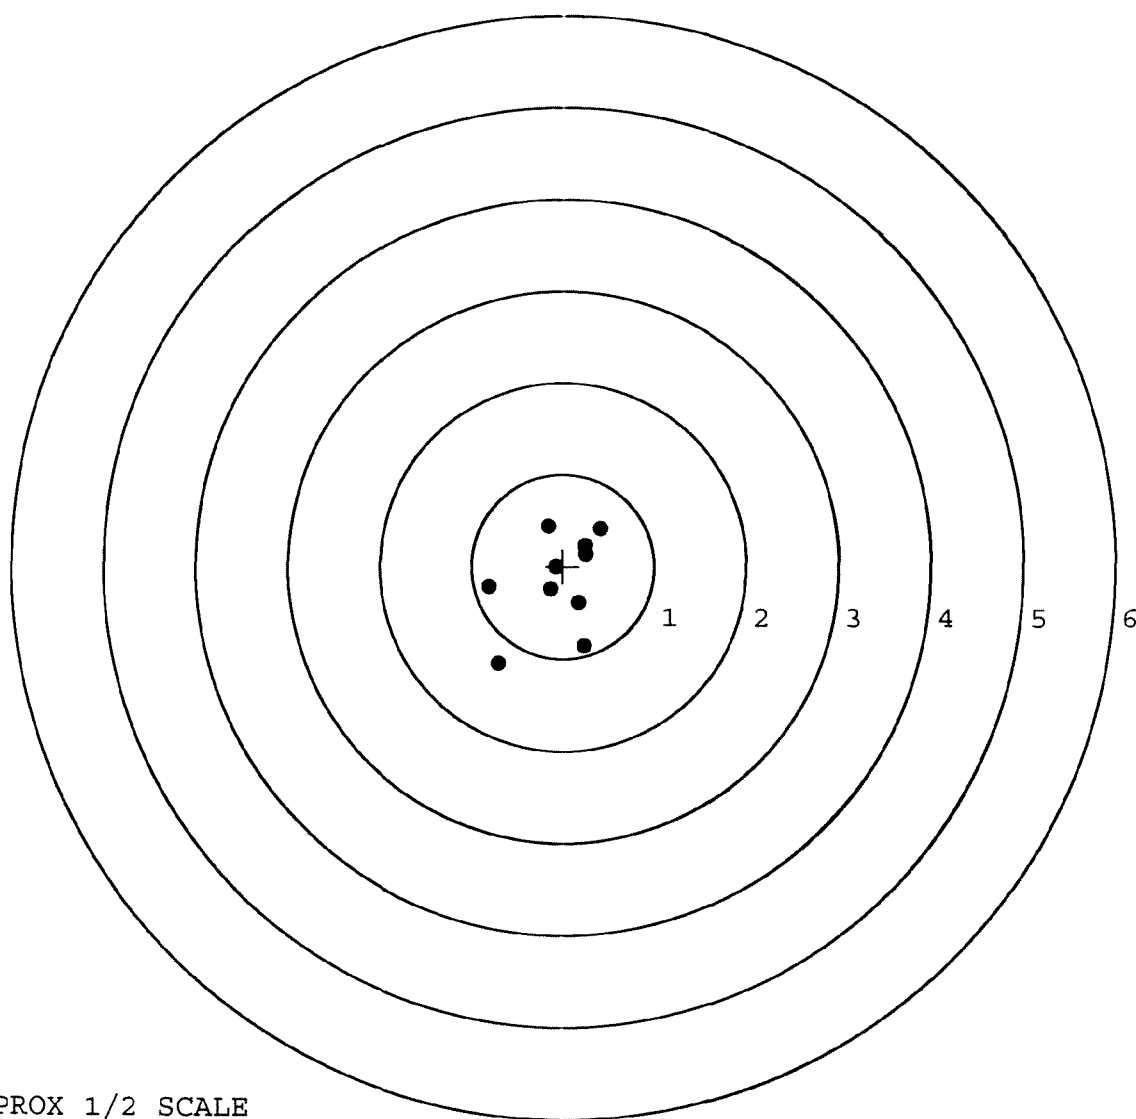

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348844. __0

TARGET NUMBER: 4

FILE DATE: 05/07/2008

FILE TIME: 04:56

POINT#	X	Y
1:	0.818	-0.151
2:	0.747	-1.211
3:	0.329	-0.691
4:	0.304	0.122
5:	-0.013	-0.238
6:	-0.344	-0.511
7:	-0.121	0.214
8:	-0.428	0.266
9:	-0.314	-0.064
10:	-1.404	0.637

X CENTROID: -0.043

Y CENTROID: -0.163

POA TO CENTROID: 0.168

HORZ SPREAD: 2.222

VERT SPREAD: 1.848

GROUP SPREAD: 2.836

MIN RADIUS: 0.081


MAX RADIUS: 1.579

MEAN RADIUS: 0.664

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 9

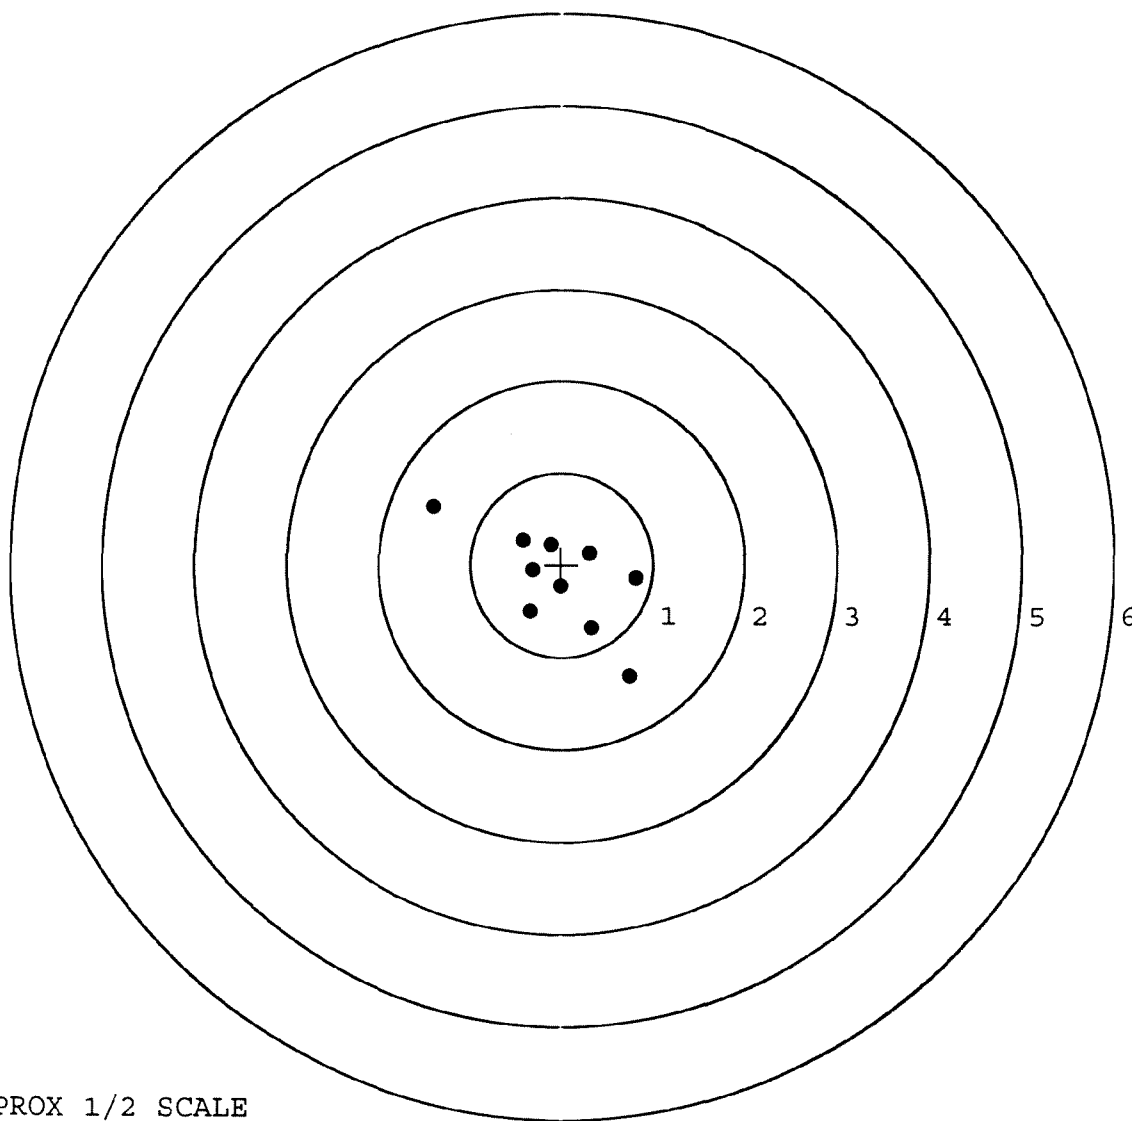

TARGET APPROX 1/2 SCALE

BARBER - M24 0039596

SERIAL NUMBER: C6348844. 0

TARGET NUMBER: 5

FILE DATE: 05/07/2008

FILE TIME: 04:56

POINT#	X	Y
1:	-1.339	0.463
2:	-0.621	-0.074
3:	-0.033	0.569
4:	-0.031	0.267
5:	0.217	0.060
6:	-0.198	-0.027
7:	-0.117	-0.282
8:	0.154	-0.558
9:	0.354	-0.413
10:	0.438	-0.734

X CENTROID: -0.118

Y CENTROID: -0.073

POA TO CENTROID: 0.138

HORZ SPREAD: 1.777

VERT SPREAD: 1.303

GROUP SPREAD: 2.143

MIN RADIUS: 0.093


MAX RADIUS: 1.334

MEAN RADIUS: 0.550

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

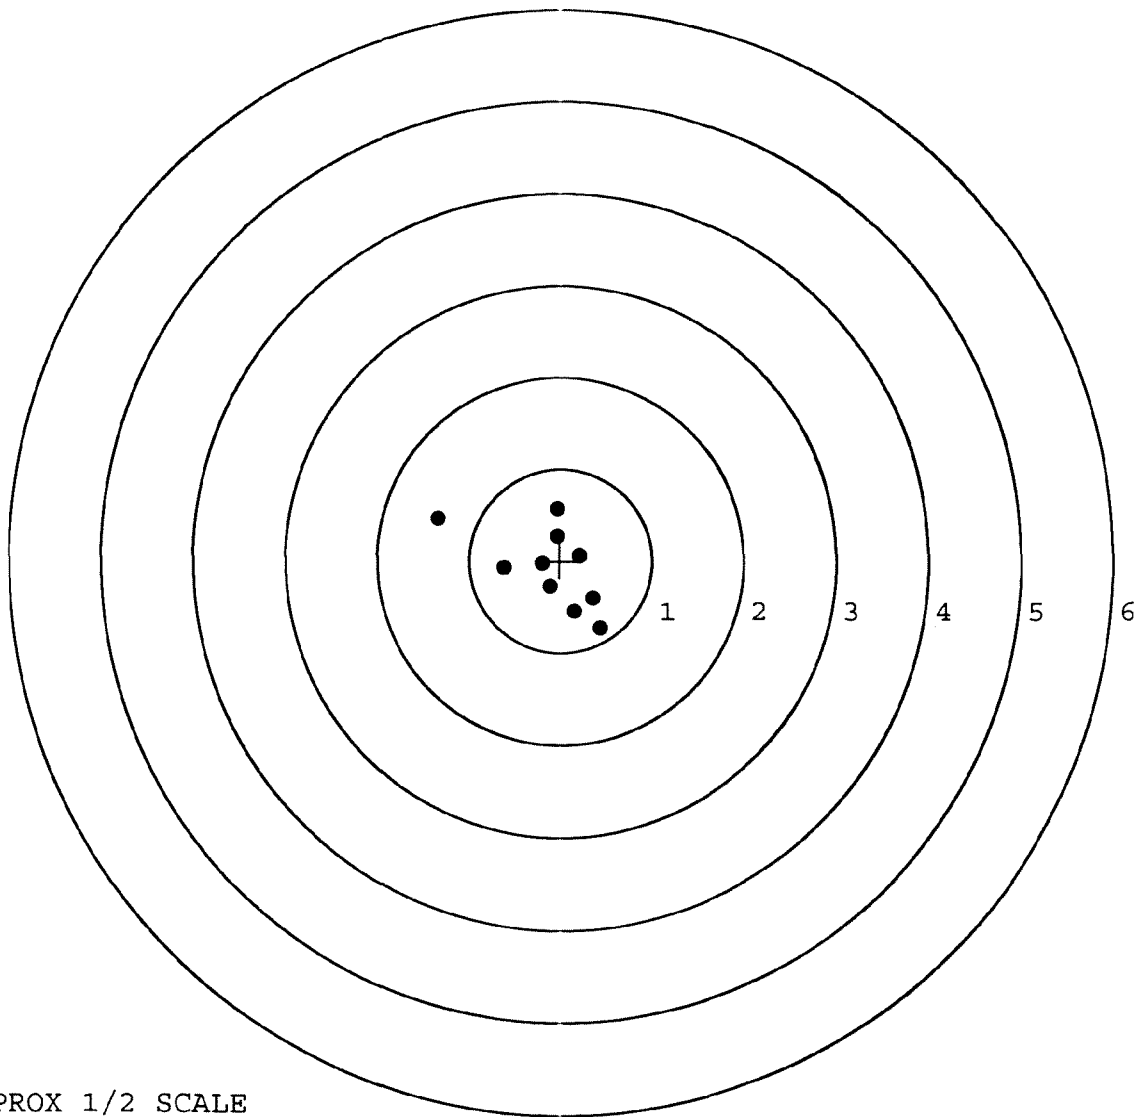

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & F NUMBER 144413
 SERIAL NUMBER 06348844
 LOG-IN DATE 4-14-08

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	4-17-08	RTZ
505	RE-BARREL	4-22-08	RTZ
560	ASSEMBLE	4-22-08	RTZ
600	PROOF	4-22-08	TRW
605	CHECK HEADSPACE	4-22-08	TRW
610	DIS-ASSEMBLE GUN	4-22-08	RTZ
612	MAGNAFLUX	4/24/08	TRW
510	DRILL AND TAP	4-22-08	TRW
615	ROLLMARK CALIBER	4-28-08	CW
618	ROTO-BLAST	4-24-08	DG
620	APPLY COATINGS	4-28-08	CV7
625	FINAL ASSEMBLY	4-29-08	RP
640	FUNCTION TEST AND	5-6-08	RP
650	TARGET	5-6-08	RP
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION A) HEADSPACE	5-6-08	RP
		5-7-08	TRW
	B) TRIGGER PULL 4-5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.84 2.88 2.95 2.80 2.98	5/7/08 Fin
	C) SAFETY ON FORCE 2 LBS MIN 3 LBS MAX	4.5 4.5 4.75	5-7-08 TRW
	D) SAFETY OFF FORCE 2 LBS MAX	3.0 3.0 3.5	5-7-08 TRW
	E) FIRING PIN INDENT 0.020	.022 .021 .022	5-7-08 TRW
690	PACK	5/8/08	Fin

Remington®

MODEL 700™ H24

MADE IN ILLION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

UPPONT
REG. U.S. PAT. & T.M. OFF.

SERIAL NO.
C6348844


ORDER NO.
5716

Ø1



5716 C6348844

UPC



0 47700 25716 7



CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6348844

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	7 11	89	RW
600	Proof	7 11	89	RW
607	Check Headspace			RW
610	Dis-assemble Gun			RW
612	Magnaflux Barrel Action		7/13	KCR
	Magnaflux Bolt		7/13	KCR
615	Rollmark Caliber		7/13	SS
617	Drill and Tap Sight Holes	7 13	89	f.
618	Polish Barrel 10/13	7 13	89	
620	Apply Coatings (Barrel Action)		7-21-89	TJA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		7/25/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		7/25/89	RW
	C) Inspect Ejector Hole for Chamfer		7/25/89	RW
	D) Oil Firing Pin Ass'y		7/25/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		7/25/89	QD

BARBER - M24 0039600		READINGS					DATE	INIT
op. #	OP. NAME							
625 cont.	F) Safety On Force	0	5	5			7/24/89	JS
	G) Safety Off Force	4	4	4			7/24/89	JS
	H) Trigger Pull Test & Retainability						7/24/89	JS
	I) Firing Pin Indent	.021	.021	.0215			7/24/89	JS
	J) Assemble Stock						7/27/89	RW
	K) Assemble Swivel Studs						7/27/89	JS
	L) Attach Front and Rear Sight Assemblies						7/27/89	RW
	M) Iron Sight Alignment						7/27/89	RW
	N) Detach Front & Rear Sights & place in numbered container						7/27/89	RW
	O) Attach Scope to Rifle						7/28/89	WB
	P) Detach & Attach Scope 20 Times						7/28/89	WB
640	Gallery Target & Test	75K	77L				7-31-89	PH
	A) Time						7-31-89	PH
	B) Malfunctions						7-31-89	PH
	C) Pierced Primers						7-31-89	PH
	D) Optical Clarity of Scope						7-31-89	PH
645	Inspect for Live Ammo						7-31-89	PH
655	Final Inspection							
	A) Headspace						10/1/89	JS
	B) Trigger Pull	26.4	27.0	25.7	25.5	2.51	10/1/89	JS
	C) Function						10/1/89	JS
660	Pack						9/20/89	A

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. 8844DATE 4/3/90TESTER D.H.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.23	2.24	2.26	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.23	2.26	2.24	
PULL #3	2.10	2.25	2.28	
PULL #4	2.24	2.26	2.30	
PULL #5	2.16	2.25	2.32	
TOTAL	10.96	11.26	11.40	
AVG.	2.19	2.25	2.28	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.11	3.12	
PULL #2	3.10	3.06	
PULL #3	3.03	3.11	
PULL #4	3.07	3.11	
PULL #5	3.01	3.12	
TOTAL	15.32	15.52	
AVG.	3.06	3.11	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.14	4.10		
PULL #2	4.12	4.10		
PULL #3	4.17	4.08		
PULL #4	4.16	4.12		
PULL #5	4.13	4.07		
TOTAL	20.72	20.47		
AVG.	4.14	4.09		

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6348844
1 Aug 1989

CENTROIDAL DISTANCES

0 TO	1	.401781
1 TO	2	.775242
1 TO	3	.423136
1 TO	4	.742405
1 TO	5	.477189

23.1
4.1 ←---POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.2
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1672
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .260683
THE AMR FOR THIS RIFLE IS: 1.082

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6348344

CENTERFIRE PATTERNS

1

POB

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS= 10

IN CIR

1in = 3

2in = 5

3in = 8

HS= 2.530

VS= 3.132

GS= 3.821

PATTERN #

1

SHOTS (BEST OF)

10

9

8

MAXIMUM X

1.055

.892

.960

MINIMUM X

-1.475

-.724

-.655

MAXIMUM Y

1.716

1.559

.980

MINIMUM Y

-1.416

-.993

-.790

CENTROID X

.258

.421

.353

CENTROID Y

.308

.465

.270

POB TO CENTROID in.

.401

.628

.444

MIN RADIUS

.148

.114

.182

MEAN RADIUS

.957

.842

.726

MAX RADIUS

2.044

1.653

1.179

HORIZONTAL SPREAD

2.530

1.616

1.616

VERTICAL SPREAD

3.132

2.552

1.778

EXTREME SPREAD

3.821

2.615

2.130

NUMBER IN ONE INCH CIRCLE =

3

NUMBER IN TWO INCH CIRCLE =

5


NUMBER IN THREE INCH CIRCLE =

8

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08348844

CENTERFIRE PATTERNS # 2

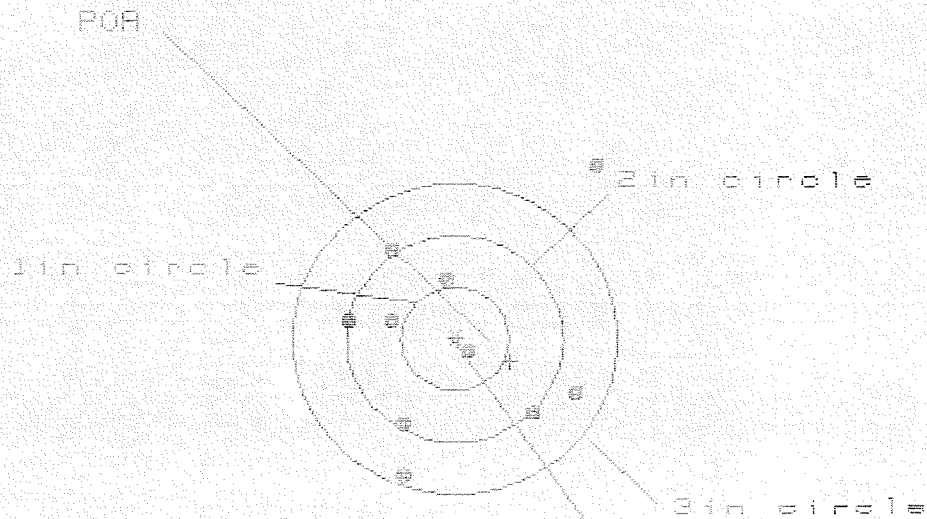

OF SHOTS = 10

IN CIR

1in = 1

2in = 5

3in = 8

HS = 0.233

VS = 2.947


GS = 3.429

PATTERN #	2	3	4
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.280	1.282	1.240
MINIMUM X	-1.953	-1.810	-1.852
MAXIMUM Y	1.673	1.019	.888
MINIMUM Y	-1.274	-1.088	-1.748
CENTROID X	-.512	-.655	-.613
CENTROID Y	.218	.032	.168
POA TO CENTROID in.	.557	.655	.636
MIN RADIUS	.169	.241	.215
MEAN RADIUS	1.002	.862	.812
MAX RADIUS	2.107	1.315	1.312
HORIZONTAL SPREAD	2.233	2.092	2.092
VERTICAL SPREAD	2.947	2.107	1.631
EXTREME SPREAD	3.429	2.206	2.206
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	9		

31 JUL 1989

FILE: \PATTERNING\CENTERFIRE_PATT\06340644

CENTERFIRE PATTERNS # 3

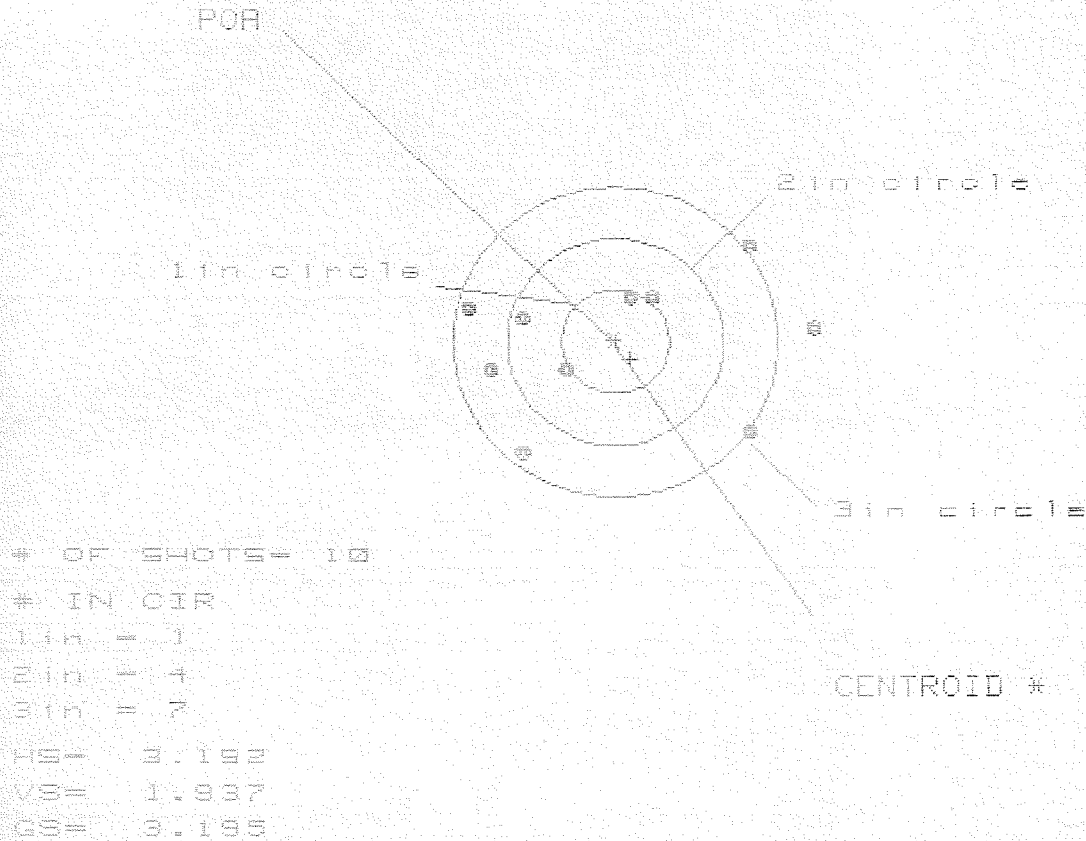


PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.982	1.475	1.644
MINIMUM X	-1.390	-1.198	-1.006
MAXIMUM Y	.904	.921	.809
MINIMUM Y	-1.033	-1.016	-1.128
CENTROID X	-.142	-.343	-.527
CENTROID Y	.170	.153	.265
POB TO CENTROID in.	.222	.375	.590
MIN RADIUS	.403	.377	.365
MEAN RADIUS	1.128	1.018	.893
MAX RADIUS	1.808	1.726	1.832
HORIZONTAL SPREAD	3.192	2.665	2.650
VERTICAL SPREAD	1.937	1.937	1.937
EXTREME SPREAD	3.195	2.926	2.849
NUMBER IN ONE INCH CIRCLE	= 1		
NUMBER IN TWO INCH CIRCLE	= 4		
NUMBER IN THREE INCH CIRCLE	= 7		

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C834B844

CENTERFIRE PATTERNS # 4

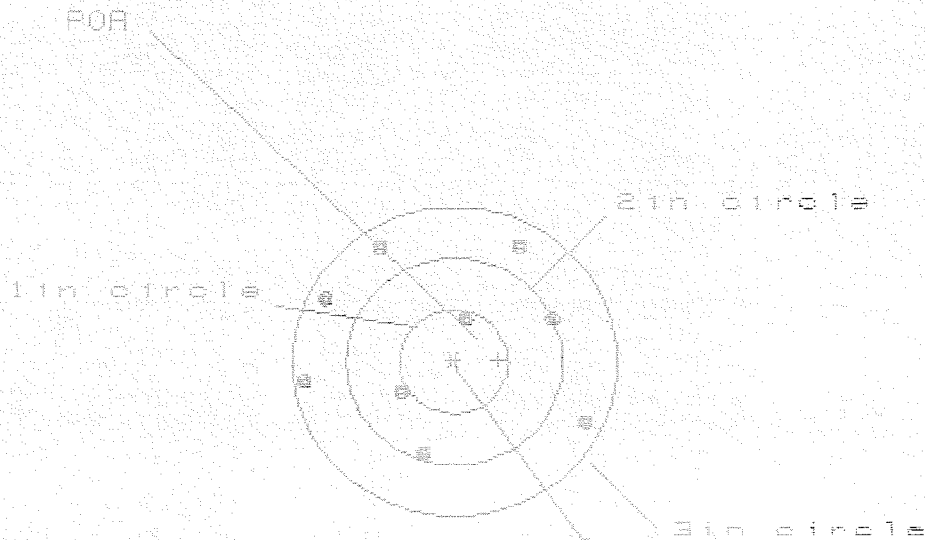

OF SHOTS= 10

IN CIR

1in = 1

2in = 3

3in = 6

HS= 2.595

VS= 2.926

GS= 3.432

CENTROID *


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.217	1.349	1.194
MINIMUM X	-1.378	-1.246	-1.198
MAXIMUM Y	1.162	.966	.914
MINIMUM Y	-1.764	-1.028	-1.080
CENTROID X	-.409	-.541	-.386
CENTROID Y	-.018	.178	.230
FOR TO CENTROID IN	.410	.570	.449
MIN RADIUS	.406	.297	.161
MEAN RADIUS	1.173	1.038	.988
MAX RADIUS	2.126	1.579	1.479
HORIZONTAL SPREAD	2.595	2.595	2.391
VERTICAL SPREAD	2.926	1.994	1.994
EXTREME SPREAD	3.432	2.700	2.700
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	6		

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C634B844

CENTERFIRE PATTERNS

5

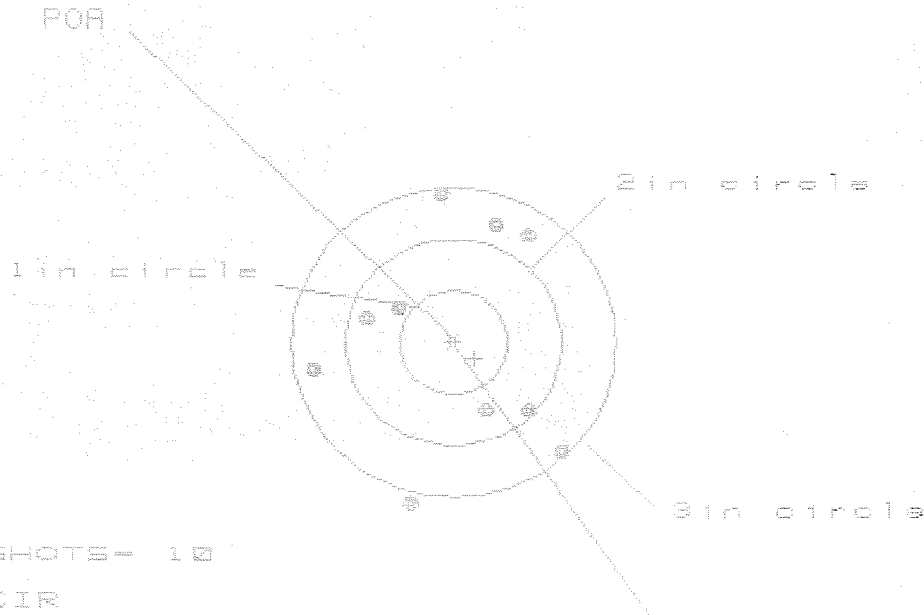

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 4

3 in = 6

HS= 2.375

VS= 2.960

QS= 2.979

CENTROID #

PATTERN #	1	5	9
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.022	.978	.820
MINIMUM X	-1.353	-1.397	-1.275
MAXIMUM Y	1.431	1.261	1.196
MINIMUM Y	-1.529	-1.243	-1.014
CENTROID X	-.195	-.151	-.273
CENTROID Y	.158	.328	.483
POA TO CENTROID in.	.251	.361	.555
MIN RADIUS	.388	.568	.433
MEAN RADIUS	1.148	1.090	1.002
MAX RADIUS	1.580	1.581	1.396
HORIZONTAL SPREAD	2.375	2.375	2.095
VERTICAL SPREAD	2.960	2.504	2.120
EXTREME SPREAD	2.979	2.727	2.470
NUMBER IN ONE INCH CIRCLE	=	0	
NUMBER IN TWO INCH CIRCLE	=	4	
NUMBER IN THREE INCH CIRCLE	=	9	

BARBER - M24 ~~0039888~~ **M2400039647**

Final Inspection

Sn: C6348844

DATE REC'D: 2/25/97

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☐ Scope☐ Scope Rings☐ Mounting Screws☒ Mounting Base☒ SCREWS☐ FINISH☐ LOOSENESS☐ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ IRON SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: _____

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

Barrel

R&E NO.

SERIAL NO.

C6348844

LOG IN DATE: / /

DATE

INIT.

INSPECT & VERIFY:

OP. #

OP. NAME

550

DIS-ASSEMBLE GUN

560 A

RE-BARREL AT CUSTOM SHOP

B

DRILL & TAP

C

POLISH

575

ASSEMBLE

600

PROOF

3/3/97

[Signature]

605

CHECK HEADSPACE

610

DIS-ASSEMBLE

612

MAGNAFLUX

615

ROLLMARK CALIBER

618

ROTO-BLAST

620

APPLY COATINGS

625 A

FINAL ASSEMBLY

B

TRIGGER PULL TEST

C

SAFETY ON FORCE

D

SAFETY OFF FORCE

E

FIRING PIN INDENT

640

TARGET

4/1/97

[Signature]

655

FINAL INSPECT

4/10/97

[Signature]

660

PACK

QAR INSPECTION

SHIP DATE

BARBER - M24 0039611

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6348848
4 Apr 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .3872
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .204
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .437653

THE AMR FOR THIS RIFLE IS: 1.13

CENTROIDAL DISTANCES

Ø TO	1	.923542
1 TO	2	.116
1 TO	3	.946597
1 TO	4	.890001
1 TO	5	.844038

5
4
3 ¹/₂
 <----POA

BARBER - M24 0039612

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .924
 MIN RADIUS : .380
 MEAN RADIUS : 1.436
 MAX RADIUS : 3.108
 CENTROID X : .891
 CENTROID Y : .243

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348848

CENTERFIRE PATTERN # 1

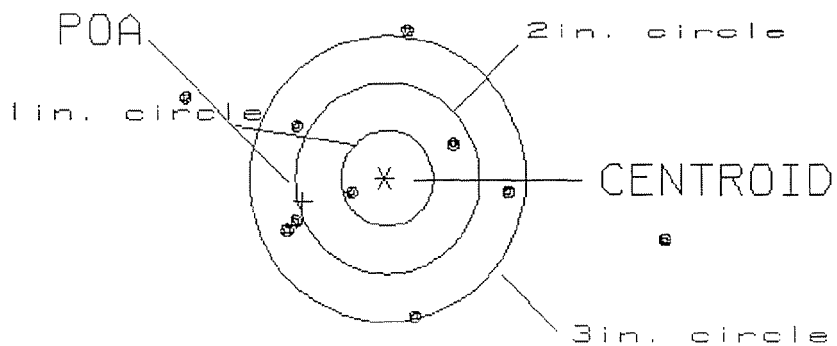

OF SHOTS= 10

IN CIRCLE

HS= 5.22

1

VS= 2.96

2

GS= 5.43

7

BARBER - M24 0039613


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐
POA TO CENTROID: .988
MIN RADIUS : .281
MEAN RADIUS : 1.168
MAX RADIUS : 2.557
CENTROID X : .975
CENTROID Y : .163

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/CG348848

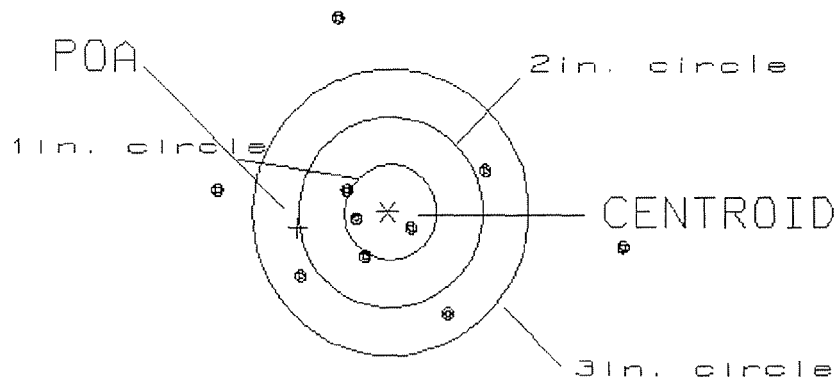CENTERFIRE PATTERN # 2

OF SHOTS= 10

IN CIRCLE

HS= 4.37

3

VS= 3.06

4

GS= 4.42

7

BARBER - M24 0039614


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐
POA TO CENTROID: .071
MIN RADIUS : .606
MEAN RADIUS : 1.171
MAX RADIUS : 2.298
CENTROID X : -.002
CENTROID Y : -.071

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348848

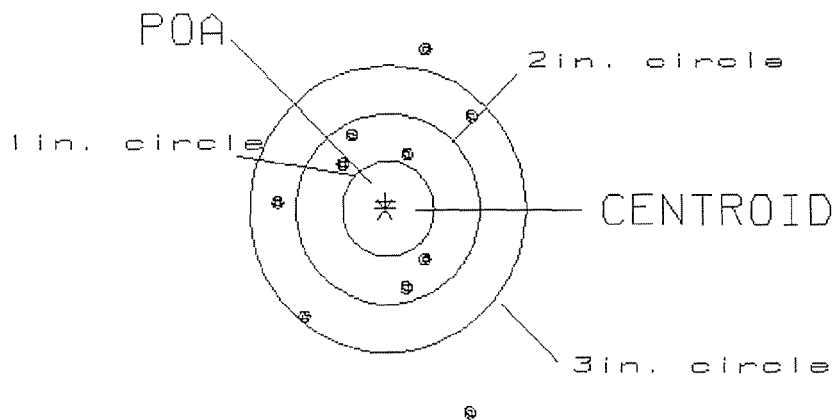CENTERFIRE PATTERN # 3

OF SHOTS= 10

IN CIRCLE

HS= 2.15

0

VS= 3.83

5

GS= 3.86


8

PATTERN #: 4
 POA TO CENTROID: .242
 MIN RADIUS : .310
 MEAN RADIUS : .835
 MAX RADIUS : 1.666
 CENTROID X : .001
 CENTROID Y : .242

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348848

CENTERFIRE PATTERN # 4

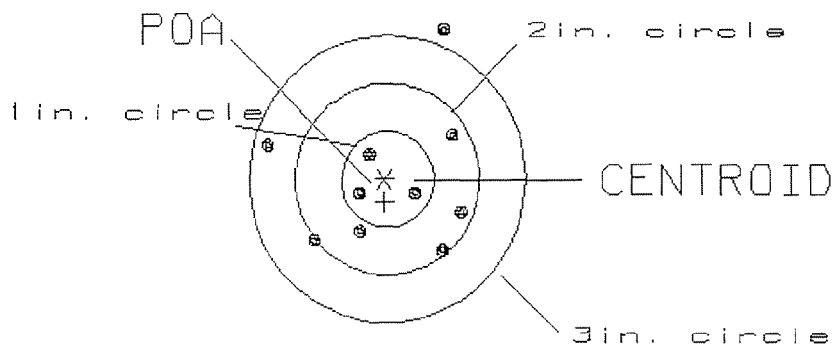

OF SHOTS= 10

IN CIRCLE

HS= 2.09

3

VS= 2.29

6

GS= 2.59

9

BARBER - M24 0039616

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 5

POA TO CENTROID: .449
MIN RADIUS : .580
MEAN RADIUS : 1.042
MAX RADIUS : 1.618
CENTROID X : .071
CENTROID Y : .443

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348848

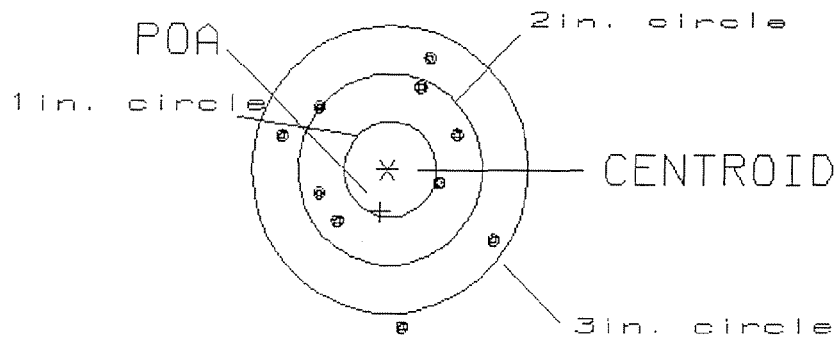CENTERFIRE PATTERN # 5

OF SHOTS= 10

IN CIRCLE

HS= 2.25

0

VS= 2.75

5

GS= 2.77

9