

C6348855

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.



Smeed
No. 2-152-51

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: RE00144407

Serial: C6348865 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Status:

Closed 4/14/2008 1:18:55 PM

Verify Repair

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: BROCK BUDDLES

BROCK BUDDLES

Address 1: C CO 1ST BN

C CO 1ST BN

Address 2: 7TH SFG (A)

PO Box:

7TH SFG (A)

PO Box:

City: FT. BRAGG

FT. BRAGG

State: NC

Zip Code: 28310

Country: US

State: NC

Zip Code: 28310

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Received Condition

Accessories Received

Phone: NN

Fair

Fax:

Condition

Email:

Notes:

Comments:

CSR

Notes:

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A057	Fit and Rear Sgt Base	1
D000	MARS RAIL	1

Repair Search

Refresh

Close

naglej

4/14/2008

3:27 PM

NUM



Serial Number: **C6348865**
 Model: **M24 SWS**

RE00144407

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348865.___0
FILE DATE AND TIME: 05/06/2008 11:08

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	0.008
The Average Y Centroid of the Five Target Set:	-0.022
The Average Point of Impact of the Five Target Set:	0.023
The Average Mean Radius of the Five Target Set:	0.698
The Distance from POA to Centroid Target #1:	0.076
The Distance from Centroid Target #2 to Centroid Target #1:	0.196
The Distance from Centroid Target #3 to Centroid Target #1:	0.386
The Distance from Centroid Target #4 to Centroid Target #1:	0.108
The Distance from Centroid Target #5 to Centroid Target #1:	0.036

BARBER - M24 0040149

SERIAL NUMBER: C6348865. __0
TARGET NUMBER: 1
FILE DATE: 05/06/2008
FILE TIME: 11:08

POINT#	X	Y
1:	0.479	0.958
2:	-0.612	0.850
3:	-0.532	0.608
4:	-1.001	-0.073
5:	-0.395	-0.352
6:	0.819	-0.025
7:	0.250	0.039
8:	0.541	-0.369
9:	0.272	-0.475
10:	0.124	-0.407

X CENTROID: -0.005
Y CENTROID: 0.075
POA TO CENTROID: 0.076
HORZ SPREAD: 1.820
VERT SPREAD: 1.433
GROUP SPREAD: 1.804
MIN RADIUS: 0.258
MAX RADIUS: 1.007
MEAN RADIUS: 0.723
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

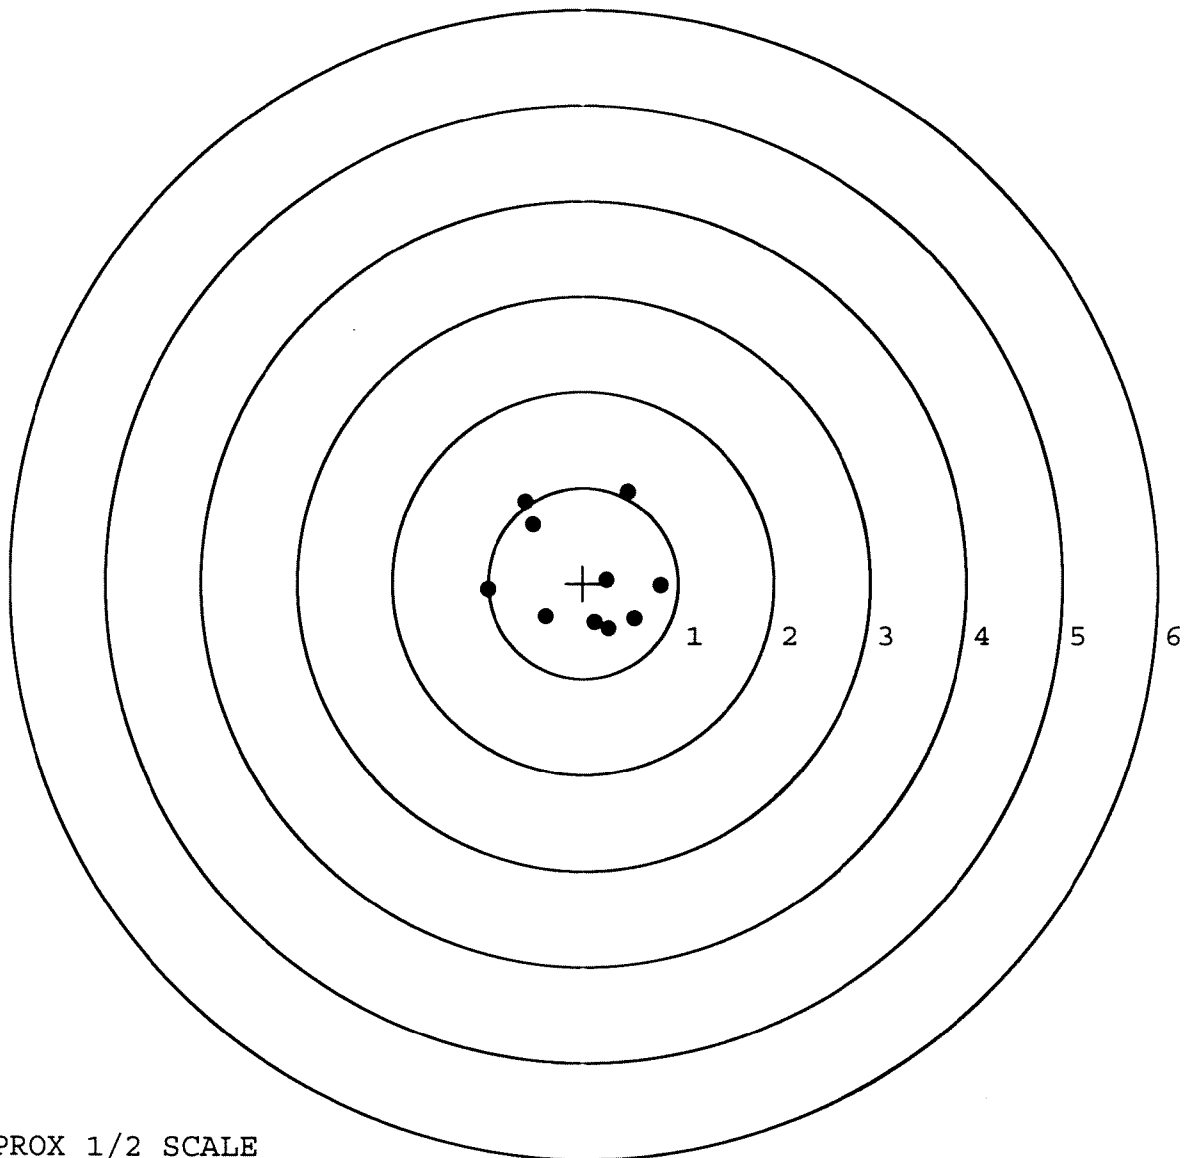

TARGET APPROX 1/2 SCALE

BARBER - M24 0040150

SERIAL NUMBER: C6348865. __0

TARGET NUMBER: 2

FILE DATE: 05/06/2008

FILE TIME: 11:08

X CENTROID: -0.194

Y CENTROID: 0.022

POA TO CENTROID: 0.195

HORZ SPREAD: 2.449

VERT SPREAD: 1.289

GROUP SPREAD: 2.453

MIN RADIUS: 0.169

MAX RADIUS: 1.442


MEAN RADIUS: 0.694

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.880	-0.558
2:	0.025	0.552
3:	-0.673	0.672
4:	-0.879	0.731
5:	-1.569	-0.413
6:	-0.348	-0.046
7:	0.040	0.064
8:	0.287	-0.092
9:	-0.028	-0.199
10:	0.327	-0.488

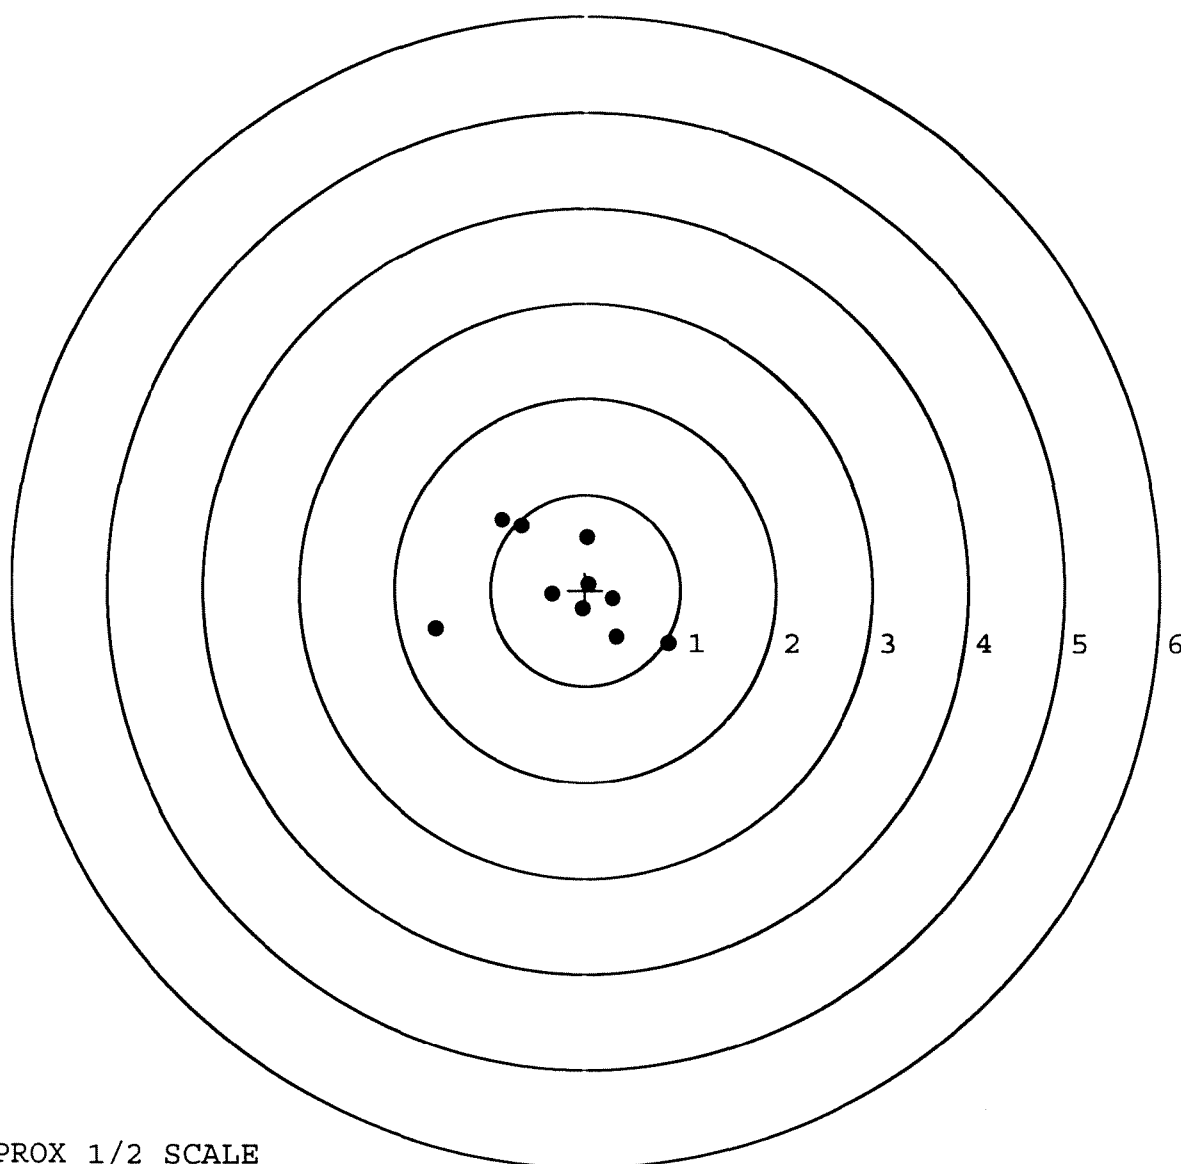


TARGET APPROX 1/2 SCALE

BARBER - M24 0040151

SERIAL NUMBER: C6348865. __0
TARGET NUMBER: 3
FILE DATE: 05/06/2008
FILE TIME: 11:08

X CENTROID: 0.150
Y CENTROID: -0.278
POA TO CENTROID: 0.315
HORZ SPREAD: 2.589
VERT SPREAD: 1.281
GROUP SPREAD: 2.592
MIN RADIUS: 0.098
MAX RADIUS: 1.368
MEAN RADIUS: 0.738
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.416	-0.745
2:	1.118	-0.372
3:	0.610	-0.261
4:	-1.173	-0.626
5:	-0.554	-0.036
6:	-0.042	0.536
7:	0.315	0.292
8:	0.184	-0.370
9:	-0.059	-0.626
10:	-0.316	-0.568

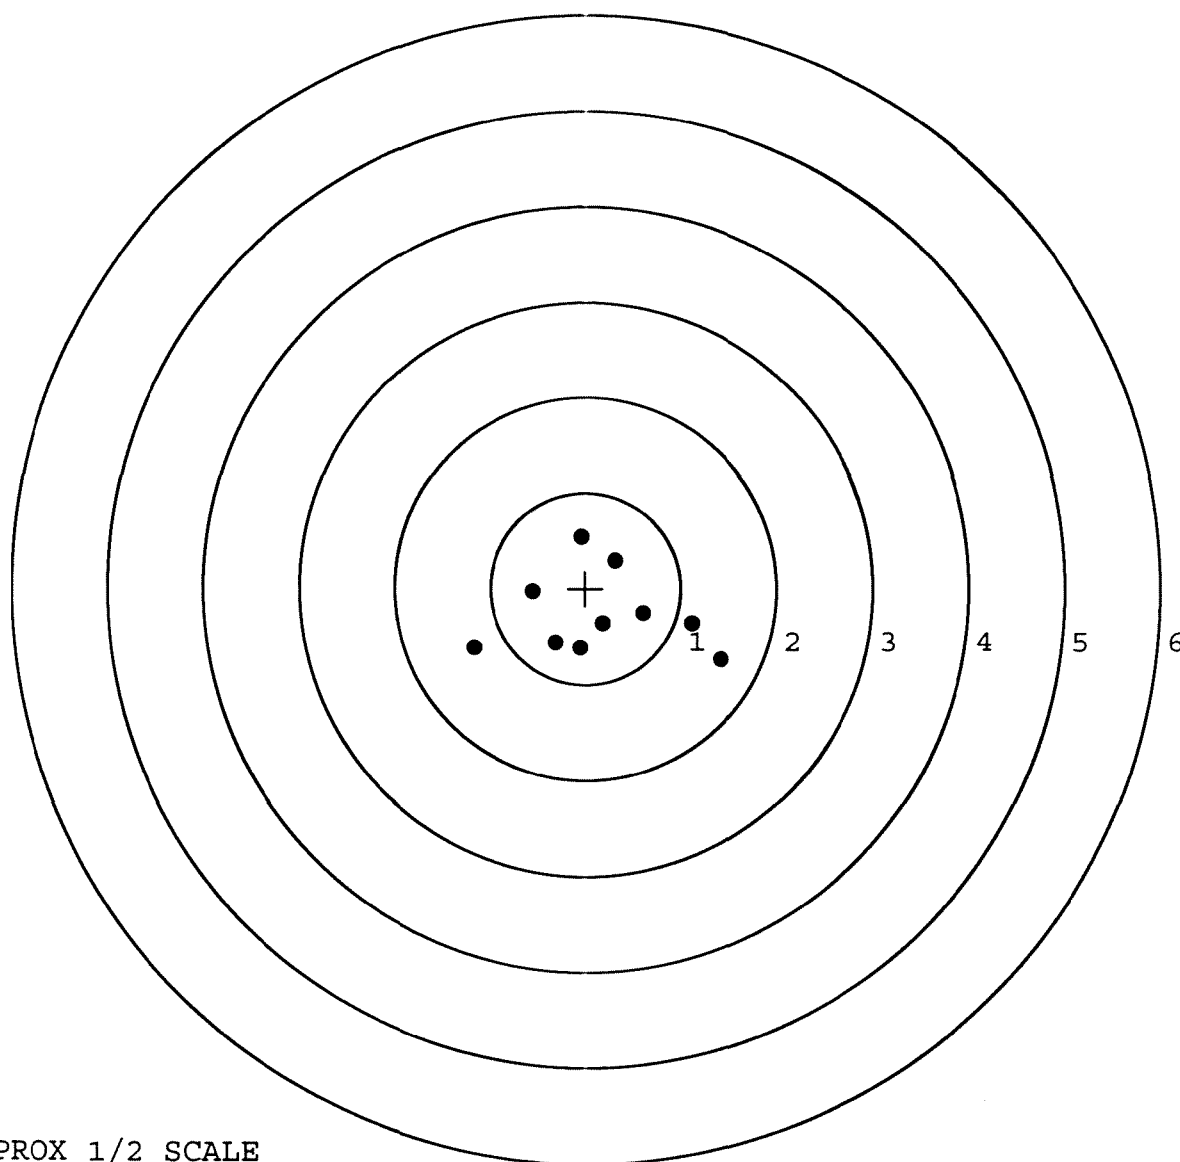


TARGET APPROX 1/2 SCALE

BARBER - M24 0040152

SERIAL NUMBER: C6348865. __0
TARGET NUMBER: 4
FILE DATE: 05/06/2008
FILE TIME: 11:08

POINT#	X	Y
1:	0.758	-0.227
2:	0.677	0.237
3:	0.378	0.205
4:	0.198	0.455
5:	0.300	-0.859
6:	0.194	-0.658
7:	0.035	-0.245
8:	-0.801	-0.285
9:	-0.427	0.661
10:	-0.735	0.589

X CENTROID: 0.058
Y CENTROID: -0.013
POA TO CENTROID: 0.059
HORZ SPREAD: 1.559
VERT SPREAD: 1.520
GROUP SPREAD: 1.780
MIN RADIUS: 0.233
MAX RADIUS: 0.995
MEAN RADIUS: 0.677
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

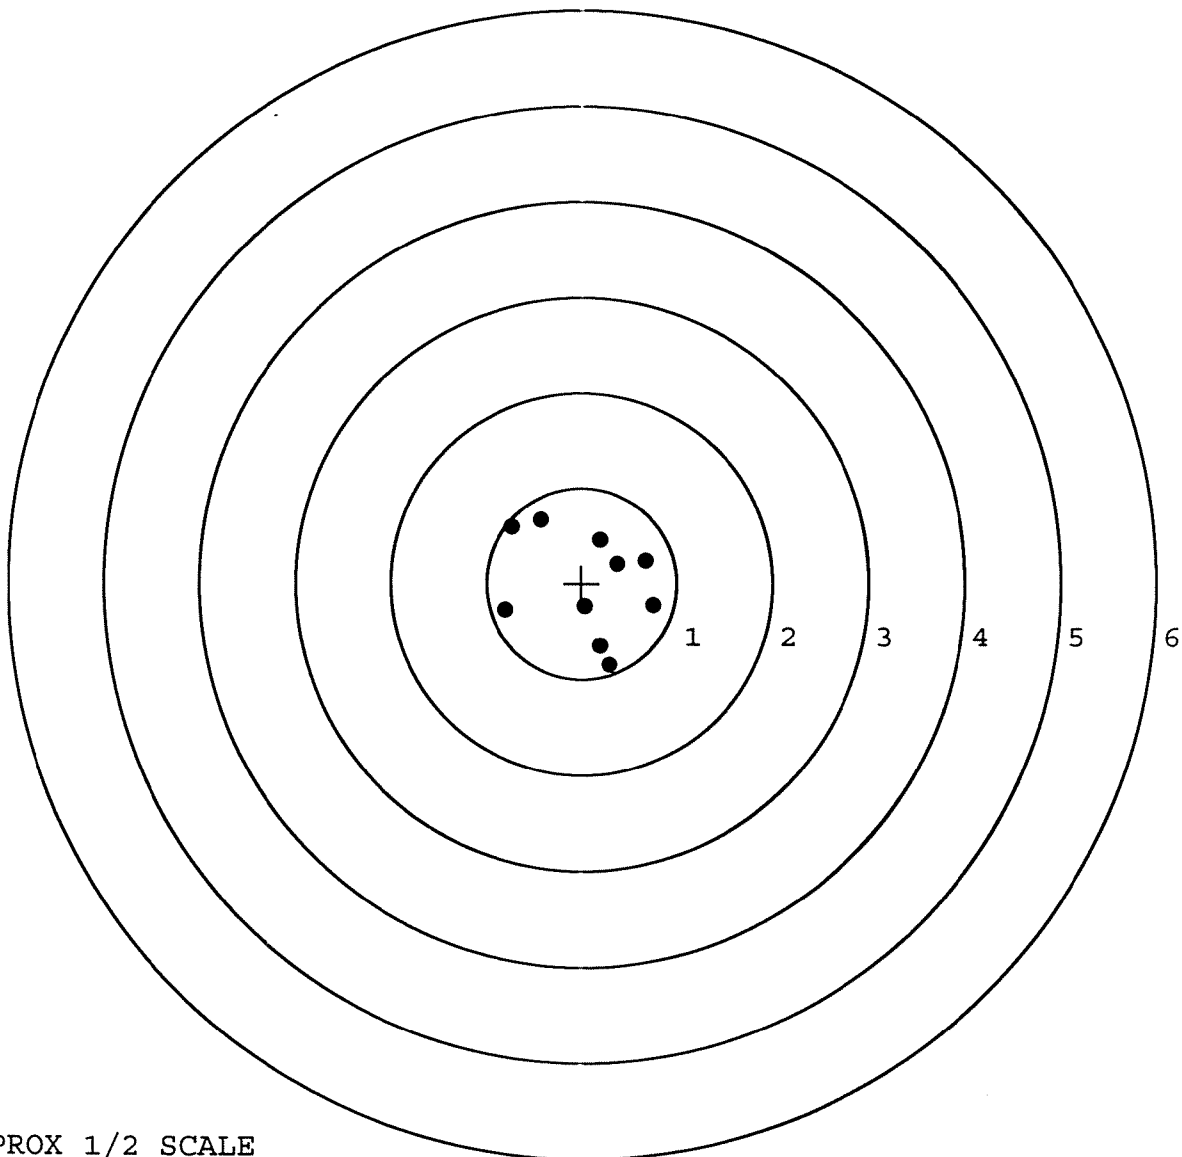


TARGET APPROX 1/2 SCALE

BARBER - M24 0040153

SERIAL NUMBER: C6348865. __0
TARGET NUMBER: 5
FILE DATE: 05/06/2008
FILE TIME: 11:08

X CENTROID: 0.030
Y CENTROID: 0.082
POA TO CENTROID: 0.087
HORZ SPREAD: 1.773
VERT SPREAD: 1.386
GROUP SPREAD: 1.905
MIN RADIUS: 0.262
MAX RADIUS: 0.968
MEAN RADIUS: 0.658
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.909	-0.268
2:	0.374	-0.625
3:	0.278	-0.325
4:	0.640	0.761
5:	0.277	0.231
6:	-0.022	0.520
7:	-0.124	0.295
8:	-0.782	0.609
9:	-0.864	-0.033
10:	-0.389	-0.342

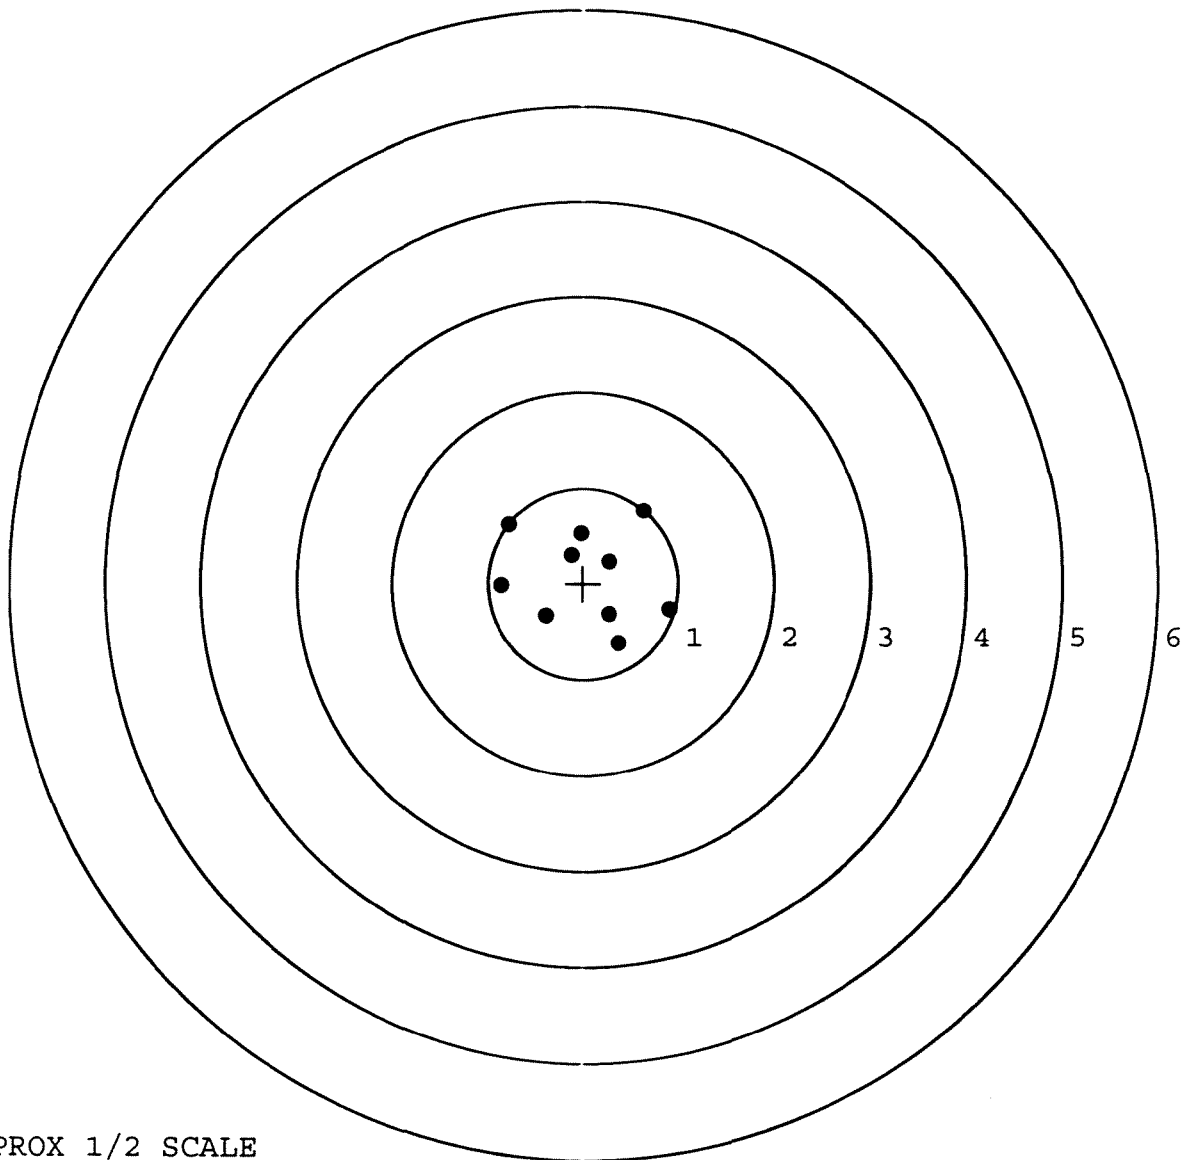

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
 CONTRACT #: DAAE-20-02-C-0149

BARBER NUMBER 144407
 SERIAL NUMBER C6348865
 LOG-IN DATE 4-14-08

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	4-18-08	RTZ
505	RE-BARREL	4-22-08	RTZ
560	ASSEMBLE	4-22-08	RTZ
600	PROOF	4-22-08	TRW
605	CHECK HEADSPACE	4-22-08	TRW
610	DIS-ASSEMBLE GUN	4-22-08	RTZ
612	MAGNAFLUX	4/24/08	WMB
510	DRILL AND TAP	4-22-08	TRW
615	ROLLMARK CALIBER	4-23-08	CW
618	ROTO-BLAST	4-24-08	DG
620	APPLY COATINGS	4-28-08	W7
625	FINAL ASSEMBLY	5-1-08	W.P.N.
640	FUNCTION TEST AND	PASS	FAIL
650	TARGET	PASS	FAIL
	MALFUNCTION (loses ^{hand} over live Rds)	CORRECTION OK	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION A) HEADSPACE	PASS	FAIL
	B) TRIGGER PULL 4-5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.53 2.50 2.51 2.47 2.55	5/7/08 Fm
680	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	5.0 5.5 5.25	5-7-08 TRW
	G) SAFETY OFF FORCE 2 LBS MIN	2.0 2.5 2.5	5-7-08 TRW
	I) FIRING PIN INDENT .020	.022 .022 .023	5-7-08 TRW
690	PACK	5/8/08	Fm

Remington
REG. U.S. PAT. & TM. OFF.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ M24

SERIAL NO.
C6348865

ORDER NO.
5716


MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

Ø1



5716 C6348865

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6348865

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	8 11	89	RW
600	Proof	8 11	89	RW
607	Check Headspace			RW
610	Dis-assemble Gun			RW
612	Magnaflux Barrel Action		8/15/89	KCR
	Magnaflux Bolt		8/15/89	KCR
615	Rollmark Caliber		8/15/89	G.S.
7	Drill and Tap Sight Holes	8 16	89	
618	Polish Barrel RB	8 16	89	
620	Apply Coatings (Barrel Action)		8/19/89	TW
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		8/21/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		8/21/89	RW
	C) Inspect Ejector Hole for Chamfer		8/21/89	RW
	D) Oil Firing Pin Ass'y		8/21/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		8/21/89	FU

op. #	BARBER - M24 0040157 OP. NAME	READINGS			DATE	INIT		
625 cont.	F) Safety On Force	6 1/2	6 1/2	6 1/4	8/22/89	WB		
	G) Safety Off Force	3 1/2	3 1/2	3 1/4	8/22/89	WB		
	H) Trigger Pull Test & Retainability				8/21/89	JU		
	I) Firing Pin Indent	.023	.023	.023	8/22/89	WB		
	J) Assemble Stock				8/22/89	RW		
	K) Assemble Swivel Studs				23 Aug 89	JD		
	L) Attach Front and Rear Sight Assemblies				8/22/89	RW		
	M) Iron Sight Alignment				8/22/89	RW		
	N) Detach Front & Rear Sights & place in numbered container				8/22/89	RW		
	O) Attach Scope to Rifle				8/22/89	WB		
	P) Detach & Attach Scope 20 Times				8/22/89	WB		
640	Gallery Target & Test	68 R	84 L	8-22-89	AC			
	A) Time			8-22-89	AC			
	B) Malfunctions			8-22-89	AC			
	C) Pierced Primers			8-22-89	AC			
	D) Optical Clarity of Scope			8-22-89	AC			
645	Inspect for Live Ammo			8-22-89	AC			
655	Final Inspection							
	A) Headspace				23 Aug 89	JD		
	B) Trigger Pull	267	276	281	261	283	23 Aug 89	JD
	C) Function						23 Aug 89	JD
660	Pack				19 Sept 89	JD		

Repaired Stock at front Swivel
9/13/89

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6348865

DATE 21 Aug 89

TESTER J.W.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.34	2.48	2.54	2.67	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.32	2.44	2.51	2.76	
PULL #3	2.36	2.51	2.41	2.81	
PULL #4	2.56	2.40	2.45	2.61	
PULL #5	2.58	2.39	2.47	2.83	
TOTAL	12.16	12.22	12.38	13.68	
AVG.	2.432	2.444	2.476	2.736	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.14	3.22		
PULL #2	3.21	3.25		
PULL #3	3.19	3.16		
PULL #4	3.19	3.17		
PULL #5	3.15	3.20		
TOTAL	15.88	16.00		
AVG.	3.176	3.20		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.98	4.11		4.50
PULL #2	4.09	4.13		4.46
PULL #3	4.20	4.20		4.53
PULL #4	4.17	4.19		4.57
PULL #5	4.15	4.23		4.44
TOTAL	20.59	20.86		22.50
AVG.	4.118	4.172		4.50

CENTROIDAL DISTANCE CALCULATIONS
 FOR RIFLE # C6348865
 23 Aug 1989

CENTROIDAL DISTANCES

0 TO	1	1.08263
1 TO	2	.468882
1 TO	3	.62359
1 TO	4	.829478
1 TO	5	.50324


+ 4.3 <----POB
 1
 2

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .6968
 THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.4128
 THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .809898
 THE AMR FOR THIS RIFLE IS: 1.013

22 Aug 1985

FILE:/PATTERNING/CENTERFIRE_PATT/06346885

CENTERFIRE PATTERNS # 1

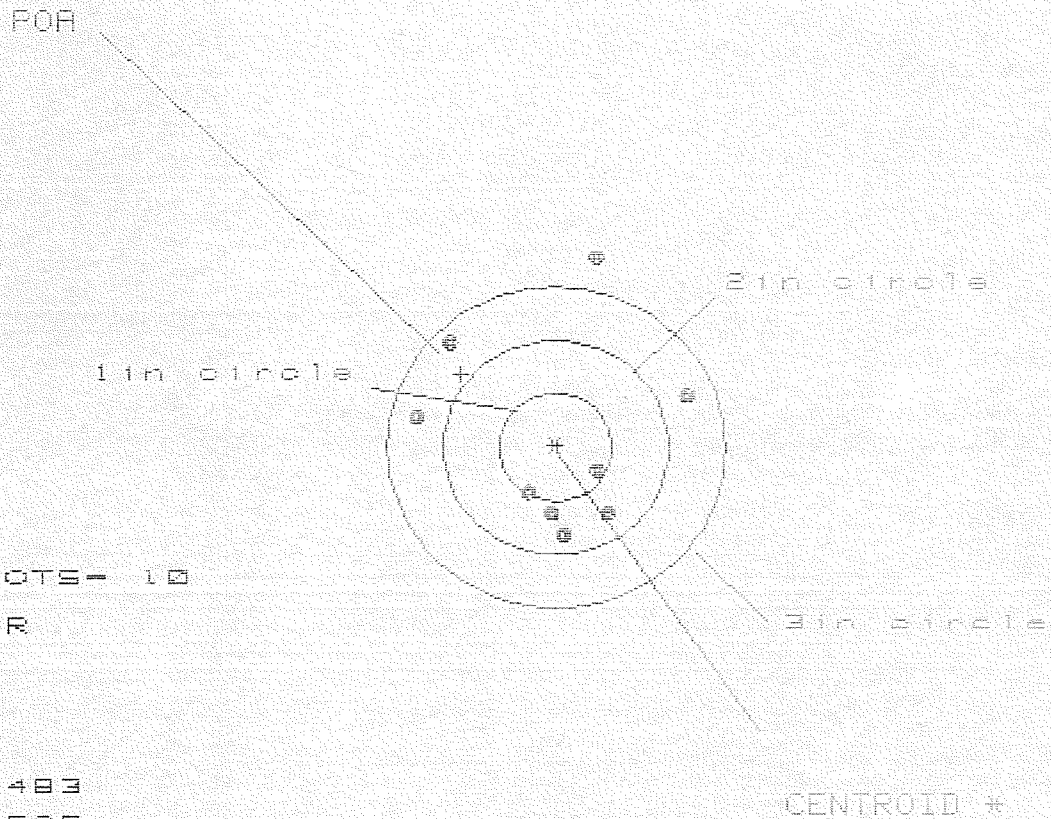

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 6

3 in = 9

HS= 2.483

VS= 2.565

GS= 2.583

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.206	1.243	1.088
MINIMUM X	-1.277	-1.240	-1.017
MAXIMUM Y	1.741	1.153	1.217
MINIMUM Y	-.824	-.630	-.566
CENTROID X	.940	.803	.958
CENTROID Y	-.683	-.877	-.941
POA TO CENTROID in.	1.083	1.189	1.343
MIN RADIUS	.413	.268	.222
MEAN RADIUS	.965	.805	.695
MAX RADIUS	1.773	1.439	1.586
HORIZONTAL SPREAD	2.483	2.483	2.105
VERTICAL SPREAD	2.565	1.783	1.783
EXTREME SPREAD	2.583	2.491	2.148
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	9		

22 Aug 1985

FILE:/PATTERNING/CENTERFIRE_PATT/05348865

CENTERFIRE PATTERNS # 2

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS - 10

IN CIR

1 in = 3

2 in = 5

3 in = 8

HS= 2.582

VS= 2.628

GS= 3.018


PATTERN #	:	22	23	24
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.517	1.400	.624
MINIMUM X	:	-1.065	-1.182	-1.007
MAXIMUM Y	:	1.422	1.288	1.224
MINIMUM Y	:	-1.206	-1.134	-1.198
CENTROID X	:	.665	.782	.607
CENTROID Y	:	-1.118	-.984	-.928
POA TO CENTROID in.	:	1.301	1.257	1.102
MIN RADIUS	:	.285	.117	.289
MEAN RADIUS	:	.933	.833	.751
MAX RADIUS	:	1.601	1.489	1.318
HORIZONTAL SPREAD	:	2.582	2.582	1.631
VERTICAL SPREAD	:	2.628	2.422	2.422
EXTREME SPREAD	:	3.018	2.695	2.562
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

22 Aug 1985

FILE:/PATTERNING/CENTERFIRE_PATT/083408855

CENTERFIRE PATTERNS # 3

POA

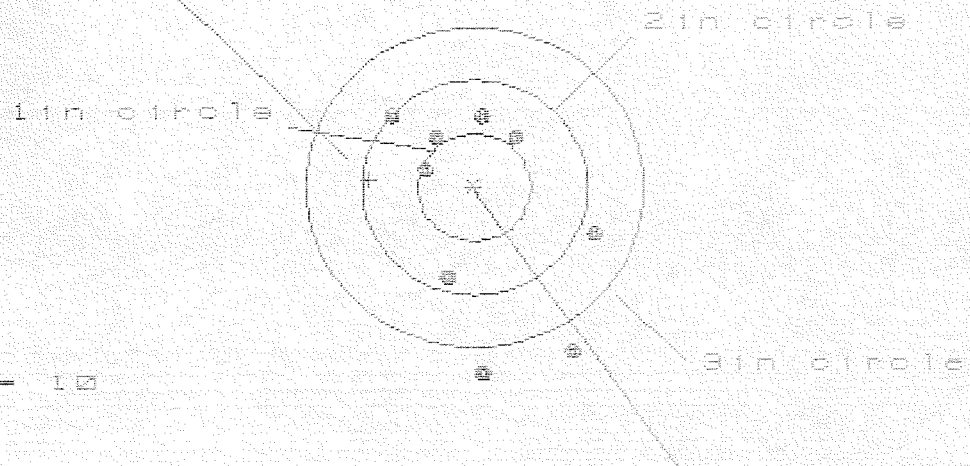

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 5

3 in = 7

HS= 1.857

VS= 3.736

GS= 3.830

CENTROID *


PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.074	1.011	1.114
MINIMUM X	-1.783	-1.846	-1.743
MAXIMUM Y	2.051	.899	.741
MINIMUM Y	-1.685	-1.457	-1.615
CENTROID X	.937	1.000	.897
CENTROID Y	-.067	-.295	-.137
POA TO CENTROID in.	.939	1.043	.908
MIN RADIUS	.469	.631	.460
MEAN RADIUS	1.094	1.002	.892
MAX RADIUS	2.129	1.507	1.618
HORIZONTAL SPREAD	1.857	1.857	1.857
VERTICAL SPREAD	3.736	2.356	2.356
EXTREME SPREAD	3.830	2.693	2.458
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	7		

22 Aug 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06340865

CENTERFIRE PATTERNS

4

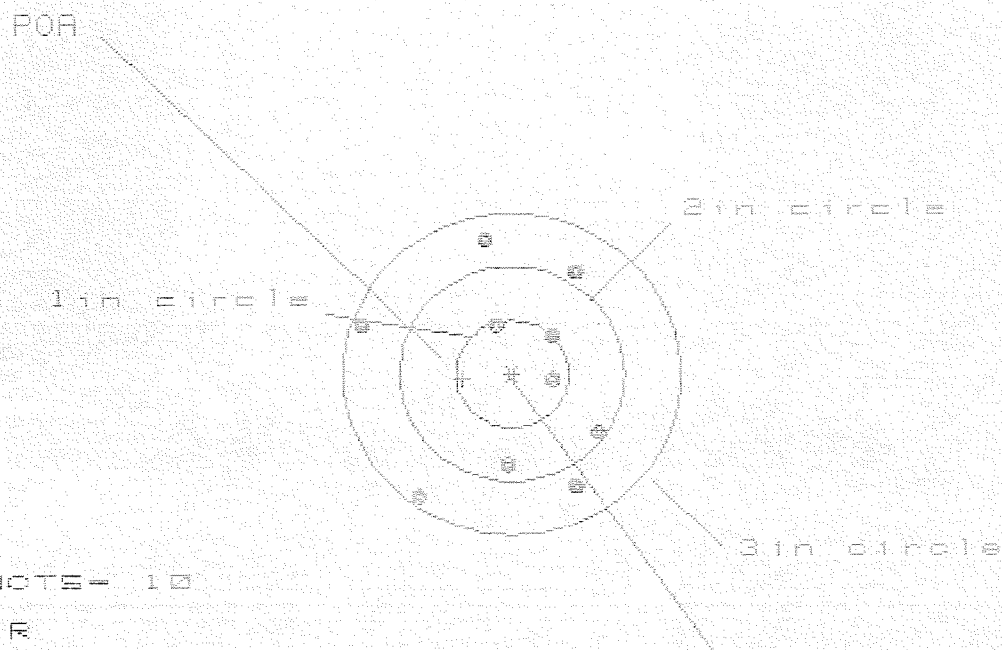

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 5

3 in = 10

HS= 2.153

VS= 2.404

GS= 2.488


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.767	.613	.493
MINIMUM X	-1.386	-.957	-.527
MAXIMUM Y	1.293	1.342	1.209
MINIMUM Y	-1.111	-1.062	-1.103
CENTROID X	.437	.591	.711
CENTROID Y	.042	-.007	.126
POA TO CENTROID in.	.439	.591	.722
MIN RADIUS	.386	.237	.139
MEAN RADIUS	.955	.869	.762
MAX RADIUS	1.455	1.430	1.319
HORIZONTAL SPREAD	2.153	1.570	1.020
VERTICAL SPREAD	2.404	2.404	2.312
EXTREME SPREAD	2.488	2.488	2.446
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	10		

22 Aug 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08348865

CENTERFIRE PATTERNS # 5

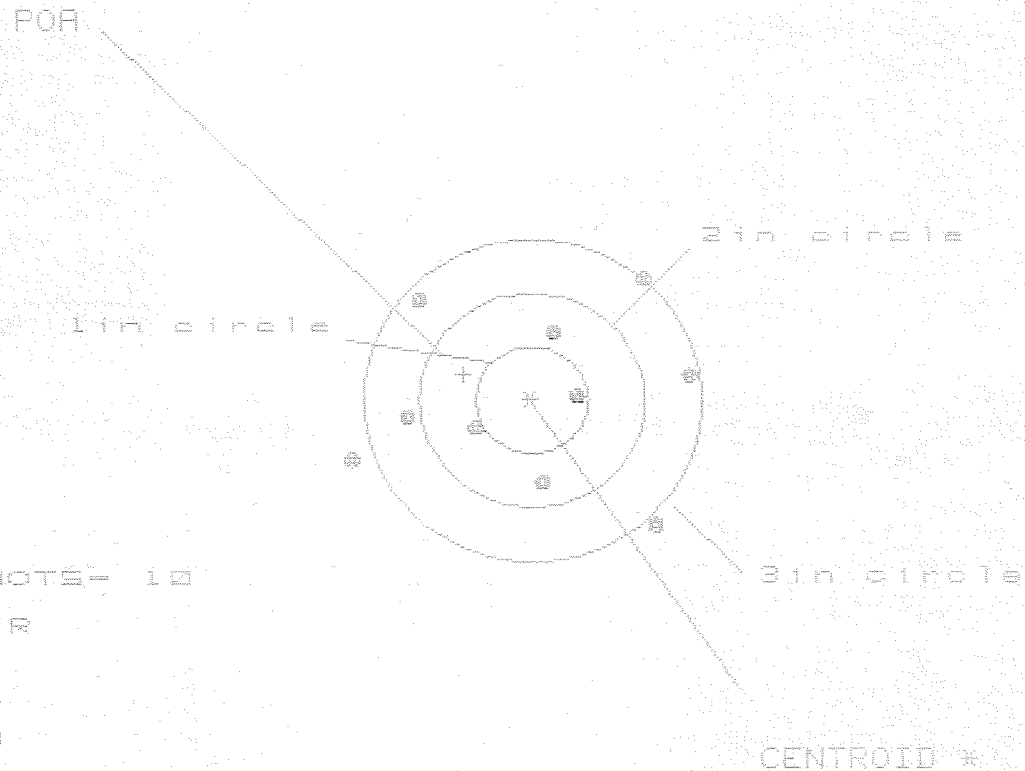

OF SHOTS= 10

IN CIR

1in = 1

2in = 4

3in = 8

HS= 3.034

VS= 2.295

GS= 3.127

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.390
MINIMUM X	-1.644
MAXIMUM Y	1.099
MINIMUM Y	-1.196
CENTROID X	.605
CENTROID Y	-.238
POA TO CENTROID in.	.650
MIN RADIUS	.406
MEAN RADIUS	1.116
MAX RADIUS	1.729
HORIZONTAL SPREAD	3.034
VERTICAL SPREAD	2.295
EXTREME SPREAD	3.127
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	4
NUMBER IN THREE INCH CIRCLE =	8

Final Inspection

Sn: C6348865

DATE REC'D: 7/25/97

DATE RET'D:

Auditor: JW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☐ Scope☐ Scope Rings☐ Mounting Screws☒ Mounting Base☒ Screws☐ Finish☐ Looseness☐ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ IRON SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

Barrel

R&E NO.

SERIAL NO. *C6348865*

LOG IN DATE: / /

DATE

INIT.

INSPECT & VERIFY:

OP. #	OP. NAME
550	DIS-ASSEMBLE GUN
560 A	RE-BARREL AT CUSTOM SHOP
B	DRILL & TAP
C	POLISH
575	ASSEMBLE
600	PROOF
605	CHECK HEADSPACE
610	DIS-ASSEMBLE
612	MAGNAFLUX
615	ROLLMARK CALIBER
618	ROTO-BLAST
620	APPLY COATINGS
625 A	FINAL ASSEMBLY
B	TRIGGER PULL TEST
C	SAFETY ON FORCE
D	SAFETY OFF FORCE
E	FIRING PIN INDENT
640	TARGET
655	FINAL INSPECT
660	PACK
	QAR INSPECTION

*3/3/97**AF**4/3/97**AF**4/10/97**RLW*

SHIP DATE

BARBER - M24 0040168

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6348865
4 Apr 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.2932$
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $.0388$
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.295756$

THE AMR FOR THIS RIFLE IS: $.9772$

CENTROIDAL DISTANCES

0	TO	1	.0686222
1	TO	2	.659215
1	TO	3	.267367
1	TO	4	.312195
1	TO	5	.363112

2 4 5
 3 1+ <----POA

BARBER - M24 0040169

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .069

MIN RADIUS : .294

MEAN RADIUS : .992


MAX RADIUS : 1.632

CENTROID X : -.065

CENTROID Y : -.022

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348865

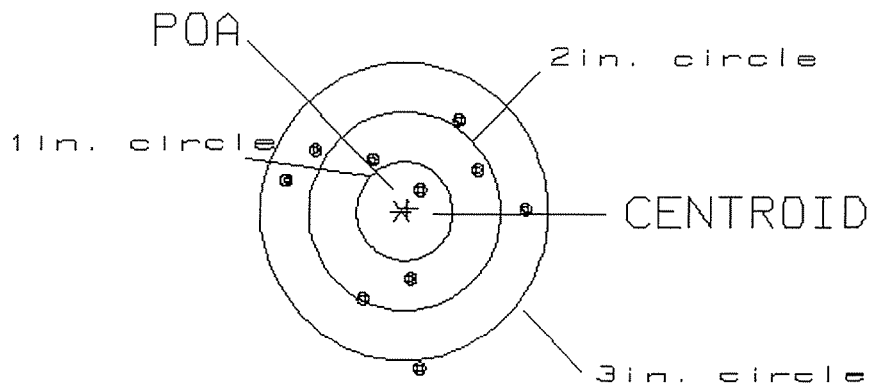CENTERFIRE PATTERN # 1

OF SHOTS= 10

IN CIRCLE

HS= 2.56

1

VS= 2.56

5

GS= 2.58

9

BARBER - M24 0040170

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .725

MIN RADIUS : .346

MEAN RADIUS : .993


MAX RADIUS : 1.814

CENTROID X : -.723

CENTROID Y : -.062

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348865

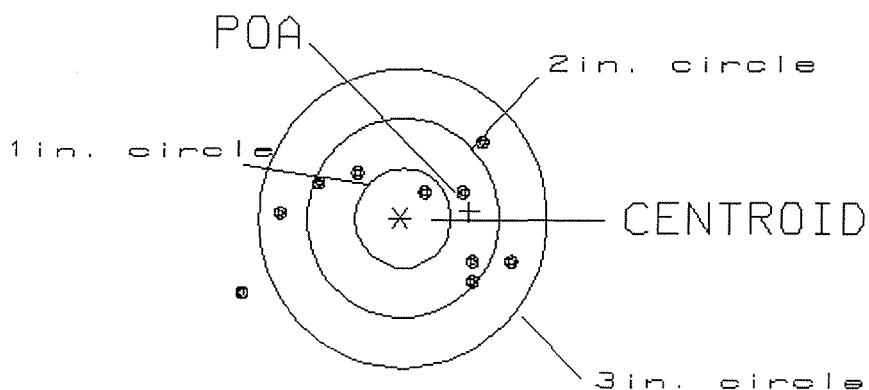CENTERFIRE PATTERN # 2

OF SHOTS= 10

IN CIRCLE

HS= 2.83

1

VS= 1.44

5

GS= 2.88

9

BARBER - M24 0040171

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .333

MIN RADIUS : .118

MEAN RADIUS : .920


MAX RADIUS : 2.250

CENTROID X : -.268

CENTROID Y : -.196

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348865

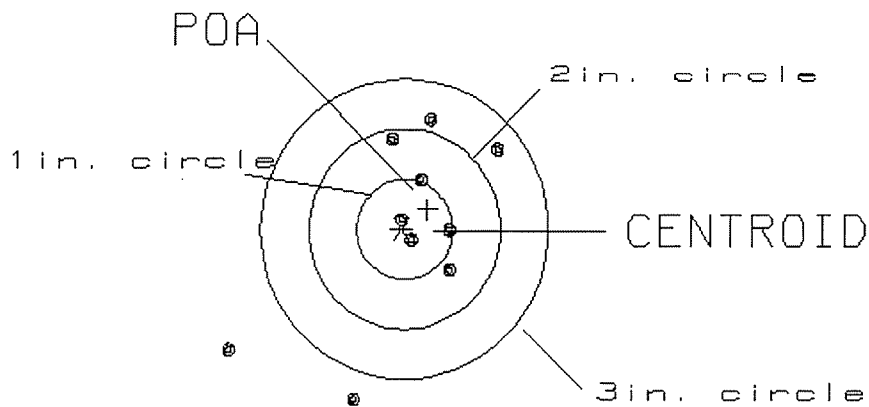CENTERFIRE PATTERN # 3

OF SHOTS= 10

IN CIRCLE

HS= 2.89

3

VS= 2.74

6

GS= 3.52

8

BARBER - M24 0040172

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .361

MIN RADIUS : .303

MEAN RADIUS : .934


MAX RADIUS : 1.562

CENTROID X : -.336

CENTROID Y : .133

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348865

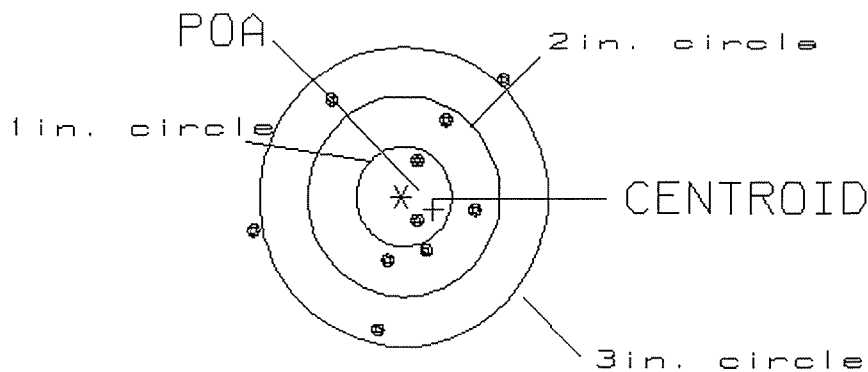CENTERFIRE PATTERN # 4

OF SHOTS= 10

IN CIRCLE

HS= 2.52

2

VS= 2.51

6

GS= 2.92

8

BARBER - M24 0040173

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 5 ☐

POA TO CENTROID: .349

MIN RADIUS : .110

MEAN RADIUS : 1.047


MAX RADIUS : 2.138

CENTROID X : -.074

CENTROID Y : .341

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348865

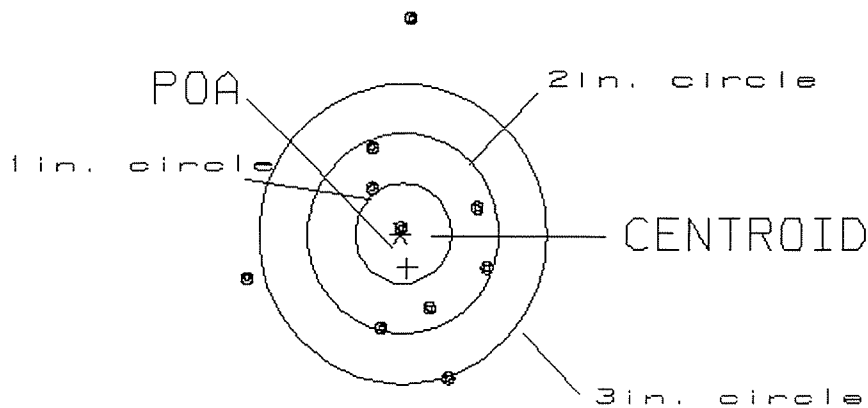CENTERFIRE PATTERN # 5

OF SHOTS= 10

IN CIRCLE

HS= 2.53

1

VS= 3.54

7

GS= 3.57

8