

C6348919

MODEL 700TM M24

Model **SMS** TM


Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.



Remington®

REG. U.S. PAT. & TM. OFF.

DUPONT

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ M24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

SERIAL NO.
C6348919

ORDER NO.
5716

0 47700 25716 7

UPC

5716 C6348919

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6348919

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	9 26	89	RW
600	Proof	9 26	89	RW
607	Check Headspace	9 26	89	RW
610	Dis-assemble Gun	9 26	89	RW
612	Magnaflux Barrel Action	9/29/89		KCR
	Magnaflux Bolt	9/29/89		KCR
615	Rollmark Caliber	9/29/89		LS
7	Drill and Tap Sight Holes	9 29	89	LB
618	Polish Barrel RB	9 29	89	BT
620	Apply Coatings (Barrel Action)		10-11-89	TJA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		10/12/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		10/12/89	RW
	C) Inspect Ejector Hole for Chamfer		10/12/89	RW
	D) Oil Firing Pin Ass'y		10/12/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		250119	JS

BARBER - M24 0041595

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			10/25/89	JL
	G) Safety Off Force	3	3	3			10/25/89	JL
	H) Trigger Pull Test & Retainability						25 Oct 89	JL
	I) Firing Pin Indent	1022	1022	1022			10/25/89	JL
	J) Assemble Stock						10/26/89	RW
	K) Assemble Swivel Studs						10/26/89	JL
	L) Attach Front and Rear Sight Assemblies						10/26/89	RW
	M) Iron Sight Alignment						10/26/89	RW
	N) Detach Front & Rear Sights & place in numbered container						10/26/89	RW
	O) Attach Scope to Rifle						10/26/89	JL
	P) Detach & Attach Scope 20 Times						10/26/89	JL
640	Gallery Target & Test						10-27-89	AC
	A) Time						10-27-89	AC
	B) Malfunctions						10-27-89	AC
	C) Pierced Primers						10-27-89	AC
	D) Optical Clarity of Scope						10-27-89	AC
645	Inspect for Live Ammo						10-27-89	AC
655	Final Inspection							
	A) Headspace						7/13/89	JL
	B) Trigger Pull	237	222	224	231	228	7/13/89	JL
	C) Function						7/13/89	JL
660	Pack						14 Dec 89	JL

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO C6348919DATE 4-11-90TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.46	2.56		2.39	MIN. SETTING,
PULL #2	2.48	2.49		2.40	NO AVG. OF 5
PULL #3	2.49	2.46		2.46	READINGS ACCEPT-
PULL #4	2.51	2.52		2.35	ABLE LESS THAN 2#
PULL #5	2.43	2.46		2.46	
TOTAL	12.37	12.49		12.06	
AVG.	2.474	2.498		2.412	

	3.00# INITIAL	3.00# AFTER 20 CYCLES			COMMENTS
PULL #1	3.30	3.29			
PULL #2	3.27	3.25			
PULL #3	3.08	3.20			
PULL #4	3.21	3.30			
PULL #5	3.25	3.17			
TOTAL	16.11	16.21			
AVG.	3.222	3.242			

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.19	4.30		
PULL #2	4.29	4.08		
PULL #3	4.29	4.30		
PULL #4	4.06	4.21		
PULL #5	4.21	4.31		
TOTAL	21.04	21.20		
AVG.	4.208	4.24		

MOD. <u>700</u>		GA. <u>7.62</u>	GUN # <u>06348919</u>
#	DATE	MALFUNCTION/DEFECT	ASSEM. #
TEST	1st		
		Skinner brass Don't eject	
	2nd		
	11/6/89	Polish EJECTOR Ream EJECTOR Hole	Riv
	3rd		
		100 Rds OK	AC
	4th		
		FUNCTION	RD 6654 Rev 1

TEST INIT. ACTION TO CORRECT		ASSEM. #
PROOF		
TEST		
TGT		
PROOF		
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6348919
30 Oct 1989

CENTROIDAL DISTANCES

0 TO	1	.121758
1 TO	2	.355106
1 TO	3	.4637
1 TO	4	.423986
1 TO	5	.510004


$\frac{t_5}{t_4}$ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1562
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1576
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .221892
THE AMR FOR THIS RIFLE IS: .885

38 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8848913.1

CENTERFIRE PATTERNS # 1

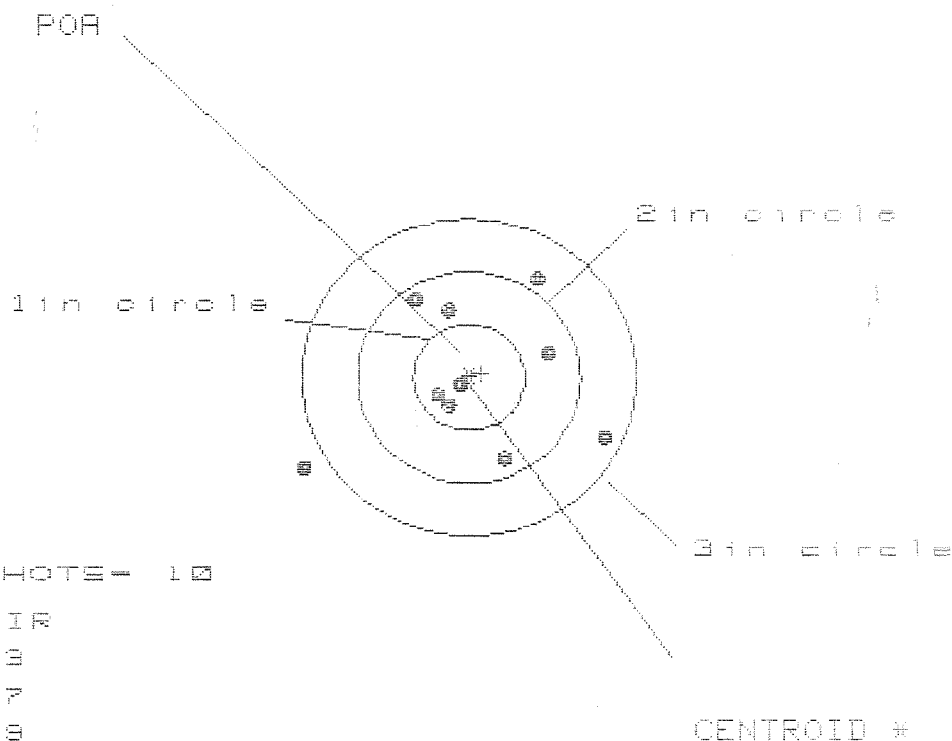

OF SHOTS = 10

IN CIR

1in = 3

2in = 7

3in = 8

HS = 2.638

VS = 1.783

GS = 2.714

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.173	1.011	.637
MINIMUM X	-1.465	-.684	-.558
MAXIMUM Y	.964	.873	.796
MINIMUM Y	-.819	-.854	-.931
CENTROID X	-.116	.047	-.079
CENTROID Y	-.037	.054	.132
POA TO CENTROID in.	.121	.072	.153
MIN RADIUS	.108	.291	.237
MEAN RADIUS	.788	.709	.626
MAX RADIUS	1.678	1.185	.981
HORIZONTAL SPREAD	2.638	1.695	1.195
VERTICAL SPREAD	1.783	1.727	1.727
EXTREME SPREAD	2.714	2.103	1.743
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		9	

30 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06348913.1

CENTERFIRE PATTERNS # 2

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS= 10

IN CIR

1in = 1

2in = 6

3in = 8

HS= 2.598

VS= 2.510

GS= 2.891


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.180	1.079	.889
MINIMUM X	-1.418	-1.519	-.975
MAXIMUM Y	1.325	.915	.846
MINIMUM Y	-1.185	-1.037	-1.106
CENTROID X	.280	.301	.491
CENTROID Y	-.199	-.347	-.278
POA TO CENTROID in.	.283	.459	.564
MIN RADIUS	.162	.234	.374
MEAN RADIUS	.970	.888	.797
MAX RADIUS	1.607	1.616	1.186
HORIZONTAL SPREAD	2.598	2.598	1.864
VERTICAL SPREAD	2.510	1.952	1.952
EXTREME SPREAD	2.991	2.953	2.000
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		8	

30 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C834B313.1

CENTERFIRE PATTERNS # 3

FOR

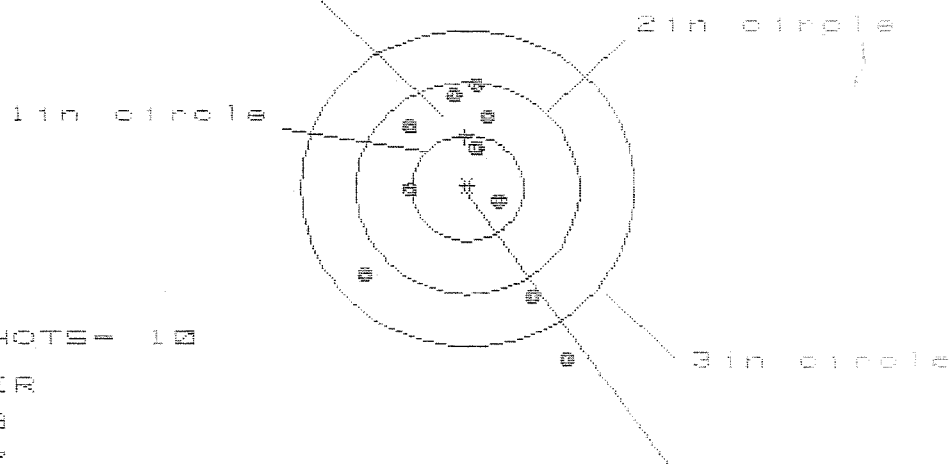

OF SHOTS= 10

IN CIR

1in = 3

2in = 7

3in = 9

HS= 1.808

VS= 2.553

GS= 2.671


CENTROID #

PATTERN #	3
SHOTS (BEST OF)	10
MAXIMUM X	.856
MINIMUM X	-.952
MAXIMUM Y	.978
MINIMUM Y	-1.575
CENTROID X	.021
CENTROID Y	-.480
FOR TO CENTROID in.	.480
MIN RADIUS	.346
MEAN RADIUS	.879
MAX RADIUS	1.793
HORIZONTAL SPREAD	1.808
VERTICAL SPREAD	2.553
EXTREME SPREAD	2.671
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	7
NUMBER IN THREE INCH CIRCLE =	9

30 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/0834B919.1

CENTERFIRE PATTERNS # 4

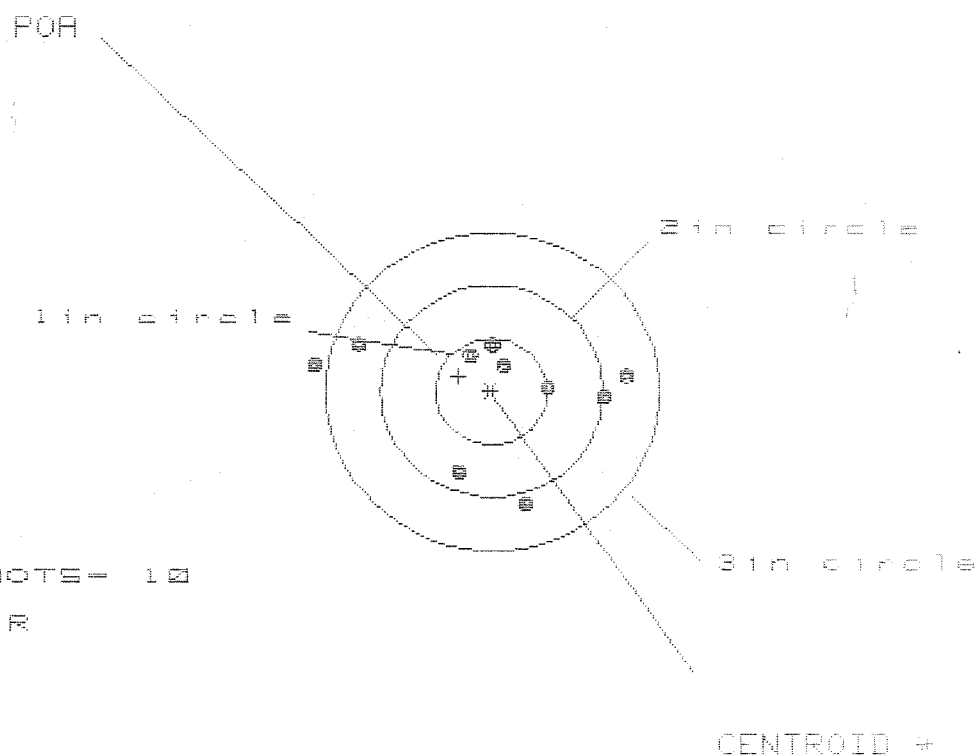

OF SHOTS= 10

IN CIR

1in = 3

2in = 5

3in = 9

HS= 2.768

VS= 1.499

GS= 2.768

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.219	1.047	.880
MINIMUM X	:	-1.549	-1.331	-.626
MAXIMUM Y	:	.482	.504	.548
MINIMUM Y	:	-1.017	-.995	-.932
CENTROID X	:	.294	.466	.633
CENTROID Y	:	-.145	-.167	-.230
POA TO CENTROID in.	:	.328	.495	.673
MIN RADIUS	:	.258	.263	.231
MEAN RADIUS	:	.855	.760	.671
MAX RADIUS	:	1.562	1.424	.935
HORIZONTAL SPREAD	:	2.768	2.378	1.506
VERTICAL SPREAD	:	1.499	1.499	1.480
EXTREME SPREAD	:	2.769	2.406	1.723
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		9	

30 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08348919.1

CENTERFIRE PATTERNS

5

POR

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 1

2in = 7

3in = 9

HS= 2.305

VS= 2.425

GS= 3.081

CENTROID *

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.064	.843	.702
MINIMUM X	:	-1.241	-1.123	-.982
MAXIMUM Y	:	1.180	1.042	1.125
MINIMUM Y	:	-1.245	-.770	-.687
CENTROID X	:	.382	.264	.405
CENTROID Y	:	.073	.211	.128
POR TO CENTROID in.	:	.389	.338	.424
MIN RADIUS	:	.251	.426	.298
MEAN RADIUS	:	.933	.861	.778
MAX RADIUS	:	1.637	1.303	1.126
HORIZONTAL SPREAD	:	2.305	1.966	1.684
VERTICAL SPREAD	:	2.425	1.812	1.812
EXTREME SPREAD	:	3.081	2.432	1.922
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		9	

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6348919
27-Oct-1989

CENTROIDAL DISTANCES

0 TO	1	.130188
1 TO	2	.363876
1 TO	3	.67705
1 TO	4	.697889
1 TO	5	.478707

$\frac{1}{5} \sum_{i=1}^5 x_i^2$ <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .4136
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0618
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .418192

THE AMR FOR THIS RIFLE IS: 1.314

27 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C834B919

CENTERFIRE PATTERNS # 1

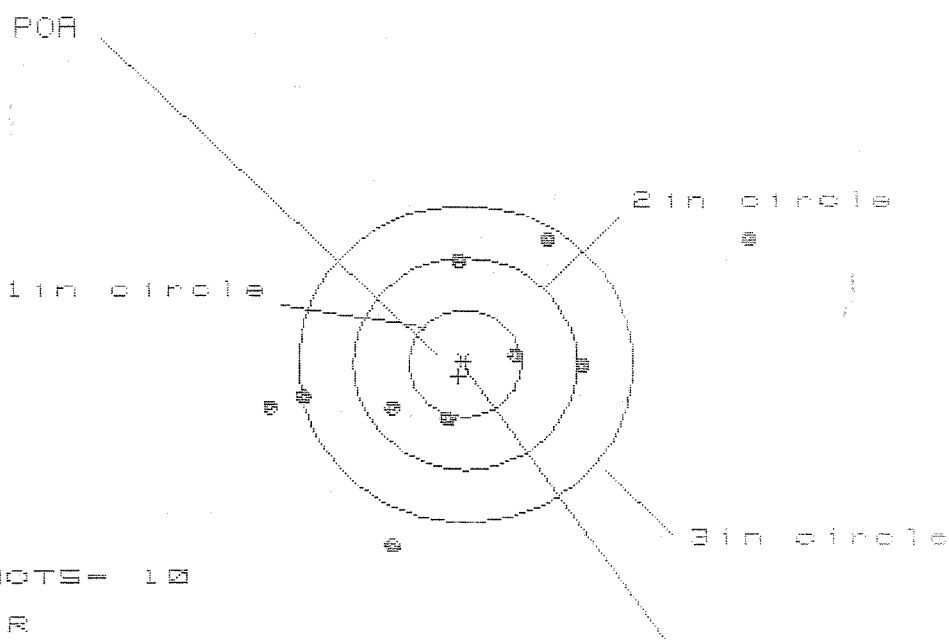

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 4

3 in = 7

HS = 4.303

VS = 2.847

GS = 4.581


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	2.539	1.313	1.128
MINIMUM X	-1.764	-1.482	-1.350
MAXIMUM Y	1.164	1.291	1.250
MINIMUM Y	-1.683	-1.556	-1.597
CENTROID X	.055	-.227	-.042
CENTROID Y	.118	-.009	.032
POA TO CENTROID in.	.131	.227	.053
MIN RADIUS	.479	.380	.398
MEAN RADIUS	1.311	1.121	1.059
MAX RADIUS	2.786	1.656	1.701
HORIZONTAL SPREAD	4.303	2.795	2.478
VERTICAL SPREAD	2.847	2.847	2.847
EXTREME SPREAD	4.591	3.190	3.190
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	7		

27 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06346919

CENTERFIRE PATTERNS # 2

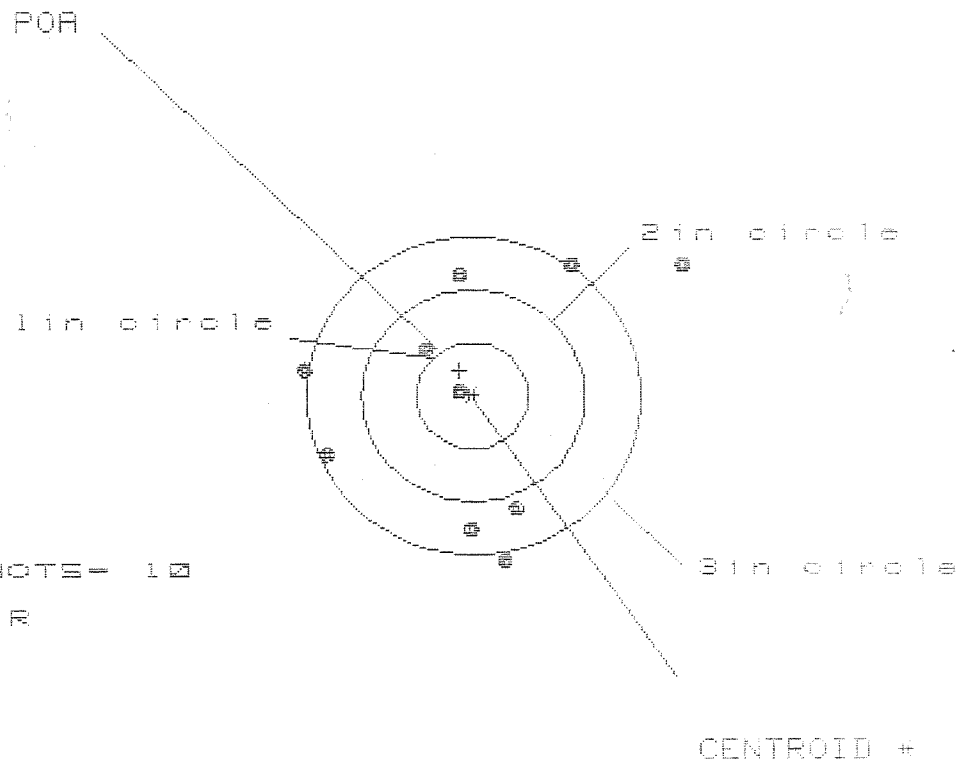

OF SHOTS- 10

IN CIR

1in = 1

2in = 2

3in = 6

HS= 3.381

VS= 2.826


GS= 3.642

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.890	1.110	1.169
MINIMUM X	:	-1.491	-1.281	-1.222
MAXIMUM Y	:	1.242	1.379	1.198
MINIMUM Y	:	-1.584	-1.447	-1.273
CENTROID X	:	.119	-.091	-.150
CENTROID Y	:	-.240	-.377	-.196
POA TO CENTROID in.	:	.268	.388	.247
MIN RADIUS	:	.104	.184	.169
MEAN RADIUS	:	1.254	1.121	1.049
MAX RADIUS	:	2.258	1.771	1.674
HORIZONTAL SPREAD	:	3.381	2.391	2.391
VERTICAL SPREAD	:	2.826	2.826	2.471
EXTREME SPREAD	:	3.642	2.897	2.826
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		2	
NUMBER IN THREE INCH CIRCLE	=		6	

27 Oct 1985

FILE:/PATTERNING/CENTERFIRE_PATT/06340919

CENTERFIRE PATTERNS # 3

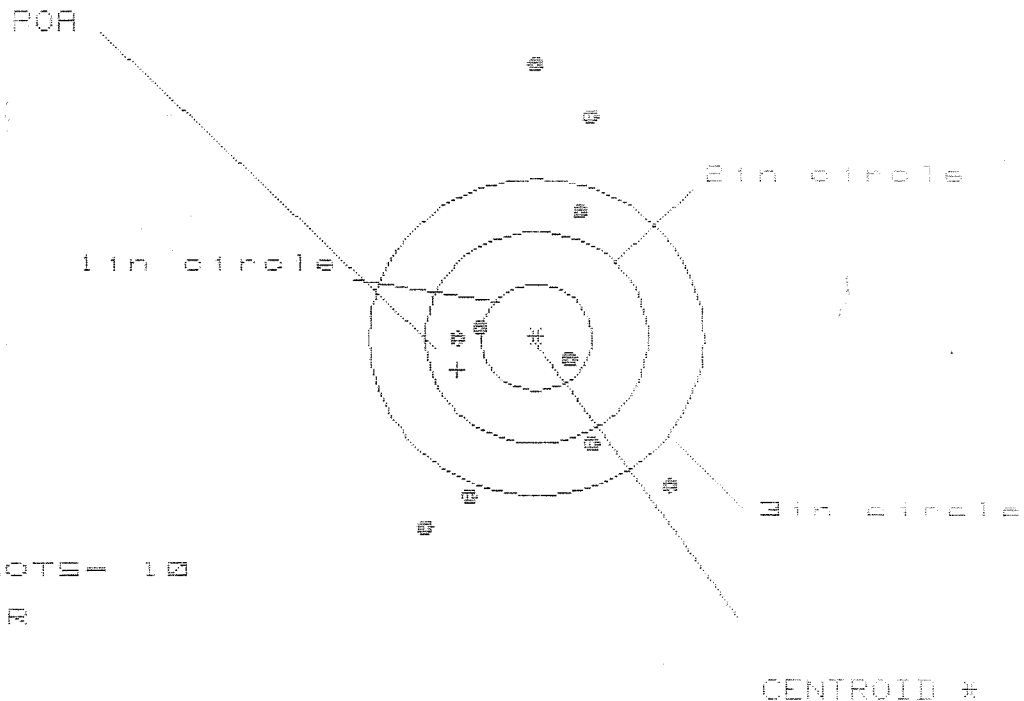

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 3

3 in = 5

HS= 2.207

VS= 4.416


GS= 4.547

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.153	1.156	1.025
MINIMUM X	:	-1.054	-1.051	-1.069
MAXIMUM Y	:	2.570	2.337	2.142
MINIMUM Y	:	-1.846	-1.560	-1.382
CENTROID X	:	.706	.703	.834
CENTROID Y	:	.304	.018	.213
POA TO CENTROID in.	:	.769	.703	.861
MIN RADIUS	:	.398	.347	.241
MEAN RADIUS	:	1.422	1.263	1.181
MAX RADIUS	:	2.570	2.382	2.167
HORIZONTAL SPREAD	:	2.207	2.207	1.894
VERTICAL SPREAD	:	4.416	3.897	3.524
EXTREME SPREAD	:	4.547	4.181	3.688
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		5	

27 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06348919

CENTERFIRE PATTERNS # 4

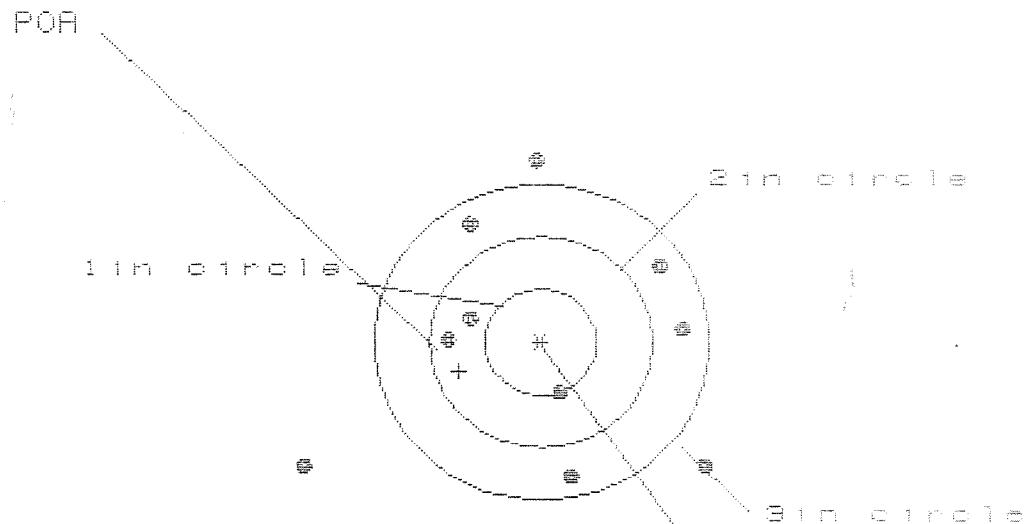

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 3


3 in = 7

HS= 3.601

VS= 2.995

GS= 3.690

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.480	1.244	1.192
MINIMUM X	:	-2.121	-1.066	-0.911
MAXIMUM Y	:	1.760	1.635	1.477
MINIMUM Y	:	-1.234	-1.360	-1.518
CENTROID X	:	.735	.971	.816
CENTROID Y	:	.275	.401	.559
POA TO CENTROID in.	:	.785	1.051	.989
MIN RADIUS	:	.529	.628	.715
MEAN RADIUS	:	1.317	1.193	1.104
MAX RADIUS	:	2.402	1.774	1.531
HORIZONTAL SPREAD	:	3.601	2.310	2.103
VERTICAL SPREAD	:	2.995	2.995	2.995
EXTREME SPREAD	:	3.690	3.271	3.011
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		7	

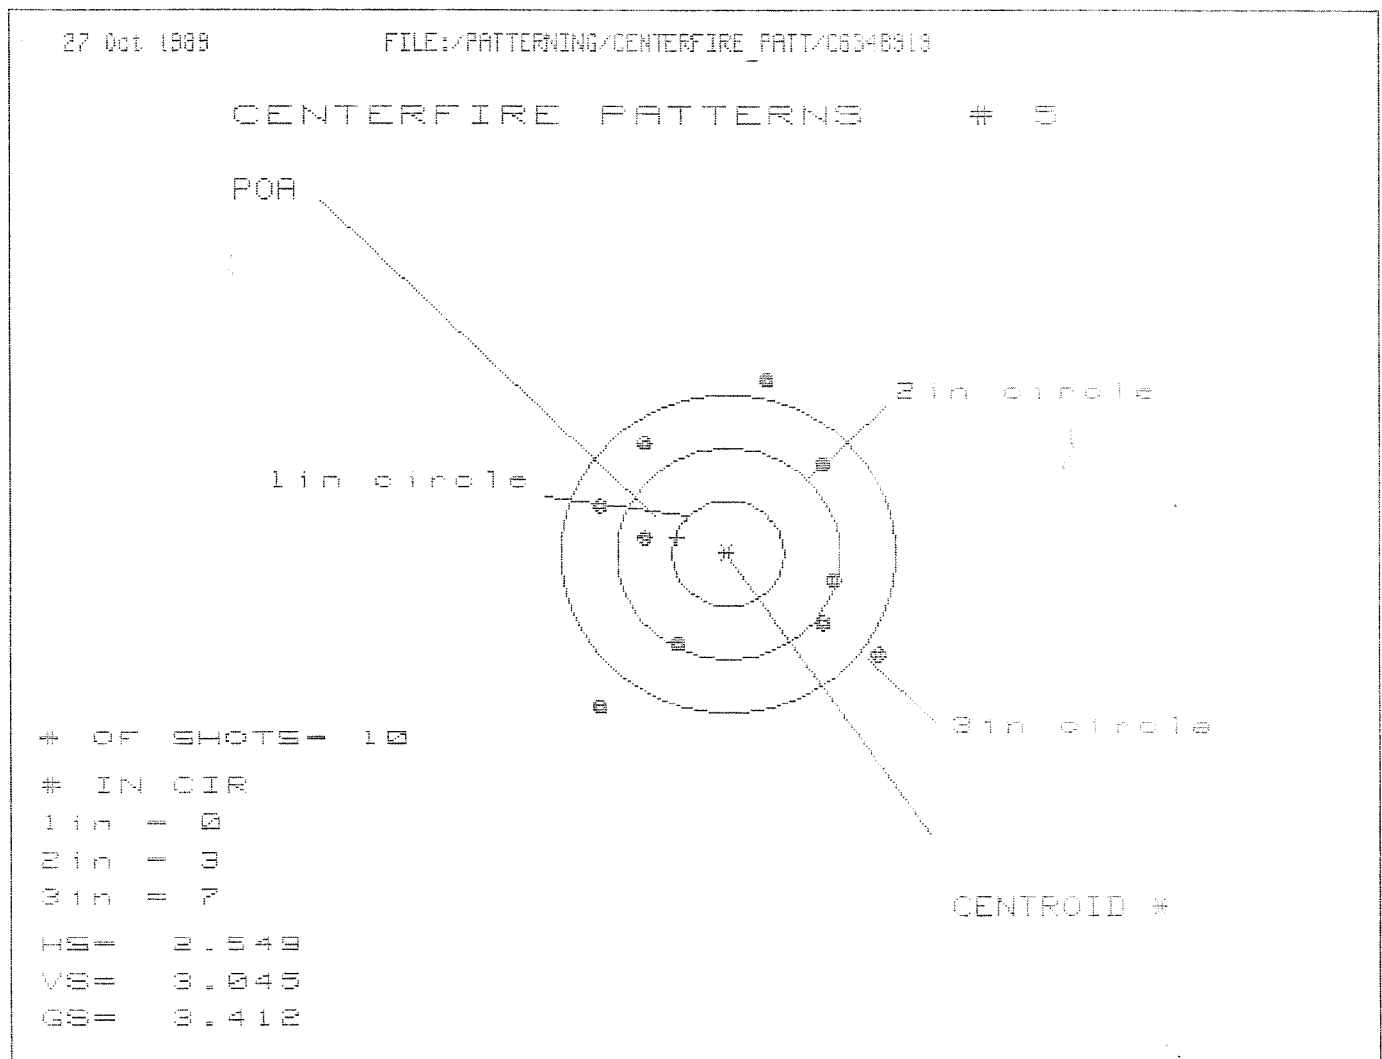

PATTERN #	5	5	5
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.356	1.223	1.250
MINIMUM X	-1.193	-1.314	-1.287
MAXIMUM Y	1.621	1.463	1.026
MINIMUM Y	-1.424	-1.088	-1.905
CENTROID X	.453	.586	.559
CENTROID Y	-.148	.010	-.173
POA TO CENTROID in.	.477	.586	.595
MIN RADIUS	.815	.897	.855
MEAN RADIUS	1.266	1.190	1.138
MAX RADIUS	1.858	1.637	1.543
HORIZONTAL SPREAD	2.549	2.537	2.537
VERTICAL SPREAD	3.045	2.551	1.931
EXTREME SPREAD	3.412	2.893	2.893
NUMBER IN ONE INCH CIRCLE =		0	
NUMBER IN TWO INCH CIRCLE =		3	
NUMBER IN THREE INCH CIRCLE =		7	

Repair Number: **RE00022081** Serial: C6348919 Model: 700 Center Fire Caliber: 7.62 NATO M24 (SWS) Repairman: Status: Closed 1/31/01 11:43:25 AM

Verify Repair

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: TRANS OFFICER

Address 1: CRP

Address 2: BLDG 5207 PO Box:

City: FORT CAMPBELL

State: KY Zip Code: 52223 Country: US

State: KY Zip Code: 52223 Country: US

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information:

Phone:

Fax:

Email:

Comments:

Received Condition:

Condition: Fair

Notes:

CSH Notes:

Accessories Received:


Code	Desc	Qty
AD07	With Stud	1
AD10	Hard Case	1
AD17	Scope Base	1

Repair Search Refresh Close

Start 1/31/01 1:37 PM NUM

Serial Number: **C6348919**

Model: **700**



RE00022081

BARBER - M24 0041612

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6348919
13 Mar 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0086
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1402
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .140464

THE AMR FOR THIS RIFLE IS: 1.183

CENTROIDAL DISTANCES

0 TO 1	.0902552
1 TO 2	.20806
1 TO 3	.208904
1 TO 4	.21606
1 TO 5	.198927

$\frac{25}{4+1}$ <----POA

BARBER - M24 0041613


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐
POA TO CENTROID: .090
MIN RADIUS : .358
MEAN RADIUS : 1.181
MAX RADIUS : 2.979
CENTROID X : .089
CENTROID Y : .015

13 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348919

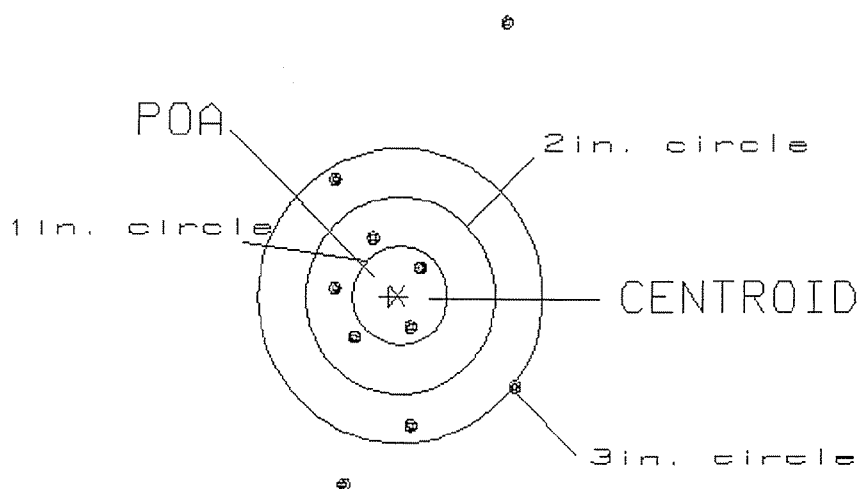CENTERFIRE PATTERN # 1

OF SHOTS= 10

IN CIRCLE

HS= 1.86

2

VS= 4.64

5

GS= 4.94

7

BARBER - M24 0041614


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐
POA TO CENTROID: .180
MIN RADIUS : .342
MEAN RADIUS : 1.472
MAX RADIUS : 2.391
CENTROID X : -.044
CENTROID Y : .175

13 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348919

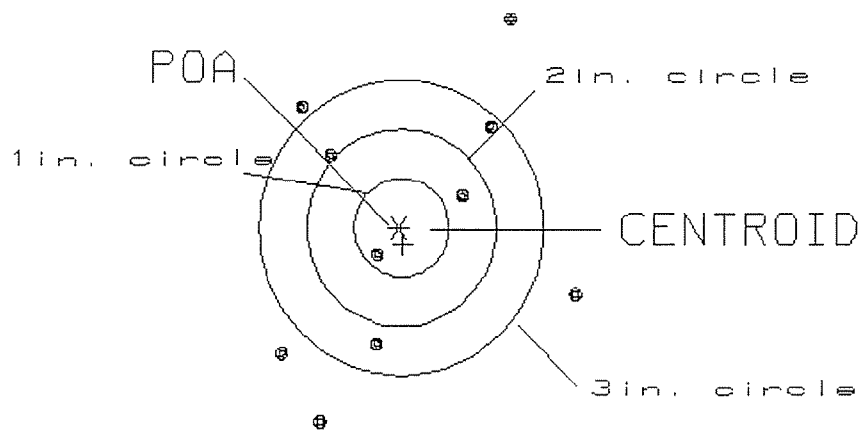CENTERFIRE PATTERN # 2

OF SHOTS= 10

IN CIRCLE

HS= 3.13
VS= 4.03
GS= 4.52

1
2
5

BARBER - M24 0041615

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .189
MIN RADIUS : .637
MEAN RADIUS : 1.134
MAX RADIUS : 2.093
CENTROID X : -.031
CENTROID Y : .186

13 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348919

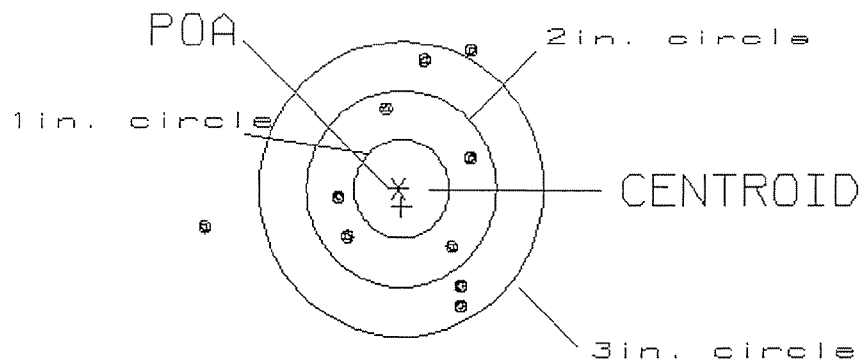CENTERFIRE PATTERN # 3

OF SHOTS= 10

IN CIRCLE

HS= 2.78

0

VS= 2.67

5

GS= 3.31

8

BARBER - M24 0041616

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .154

MIN RADIUS : .408

MEAN RADIUS : .929


MAX RADIUS : 1.526

CENTROID X : -.102

CENTROID Y : .116

13 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348919

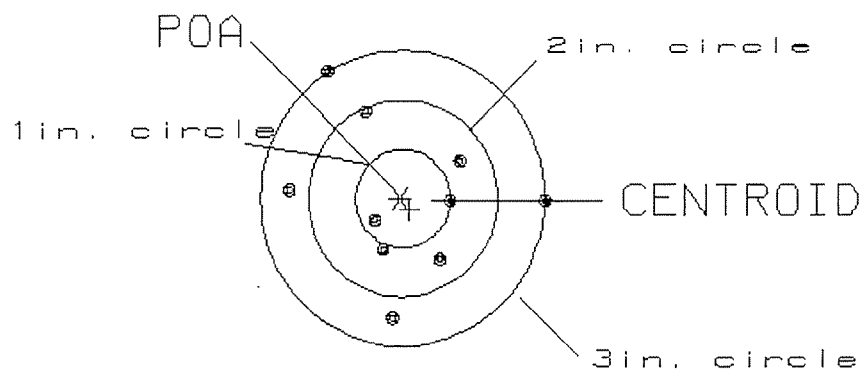CENTERFIRE PATTERN # 4

OF SHOTS= 10

IN CIRCLE

HS= 2.64

2

VS= 2.51

6

GS= 2.64

9

BARBER - M24 0041617

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 5 ☐

POA TO CENTROID: .213

MIN RADIUS : .157

MEAN RADIUS : 1.200


MAX RADIUS : 1.972

CENTROID X : .045

CENTROID Y : .209

13 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348919

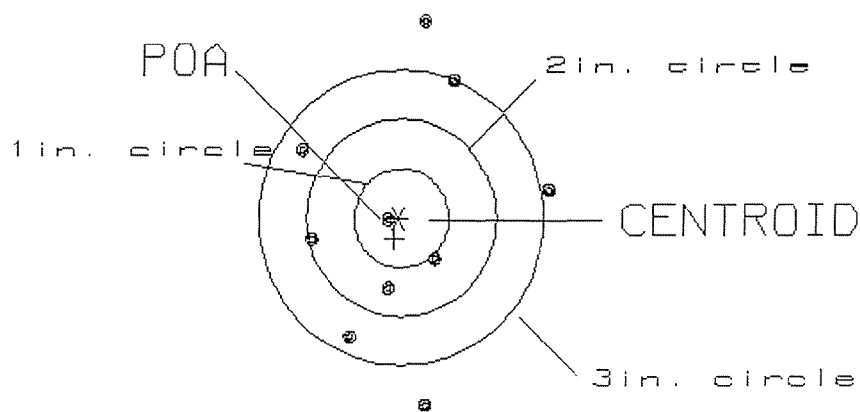CENTERFIRE PATTERN # 5

OF SHOTS= 10

IN CIRCLE

HS= 2.56

1

VS= 3.86

3

GS= 3.86

6

Final Inspection

Sn: C-6348919

DATE REC'D: 1-31-01

DATE RET'D:

Auditor: CK

Item:

Barrel Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

Scope Assy.

- ☐ Scope
- ☐ Scope Rings
- ☐ Mounting Screws
- ☐ Mounting Base
- ☐ Screws
- ☐ Finish
- ☐ Looseness
- ☐ CLARITY

Misc.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

Item:

Stock Assy.

- ☒ Stock
- ☒ Sling Swivel Studs
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

Systems Case

- ☐ Scope Case
- ☐ Iron SIGHTS
- ☐ Deployment Kit

Trigger

- ☒ SAFETY OPERATION
- ☒ SET
- ☐

Comments:

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER <u>22081</u>			
SERIAL NUMBER <u>C-6348919</u>			
LOG-IN DATE <u>1-31-01</u>			
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	2-2-01	ck
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL AND TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	2-12-01	ck
605	CHECK HEADSPACE	2-22-01	ck
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	3-13-01	ck
655	FINAL INSPECT	3-15-01	ck
660	PACK		
		SHIP DATE	
QAR INSPECTION DATE			