

C6348940

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length


Capacity

Order No. **5716**

\*Includes 1 in chamber.

*Remington.*

1111  
1000 120000

|                                                                                                      |  |                                                                                                  |                               |
|------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------|-------------------------------|
| <b>Remington</b><br>REG. U.S. PAT. & TM. OFF.                                                        |  | <b>VERY IMPORTANT:</b><br>Instruction Book<br>enclosed to assure<br>safe use of this<br>firearm. |                               |
| <b>MODEL 700™ H24</b>                                                                                |  | <b>SERIAL NO.</b><br>C6348940                                                                    | <b>UPC</b><br>0 47700 25716 7 |
| <b>MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat &amp; Tm. Off. Marca Registrada Marque Deposee.</b>      |  | <b>ORDER NO.</b><br>5716                                                                         |                               |
| <br>5716 C6348940 |  |                 |                               |

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6348940

| OP. #     | OP. NAME                                                 | READINGS | DATE     | INIT |
|-----------|----------------------------------------------------------|----------|----------|------|
| 575 & 580 | Assemble Action and Stock                                | 7 11     | 89       | RW   |
| 600       | Proof                                                    | 7 11     | 89       | RW   |
| 607       | Check Headspace                                          | 7 11     | 89       | RW   |
| 610       | Dis-assemble Gun                                         | 7 11     | 89       | RW   |
| 612       | Magnaflux Barrel Action                                  |          | 7/13     | KCR  |
|           | Magnaflux Bolt                                           |          | 7/13     | KCR  |
| 615       | Rollmark Caliber                                         |          | 7/13     | SS   |
| 617       | Drill and Tap Sight Holes                                | 7 13     | 89       | YE   |
| 618       | Polish Barrel RB                                         | 7 13     | 89       | BT   |
| 620       | Apply Coatings (Barrel Action)                           |          | 7-21-89  | TJA  |
|           | Apply Coating (Bolt)                                     |          |          |      |
| 625       | Final Assembly                                           |          |          |      |
|           | A) Clean inside of Bolt Assembly                         |          | 7/25/89  | RW   |
|           | B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head |          | 7/25/89  | RW   |
|           | C) Inspect Ejector Hole for Chamfer                      |          | 7/25/89  | RW   |
|           | D) Oil Firing Pin Ass'y                                  |          | 7/25/89  | RW   |
|           | E) Adjust Trigger Pull to Min Setting and Stake          |          | 27/26/89 | JS   |

| op. #        | BARBER - M24 0042126<br>OP. NAME                            | READINGS |      |      |      |      | DATE       | INIT |
|--------------|-------------------------------------------------------------|----------|------|------|------|------|------------|------|
| 625<br>cont. | F) Safety On Force                                          | 6        | 5    | 5    |      |      | 21/6/89    | JS   |
|              | G) Safety Off Force                                         | 4        | 4    | 4    |      |      | 21/6/89    | JS   |
|              | H) Trigger Pull Test & Retainability                        |          |      |      |      |      | 21/6/89    | JS   |
|              | I) Firing Pin Indent                                        | .0215    | .021 | .021 |      |      | 21/6/89    | JS   |
|              | J) Assemble Stock                                           |          |      |      |      |      | 21/28/89   | RW   |
|              | K) Assemble Swivel Studs                                    |          |      |      |      |      | 31/7/89    | JS   |
|              | L) Attach Front and Rear Sight Assemblies                   |          |      |      |      |      | 7/28/89    | RW   |
|              | M) Iron Sight Alignment                                     |          |      |      |      |      | 7/28/89    | RW   |
|              | N) Detach Front & Rear Sights & place in numbered container |          |      |      |      |      | 7/28/89    | RW   |
|              | O) Attach Scope to Rifle                                    |          |      |      |      |      | 7/28/89    | WB   |
|              | P) Detach & Attach Scope 20 Times                           |          |      |      |      |      | 7/28/89    | WB   |
| 640          | Gallery Target & Test                                       | 84 R     | 676  |      |      |      | 7-28-89    | PH   |
|              | A) Time                                                     |          |      |      |      |      | 7-28-89    | PH   |
|              | B) Malfunctions                                             |          |      |      |      |      | 7-28-89    | PH   |
|              | C) Pierced Primers                                          |          |      |      |      |      | 7-28-89    | PH   |
|              | D) Optical Clarity of Scope                                 |          |      |      |      |      | 7-28-89    | PH   |
| 645          | Inspect for Live Ammo                                       |          |      |      |      |      | 7-28-89    | PH   |
| 655          | Final Inspection                                            |          |      |      |      |      |            |      |
|              | A) Headspace                                                |          |      |      |      |      | 31/July/89 | JS   |
|              | B) Trigger Pull                                             | 2.72     | 2.75 | 2.81 | 2.55 | 2.66 | 31/July/89 | JS   |
|              | C) Function                                                 |          |      |      |      |      | 31/July/89 | JS   |
| 660          | Pack                                                        |          |      |      |      |      | 20/8/89    | JS   |

BARBER - M24 0042127

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. 8940DATE 3-26-90TESTER JH

|         | 2.50#<br>INITIAL       | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# | COMMENTS          |
|---------|------------------------|--------------------------|--------------------------------|-------------------|
| PULL #1 | <sup>2.3</sup><br>2.59 | <sup>2.1</sup><br>2.46   | <sup>2.5</sup><br>2.51         | MIN. SETTING,     |
| PULL #2 | 2.45                   | 2.50                     | 2.32                           | NO AVG. OF 5      |
| PULL #3 | 2.44                   | 2.60                     | 2.44                           | READINGS ACCEPT-  |
| PULL #4 | 2.55                   | 2.44                     | 2.43                           | ABLE LESS THAN 2# |
| PULL #5 | 2.59                   | 2.60                     | 2.39                           |                   |
| TOTAL   | 12.62                  | 12.65                    | 12.09                          |                   |
| AVG.    | 2.524                  | 2.53                     | 2.418                          |                   |

|         | 3.00#<br>INITIAL       | 3.00# AFTER<br>20 CYCLES | COMMENTS |
|---------|------------------------|--------------------------|----------|
| PULL #1 | <sup>3.3</sup><br>3.36 | <sup>3.3</sup><br>3.36   |          |
| PULL #2 | 3.38                   | 3.26                     |          |
| PULL #3 | 3.37                   | 3.37                     |          |
| PULL #4 | 3.37                   | 3.39                     |          |
| PULL #5 | 3.44                   | 3.38                     |          |
| TOTAL   | 16.92                  | 16.76                    |          |
| AVG.    | 3.384                  | 3.352                    |          |

|         | 4.00#<br>INITIAL       | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | <sup>4.3</sup><br>4.23 | <sup>4.5</sup><br>4.35   |                                |                                      |
| PULL #2 | 4.19                   | 4.41                     |                                |                                      |
| PULL #3 | 4.18                   | 4.34                     |                                |                                      |
| PULL #4 | 4.36                   | 4.36                     |                                |                                      |
| PULL #5 | 4.39                   | 4.37                     |                                |                                      |
| TOTAL   | 21.35                  | 21.83                    |                                |                                      |
| AVG.    | 4.27                   | 4.366                    |                                |                                      |

CENTROIDAL DISTANCE CALCULATIONS  
FOR RIFLE # C6348940  
28 Jul 1989

CENTROIDAL DISTANCES

|      |   |         |
|------|---|---------|
| 0 TO | 1 | .176045 |
| 1 TO | 2 | .532113 |
| 1 TO | 3 | .371615 |
| 1 TO | 4 | .387621 |
| 1 TO | 5 | .779933 |

$t^5$  <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .3896  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0856  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .398893

THE AMR FOR THIS RIFLE IS: 1.167

28 Jul 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/C634B940

## CENTERFIRE PATTERNS # 1

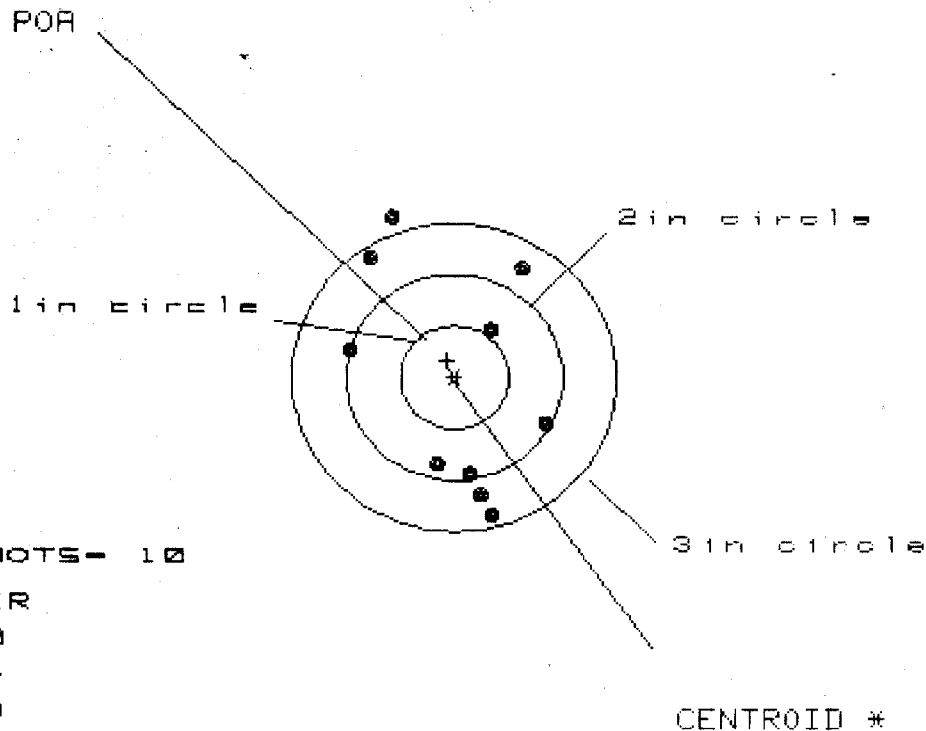

# OF SHOTS- 10

# IN CIR

1in = 0

2in = 4

3in = 9

HS= 1.870

VS= 2.833

GS= 2.987


CENTROID \*

| PATTERN #                     | 1      | 2      | 3      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | .870   | .803   | .703   |
| MINIMUM X                     | -1.000 | -1.067 | -1.167 |
| MAXIMUM Y                     | 1.545  | 1.309  | 1.374  |
| MINIMUM Y                     | -1.288 | -1.117 | -.953  |
| CENTROID X                    | .064   | .131   | .231   |
| CENTROID Y                    | -.164  | -.335  | -.499  |
| POA TO CENTROID in.           | .176   | .360   | .550   |
| MIN RADIUS                    | .570   | .686   | .564   |
| MEAN RADIUS                   | 1.099  | 1.007  | .900   |
| MAX RADIUS                    | 1.659  | 1.533  | 1.457  |
| HORIZONTAL SPREAD             | 1.870  | 1.870  | 1.870  |
| VERTICAL SPREAD               | 2.833  | 2.426  | 2.327  |
| EXTREME SPREAD                | 2.987  | 2.651  | 2.348  |
| NUMBER IN ONE INCH CIRCLE =   | 0      |        |        |
| NUMBER IN TWO INCH CIRCLE =   | 4      |        |        |
| NUMBER IN THREE INCH CIRCLE = | 9      |        |        |

28 Jul 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/C6348940

## CENTERFIRE PATTERNS # 2

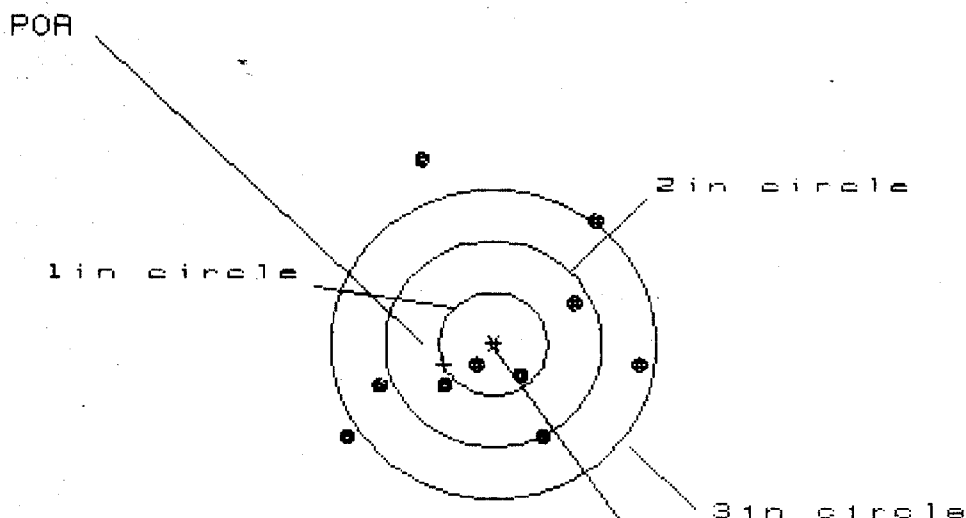

# OF SHOTS - 10

# IN CIR

1 in = 2

2 in = 5

3 in = 7

HS = 2.638

VS = 2.711

GS = 3.127

| PATTERN #                     | 1      | 2      | 3      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | 1.301  | 1.231  | 1.055  |
| MINIMUM X                     | -1.337 | -1.407 | -1.300 |
| MAXIMUM Y                     | 1.780  | 1.383  | 1.291  |
| MINIMUM Y                     | -.931  | -.733  | -.808  |
| CENTROID X                    | .454   | .524   | .700   |
| CENTROID Y                    | .198   | .000   | .092   |
| POA TO CENTROID in.           | .496   | .524   | .706   |
| MIN RADIUS                    | .282   | .199   | .187   |
| MEAN RADIUS                   | 1.068  | .930   | .856   |
| MAX RADIUS                    | 1.887  | 1.647  | 1.478  |
| HORIZONTAL SPREAD             | 2.638  | 2.638  | 2.355  |
| VERTICAL SPREAD               | 2.711  | 2.116  | 2.099  |
| EXTREME SPREAD                | 3.127  | 3.127  | 2.589  |
| NUMBER IN ONE INCH CIRCLE =   |        | 2      |        |
| NUMBER IN TWO INCH CIRCLE =   |        | 5      |        |
| NUMBER IN THREE INCH CIRCLE = |        | 7      |        |

28 Jul 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/C634B940

## CENTERFIRE PATTERNS # 3

POA

1in circle

2in circle

3in circle

CENTROID #

# OF SHOTS - 10

# IN CIR

1in = 1

2in = 3

3in = 10

IS = 2.584

VS = 2.069

GS = 2.688

| PATTERN #                   | : | 10     | 9      | 8      |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | 1.198  | 1.291  | 1.196  |
| MINIMUM X                   | : | -1.386 | -1.293 | -1.388 |
| MAXIMUM Y                   | : | 1.234  | 1.276  | .987   |
| MINIMUM Y                   | : | -.835  | -.698  | -.538  |
| CENTROID X                  | : | .411   | .318   | .413   |
| CENTROID Y                  | : | -.031  | -.168  | -.328  |
| POA TO CENTROID in.         | : | .412   | .359   | .528   |
| MIN RADIUS                  | : | .106   | .271   | .272   |
| MEAN RADIUS                 | : | 1.046  | .988   | .893   |
| MAX RADIUS                  | : | 1.493  | 1.534  | 1.550  |
| HORIZONTAL SPREAD           | : | 2.584  | 2.584  | 2.584  |
| VERTICAL SPREAD             | : | 2.069  | 1.974  | 1.525  |
| EXTREME SPREAD              | : | 2.688  | 2.688  | 2.688  |
| NUMBER IN ONE INCH CIRCLE   | = | 1      |        |        |
| NUMBER IN TWO INCH CIRCLE   | = | 3      |        |        |
| NUMBER IN THREE INCH CIRCLE | = | 10     |        |        |

28 Jul 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/C634B940

## CENTERFIRE PATTERNS

# 4

POA

1in circle

2in circle

3in circle

# OF SHOTS- 10

# IN CIR

1in = 0

2in = 2

3in = 5

HS= 4.356

VS= 2.172

GS= 4.357


CENTROID \*

| PATTERN #                   | : | 4      |        |        |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | 2.030  | 1.772  | 1.434  |
| MINIMUM X                   | : | -2.326 | -1.923 | -1.702 |
| MAXIMUM Y                   | : | .800   | .817   | .824   |
| MINIMUM Y                   | : | -1.372 | -1.355 | -1.348 |
| CENTROID X                  | : | .345   | .603   | .382   |
| CENTROID Y                  | : | .103   | .086   | .079   |
| POA TO CENTROID in.         | : | .360   | .610   | .390   |
| MIN RADIUS                  | : | .793   | .538   | .752   |
| MEAN RADIUS                 | : | 1.477  | 1.339  | 1.298  |
| MAX RADIUS                  | : | 2.331  | 1.951  | 1.734  |
| HORIZONTAL SPREAD           | : | 4.356  | 3.695  | 3.136  |
| VERTICAL SPREAD             | : | 2.172  | 2.172  | 2.172  |
| EXTREME SPREAD              | : | 4.357  | 3.704  | 3.229  |
| NUMBER IN ONE INCH CIRCLE   | = |        | 0      |        |
| NUMBER IN TWO INCH CIRCLE   | = |        | 2      |        |
| NUMBER IN THREE INCH CIRCLE | = |        | 5      |        |

28 Jul 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/C6346340

## CENTERFIRE PATTERNS # 5

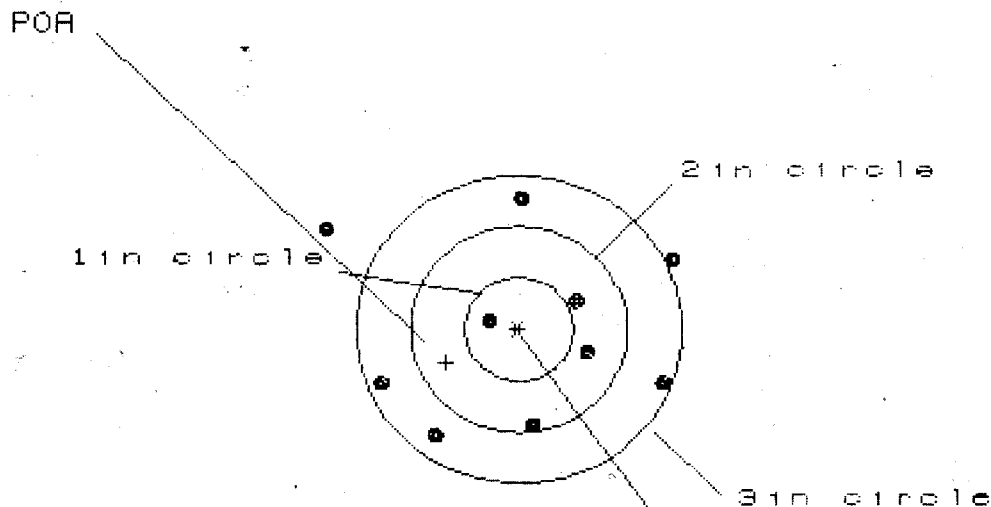

# OF SHOTS- 10

# IN CIR

1 in - 1

2 in - 4

3 in = 8

HS- 3.140

VS= 2.282

GS= 3.409

CENTROID \*

| PATTERN #                   | : | 5      |        |        |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | 1.405  | 1.213  | 1.322  |
| MINIMUM X                   | : | -1.735 | -1.477 | -1.326 |
| MAXIMUM Y                   | : | 1.271  | 1.375  | 1.472  |
| MINIMUM Y                   | : | -1.011 | -.907  | -.810  |
| CENTROID X                  | : | .674   | .866   | .715   |
| CENTROID Y                  | : | .322   | .218   | .121   |
| POA TO CENTROID in.         | : | .747   | .894   | .725   |
| MIN RADIUS                  | : | .290   | .469   | .437   |
| MEAN RADIUS                 | : | 1.146  | 1.029  | .977   |
| MAX RADIUS                  | : | 1.969  | 1.535  | 1.472  |
| HORIZONTAL SPREAD           | : | 3.140  | 2.590  | 2.648  |
| VERTICAL SPREAD             | : | 2.282  | 2.282  | 2.282  |
| EXTREME SPREAD              | : | 3.409  | 2.942  | 2.648  |
| NUMBER IN ONE INCH CIRCLE   | = |        | 1      |        |
| NUMBER IN TWO INCH CIRCLE   | = |        | 4      |        |
| NUMBER IN THREE INCH CIRCLE | = |        | 8      |        |

RECEIVED BARBER - M24 0042134 REPORT

COMMENTS

ORDER

R

97-04329

INITIAL CUSTOMER ORDER NO.

WOG 5 OF 9 W/LEUPOLD 10X SCOPE

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

ACCESSORIES

02/18/97

C6348940

700 7.62

NATO

FROM:

SHIP TO:

DEPT OF THE ARMY  
COMMANDER ATTN SFC BARTON  
2ND BN 10TH SFG (A)  
FT CARSON

CO B0913

DEPT OF THE ARMY  
COMMANDER ATTN SFC BARTON  
2ND BN 10TH SFG (A)  
FT CARSON

CO B0913

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

CUST NO: 162097 C.O.D.

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW  
☐ LIGHTLY WORN  
☐ WORN  
☐ VERY WORN  
☐ UNREPAIRABLE  
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Barrel 96003

Re powder Coat Trigger Guard  
ASSY Front & Rear Sight  
Bases

Re Zinc Scope Base, Rings &  
Swivel Studs

Scope Sent Back to Factory  
for Inspect.

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD0925 REV. 11/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

BARBER - M24 0042134

## Final Inspection

S.N.: C6348940

DATE REC'D: 4/18/92

DATE RET'D:

AUDITOR: RW

## Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ Looseness☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

## Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ IRON SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: \_\_\_\_\_

## 21 DAY TURN - AROUND

*Barrel*

M-24

CONTRACT # DAAA09-92-C-0834

R&amp;E NO.

SERIAL NO. *C6348940*

LOG IN DATE: / /

DATE

INIT.

INSPECT &amp; VERIFY:

OP. #

OP. NAME

550

DIS-ASSEMBLE GUN

560 A

RE-BARREL AT CUSTOM SHOP

B

DRILL &amp; TAP

C

POLISH

575

ASSEMBLE

600

PROOF

605

CHECK HEADSPACE

610

DIS-ASSEMBLE

612

MAGNAFLUX

615

ROLLMARK CALIBER

618

ROTO-BLAST

620

APPLY COATINGS

625 A

FINAL ASSEMBLY

B

TRIGGER PULL TEST

C

SAFETY ON FORCE

D

SAFETY OFF FORCE

E

FIRING PIN INDENT

640

TARGET

655

FINAL INSPECT

660

PACK

QAR INSPECTION

SHIP DATE

*3/18/97**3/18/97**AP**hw*

**BARBER - M24 0042137**

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6348940

1 Apr 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS:  $-.2294$

THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS:  $.004$

THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS:  $.229435$

THE AMR FOR THIS RIFLE IS:  $1.088$

CENTROIDAL DISTANCES

|        |         |
|--------|---------|
| 0 TO 1 | .197396 |
| 1 TO 2 | .240077 |
| 1 TO 3 | .884382 |
| 1 TO 4 | .596335 |
| 1 TO 5 | .395051 |

|   |  |   |   |
|---|--|---|---|
| 3 |  | 5 |   |
|   |  | + |   |
| 4 |  | 2 | 1 |


<----POA

PATTERN #: ☐ 1 ☐  
 POA TO CENTROID: .197  
 MIN RADIUS : .416  
 MEAN RADIUS : .850  
 MAX RADIUS : 1.701  
 CENTROID X : .074  
 CENTROID Y : -.183

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/C6348940

# CENTERFIRE PATTERN # 1

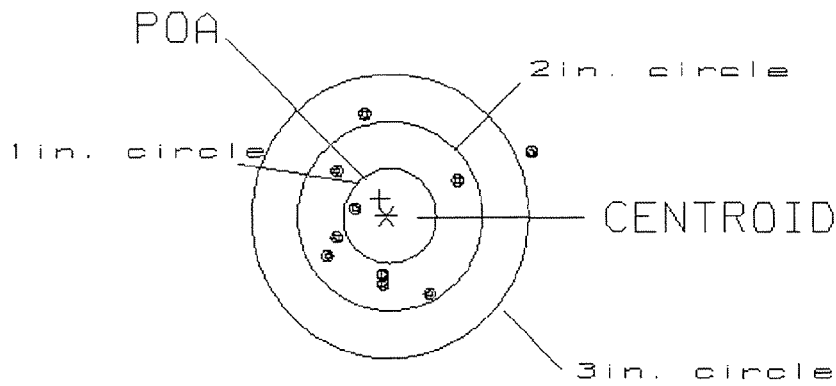

# OF SHOTS= 10

# IN CIRCLE

HS= 2.20

1

VS= 1.92

6

GS= 2.48


9

PATTERN #: 2  
 POA TO CENTROID: .304  
 MIN RADIUS : .172  
 MEAN RADIUS : 1.064  
 MAX RADIUS : 1.715  
 CENTROID X : -.152  
 CENTROID Y : -.264

21 Mar 1997

FILE:/Hqbasic/Accuracy/Patterning/Centerfire\_Patt/C6348940

# CENTERFIRE PATTERN # 2

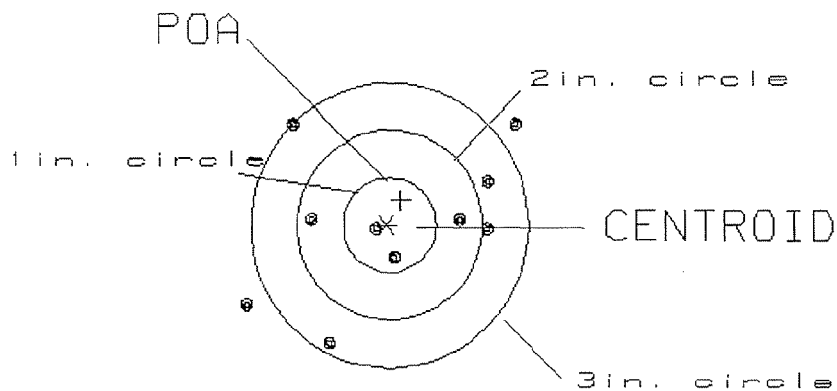

# OF SHOTS= 10

# IN CIRCLE

HS= 2.84

2

VS= 2.36

4

GS= 3.39

7

**BARBER - M24 0042140**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .710

MIN RADIUS : .339

MEAN RADIUS : 1.297


MAX RADIUS : 2.482

CENTROID X : -.572

CENTROID Y : .421

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/C6348940

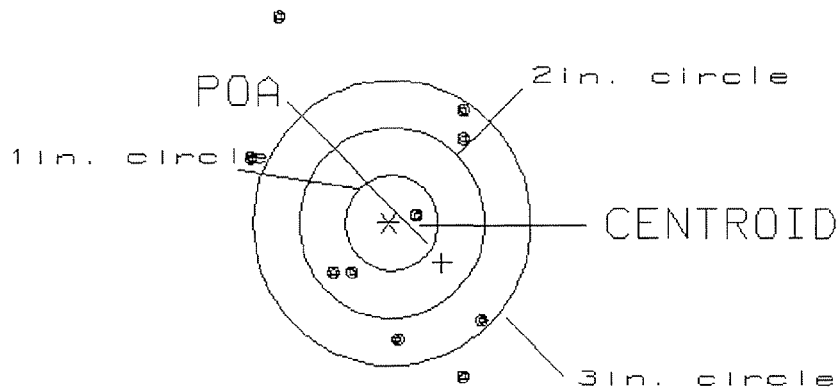**CENTERFIRE PATTERN # 3**

# OF SHOTS= 10

# IN CIRCLE

HS= 2.50

1

VS= 3.77

3

GS= 4.26


7

PATTERN #: 4  
 POA TO CENTROID: .547  
 MIN RADIUS : .132  
 MEAN RADIUS : 1.324  
 MAX RADIUS : 2.797  
 CENTROID X : -.522  
 CENTROID Y : -.163

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/C634894D

# CENTERFIRE PATTERN # 4

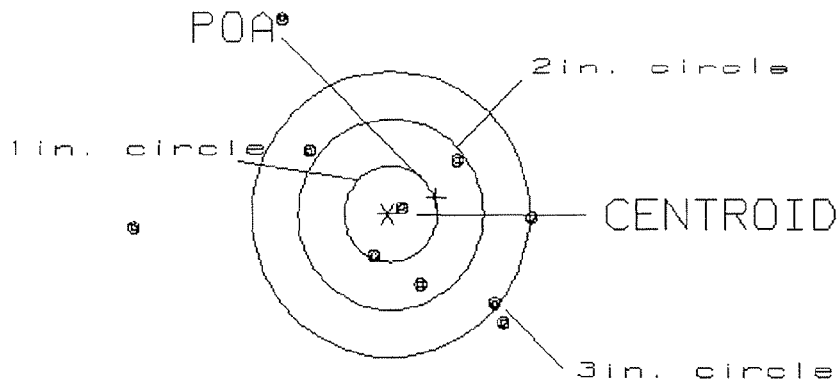

# OF SHOTS= 10

# IN CIRCLE

HS= 4.33

2

VS= 3.22

4

GS= 4.33

6

**BARBER - M24 0042142**

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 5

POA TO CENTROID: .211  
MIN RADIUS : .300  
MEAN RADIUS : .907  
MAX RADIUS : 1.702  
CENTROID X : .025  
CENTROID Y : .209

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/C634894D

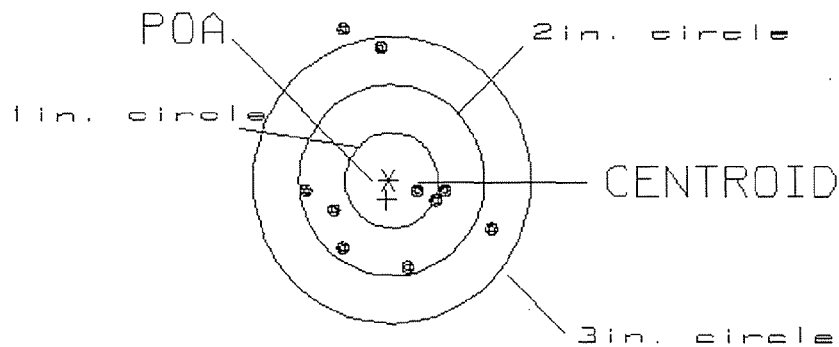**CENTERFIRE PATTERN # 5**

# OF SHOTS= 10

# IN CIRCLE

HS= 2.00

1

VS= 2.48

7

GS= 2.68

9