

UPC



C6702949

ORDER NO. 25705
BARREL LENGTH 24"
CAPACITY * 6
*INCLUDES 1 IN CHAMBER

BARBER - M24 0047049

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6702949
7 Nov 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.07$
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $.103333$
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.124811$

THE AMR FOR THIS RIFLE IS: 1.188

CENTROIDAL DISTANCES

0 TO 1 .0876926
1 TO 2 .346706
1 TO 3 .28048

$\begin{matrix} 2 \\ 3 \\ \uparrow \end{matrix}$ <----POA

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 1 ☐

POA TO CENTROID: .088
MIN RADIUS : .544
MEAN RADIUS : .748
MAX RADIUS : 1.042
CENTROID X : .011
CENTROID Y : -.087

7 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6702949

CENTERFIRE PATTERN # 1

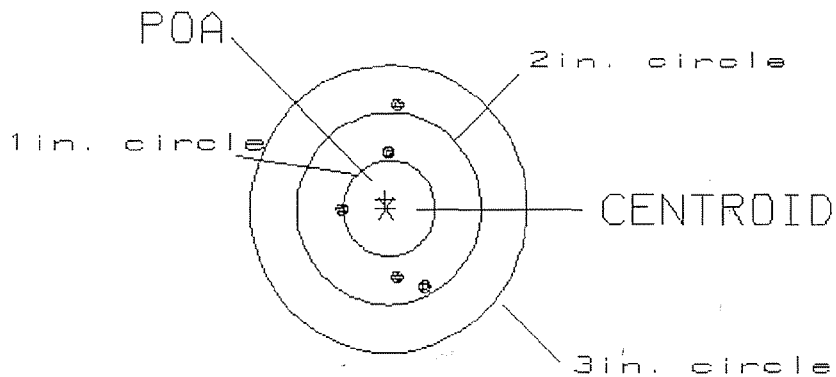

OF SHOTS= 5

IN CIRCLE

HS= .90
VS= 1.81
GS= 1.83

0
4
5

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
 POA TO CENTROID: .260
 MIN RADIUS : .262
 MEAN RADIUS : 1.010
 MAX RADIUS : 1.784
 CENTROID X : -.082
 CENTROID Y : .247

7 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6702949

CENTERFIRE PATTERN # 2

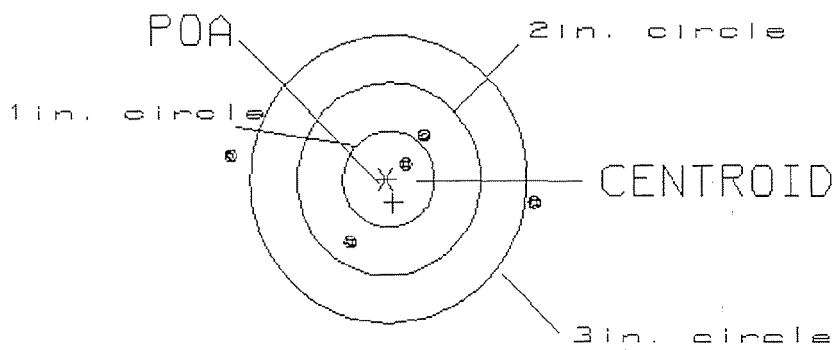

OF SHOTS= 5

IN CIRCLE

HS= 3.37
 VS= 1.11
 GS= 3.41

1
 3
 3

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 3
 POA TO CENTROID: .205
 MIN RADIUS : .776
 MEAN RADIUS : 1.805
 MAX RADIUS : 2.757
 CENTROID X : -.139
 CENTROID Y : .150

7 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6782949

CENTERFIRE PATTERN # 3

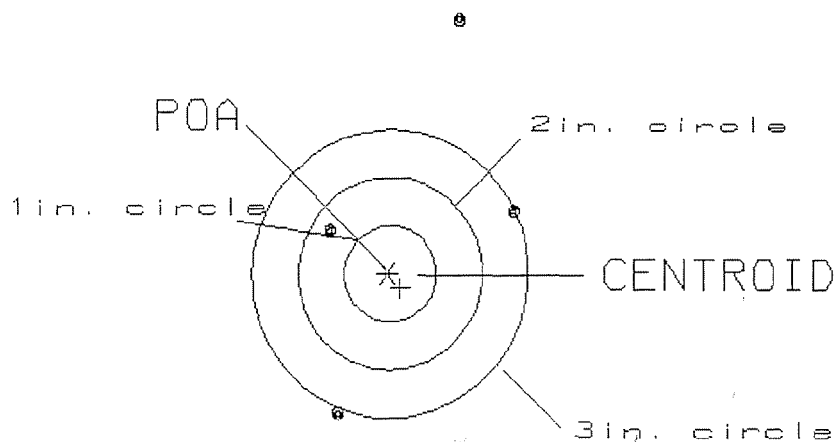

OF SHOTS= 5

IN CIRCLE

HS= 2.17
 VS= 4.97
 GS= 5.21

0
 1
 2

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL # C6702949

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	<u>6</u> <u>6</u> <u>5</u>	10-29-97	C/K
CONT.	G) SAFETY OFF FORCE	<u>8</u> <u>5</u> <u>8</u>	10-29-97	C/K
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.022</u> <u>.021</u> <u>.022</u>	10-29-97	CK
	J) ASSEMBLE STOCK		10-23-97	CR
	K) ASSEMBLE SWIVEL STUDS		11-11-97	CR
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		10-23-97	CR
	M) IRON SIGHT ALIGNMENT		10-23-97	CR
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		10-23-97	CR
640	GALLERY TEST AND TARGET	L 75 R 75	11/7/97	PB
	A) MALFUNCTIONS		11/7/97	PB
	B) PIERCED PRIMERS		11/7/97	PB
645	INSPECT FOR LIVE AMMO		11/7/97	PB
655	FINAL INSPECTION A) HEADSPACE		11-11-97	CK
	B) TRIGGER PULL	<u>2.48</u> <u>2.53</u> <u>2.52</u> <u>2.50</u> <u>2.59</u>	11/10/97	TRP
	C) FUNCTION		11-11-97	C/K
660	PACK			

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6702949

DATE 10-21-97

TESTER TM

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.57	2.61	2.60		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.43	2.63	2.62		
PULL #3	2.54	2.49	2.57		
PULL #4	2.50	2.61	2.63		
PULL #5	2.53	2.63	2.61		
TOTAL	12.57	12.97	13.03		
AVG.	2.51	2.59	2.60		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	2.99	3.05		
PULL #2	3.10	3.00		
PULL #3	2.98	3.09		
PULL #4	3.01	3.14		
PULL #5	3.03	3.11		
TOTAL	15.11	15.39		
AVG.	3.02	3.07		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.99	3.94		3.99
PULL #2	4.04	3.99		4.09
PULL #3	3.96	3.98		4.17
PULL #4	3.99	4.01		3.98
PULL #5	3.97	3.98		4.01
TOTAL	19.95	19.90		20.24
AVG.	3.99	3.98		4.04

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:
- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM

proof of purchase



06702949

owner registration sticker



06702949

Do Not Use

VERY IMPORTANT
INSTRUCTION BOOK
ENCLOSED TO ASSURE
SAFE USE OF THIS
FIREARM

SERIAL NO
C6702949

46

ORDER NO
25705

19RR

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Trade Name & Marque Deposited

5705 C6702949

ORDER 25705

MODEL 700™ M24

UPC



ORDER 25705

MODEL 700™ M24

UPC



SERIAL NO

