

UPC



C6702951

ORDER NO. 25705

BARREL LENGTH 24"

CAPACITY * 6

*INCLUDES 1 IN CHAMBER

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6702951
29 Sep 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.282667$
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $.194$
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.342836$

THE AMR FOR THIS RIFLE IS: 1.033

CENTROIDAL DISTANCES

0 TO 1	.0711969
1 TO 2	.763236
1 TO 3	.239654


2
3
+ <----POA

PATTERN #: 1
 POA TO CENTROID: .071
 MIN RADIUS : .395
 EAN RADIUS : .748
 MAX RADIUS : 1.199
 CENTROID X : -.062
 CENTROID Y : -.035

29 Sep 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6702951

CENTERFIRE PATTERN # 1

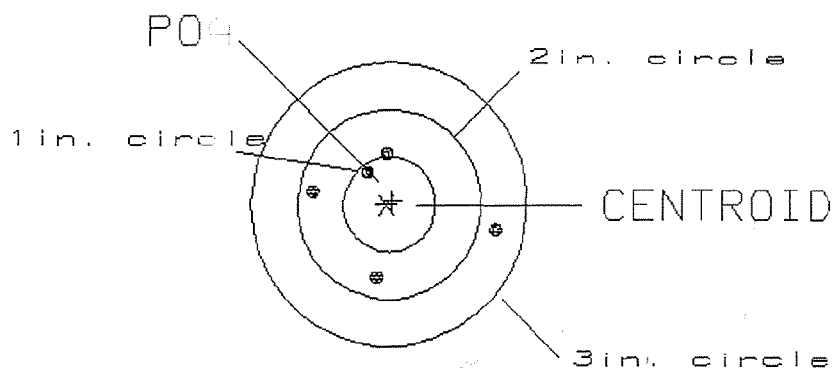

OF SHOTS= 5

IN CIRCLE

HS= 1.99

1

VS= 1.32

4

GS= 2.02


5

PATTERN #: 2
 POA TO CENTROID: .796
 MIN RADIUS : .734
 MEAN RADIUS : 1.754
 MAX RADIUS : 3.452
 CENTROID X : -.677
 CENTROID Y : .417

29 Sep 1997

FILE://Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6702951

CENTERFIRE PATTERN # 2

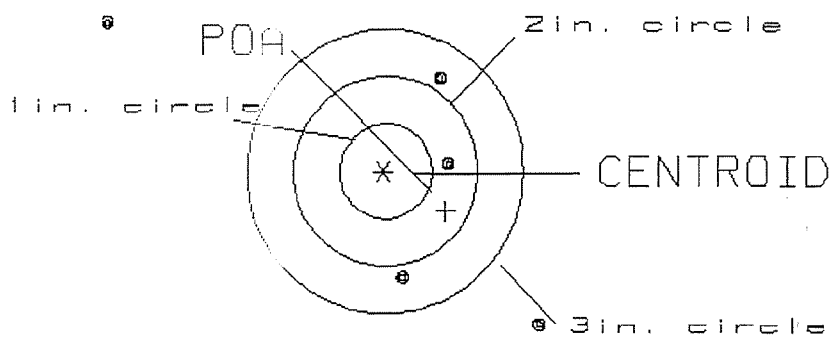

OF SHOTS= 5

IN CIRCLE

HS= 4.70

0

VS= 3.28

1

GS= 5.73

3

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 3

POA TO CENTROID: .228
MIN RADIUS : .378
MEAN RADIUS : .598
MAX RADIUS : .926
CENTROID X : -.109
CENTROID Y : .200

29 Sep 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6702951

CENTERFIRE PATTERN # 3

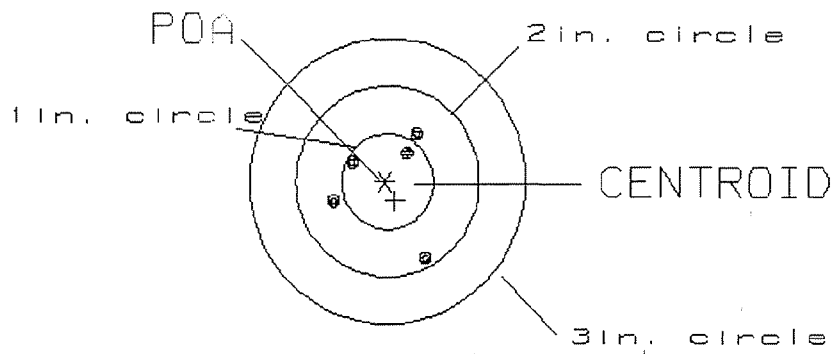

OF SHOTS= 5

IN CIRCLE

HS= .96
VS= 1.38
GS= 1.38

2
5
5

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C 6702951

DATE 9-17-97

TESTER TRO

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.22	2.39	2.51	2.51	MIN. SETTING,
PULL #2	2.17	2.42		2.56	NO AVG. OF 5
PULL #3	2.26	2.45		2.54	READINGS ACCEPT-
PULL #4	2.28	2.40		2.55	ABLE LESS THAN 2#
PULL #5	2.27	2.38		2.50	
TOTAL	11.20	12.04		12.66	
AVG.	2.24	2.40		2.53	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.00	3.04		
PULL #2	2.89	3.06		
PULL #3	2.98	3.14		
PULL #4	3.04	3.13		
PULL #5	2.97	3.17		
TOTAL	14.88	15.54		
AVG.	2.97	3.10		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.59	3.96		3.89
PULL #2	3.58	3.98		3.85
PULL #3	3.56	3.88		3.75
PULL #4	3.62	3.95		3.86
PULL #5	3.65	3.74		3.83
TOTAL	18.00	19.71		19.18
AVG.	3.60	3.94		3.83

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL # C 6702951


OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	<u>5</u> <u>5</u> <u>5</u>	9-19-97	CR
CONT.	G) SAFETY OFF FORCE	<u>3</u> <u>3</u> <u>3</u>	9-19-97	CR
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.021</u> <u>.022</u> <u>.021</u>	9-19-97	CR
	J) ASSEMBLE STOCK		9-18-97	CR
	K) ASSEMBLE SWIVEL STUDS		9-29-97	CIC
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		9-18-97	CR
	M) IRON SIGHT ALIGNMENT		9-18-97	CR
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		9-18-97	CR
640	GALLERY TEST AND TARGET	^{65 85} R. L.	9-27-97	DH
	A) MALFUNCTIONS		9-27-97	DH
	B) PIERCED PRIMERS		9-27-97	DH
645	INSPECT FOR LIVE AMMO		9-27-97	DH
655	FINAL INSPECTION A) HEADSPACE		9-29-97	CIC
	B) TRIGGER PULL	<u>2.44</u> <u>2.46</u> <u>2.51</u> <u>2.36</u> <u>2.47</u>	9-29-97	RP
	C) FUNCTION		9-29-97	CIC

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS



46 FORM

BARBER - M24 0047079

Do Not Use

Do Not Use

LOT #25

SERIAL NO.



C6702951

ORDER 25705
MODEL 700™ M24
UPC



ORDER 25705
MODEL 700™ M24
UPC



Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Déposée.

VERY IMPORTANT!
Instruction Book
enclosed to assure
safe use of this
firearm.

SERIAL NO. C6702951	46
ORDER NO. 25705	
29DR	

5705 C6702951

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 004709947118