

C6225056

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5715**

\*Includes 1 in chamber.



*Smith  
Smead*

**Remington**  
REG. U.S. PAT. & TM. OFF.

**MODEL 700™ M24**


**VERY IMPORTANT:**  
Instruction Book  
enclosed to assure  
safe use of this  
firearm.

**SERIAL NO.**  
C6225056

**ORDER NO.**  
5716

MADE IN ILION, N.Y., U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

Ø1

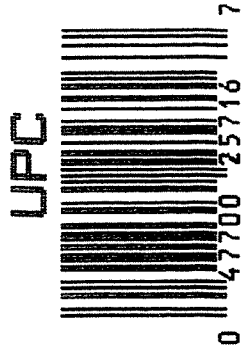

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225056

| OP. #        | OP. NAME                                                       | READINGS | DATE    | INIT |
|--------------|----------------------------------------------------------------|----------|---------|------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   | 4 12     | 89      | RW   |
| 600          | Proof                                                          | 4 12     | 89      | RW   |
| 607          | Check Headspace                                                | 4 12     | 89      | RW   |
| 610          | Dis-assemble Gun                                               | 4 12     | 89      | RW   |
| 612          | Magnaflux Barrel<br>Action                                     |          | 4/13/89 | KCR  |
|              | Magnaflux Bolt                                                 |          | 4/14/89 | KCR  |
| 615          | Rollmark Caliber                                               |          | 4/14/89 | MS.  |
| 617          | Drill and Tap Sight Holes                                      | 4 14     | 89      | FB   |
| 618          | Polish Barrel RB                                               | 4 14     | 89      | BT   |
| 620          | Apply Coatings<br>(Barrel Action)                              |          | 4/19/89 | TJA  |
|              | Apply Coating (Bolt)                                           |          |         |      |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          | 5/4/89  | RW   |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          | 5/4/89  | RW   |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          | 5/4/89  | RW   |
|              | D) Oil Firing Pin Ass'y                                        |          | 5/4/89  | RW   |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          | 5/9/89  | WB   |

| op. #        | OP. NAME                                                    | READINGS |        |        |      |      | DATE       | INIT |
|--------------|-------------------------------------------------------------|----------|--------|--------|------|------|------------|------|
| 625<br>cont. | F) Safety On Force                                          | 7        | 6      | 7      |      |      | 5/10/89    | JK   |
|              | G) Safety Off Force                                         | 4        | 3      | 4      |      |      | 5/10/89    | JK   |
|              | H) Trigger Pull Test & Retainability                        |          |        |        |      |      | 3/9/89     | WOB  |
|              | I) Firing Pin Indent                                        | .020     | .020.5 | .020.5 |      |      | 5/10/89    | JK   |
|              | J) Assemble Stock                                           |          |        |        |      |      | 5/11/89    | RW   |
|              | K) Assemble Swivel Studs                                    |          |        |        |      |      | 16 May 89  | QD   |
|              | L) Attach Front and Rear Sight Assemblies                   |          |        |        |      |      | 5/11/89    | RW   |
|              | M) Iron Sight Alignment                                     |          |        |        |      |      | 5/11/89    | RW   |
|              | N) Detach Front & Rear Sights & place in numbered container |          |        |        |      |      | 5/11/89    | RW   |
|              | O) Attach Scope to Rifle                                    |          |        |        |      |      | 5/11/89    | JK   |
|              | P) Detach & Attach Scope 20 Times                           |          |        |        |      |      | 5/11/89    | JK   |
| 640          | Gallery Target & Test                                       | 63       | R      | 90L    |      |      | 5/12/89    | DH   |
|              | A) Time                                                     |          |        |        |      |      | 5/12/89    | DH   |
|              | B) Malfunctions                                             |          |        |        |      |      | 5/12/89    | DH   |
|              | C) Pierced Primers                                          |          |        |        |      |      | 5/12/89    | DH   |
|              | D) Optical Clarity of Scope                                 |          |        |        |      |      | 5/12/89    | DH   |
| 645          | Inspect for Live Ammo                                       |          |        |        |      |      | 5/12/89    | DH   |
| 655          | Final Inspection                                            |          |        |        |      |      |            |      |
|              | A) Headspace                                                |          |        |        |      |      | 16 May 89  | QD   |
|              | B) Trigger Pull                                             | 2.58     | 2.86   | 2.90   | 2.85 | 2.84 | 16 May 89  | QD   |
|              | C) Function                                                 |          |        |        |      |      | 16 May 89  | QD   |
| 660          | Pack                                                        |          |        |        |      |      | 27 June 89 | QD   |

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50#+ .50#

3.00#+ .75#

4.00#+1.00#

SERIAL NO. 5056  
66348925

DATE 10 Oct 89

TESTER 928

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# |       | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|-------|------------------------------------------------------------------------|
| PULL #1 | 2.27             | 2.15                     | 2.24                           | 2.63  | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.17             | 2.10                     | 2.21                           | 2.78  |                                                                        |
| PULL #3 | 2.21             | 2.19                     | 2.28                           | 2.70  |                                                                        |
| PULL #4 | 2.20             | 2.14                     | 2.32                           | 2.62  |                                                                        |
| PULL #5 | 2.20             | 2.14                     | 2.31                           | 2.74  |                                                                        |
| TOTAL   | 11.05            | 10.72                    | 11.36                          | 13.47 |                                                                        |
| AVG.    | 2.21             | 2.144                    | 2.272                          | 2.694 |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES |  | COMMENTS |
|---------|------------------|--------------------------|--|----------|
| PULL #1 | 2.98             | 2.95                     |  |          |
| PULL #2 | 2.95             | 2.95                     |  |          |
| PULL #3 | 2.93             | 2.94                     |  |          |
| PULL #4 | 2.95             | 3.02                     |  |          |
| PULL #5 | 2.98             | 2.92                     |  |          |
| TOTAL   | 14.79            | 14.78                    |  |          |
| AVG.    | 2.958            | 2.956                    |  |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.07             | 4.01                     |                                | 4.17                                 |
| PULL #2 | 4.07             | 4.00                     |                                | 4.21                                 |
| PULL #3 | 4.10             | 3.99                     |                                | 4.21                                 |
| PULL #4 | 4.07             | 3.98                     |                                | 4.17                                 |
| PULL #5 | 4.04             | 3.91                     |                                | 4.20                                 |
| TOTAL   | 20.35            | 19.89                    |                                | 20.96                                |
| AVG.    | 4.07             | 3.978                    |                                | 4.192                                |

CENTROIDAL DISTANCE CALCULATIONS  
FOR RIFLE # 06225056  
15 May 1989

CENTROIDAL DISTANCES

|      |   |         |
|------|---|---------|
| 0 TO | 1 | .300541 |
| 1 TO | 2 | .281    |
| 1 TO | 3 | .130587 |
| 1 TO | 4 | .217187 |
| 1 TO | 5 | .210354 |



 (----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .374  
 THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0992  
 THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .375471  
 THE AMR FOR THIS RIFLE IS: 1.011

15 May 1985

FILE:/PATTERNING/CENTERFIRE\_PATT/06023056

## CENTERFIRE PATTERNS # 1

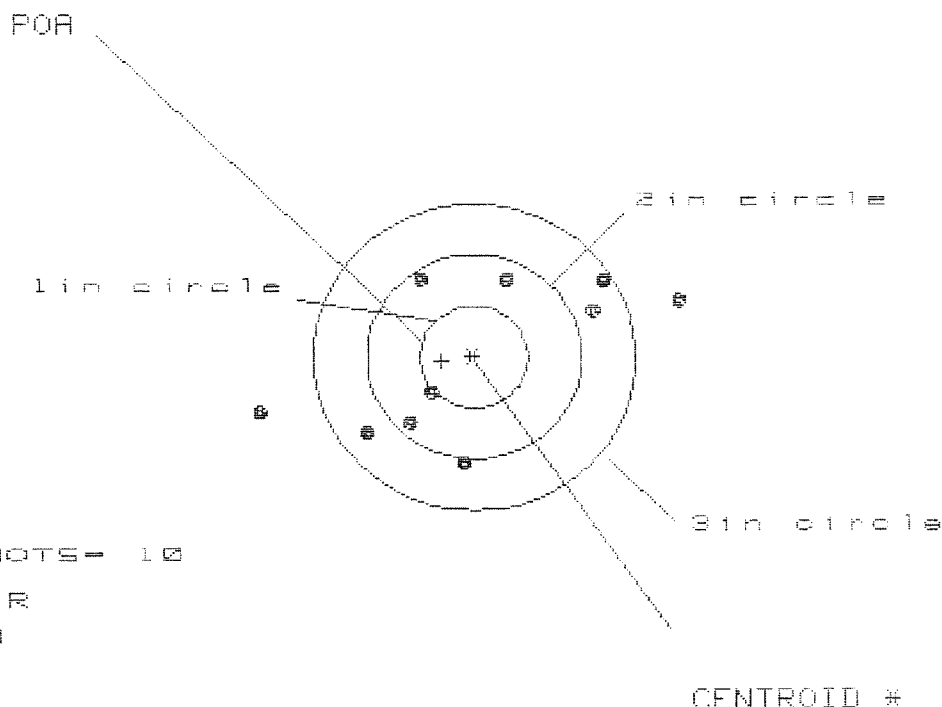

# OF SHOTS = 10

# IN CIR

1 in = 0

2 in = 4

3 in = 8

HS = 3.0000

VS = 1.821

GS = 4.037

| PATTERN #                     | 1      | 2      | 3      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | 1.918  | 1.700  | 1.240  |
| MINIMUM X                     | -1.962 | -1.198 | -.985  |
| MAXIMUM Y                     | .783   | .723   | .786   |
| MINIMUM Y                     | -1.038 | -1.098 | -1.035 |
| CENTROID X                    | .298   | .516   | .303   |
| CENTROID Y                    | .039   | .099   | .036   |
| POA TO CENTROID in.           | .300   | .525   | .305   |
| MIN RADIUS                    | .540   | .658   | .541   |
| MEAN RADIUS                   | 1.205  | 1.117  | 1.002  |
| MAX RADIUS                    | 2.035  | 1.775  | 1.468  |
| HORIZONTAL SPREAD             | 3.880  | 2.898  | 2.225  |
| VERTICAL SPREAD               | 1.821  | 1.821  | 1.821  |
| EXTREME SPREAD                | 4.037  | 3.190  | 2.709  |
| NUMBER IN ONE INCH CIRCLE =   | 0      |        |        |
| NUMBER IN TWO INCH CIRCLE =   | 4      |        |        |
| NUMBER IN THREE INCH CIRCLE = | 8      |        |        |

15 May 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/08225056

## CENTERFIRE PATTERNS

# 2

POA

1 in circle

2 in circle

3 in circle

# OF SHOTS- 10

# IN CIR

1 in = 2

2 in = 8

3 in = 9

HS= 2.807

VS= 2.041

GS= 3.042

CENTROID \*

| PATTERN #                   | : | 2      |       |       |
|-----------------------------|---|--------|-------|-------|
| SHOTS (BEST OF)             | : | 10     | 9     | 8     |
| MAXIMUM X                   | : | .709   | .476  | .512  |
| MINIMUM X                   | : | -2.098 | -.843 | -.807 |
| MAXIMUM Y                   | : | 1.284  | 1.254 | .924  |
| MINIMUM Y                   | : | -.757  | -.787 | -.630 |
| CENTROID X                  | : | .529   | .762  | .726  |
| CENTROID Y                  | : | .199   | .229  | .072  |
| POA TO CENTROID in.         | : | .565   | .795  | .729  |
| MIN RADIUS                  | : | .286   | .177  | .052  |
| MEAN RADIUS                 | : | .885   | .706  | .609  |
| MAX RADIUS                  | : | 2.114  | 1.287 | 1.024 |
| HORIZONTAL SPREAD           | : | 2.807  | 1.319 | 1.319 |
| VERTICAL SPREAD             | : | 2.041  | 2.041 | 1.554 |
| EXTREME SPREAD              | : | 3.042  | 2.332 | 1.666 |
| NUMBER IN ONE INCH CIRCLE   | = |        | 2     |       |
| NUMBER IN TWO INCH CIRCLE   | = |        | 8     |       |
| NUMBER IN THREE INCH CIRCLE | = |        | 9     |       |

15 May 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/06225056

## CENTERFIRE PATTERNS # 3

POA

1in circle

2in circle

3in circle

CENTROID \*

# OF SHOTS- 10

# IN CIR

1in = 3

2in = 6

3in = 8

HS= 2.813

VS= 2.283


GS= 3.020

| PATTERN #                   | : | 3      |        |        |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | 1.565  | 1.426  | 1.043  |
| MINIMUM X                   | : | -1.248 | -.835  | -.656  |
| MAXIMUM Y                   | : | 1.100  | .614   | .630   |
| MINIMUM Y                   | : | -1.183 | -1.061 | -1.045 |
| CENTROID X                  | : | .415   | .554   | .375   |
| CENTROID Y                  | : | .097   | -.025  | -.041  |
| POA TO CENTROID in.         | : | .426   | .554   | .378   |
| MIN RADIUS                  | : | .262   | .380   | .204   |
| MEAN RADIUS                 | : | .887   | .808   | .694   |
| MAX RADIUS                  | : | 1.664  | 1.432  | 1.069  |
| HORIZONTAL SPREAD           | : | 2.813  | 2.261  | 1.699  |
| VERTICAL SPREAD             | : | 2.283  | 1.675  | 1.675  |
| EXTREME SPREAD              | : | 3.020  | 2.313  | 1.792  |
| NUMBER IN ONE INCH CIRCLE   | = |        | 3      |        |
| NUMBER IN TWO INCH CIRCLE   | = |        | 6      |        |
| NUMBER IN THREE INCH CIRCLE | = |        | 8      |        |

15 May 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/C6225056

## CENTERFIRE PATTERNS # 4

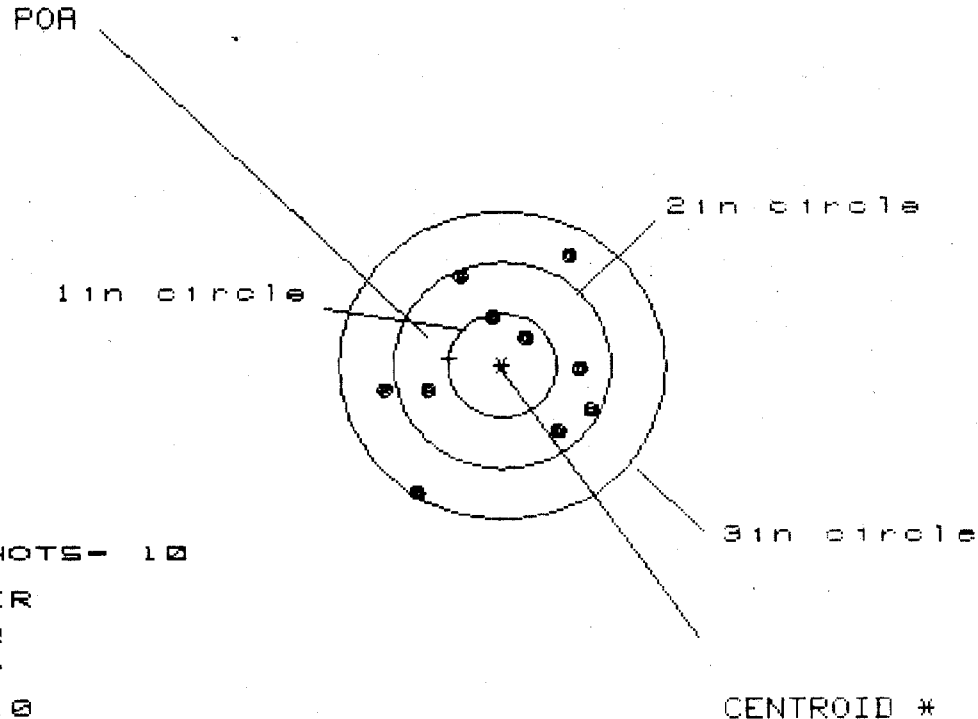

# OF SHOTS- 10

# IN CIR

1 in = 2

2 in = 7

3 in = 10

HS= 1.950

VS= 2.319

GS= 2.673

| PATTERN #                     | 1      | 9      | 8      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | .861   | .777   | .837   |
| MINIMUM X                     | -1.089 | -1.173 | -1.113 |
| MAXIMUM Y                     | 1.107  | .973   | .823   |
| MINIMUM Y                     | -1.212 | -.723  | -.602  |
| CENTROID X                    | .487   | .571   | .511   |
| CENTROID Y                    | -.068  | .066   | -.055  |
| POA TO CENTROID in.           | .491   | .575   | .514   |
| MIN RADIUS                    | .386   | .230   | .360   |
| MEAN RADIUS                   | .872   | .780   | .752   |
| MAX RADIUS                    | 1.432  | 1.225  | 1.136  |
| HORIZONTAL SPREAD             | 1.950  | 1.950  | 1.950  |
| VERTICAL SPREAD               | 2.319  | 1.696  | 1.425  |
| EXTREME SPREAD                | 2.673  | 2.119  | 1.966  |
| NUMBER IN ONE INCH CIRCLE =   | 2      |        |        |
| NUMBER IN TWO INCH CIRCLE =   | 7      |        |        |
| NUMBER IN THREE INCH CIRCLE = | 10     |        |        |

15 May 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/06225056

## CENTERFIRE PATTERNS # 5

POA

1 in circle

2 in circle

3 in circle

CENTROID \*

# OF SHOTS- 10

# IN CIR

1 in - 0

2 in - 4

3 in = 8

HS= 3.277

VS= 2.559

GS= 3.286

| PATTERN #                   | 10     | 9      | 8      |
|-----------------------------|--------|--------|--------|
| SHOTS (BEST OF)             | 10     | 9      | 8      |
| MAXIMUM X                   | 1.270  | 1.047  | .818   |
| MINIMUM X                   | -2.007 | -1.829 | -.895  |
| MAXIMUM Y                   | 1.355  | 1.366  | 1.254  |
| MINIMUM Y                   | -1.204 | -1.193 | -1.304 |
| CENTROID X                  | .141   | .364   | .593   |
| CENTROID Y                  | -.101  | -.112  | -.000  |
| POA TO CENTROID in.         | .174   | .381   | .593   |
| MIN RADIUS                  | .571   | .488   | .307   |
| MEAN RADIUS                 | 1.206  | 1.080  | .917   |
| MAX RADIUS                  | 2.010  | 2.036  | 1.306  |
| HORIZONTAL SPREAD           | 3.277  | 2.876  | 1.713  |
| VERTICAL SPREAD             | 2.559  | 2.559  | 2.559  |
| EXTREME SPREAD              | 3.286  | 3.146  | 2.566  |
| NUMBER IN ONE INCH CIRCLE   | = 0    |        |        |
| NUMBER IN TWO INCH CIRCLE   | = 4    |        |        |
| NUMBER IN THREE INCH CIRCLE | = 8    |        |        |

## RECEIVING AND EXAMINING REPORT

BARBER M24 0047922

COMMENTS

ORDER

R

97-04326

INITIAL CUSTOMER ORDER NO.

WOG 2 OF 9 W/LEUPOLD 10X SCOPE

S/N 89 0013

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

02/18/97

02/18/97

C6225056

700

7.62

NATO

ACCESSORIES

FROM:

SHIP TO:

DEPT OF THE ARMY  
COMMANDER ATTN SFC BARTON  
2ND BN 10TH SFG (A)  
FT CARSON

CO 80913

DEPT OF THE ARMY  
COMMANDER ATTN SFC BARTON  
2ND BN 10TH SFG (A)  
FT CARSON

CO  
80913

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

CUST NO:162097 C.O.D

FROM DATE

ESTIMATED

VIA

WRITE ☐

UPS

GUN CONDITION

- ☐ NEW  
☐ LIGHTLY WORN  
☐ WORN  
☐ VERY WORN  
☐ UNREPAIRABLE  
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

TRIGGER GROUP

BOLT ASSY.

BARREL ASSY.

REC. ASSY.

WOOD

METAL

MAIN FAULT

W55H097077#543

PARTS

Barrel

96003

COMMENTS

Repowder Coat Trigger Guard  
Assy, Front & Rear Sight Bases  
Retine Scope Base, Rings &  
Swivel Studs  
Scope Sent Back To Factory  
for Inspect.

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

2/17/97

3/13/97

3/13/97

3/13/97

OFFICE COPY

RD6925 REV. 11/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

BARBER - M24 0047922 M2400047961

## Final Inspection

Sn: C6225056

DATE REC'D: 2/13/97

DATE RET'D:

Auditor: RW

## Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

## Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ Iron Sights☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

## 21 DAY TURN - AROUND

*Barrel*

M-24

CONTRACT # DAAA09-92-C-0834

R&amp;E NO.

SERIAL NO.

*C6225056*

| LOG IN DATE: / /  |                          | DATE           | INIT.              |
|-------------------|--------------------------|----------------|--------------------|
| INSPECT & VERIFY: |                          |                |                    |
| OP. #             | OP. NAME                 |                |                    |
| 550               | DIS-ASSEMBLE GUN         |                |                    |
| 560 A             | RE-BARREL AT CUSTOM SHOP |                |                    |
| B                 | DRILL & TAP              |                |                    |
| C                 | POLISH                   |                |                    |
| 575               | ASSEMBLE                 |                |                    |
| 600               | PROOF                    | <i>2/12/97</i> |                    |
| 605               | CHECK HEADSPACE          |                |                    |
| 610               | DIS-ASSEMBLE             |                |                    |
| 612               | MAGNAFLUX                |                |                    |
| 615               | ROLLMARK CALIBER         |                |                    |
| 618               | ROTO-BLAST               |                |                    |
| 620               | APPLY COATINGS           |                |                    |
| 625 A             | FINAL ASSEMBLY           |                |                    |
| B                 | TRIGGER PULL TEST        |                |                    |
| C                 | SAFETY ON FORCE          |                |                    |
| D                 | SAFETY OFF FORCE         |                |                    |
| E                 | FIRING PIN INDENT        |                |                    |
| 640               | TARGET                   | <i>3/13/97</i> | <i>[Signature]</i> |
| 655               | FINAL INSPECT            | <i>3/12/97</i> | <i>RW</i>          |
| 660               | PACK                     |                |                    |
|                   | QAR INSPECTION           | SHIP DATE      |                    |

**BARBER - M24 0047925**

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225056  
21 Mar 1997 .

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0292  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0986  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .102833

THE AMR FOR THIS RIFLE IS: 1

**CENTROIDAL DISTANCES**

|      |   |         |
|------|---|---------|
| Ø TO | 1 | .595483 |
| 1 TO | 2 | .779678 |
| 1 TO | 3 | .779672 |
| 1 TO | 4 | .300135 |
| 1 TO | 5 | 1.25616 |


5                      3  
2 +                      4    <----POA  
                            1

PATTERN #: 1  
 POA TO CENTROID: .595  
 MIN RADIUS : .119  
 MEAN RADIUS : 1.419  
 MAX RADIUS : 2.011  
 CENTROID X : .582  
 CENTROID Y : -.126

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/C6225056

CENTERFIRE PATTERN # 1

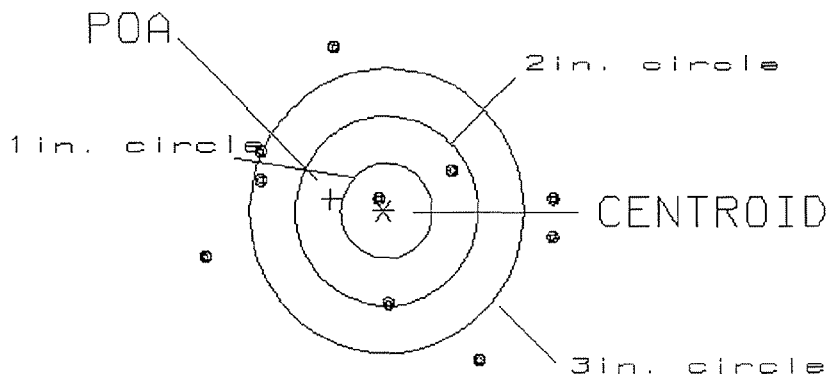

# OF SHOTS= 10

# IN CIRCLE

HS= 3.80  
 VS= 3.30  
 GS= 3.85


1  
 3  
 4

PATTERN #: 2  
 POA TO CENTROID: .189  
 MIN RADIUS : .084  
 MEAN RADIUS : .828  
 MAX RADIUS : 1.637  
 CENTROID X : -.189  
 CENTROID Y : -.010

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/C6225056

CENTERFIRE PATTERN # 2

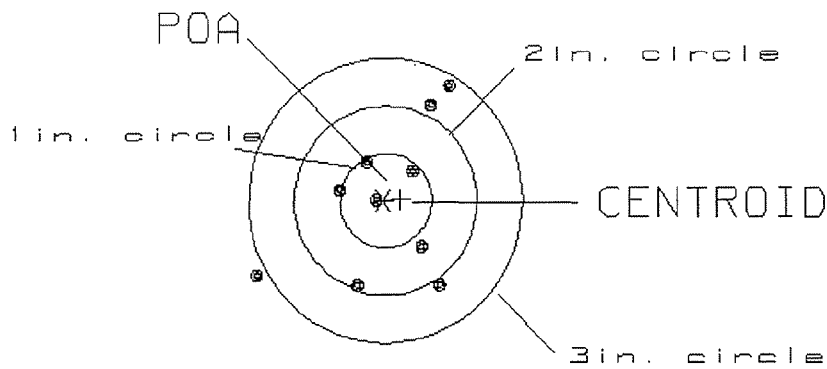

# OF SHOTS= 10

# IN CIRCLE

HS= 2.11  
 VS= 2.13  
 GS= 2.93

3  
 6  
 9

**BARBER - M24 0047928**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 3

POA TO CENTROID: .467  
 MIN RADIUS : .189  
 MEAN RADIUS : .922  
 MAX RADIUS : 2.347  
 CENTROID X : .070  
 CENTROID Y : .462

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/C6225056

**CENTERFIRE PATTERN # 3**

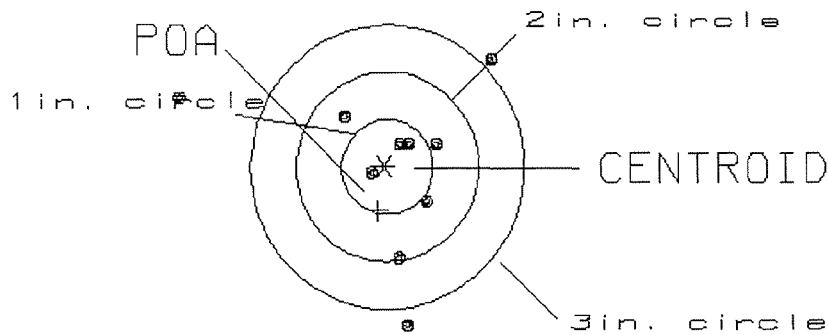

# OF SHOTS= 10

# IN CIRCLE

HS= 3.38  
 VS= 2.78  
 GS= 3.44


3  
 6  
 7

PATTERN #: 4  
 POA TO CENTROID: .313  
 MIN RADIUS : .403  
 MEAN RADIUS : .834  
 MAX RADIUS : 1.817  
 CENTROID X : .282  
 CENTROID Y : -.135

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/C6225056

# CENTERFIRE PATTERN # 4

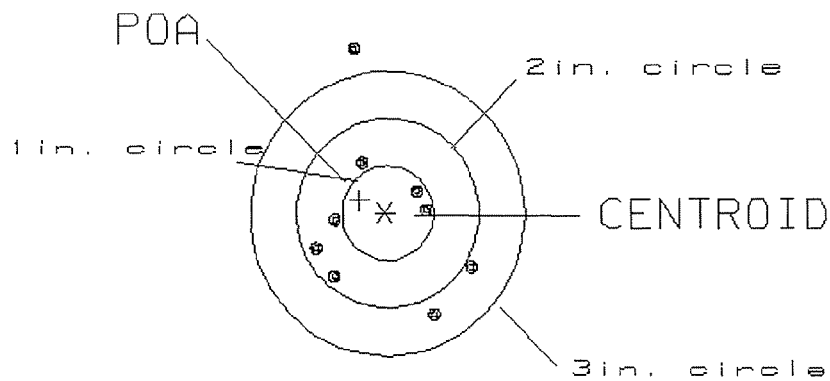

# OF SHOTS= 10

# IN CIRCLE

HS= 1.73  
 VS= 2.86  
 GS= 3.00

3  
 7  
 9

**BARBER - M24 0047930**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 050

POA TO CENTROID: .671

MIN RADIUS : .550

MEAN RADIUS : .998


MAX RADIUS : 1.559

CENTROID X : -.599

CENTROID Y : .302

21 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/CG225056

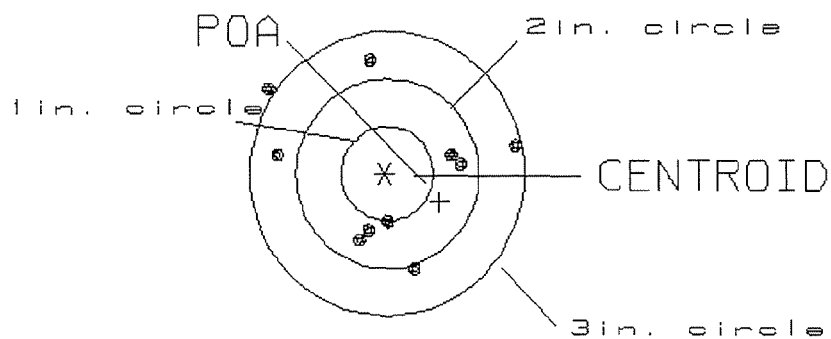**CENTERFIRE PATTERN # 5**

# OF SHOTS= 10

# IN CIRCLE

HS= 2.64

0

VS= 2.26

5

GS= 2.71

9