

06225082

MODEL 700™ M24

Model 700 M24™

Action

Barrel Length

Capacity

Order No. 5716

*Includes 1 in chamber.



RECEIVED BARBER M24 0048563 PORT

COMMENTS

ORDER
R 95-30733

INITIAL JJM	CUSTOMER ORDER NO. 10164	W/LEUPOLD 10X SCOPE M-24 SNIPER				
DATE RECEIVED 12/01/95	DATE OPENED 12/04/95	DATE CODE DI 9-88	SERIAL NUMBER C6225082	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62 NATO	
ACCESSORIES SCOPE MNTS		SCOPE BASE				

FROM:

US ARMY
C CO 3RD BN 7TH SFG (A)
FT CLAYTON PAN AM

34004

SHIP TO:

US ARMY
C CO 3RD BN 7TH SFG (A)
FT CLAYTON PAN AM

34004

CUST NO: 132573 C.O.D.L

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA DOOR
GUN CONDITION					REPAIR CHARGE
☐ NEW					EXCISE
☐ LIGHTLY WORN					TAX
☐ WORN					INSURANCE
☐ VERY WORN					UPS
☐ UNREPAIRABLE					PARCEL POST
☐ MARRED					TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS	COMMENTS					
96003 - Barrel	Repowder Coat Trigger Guard					
15677 - Mag Spring	Asby Front & Rear Sight					
	Pages					
	Reticle - Scope Base, Rings					
	& Swivel Studs					
	REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
	Phu	✓	✓	WB	WB	
	GALLERY TESTER	DATE	DATE	DATE	DATE	DATE
	Phu	12/5/95	12/15/95	12/15/95	12/15/95	

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0048563

PAYMENT:

Mastercard / Visa (circle one)

Card #:

Exp. Date:

Signature

RETURN:

☒ Clark Street Entrance☐ Via US Mail or UPS

(PLEASE PRINT CLEARLY)

FIREARMS DELIVERED TO PLANT

FILE NO 010164

DATE 12-03-95

CUSTOMER NAME:

ADDRESS:

ZIP:

PHONE:

FIREARM

MODEL: M-24

GAUGE: 7.62mm

SERIAL # C16225080

REMINGTON EMPLOYEE:

YES ☐ NO ☒

EMPLOYEE #

DEPT. #

CHECK FOR AMMUNITION

CONDITION:

WOOD GOOD FAIR POOR FANCY PLAIN

METAL GOOD FAIR POOR FANCY PLAIN

BARREL VT. RIB PLAIN DEER RSS

ACCESSORIES:

SCOPE: YES NO

(BRAND NAME/POWER)

SLING: YES NO

GUN CASE: YES NO (HARD-SOFT)

EXTRA BBL FOR GUN MENTIONED ABOVE:

OTHER (Note in this area items missing or added from orig. equipment)

CUSTOMER REQUEST:

SIGNATURE: [Signature]
(Person delivering firearm to Plant)

DATE: 30 Dec 95

SIGNATURE: [Signature]
(Security Officer)

DATE: 12-03-95

SIGNATURE: [Signature]
(Firearm picked up by)

DATE: 12-04-95

Arm Service Copy

CONTRACT # DAAA21-87-C-0086

New Barrel

GUN SERIAL # C6225082

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		12/5/95	RW
600	Proof		12/5/95	RW
607	Check Headspace		12/5/95	RW
610	Dis-assemble Gun		12/5/95	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		12/5/95	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		12/5/95	RW
	C) Inspect Ejector Hole for Chamfer		12/5/95	RW
	D) Oil Firing Pin Ass'y		12/5/95	RW
	E) Adjust Trigger Pull to Min Setting and Stake		12/5/95	RW

BARBER - M24 0048527					DATE	INIT
op. #	OP. NAME	READINGS				
625 cont.	F) Safety On Force					
	G) Safety Off Force					
	H) Trigger Pull Test & Retainability					
	I) Firing Pin Indent					
	J) Assemble Stock					
	K) Assemble Swivel Studs					
	L) Attach Front and Rear Sight Assemblies					
	M) Iron Sight Alignment					
	N) Detach Front & Rear Sights & place in numbered container					
	O) Attach Scope to Rifle					
	P) Detach & Attach Scope 20 Times					
640	Gallery Target & Test				12/16/95	BB
	A) Time					
	B) Malfunctions					
	C) Pierced Primers					
	D) Optical Clarity of Scope					
645	Inspect for Live Ammo				12/16/95	BB
655	Final Inspection					
	A) Headspace				12/19/95	RW
	B) Trigger Pull					
	C) Function				12/19/95	RW
660	Pack					

Final Inspection

Sn: C6225082

DATE REC'D: 12/1/95

DATE RET'D:

AUDITOR: MW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ IRON SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: _____

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225082
1 Jan 1900

CENTROIDAL DISTANCES

0 TO	1	.900614
1 TO	2	.876672
1 TO	3	.444541
1 TO	4	.841701
1 TO	5	.579338

1 4
2 2
+ +


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1618
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .500
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .533145

THE AMR FOR THIS RIFLE IS: 1.036

1 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225082

CENTERFIRE PATTERNS # 1

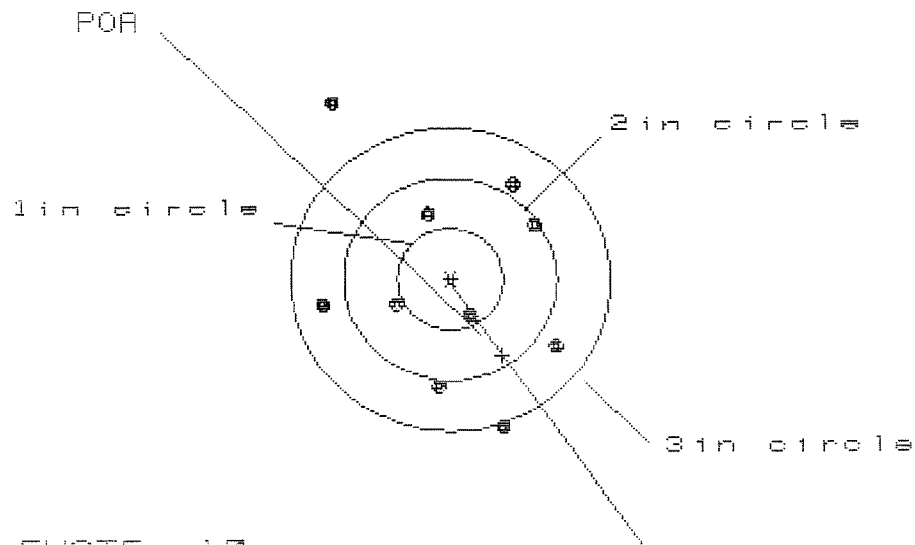

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 4

3 in = 8

HS= 2.197

VS= 3.210


GS= 3.574

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.972	.853	.900
MINIMUM X	-1.225	-1.344	-1.297
MAXIMUM Y	1.753	1.146	.989
MINIMUM Y	-1.457	-1.263	-.973
CENTROID X	-.491	-.372	-.419
CENTROID Y	.755	.561	.718
POA TO CENTROID in.	.901	.673	.832
MIN RADIUS	.438	.209	.371
MEAN RADIUS	1.075	.936	.890
MAX RADIUS	2.055	1.346	1.316
HORIZONTAL SPREAD	2.197	2.197	2.197
VERTICAL SPREAD	3.210	2.409	1.962
EXTREME SPREAD	3.574	2.411	2.226
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	8		

1 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225062

CENTERFIRE PATTERNS # 2

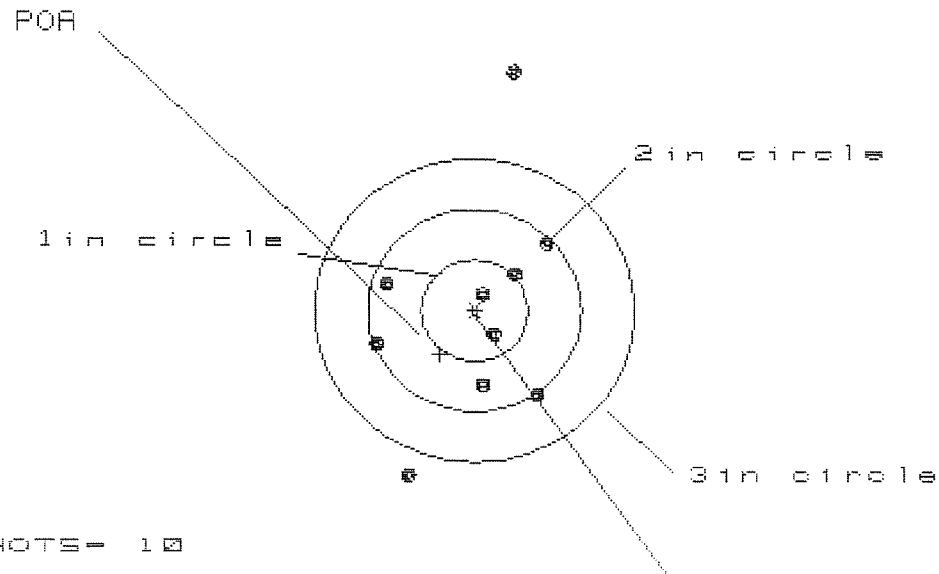

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 7

3 in = 8

HS= 1.543

VS= 3.981


GS= 4.120

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	
MAXIMUM X	:	.661	.705	.628
MINIMUM X	:	-.882	-.838	-.915
MAXIMUM Y	:	2.358	.938	.767
MINIMUM Y	:	-1.623	-1.361	-.784
CENTROID X	:	.324	.280	.357
CENTROID Y	:	.432	.170	.341
POA TO CENTROID in.	:	.540	.328	.493
MIN RADIUS	:	.152	.240	.187
MEAN RADIUS	:	.967	.805	.686
MAX RADIUS	:	2.391	1.495	.992
HORIZONTAL SPREAD	:	1.543	1.543	1.543
VERTICAL SPREAD	:	3.981	2.299	1.551
EXTREME SPREAD	:	4.120	2.652	1.862
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		8	

1 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225082

CENTERFIRE PATTERNS # 3

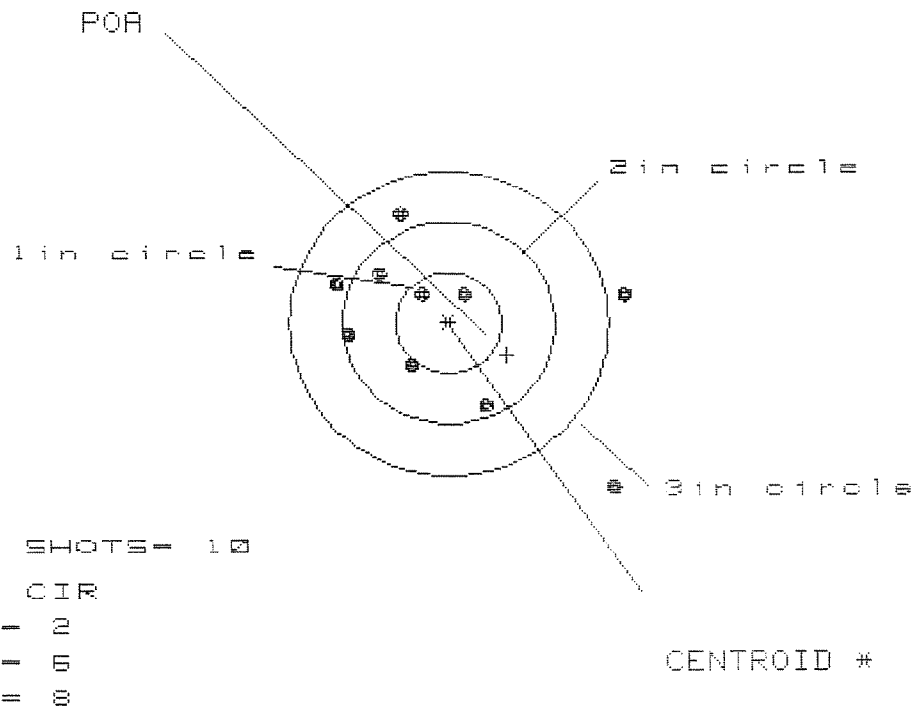


HS= 2.696
 VS= 2.737
 GS= 3.363

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.669	1.838	.756
MINIMUM X	:	-1.027	-.858	-.628
MAXIMUM Y	:	1.091	.908	.927
MINIMUM Y	:	-1.646	-1.035	-1.016
CENTROID X	:	-.547	-.716	-.946
CENTROID Y	:	.314	.497	.478
POA TO CENTROID in.	:	.631	.871	1.060
MIN RADIUS	:	.290	.167	.224
MEAN RADIUS	:	1.019	.818	.657
MAX RADIUS	:	2.239	1.844	1.266
HORIZONTAL SPREAD	:	2.696	2.696	1.384
VERTICAL SPREAD	:	2.737	1.943	1.943
EXTREME SPREAD	:	3.363	2.698	2.099
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		8	

1 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225082

CENTERFIRE PATTERNS # 4

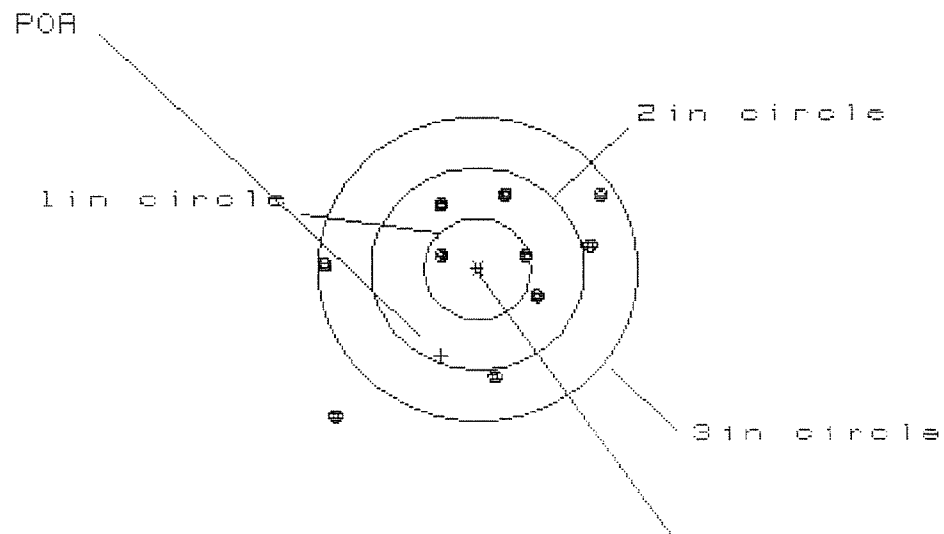

OF SHOTS = 10

IN CIR

1in = 2

2in = 5

3in = 8

HS = 2.570

VS = 2.203


GS = 3.313

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.107	.955	.754
MINIMUM X	:	-1.463	-1.615	-.719
MAXIMUM Y	:	.780	.622	.612
MINIMUM Y	:	-1.423	-1.190	-1.200
CENTROID X	:	.344	.496	.697
CENTROID Y	:	.861	1.019	1.029
POA TO CENTROID in.	:	.927	1.134	1.243
MIN RADIUS	:	.398	.328	.140
MEAN RADIUS	:	.986	.834	.699
MAX RADIUS	:	1.973	1.616	1.221
HORIZONTAL SPREAD	:	2.570	2.570	1.473
VERTICAL SPREAD	:	2.203	1.812	1.812
EXTREME SPREAD	:	3.313	2.664	2.059

1 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225082

CENTERFIRE PATTERNS # 5

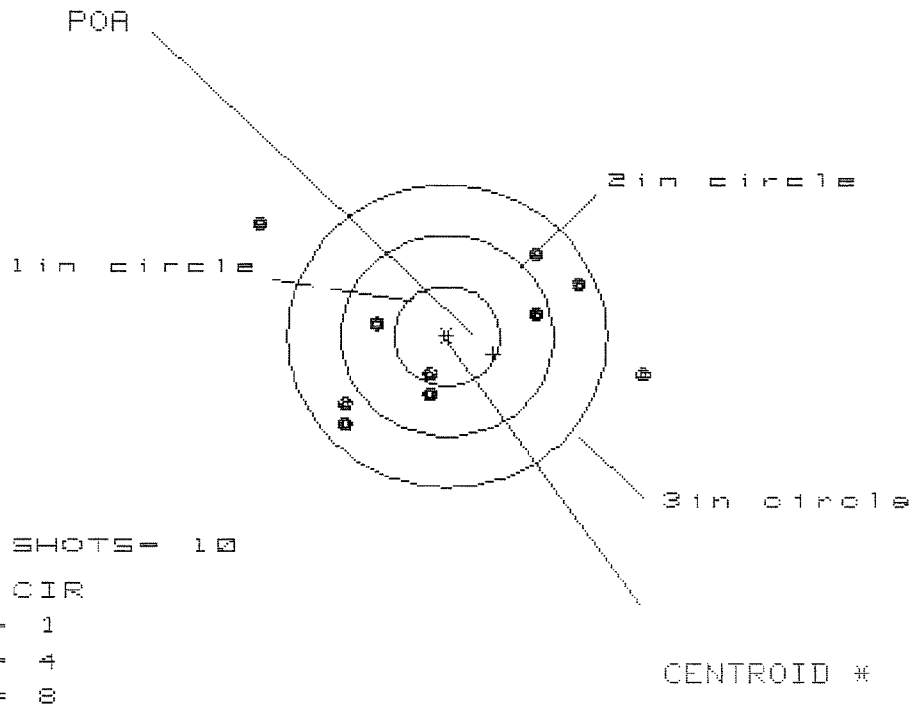

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 4

3 in = 8

HS= 3.563

VS= 1.972

GS= 3.866

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.793	1.596	1.216
MINIMUM X	-1.770	-1.195	-.996
MAXIMUM Y	1.143	.976	.947
MINIMUM Y	-.829	-.702	-.731
CENTROID X	-.439	-.242	-.441
CENTROID Y	.178	.051	.080
POA TO CENTROID in.	.473	.247	.448
MIN RADIUS	.442	.445	.349
MEAN RADIUS	1.134	1.015	.909
MAX RADIUS	2.107	1.612	1.357
HORIZONTAL SPREAD	3.563	2.791	2.212
VERTICAL SPREAD	1.972	1.678	1.678
EXTREME SPREAD	3.866	2.831	2.582
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	8		

OP.#	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock	8	9/88	FB
600	Proof	9	7/88	RW
607	Check Headspace	9	7/88	RW
610	Dis-assemble gun	9	7/88	RW
612	Magnaflux Barrel Action		9-14-88	pfe.
	Magnaflux Bolt		9-14-88	pfe.
615	Rollmark Caliber			
617	Drill & Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)		10-31-88	TJA
	Apply Coatings (Bolt)		10-31-88	TJA
625	Final Assembly A) Clean inside of Bolt Assembly		11/7/88	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		11/7/88	RW
	C) Inspect Ejector Hole for Chamfer		11/7/88	RW

OVER

OP. #	READINGS	DATE	INITIAL
625	D) Oil Firing Pin Ass'y	11/7/88	AW
cont.	E) Adjust Trigger Pull to Min. Setting and Stake	8/NOV 88	J.U
	F) Safety on Force	3 3 3	8/NOV 88
	G) Safety off Force	2 2 2	8/NOV 88
	H) Trigger Pull Test & Retainability		8/NOV 88
	I) Firing Pin Indent	.021 .021 .021	8/NOV 88
	J) Assemble Stock		11/16/88
	K) Attach Front & Rear Sight Assemblies		11/16/88
	L) Iron Sight Alignment		11/16/88
	M) Detach Front & Rear Sights & place in numbered container		11/16/88
	N) Attach Scope to Rifle		11/18/88
	O) Detach & Attach Scope 20 times		11/18/88
640	Gallery Target & Test	62 R 91 L	11/29/88
	A) Optical Clarity of Scope		11/29/88
645	Inspect for Live Ammo		11/29/88
655	Final Inspection		1 Dec 88
	A) Headspace		1 Dec 88
	B) Trigger Pull	269 253 270	270 269
	C) Function		1 Dec 88
	D) Assemble Swivel Studs		1 Dec 88
660	Pack		14 Dec 88

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS2.50# + .50#
3.00# + .75#
4.00# + 1.00#SERIAL NO. C6225082DATE 11-8-88TESTER JZ

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.54	2.47	2.63	2.69	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.49	2.55	2.59	2.53	
PULL #3	2.42	2.58	2.56	2.70	
PULL #4	2.65	2.52	2.56	2.70	
PULL #5	2.53	2.53	2.47	2.69	
TOTAL	12.63	12.65	12.81	13.31	
AVG.	2.526	2.530	2.562	2.662	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.20	3.20		
PULL #2	3.16	3.10		
PULL #3	3.14	3.16		
PULL #4	3.05	3.14		
PULL #5	3.18	3.14		
TOTAL	15.73	15.74		
AVG.	3.146	3.148		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.33	4.11		4.27
PULL #2	4.30	4.26		4.29
PULL #3	4.34	4.27		4.30
PULL #4	4.35	4.27		4.25
PULL #5	4.29	4.26		4.31
TOTAL	21.61	21.17		21.42
AVG.	4.322	4.234		4.284

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225082

CENTROIDAL DISTANCES

0 TO	1	.4792
1 TO	2	.318453
1 TO	3	.457411
1 TO	4	.32458
1 TO	5	.16556

13 <----POA
51

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .2002
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2458
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .317014
THE AMR FOR THIS RIFLE IS: .9344

29 May 1988

FILE:/PATTERNING/CENTERFIRE_PAT/06225062

CENTERFIRE PATTERNS # 1

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 8

3 in = 9

HS= 1.723

VS= 2.439

GS= 2.561

PATTERN #	1	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.752	.644	.619
MINIMUM X	-.971	-.845	-.870
MAXIMUM Y	1.508	1.254	.630
MINIMUM Y	-.931	-.763	-.606
CENTROID X	.103	.211	.236
CENTROID Y	-.468	-.636	-.793
POA TO CENTROID in.	.479	.670	.827
MIN RADIUS	.400	.264	.106
MEAN RADIUS	.818	.652	.528
MAX RADIUS	1.794	1.270	.927
HORIZONTAL SPREAD	1.723	1.489	1.489
VERTICAL SPREAD	2.439	2.017	1.236
EXTREME SPREAD	2.561	2.027	1.489
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	8		
NUMBER IN THREE INCH CIRCLE =	9		

29 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225082

CENTERFIRE PATTERNS

2

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 5

3 in = 10

HS = 2.031

VS = 2.202

GS = 2.457

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.906	.781	.638
MINIMUM X	:	-1.125	-1.149	-.572
MAXIMUM Y	:	1.276	1.358	1.266
MINIMUM Y	:	-.926	-.844	-.936
CENTROID X	:	.319	.444	.587
CENTROID Y	:	-.234	-.316	-.224
POA TO CENTROID in.	:	.396	.545	.629
MIN RADIUS	:	.117	.256	.298
MEAN RADIUS	:	.824	.771	.694
MAX RADIUS	:	1.345	1.366	1.282
HORIZONTAL SPREAD	:	2.031	1.930	1.210
VERTICAL SPREAD	:	2.202	2.202	2.202
EXTREME SPREAD	:	2.457	2.362	2.288
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	


29 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225082

CENTERFIRE PATTERNS

3

POA

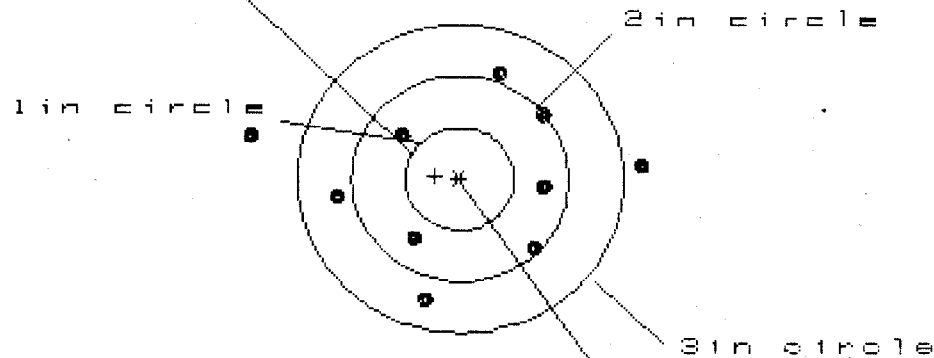

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 4

3 in = 8

HS= 3.660

VS= 2.148

GS= 3.669


CENTROID *

PATTERN #	3		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.710	1.493	.768
MINIMUM X	-1.950	-1.353	-1.166
MAXIMUM Y	1.001	1.046	1.071
MINIMUM Y	-1.147	-1.102	-1.077
CENTROID X	.228	.445	.258
CENTROID Y	-.028	-.073	-.098
POA TO CENTROID in.	.230	.451	.276
MIN RADIUS	.625	.511	.659
MEAN RADIUS	1.117	1.000	.929
MAX RADIUS	1.992	1.506	1.167
HORIZONTAL SPREAD	3.660	2.846	1.934
VERTICAL SPREAD	2.148	2.148	2.148
EXTREME SPREAD	3.669	2.860	2.264
NUMBER IN ONE INCH CIRCLE	=	0	
NUMBER IN TWO INCH CIRCLE	=	4	
NUMBER IN THREE INCH CIRCLE	=	8	

29 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/062250B2

CENTERFIRE PATTERNS # 4

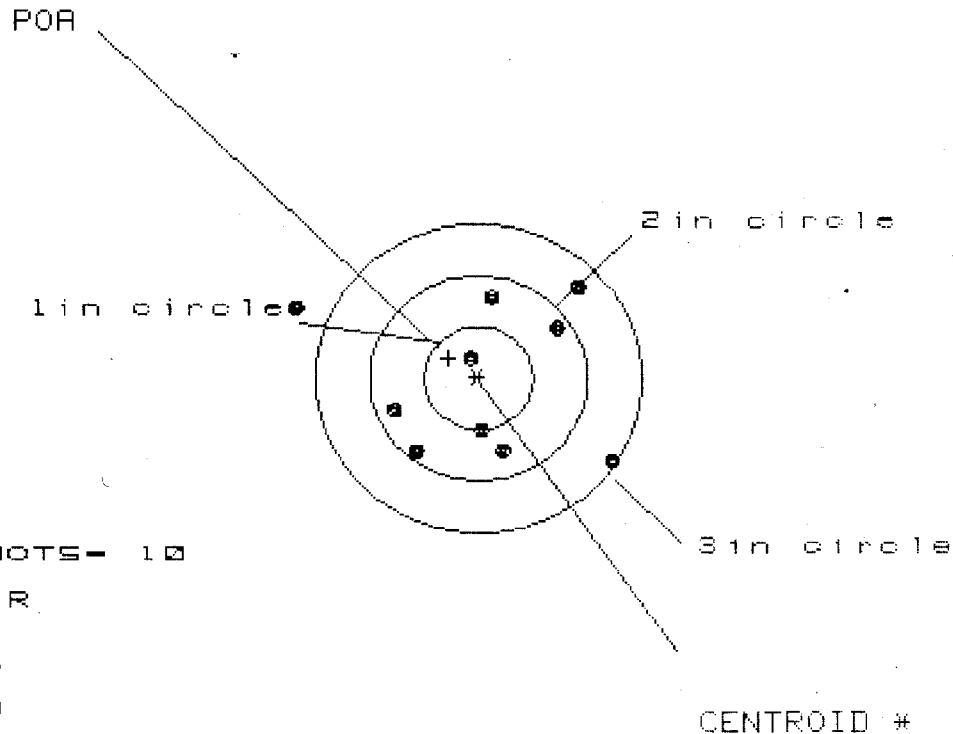

OF SHOTS- 10

IN CIR

1in = 1

2in = 7

3in = 9

HS= 2.953

VS= 1.652


GS= 3.284

PATTERN #	4		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.271	1.084	.825
MINIMUM X	-1.682	-.988	-.852
MAXIMUM Y	.890	.965	.879
MINIMUM Y	-.762	-.687	-.719
CENTROID X	.277	.464	.328
CENTROID Y	-.194	-.269	-.183
POA TO CENTROID in.	.338	.536	.376
MIN RADIUS	.212	.383	.228
MEAN RADIUS	.948	.851	.776
MAX RADIUS	1.812	1.283	1.205
HORIZONTAL SPREAD	2.953	2.072	1.677
VERTICAL SPREAD	1.652	1.652	1.598
EXTREME SPREAD	3.284	2.179	2.179
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		9	

29 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225082

CENTERFIRE PATTERNS # 5

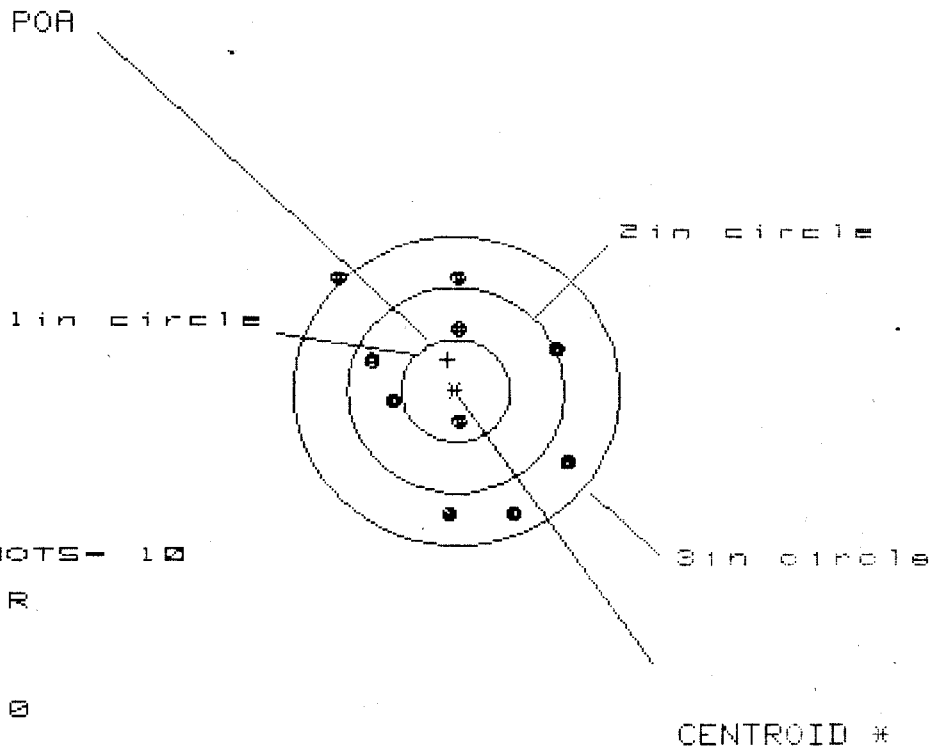

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 10

HS= 2.057

VS= 2.298

GS= 2.716

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.028	.914	.966
MINIMUM X	:	-1.029	-.922	-.870
MAXIMUM Y	:	1.072	1.182	1.053
MINIMUM Y	:	-1.226	-1.107	-1.236
CENTROID X	:	.074	.188	.136
CENTROID Y	:	-.305	-.424	-.295
POA TO CENTROID in.	:	.314	.464	.325
MIN RADIUS	:	.341	.237	.352
MEAN RADIUS	:	.965	.902	.865
MAX RADIUS	:	1.486	1.185	1.240
HORIZONTAL SPREAD	:	2.057	1.836	1.836
VERTICAL SPREAD	:	2.298	2.289	2.289
EXTREME SPREAD	:	2.716	2.290	2.290
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

RECEIVING AND ESTIMATING REPORT

BARBER - M24 0048544

COMMENTS

ORDER
R 99-08870INITIAL
SWSCUSTOMER ORDER NO.
352

DATE RECEIVED

04/05/99

DATE OPENED

04/05/99

DATE CODE

SERIAL NUMBER

C6225082

NEW SERIAL NUMBER

MODEL AND GRADE

700 7.62

M/24

ACCESSORIES

FROM:

US ARMY
C CO 3RD BN 7TH SFG (A)

FT CLAYTON PAN AM

34004

SHIP TO:

US ARMY
C CO 3RD BN 7TH SFG (A)
ATTN: ROBERT HOBART
FT CLAYTON PAN AM

34004

CUST NO: 132573 C.O.D.L.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

DOOR

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Barrel

96023

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0048544

M2400048583

Receipt Of Firearm(s) Delivered to the Plant for Repair
Firearm Checked For Live Ammunition ☒

File # 00352

Delivery Date 4/5/99

Customer Name (Print)

US ARMY (ROBERT HOBART)
Address 3rd BN 10th SF SFG State FORT CLAYTON Zip PANAMA
Phone Number () -

Firearm Description Model

M/24 Cal./Ga. 7.62
Serial Number C6225082

Stock/ Fore-end Condition circle the description

(Excellent; Good ; Fair; Poor; Fancy; Plain, Synthetic, Wood)

Comments on Stock/ Fore-end condition

Metal Condition circle the description

(Excellent; Good ; Fair; Poor; Fancy; Plain Stainless Steel)

Comments on Metal condition

Barrel Type (VT. Rib; Plain; Deer; Stainless Steel) Barrel length

List additional accessories IE Scope, Sling, Gun case and description;

Customer request:

recondition per SWSReturn Process Return to Clark St. Ent. ☐ Return via UPS ☐

By signing this receipt the person delivering the firearm understands to be the only person to receive the firearm upon completion of repairs.

Signature

person delivering firearm,

Date 4/5/99

Signature

security officer

Date 4/5/99

Signature

arms service / CSR

Date 4/5/99

Customer Pick Up Verification

I certify, I am the same person whom delivered the above described firearm to the Remington Ilion plant for repair and may lawfully possess a firearm in New York State

Signature

person receiving firearm must be the same whom delivered

Date ___/___/___

Signature

security officer or other witness returning the firearm

Date ___/___/___

Receipt Of Firearm. Doc
Rev. 12/16/98

ARM SERVICE COPY

BARBER - M24 0048546

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225082
26 May 1999

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1646
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1134
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .199882

THE AMR FOR THIS RIFLE IS: 1.157

CENTROIDAL DISTANCES

0 TO	1	.470269
1 TO	2	.0438634
1 TO	3	.679512
1 TO	4	.0979081
1 TO	5	.603345

3
+5 <----POA
4

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 1

POA TO CENTROID: .133
 MIN RADIUS : .382
 MEAN RADIUS : 1.104
 MAX RADIUS : 2.487
 CENTROID X : .100
 CENTROID Y : .088

26 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225082

CENTERFIRE PATTERN # 1

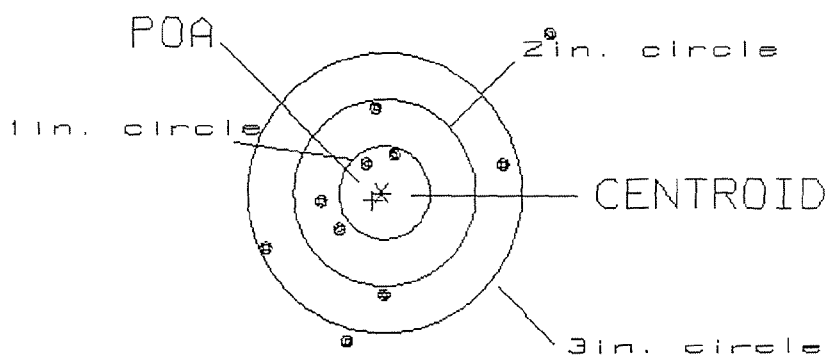

OF SHOTS= 10

IN CIRCLE

HS= 3.06

2

VS= 3.36

5

GS= 3.99


8

PATTERN #: 2
 POA TO CENTROID: .375
 MIN RADIUS : .383
 MEAN RADIUS : 1.195
 MAX RADIUS : 2.376
 CENTROID X : -.282
 CENTROID Y : -.247

26 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225002

CENTERFIRE PATTERN # 2

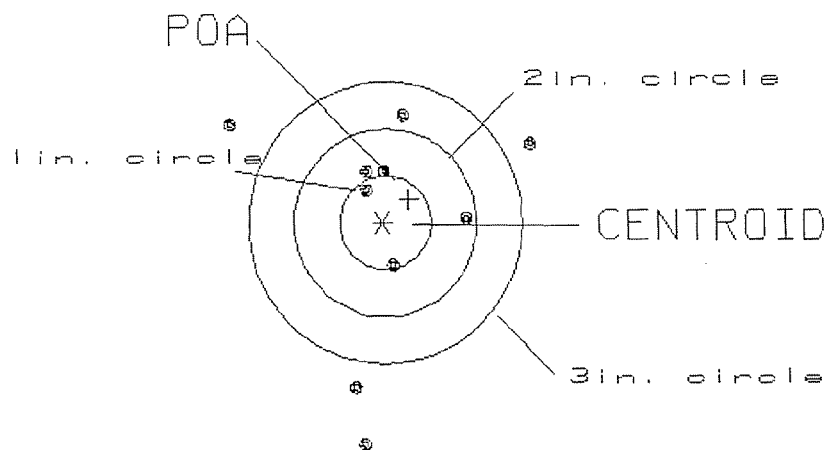

OF SHOTS= 10

IN CIRCLE

HS= 3.32

2

VS= 3.53

5

GS= 3.76

6

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 3
 POA TO CENTROID: .266
 MIN RADIUS : .574
 MEAN RADIUS : 1.340
 MAX RADIUS : 2.188
 CENTROID X : -.007
 CENTROID Y : .266

26 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225082

CENTERFIRE PATTERN # 3

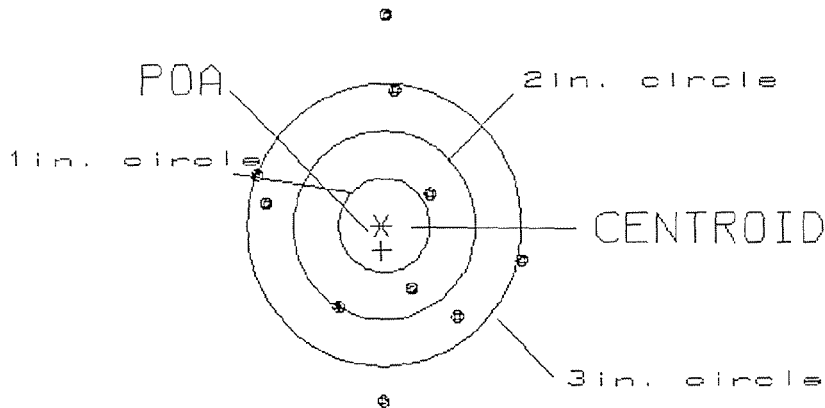

OF SHOTS= 10

IN CIRCLE

HS= 2.95

0

VS= 4.05

3

GS= 4.05

6

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 4
 POA TO CENTROID: .456
 MIN RADIUS : .190
 MEAN RADIUS : 1.192
 MAX RADIUS : 2.461
 CENTROID X : -.297
 CENTROID Y : -.346

26 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225082

CENTERFIRE PATTERN # 4

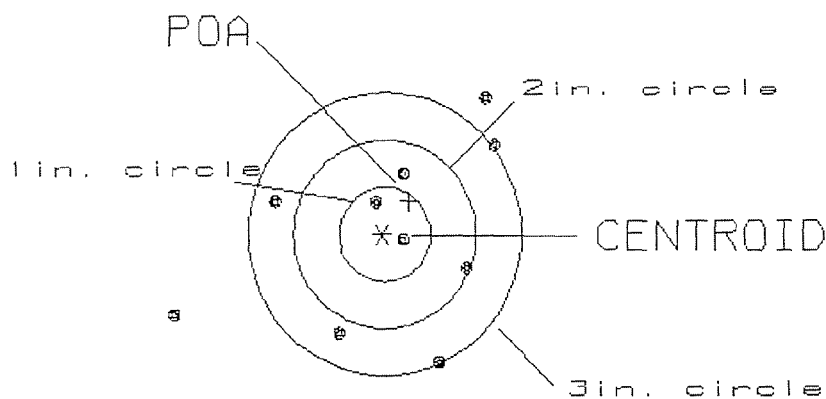

OF SHOTS= 10

IN CIRCLE

HS= 3.50

2

VS= 2.81

4

GS= 4.09

7


PATTERN #: 5

POA TO CENTROID: .471
 MIN RADIUS : .155
 MEAN RADIUS : .954
 MAX RADIUS : 3.012
 CENTROID X : -.337
 CENTROID Y : -.328

26 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225882

CENTERFIRE PATTERN # 5

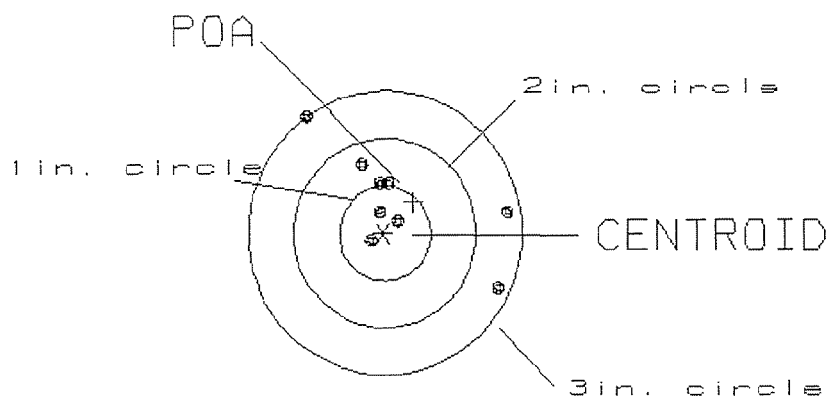

OF SHOTS= 10

IN CIRCLE

HS= 2.54

3

VS= 3.95

6

GS= 3.97

9