

C6225101

MODEL 700™ M24

Model 700 M24™

Action

Barrel Length

Capacity

Order No. 5715

*Includes 1 in chamber.

Remington

Repair Inquiry																			
Repair Number: RE00061155		Serial: C6225101 Model 700 Center Fire Caliber: 7.62 NATO M-24 (SWS)		Repairman: _____															
Verify Repair		Status: Closed 2/5/2003 12:37:33 PM																	
Address Information																			
Customer: ☒ Received From		Return To: ☐ Received From																	
Name: CO C SUPPORT BATTALION		CO C SUPPORT BATTALION																	
Address 1: 11 ST SWTG (A)		11 ST SWTG (A)																	
Address 2: ATTN ARMAMENT FAC		ATTN ARMAMENT FAC																	
City: FORT BRAGG		FORT BRAGG																	
State: NC Zip Code: 28310 Country: US		State: NC Zip Code: 28310 Country: US																	
FFL: _____																			
<table border="1"><thead><tr><th>Contact / Condition</th><th>Problems</th><th>Estimate</th><th>History / Status</th><th>Shipping / Billing</th></tr></thead></table>					Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing										
Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing															
Contact Information		Received Condition		Accessories Received															
Phone: _____		Poor		<table border="1"><thead><tr><th>Code</th><th>Desc</th><th>Qty</th></tr></thead><tbody><tr><td>A007</td><td>With Stud</td><td>1</td></tr><tr><td>A017</td><td>Scope Base</td><td>1</td></tr><tr><td>A026</td><td>Scope</td><td>1</td></tr><tr><td>X</td><td>FRT & REAR SGT BA</td><td>1</td></tr></tbody></table>	Code	Desc	Qty	A007	With Stud	1	A017	Scope Base	1	A026	Scope	1	X	FRT & REAR SGT BA	1
Code	Desc	Qty																	
A007	With Stud	1																	
A017	Scope Base	1																	
A026	Scope	1																	
X	FRT & REAR SGT BA	1																	
Fax: _____		Condition Notes: _____																	
Email: _____		CSR Notes: _____																	
Comments: _____																			
<table border="1"><tbody><tr><td>Repair Search</td><td>Refresh</td><td>Close</td></tr></tbody></table>					Repair Search	Refresh	Close												
Repair Search	Refresh	Close																	

nagletj 2/6/2003 8:16 AM CAPS NUM INS SCPL

start Inet - Microsoft... Calendar - Micro... Show Show - M... Arms Services R... 8:16 AM

Serial Number: **C6225101**Model: **700****RE00061155**

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225101.___0
FILE DATE AND TIME: 03/08/2003 11:46

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	-0.066
The Average Y Centroid of the Five Target Set:	-0.030
The Average Point of Impact of the Five Target Set:	0.073
The Average Mean Radius of the Five Target Set:	0.584
The Distance from POA to Centroid Target #1:	0.172
The Distance from Centroid Target #2 to Centroid Target #1:	0.191
The Distance from Centroid Target #3 to Centroid Target #1:	0.385
The Distance from Centroid Target #4 to Centroid Target #1:	0.090
The Distance from Centroid Target #5 to Centroid Target #1:	0.134

SERIAL NUMBER: C6225101. __0
 TARGET NUMBER: 1
 FILE DATE: 03/08/2003
 FILE TIME: 11:46

X CENTROID: -0.132
 Y CENTROID: 0.111
 POA TO CENTROID: 0.172
 HORZ SPREAD: 1.658
 VERT SPREAD: 2.284
 GROUP SPREAD: 2.471
 MIN RADIUS: 0.193
 MAX RADIUS: 1.547
 MEAN RADIUS: 0.886

IN 1 IN DIAMETER: 1
 # IN 2 IN DIAMETER: 5
 # in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.189	-1.194
2:	-0.402	-1.412
3:	-1.117	-0.413
4:	-0.531	0.556
5:	-0.899	0.786
6:	0.047	0.037
7:	0.338	0.414
8:	0.178	0.617
9:	0.541	0.872
10:	0.338	0.845

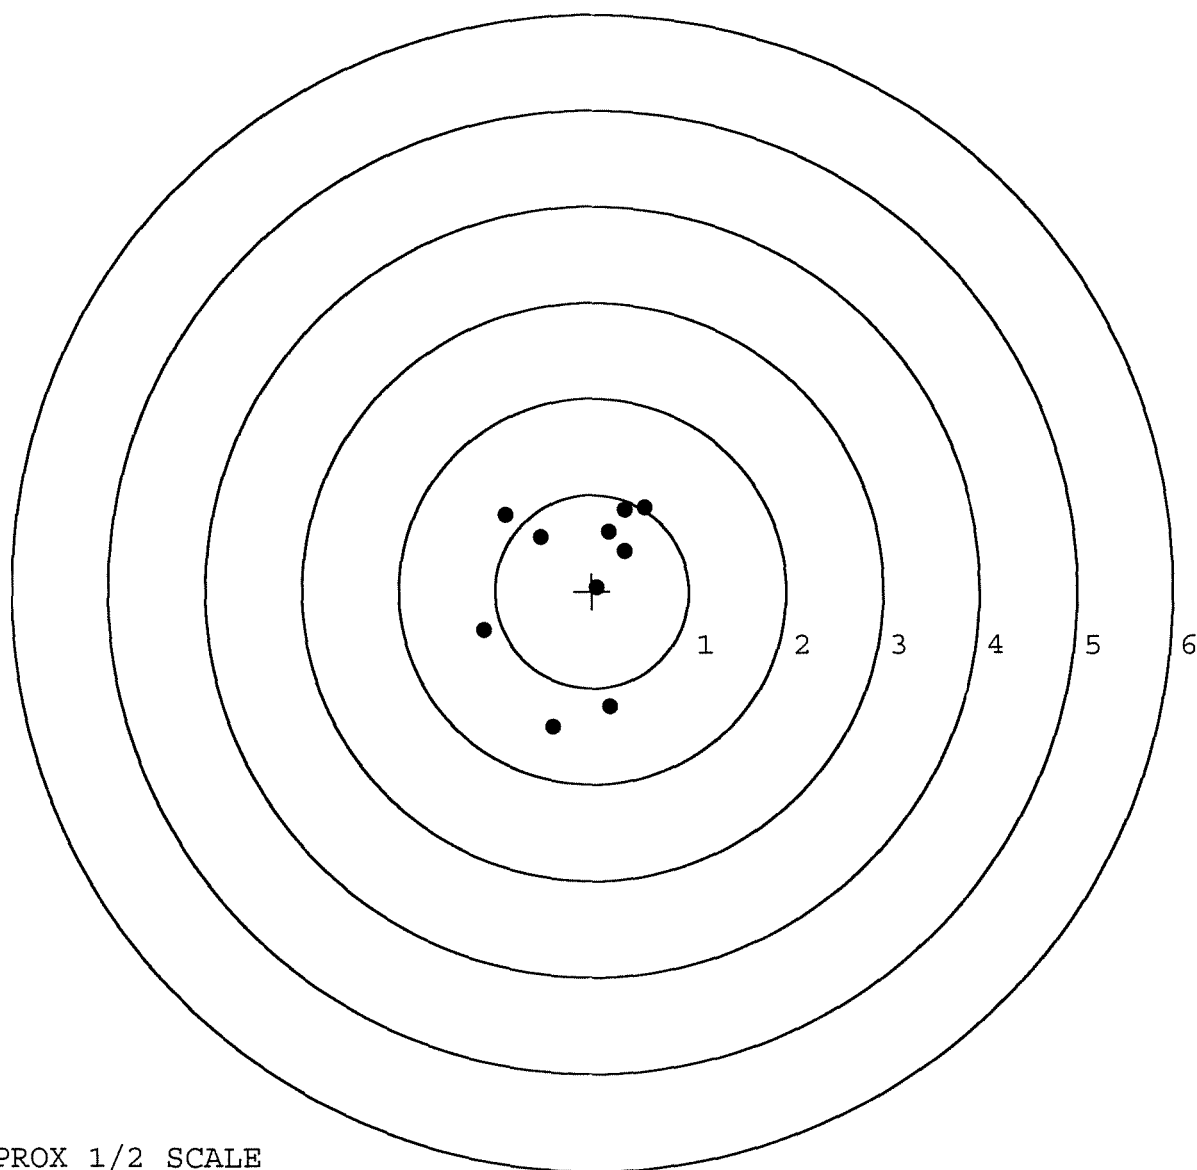


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225101. __0
 TARGET NUMBER: 2
 FILE DATE: 03/08/2003
 FILE TIME: 11:46

X CENTROID: -0.032
 Y CENTROID: -0.052
 POA TO CENTROID: 0.061
 HORZ SPREAD: 1.126
 VERT SPREAD: 1.363
 GROUP SPREAD: 1.768
 MIN RADIUS: 0.091
 MAX RADIUS: 1.015
 MEAN RADIUS: 0.476
 # IN 1 IN DIAMETER: 7
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.653	-0.854
2:	-0.268	-0.732
3:	0.403	-0.140
4:	0.392	0.072
5:	0.473	0.509
6:	-0.062	0.318
7:	0.114	0.094
8:	-0.214	0.221
9:	-0.083	0.023
10:	-0.418	-0.028

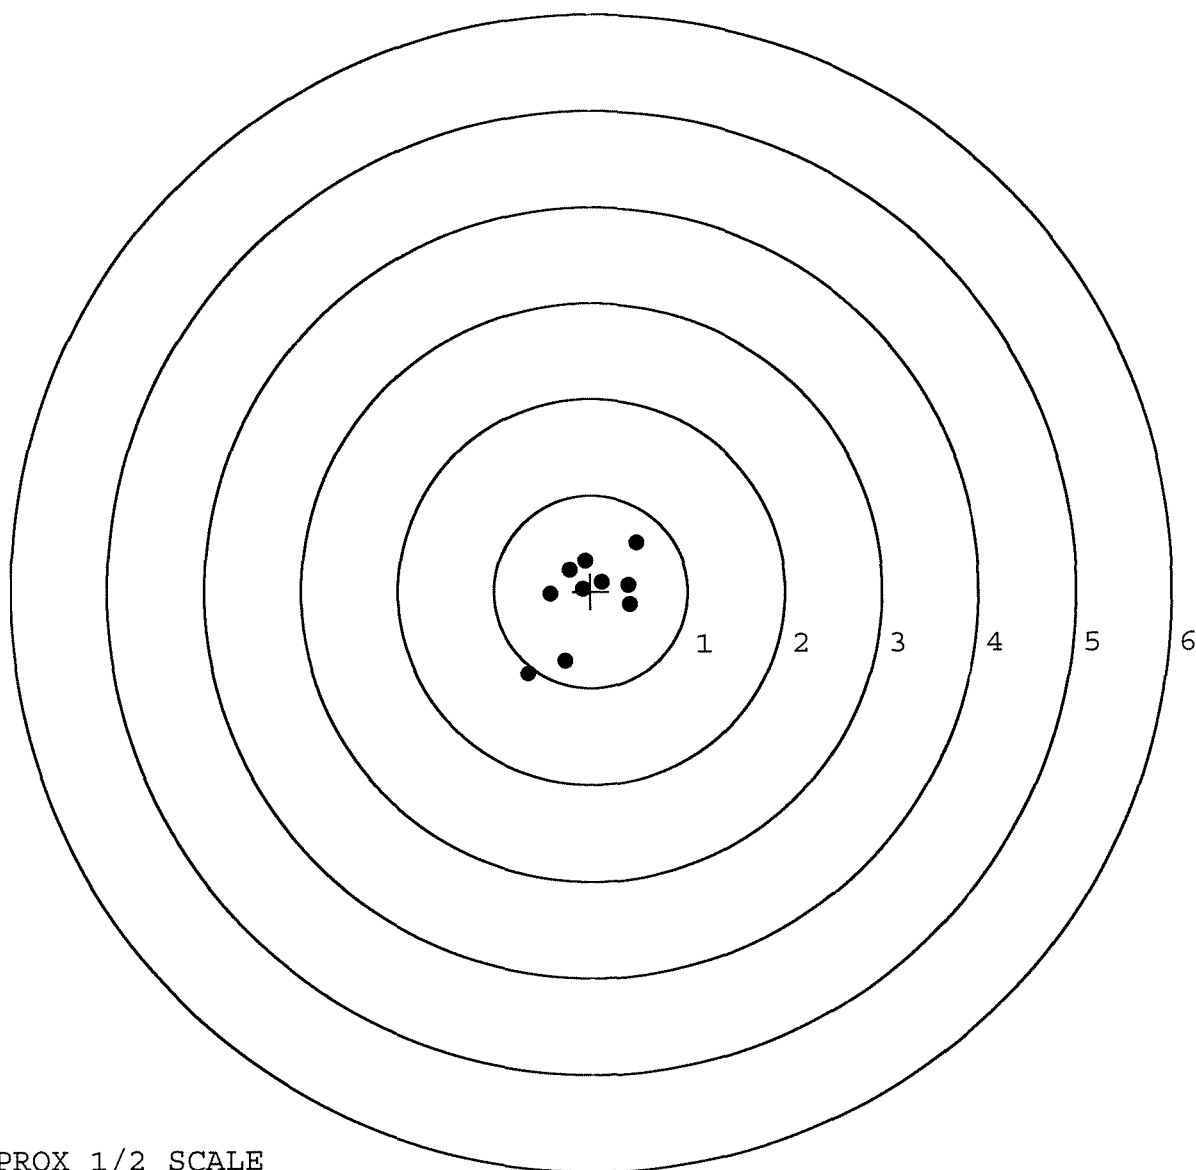

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225101. 0

TARGET NUMBER: 3

FILE DATE: 03/08/2003

FILE TIME: 11:46

X CENTROID: 0.050

Y CENTROID: -0.228

POA TO CENTROID: 0.234

HORZ SPREAD: 1.323

VERT SPREAD: 1.740

GROUP SPREAD: 1.990

MIN RADIUS: 0.201

MAX RADIUS: 1.013


MEAN RADIUS: 0.604

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.761	-0.520
2:	0.402	-0.815
3:	0.585	-1.088
4:	0.052	-0.429
5:	-0.258	-0.422
6:	-0.562	-0.298
7:	0.169	0.039
8:	-0.088	0.283
9:	-0.380	0.652
10:	-0.184	0.316

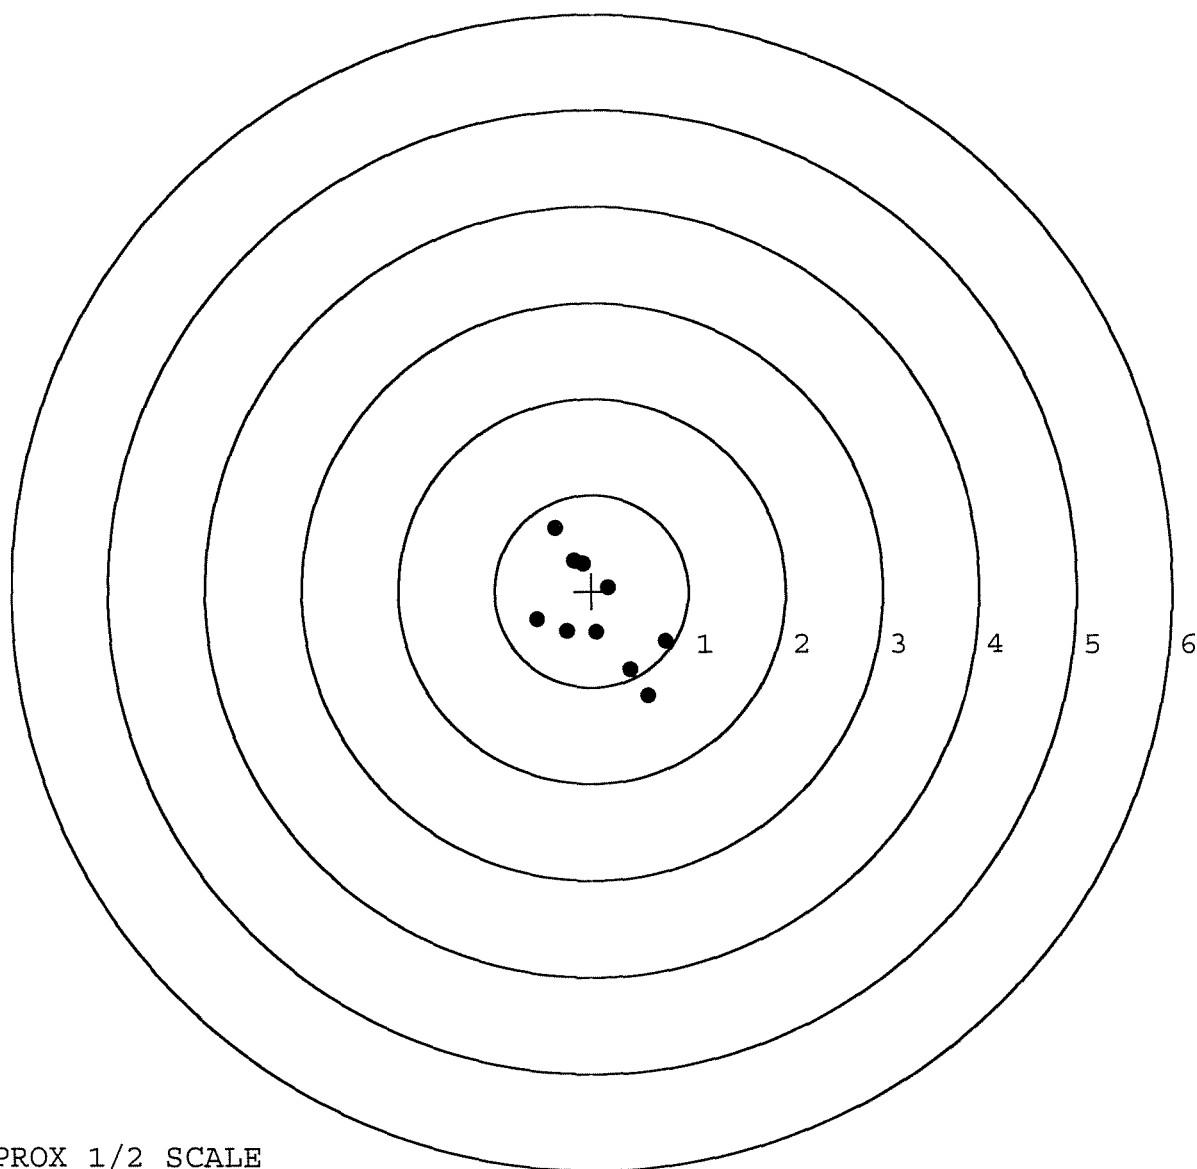


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225101. __0
 TARGET NUMBER: 4
 FILE DATE: 03/08/2003
 FILE TIME: 11:46

X CENTROID: -0.072
 Y CENTROID: 0.043
 POA TO CENTROID: 0.084
 HORZ SPREAD: 1.508
 VERT SPREAD: 1.085
 GROUP SPREAD: 1.854
 MIN RADIUS: 0.155
 MAX RADIUS: 1.064
 MEAN RADIUS: 0.524
 # IN 1 IN DIAMETER: 5
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.808	-0.555
2:	0.395	0.455
3:	0.178	-0.536
4:	-0.135	-0.438
5:	-0.194	-0.154
6:	-0.313	-0.022
7:	-0.119	0.190
8:	-0.256	0.433
9:	-0.388	0.530
10:	-0.700	0.523

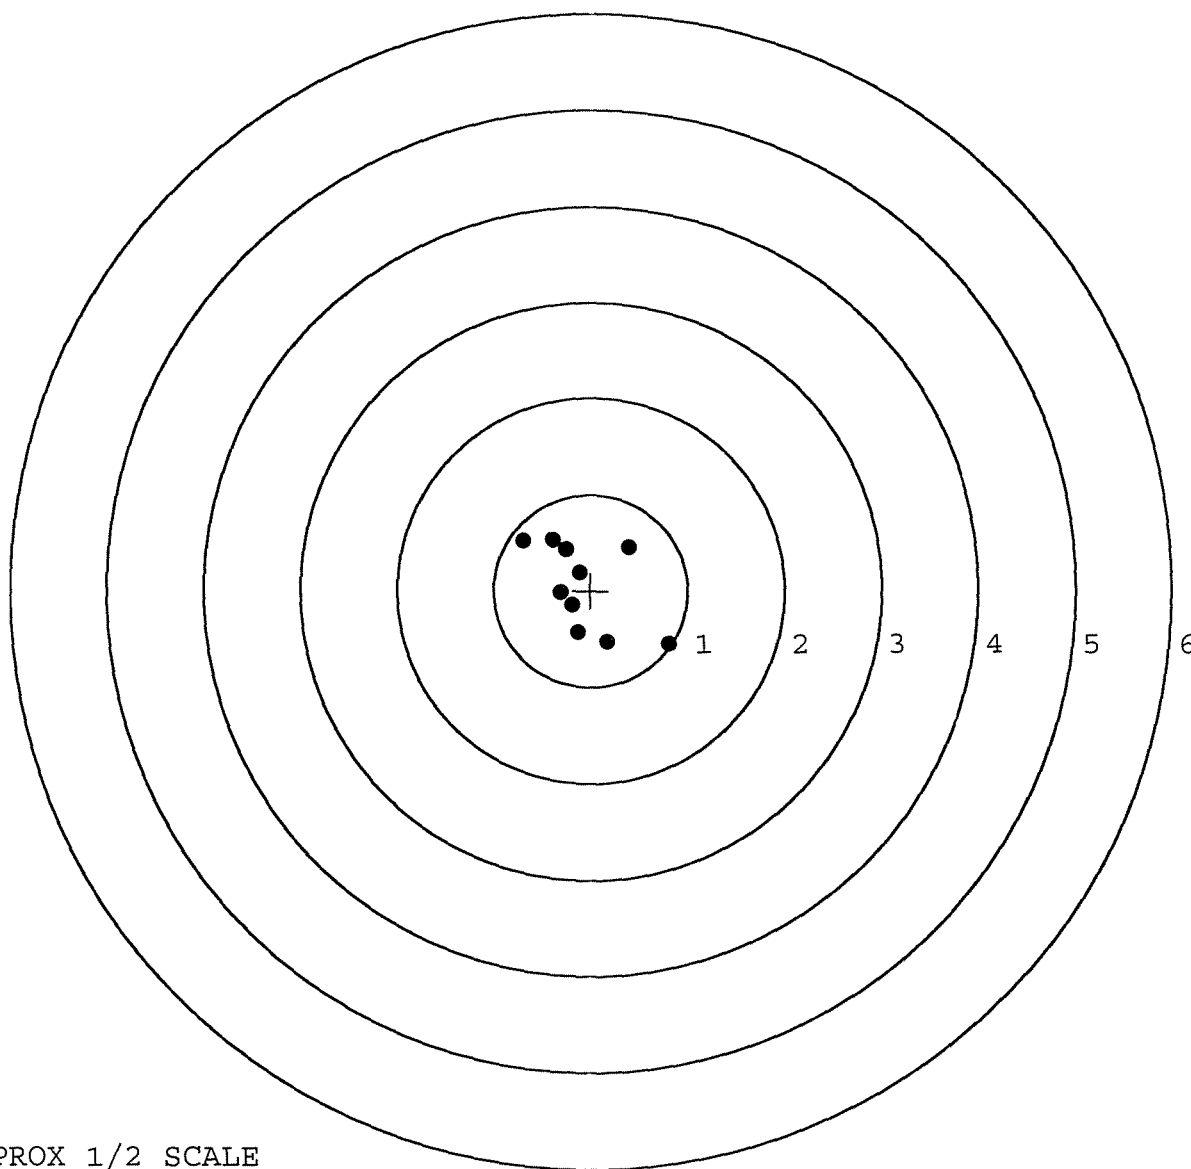


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225101. __0
 TARGET NUMBER: 5
 FILE DATE: 03/08/2003
 FILE TIME: 11:46

X CENTROID: -0.145
 Y CENTROID: -0.022
 POA TO CENTROID: 0.147
 HORZ SPREAD: 1.001
 VERT SPREAD: 1.501
 GROUP SPREAD: 1.578
 MIN RADIUS: 0.073
 MAX RADIUS: 0.923
 MEAN RADIUS: 0.430
 # IN 1 IN DIAMETER: 6
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.141	-0.103
2:	0.333	-0.812
3:	0.101	-0.197
4:	0.074	0.289
5:	-0.052	0.689
6:	-0.265	0.648
7:	-0.668	-0.170
8:	-0.200	-0.071
9:	-0.343	-0.129
10:	-0.290	-0.366

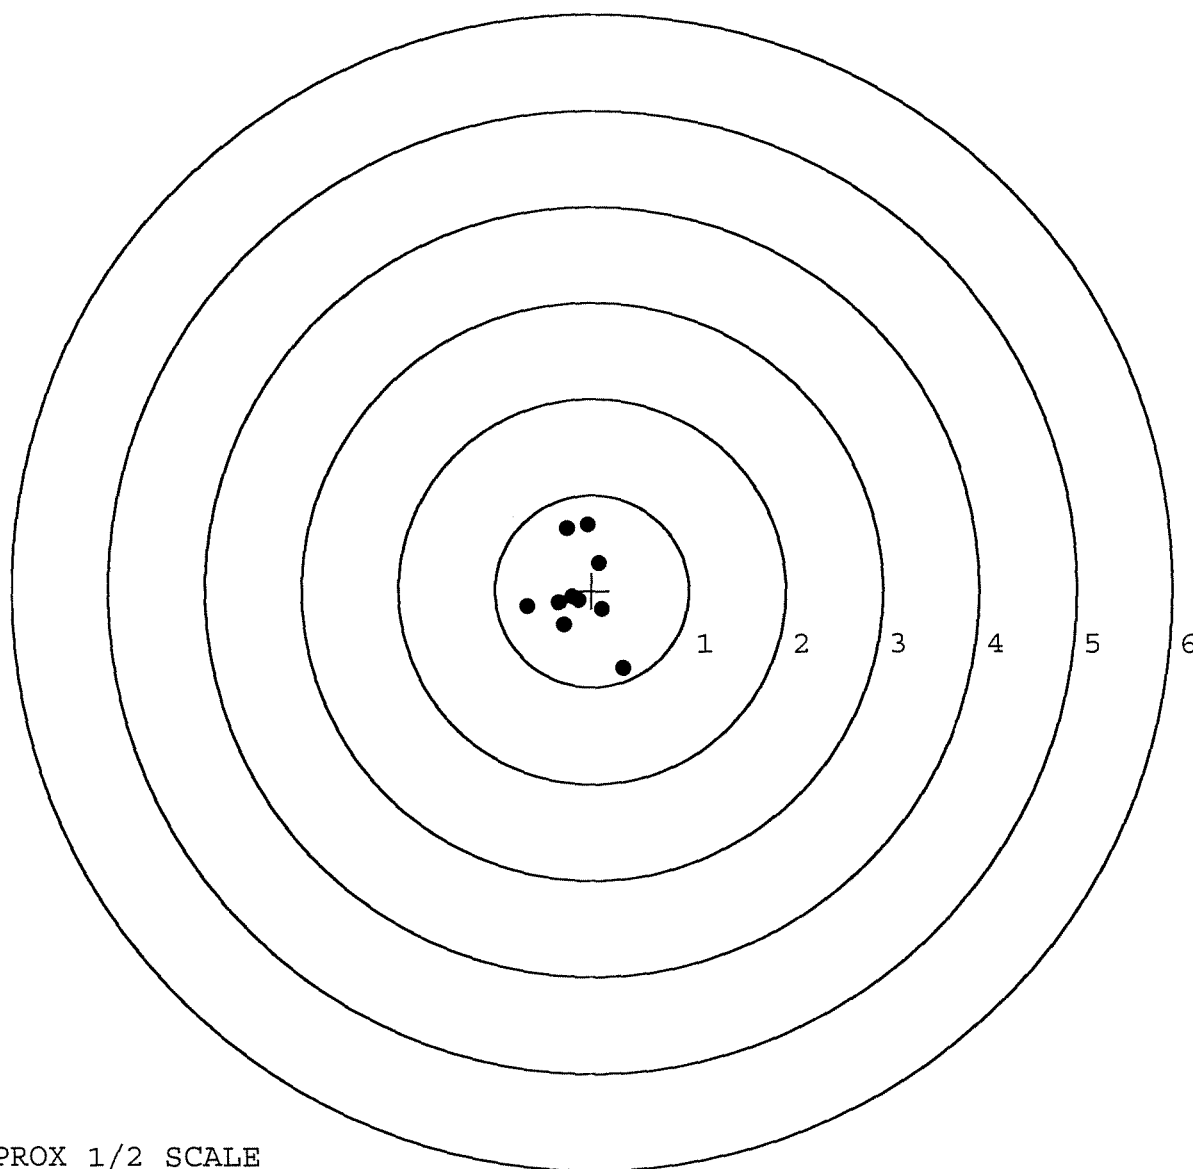

TARGET APPROX 1/2 SCALE

SERIAL # C6225101INSPECTED BY: RTLDATE REC'D: 2-5-03DATE RET'D: 3-10-03

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BASE
☒ REAR SIGHT BASE
☒ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☒ SCOPE
☒ SCOPE RINGS
☒ MOUNTING SCREWS
☒ MOUNTING BASE
☒ SCREWS
☒ FINISH
☒ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☒ SCOPE CASE
☒ IRON SIGHTS
☒ DEPLOYMENT KIT

TRIGGER ASSEMBLY

☒ SAFETY OPERATION
☒ RE-SET TO FACTORY SPECS

COMMENTS:

R & E NUMBER	61153		
SERIAL NUMBER	C6225101		
LOG-IN DATE	2/5/03		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	2-10-03	RTL
560 A	RE-BARREL	2-11-03	RTL
B	DRILL AND TAP	2-20-03	TRW
575	ASSEMBLE	2-13-03	RTL
600	PROOF	2-13-03	AK
605	CHECK HEADSPACE	2-13-03	AK
610	DIS-ASSEMBLE GUN	2-14-03	RTL
612	MAGNAFLUX OPERATOR		
615	ROLLMARK CALIBER	2/19/03	AK
618	ROTO-BLAST	2-24-03	AK
620	APPLY COATINGS	3-3	AK
625 A	FINAL ASSEMBLY	3-5-03	RLW
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	3-7-03	TRW
655	FINAL INSPECT	3-10-03	RTL
660	PACK	3-10-03	AK
		SHIP DATE	
	QAR INSPECTION DATE		

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225101

OPERATION		DATE	INT
#	NAME		
575-580	ASSEMBLY	1/22	FB
600	PROOF	1/28/88	RW
615	MAGNAFLUX BARREL	2/18/88	R/C
	MAGNAFLUX BOLT	2/25/88	R/C
620	COATING	3/21/88	TJA
625-630	FINAL ASSEMBLY		
635	TEST		
640	TARGET		
	FIRING PIN INDENT		
660	PACK		

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6225101

OP.#	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill & Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coatings (Bolt)			
	Final Assembly A) Clean inside of Bolt Assembly		9/9/88	AW
	B) Inspect Ejector Hole for Chamfer in Bolt Head		9/9/88	AW
	C) Inspect Ejector Hole for Chamfer		9/9/88	AW

OVER

OP.#		READINGS	DATE	INITIAL
625 cont.	D) Oil Firing Pin Ass'y		9/9/88	RW
	E) Adjust Trigger Pull to Min. Setting and Stake		9/8/88	J.U.+B.S.
	F) Safety on Force	4.25 5.75 5.75	9/8/88	J.U.+B.S.
	G) Safety off Force	4 4 4	9/8/88	J.U.+B.S.
	H) Trigger Pull Test & Retainability		9/8/88	J.U.+B.S.
	I) Firing Pin Indent	0.215 0.22 0.215	9/8/88	J.U.+B.S.
	J) Assemble Stock		9/20/88	RW
	K) Assemble Swivel Studs		10-12-88	J.S.
	L) Attach Front & Rear Sight Assemblies		9/20/88	RW
	M) Iron Sight Alignment		9/20/88	RW
	N) Detach Front & Rear Sights & place in numbered container		9/20/88	RW
	O) Attach Scope to Rifle		10/4/88	RW
	P) Detach & Attach Scope 20 times		10-5-88	B.S.
640	Gallery Target & Test	83 R 72 L	10/10/88	W.B.
	A) Optical Clarity of Scope		10/10/88	W.B.
645	Inspect for Live Ammo		10/10/88	W. B.A.
655	Final Inspection			
	A) Headspace		10-12-88	J.S.
	B) Trigger Pull		10-14-88	J.S.
	C) Function		10-12-88	J.S.
660	Pack		10-21-88	J.S.

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50#+ .50#
3.00#+ .75#
4.00#+1.00#

SERIAL NO. C6225101DATE 9 Sept. 88TESTER J. U. + G. S.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.61	2.33	2.27	2.28	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.55	2.27	2.14	2.23	
PULL #3	2.56	2.18	2.22	2.22	
PULL #4	2.45	2.28	2.22	2.19	
PULL #5	2.49	2.18	2.16	2.18	
TOTAL	12.66	11.24	11.01	11.10	
AVG.	2.532	2.248	2.202	2.222	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.23	3.19		
PULL #2	3.23	3.14		
PULL #3	3.21	3.22		
PULL #4	3.23	3.14		
PULL #5	3.23	3.15		
TOTAL	16.13	15.84		
AVG.	3.226	3.168		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.34	4.05		4.08
PULL #2	4.16	4.10		4.07
PULL #3	4.20	4.08		4.14
PULL #4	4.16	4.12		4.11
PULL #5	3.98	4.13		4.10
TOTAL	20.84	20.48		20.50
AVG.	4.168	4.096		4.10

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 6225101

CENTROIDAL DISTANCES

0 TO	1	2.08134
1 TO	2	.53834
1 TO	3	1.48208
1 TO	4	1.49014
1 TO	5	1.11741

+ <---POA

1
2
5
4

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: 1.6888
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -1.7186
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: 2.40949
THE AMR FOR THIS RIFLE IS: .9686

11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225101

CENTERFIRE PATTERNS # 1

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS = 10

IN CIR

1 in = 6

2 in = 7

3 in = 8

HS = 0.0035

VS = 0.270

GS = 0.790


PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.856	.725	.801
MINIMUM X	:	-1.179	-.484	-.408
MAXIMUM Y	:	1.859	.946	.795
MINIMUM Y	:	-1.411	-1.204	-1.045
CENTROID X	:	1.566	1.697	1.621
CENTROID Y	:	-1.371	-1.578	-1.427
POA TO CENTROID in.	:	2.082	2.317	2.160
MIN RADIUS	:	.053	.252	.086
MEAN RADIUS	:	.766	.657	.505
MAX RADIUS	:	2.202	1.348	1.317
HORIZONTAL SPREAD	:	2.035	1.209	1.209
VERTICAL SPREAD	:	3.270	2.150	1.841
EXTREME SPREAD	:	3.790	2.204	1.937
NUMBER IN ONE INCH CIRCLE	=		6	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		8	

11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225101

CENTERFIRE PATTERNS # 2

POA

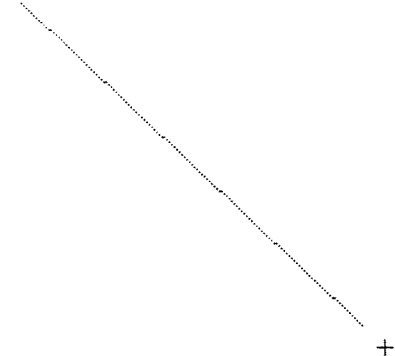

1 in circle

2 in circle

OF SHOTS= 10

IN CIR

1 in = 0


2 in = 4

3 in = 8

HS= 3.828

VS= 2.555

GS= 4.416

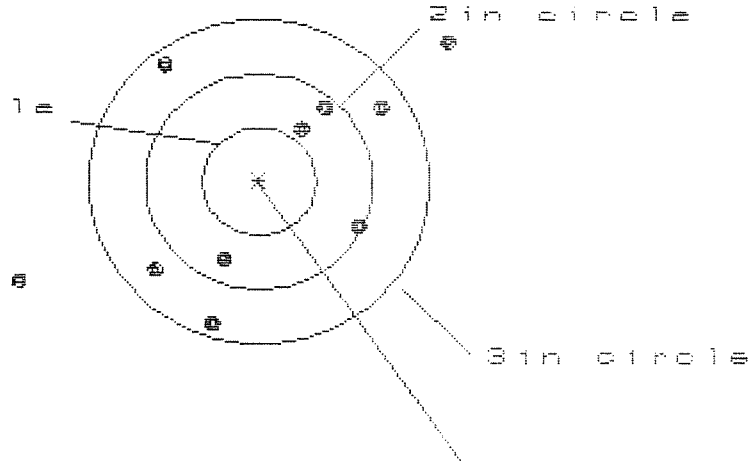

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.708	1.473	1.043
MINIMUM X	:	-2.120	-1.190	-1.006
MAXIMUM Y	:	1.267	1.163	1.089
MINIMUM Y	:	-1.288	-1.392	-1.247
CENTROID X	:	1.423	1.658	1.474
CENTROID Y	:	-1.890	-1.786	-1.931
POA TO CENTROID in.	:	2.365	2.437	2.430
MIN RADIUS	:	.599	.378	.599
MEAN RADIUS	:	1.284	1.129	1.045
MAX RADIUS	:	2.317	1.876	1.374
HORIZONTAL SPREAD	:	3.828	2.663	2.049
VERTICAL SPREAD	:	2.555	2.555	2.336
EXTREME SPREAD	:	4.416	3.396	2.564
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		8	

11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225181

CENTERFIRE PATTERNS # 3

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 9

3 in = 9

HS= 1.221

VS= 2.997

GS= 3.054

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.673	.706	.784
MINIMUM X	:	-.548	-.515	-.427
MAXIMUM Y	:	.883	.648	.701
MINIMUM Y	:	-2.114	-.988	-.935
CENTROID X	:	2.234	2.201	2.113
CENTROID Y	:	-.048	.187	.134
POA TO CENTROID in.	:	2.234	2.209	2.118
MIN RADIUS	:	.272	.065	.077
MEAN RADIUS	:	.810	.578	.549
MAX RADIUS	:	2.134	1.114	1.028
HORIZONTAL SPREAD	:	1.221	1.221	1.211
VERTICAL SPREAD	:	2.997	1.636	1.636
EXTREME SPREAD	:	3.054	1.863	1.655
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		9	

11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225101

CENTERFIRE PATTERNS

4

POA

+

OF SHOTS= 10

IN CIR

1 in = 4

2 in = 5

3 in = 8

HS= .711

VS= 3.286

GS= 3.291

1 in circle

2 in circle

3 in circle

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.499	.496	.463
MINIMUM X	:	-.212	-.215	-.153
MAXIMUM Y	:	1.405	1.196	.976
MINIMUM Y	:	-1.881	-1.756	-.859
CENTROID X	:	1.901	1.904	1.842
CENTROID Y	:	-2.823	-2.614	-2.394
POA TO CENTROID in.:	:	3.403	3.234	3.021
MIN RADIUS	:	.160	.145	.152
MEAN RADIUS	:	.843	.687	.541
MAX RADIUS	:	1.881	1.825	.988
HORIZONTAL SPREAD	:	.711	.711	.616
VERTICAL SPREAD	:	3.286	2.952	1.835
EXTREME SPREAD	:	3.291	3.036	1.935
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		8	


11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225181

CENTERFIRE PATTERNS

5

POA

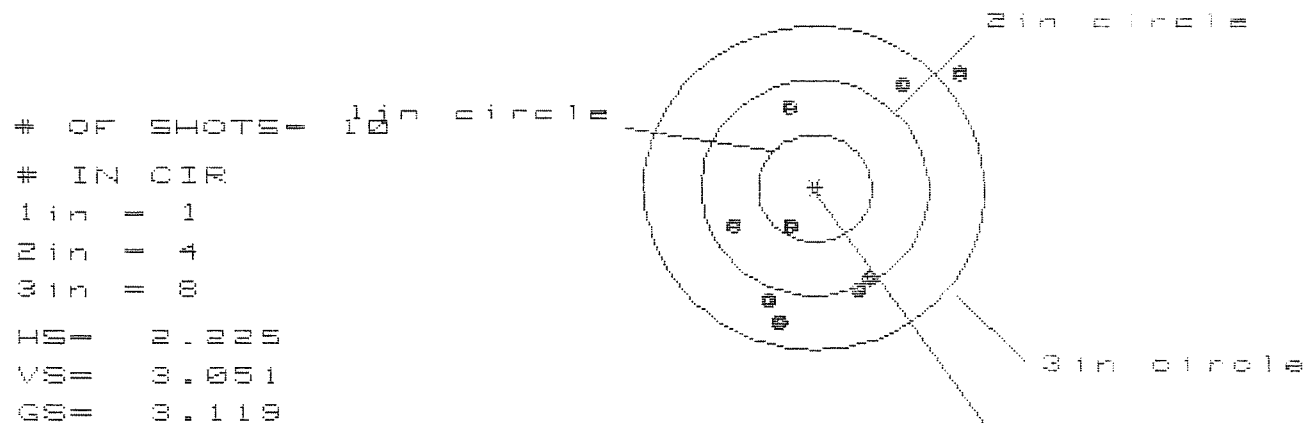

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.263	1.156	.848
MINIMUM X	:	-.962	-.792	-.647
MAXIMUM Y	:	1.845	1.238	1.356
MINIMUM Y	:	-1.206	-1.001	-.846
CENTROID X	:	1.320	1.427	1.282
CENTROID Y	:	-2.461	-2.666	-2.821
POA TO CENTROID in.	:	2.793	3.024	3.099
MIN RADIUS	:	.455	.409	.231
MEAN RADIUS	:	1.140	.997	.846
MAX RADIUS	:	2.081	1.694	1.599
HORIZONTAL SPREAD	:	2.225	1.948	1.495
VERTICAL SPREAD	:	3.051	2.239	2.202
EXTREME SPREAD	:	3.119	2.751	2.482
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	4		
NUMBER IN THREE INCH CIRCLE	=	8		

JOHN:

REGISTERED MAIL

R 660 491 021

DEPARTMENT OF THE ARMY

Commander

Attn: Property Book Officer

1st Bn 1st SFG(A) Unit 35123

PSC 560 TORII STATION

APO AP 96376-5123

DA Label 18-1, Sep 83
Edition of Oct 74 will be used until exhausted.Remington Arms Co., Inc.
ATTN: Fabricated Products Dept.
14 Hoefler Avenue
Ticon NY 13357-1816

PSC 560 TORII STATION

WEIGHT

58.13

VIA

12 GUNS
M-24

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225101
19 Feb 1999

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0152
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0404
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0431648
THE AMR FOR THIS RIFLE IS: 1.224

CENTROIDAL DISTANCES

0	TO	1	.105551
1	TO	2	.0578014
1	TO	3	.511321
1	TO	4	.179234
1	TO	5	.200325


5 ⁴ 3<----POA

PATTERN #: 5
 POA TO CENTROID: .288
 MIN RADIUS : .359
 MEAN RADIUS : 1.156
 MAX RADIUS : 2.235
 CENTROID X : -.269
 CENTROID Y : -.102

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225101

CENTERFIRE PATTERN # 5

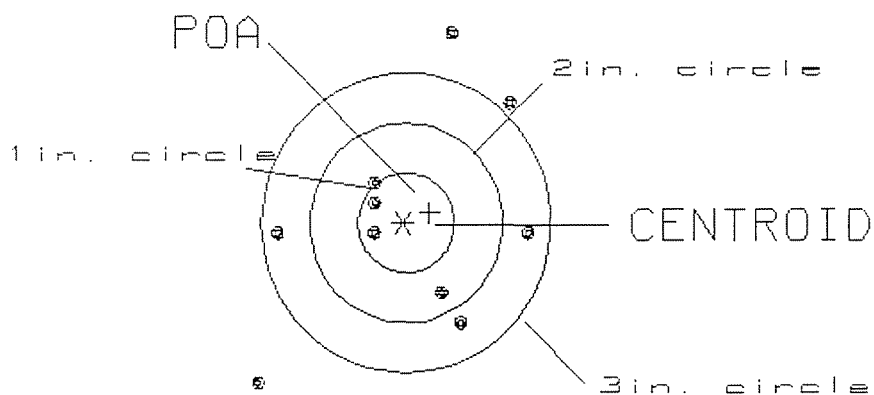

OF SHOTS= 10

IN CIRCLE

HS= 2.76
 VS= 3.51
 GS= 4.03


2
 4
 7

PATTERN #: 4
 POA TO CENTROID: .078
 MIN RADIUS : .425
 MEAN RADIUS : 1.216
 MAX RADIUS : 2.433
 CENTROID X : .020
 CENTROID Y : .076

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225101

CENTERFIRE PATTERN # 4

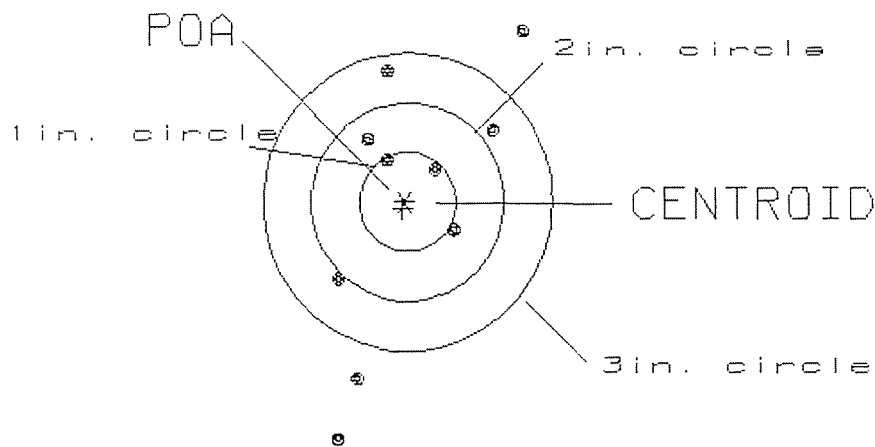

OF SHOTS= 10

IN CIRCLE

MS= 1.93
 VS= 4.10
 GS= 4.50

2
 4
 7


PATTERN #: 3

POA TO CENTROID: .431
 MIN RADIUS : .043
 MEAN RADIUS : .739
 MAX RADIUS : 1.680
 CENTROID X : .430
 CENTROID Y : .028

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225101

CENTERFIRE PATTERN # 3

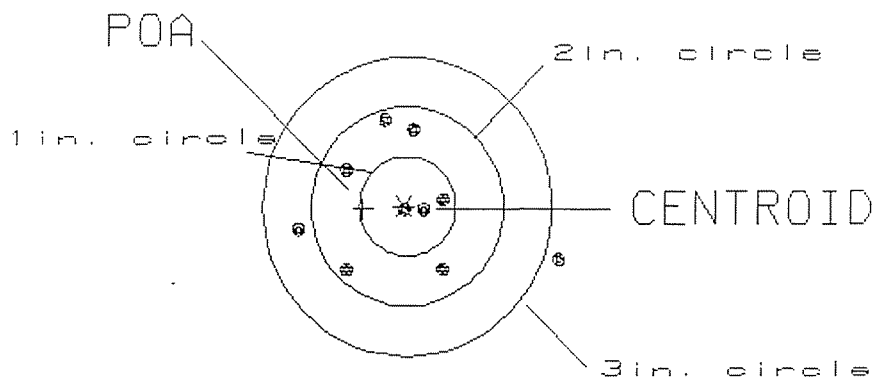

OF SHOTS= 10

IN CIRCLE

HS= 2.68

3

VS= 1.51

6

GS= 2.69

9

PATTERN #: 2

POA TO CENTROID: .130

MIN RADIUS : .174

MEAN RADIUS : 1.608

MAX RADIUS : 3.022


CENTROID X : -.035

CENTROID Y : -.125

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225101

CENTERFIRE PATTERN # 2

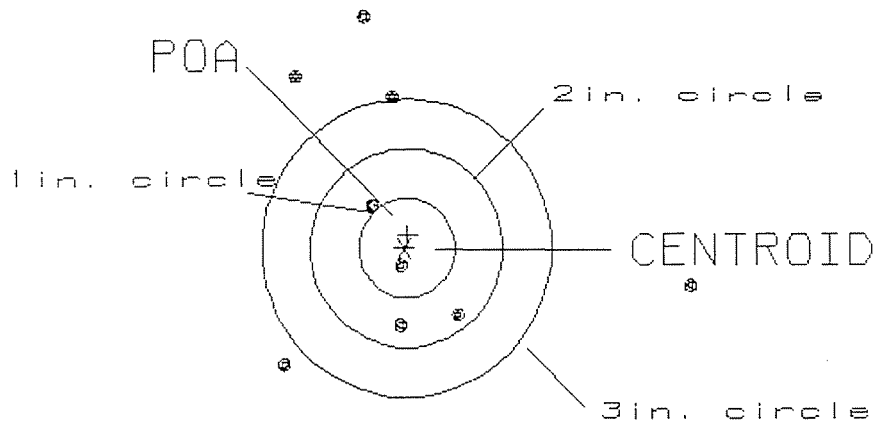

OF SHOTS= 10

IN CIRCLE

HS= 4.14

1

VS= 5.39

4

GS= 5.40

4

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .105

MIN RADIUS : .463

MEAN RADIUS : 1.401

MAX RADIUS : 2.016


CENTROID X : -.070

CENTROID Y : -.079

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225181

CENTERFIRE PATTERN # 1

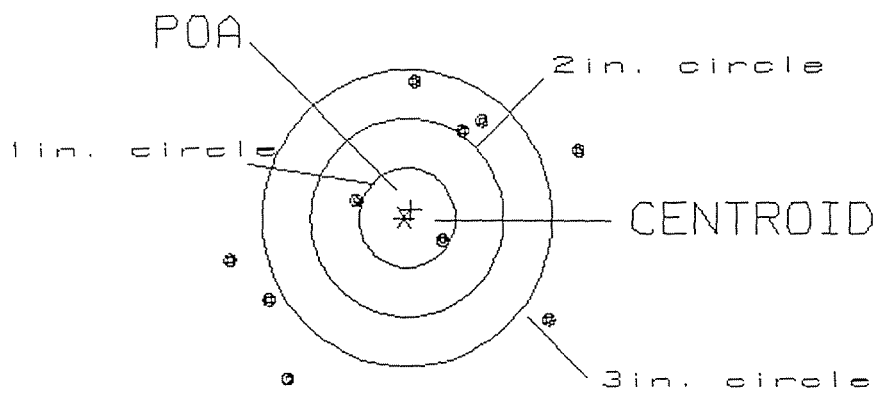

OF SHOTS= 10

IN CIRCLE

HS= 3.62

1

VS= 3.00

2

GS= 3.80

5