

66225112

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.



SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225112.___1

FILE DATE AND TIME: 07/17/2006 15:58

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	-0.090
The Average Y Centroid of the Five Target Set:	-0.001
The Average Point of Impact of the Five Target Set:	0.090
The Average Mean Radius of the Five Target Set:	0.573
The Distance from POA to Centroid Target #1:	0.089
The Distance from Centroid Target #2 to Centroid Target #1:	0.188
The Distance from Centroid Target #3 to Centroid Target #1:	0.061
The Distance from Centroid Target #4 to Centroid Target #1:	0.517
The Distance from Centroid Target #5 to Centroid Target #1:	0.126

BARBER - M24 0049271

SERIAL NUMBER: C6225112. __1
TARGET NUMBER: 1
FILE DATE: 07/17/2006
FILE TIME: 15:58

X CENTROID: 0.046
Y CENTROID: -0.076
POA TO CENTROID: 0.089
HORZ SPREAD: 1.242
VERT SPREAD: 2.138
GROUP SPREAD: 2.390
MIN RADIUS: 0.106
MAX RADIUS: 1.479
MEAN RADIUS: 0.594
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.583	0.682
2:	0.064	0.028
3:	-0.486	-1.456
4:	-0.269	-0.382
5:	-0.515	-0.312
6:	-0.504	0.010
7:	0.062	0.047
8:	0.397	0.104
9:	0.398	0.405
10:	0.727	0.111

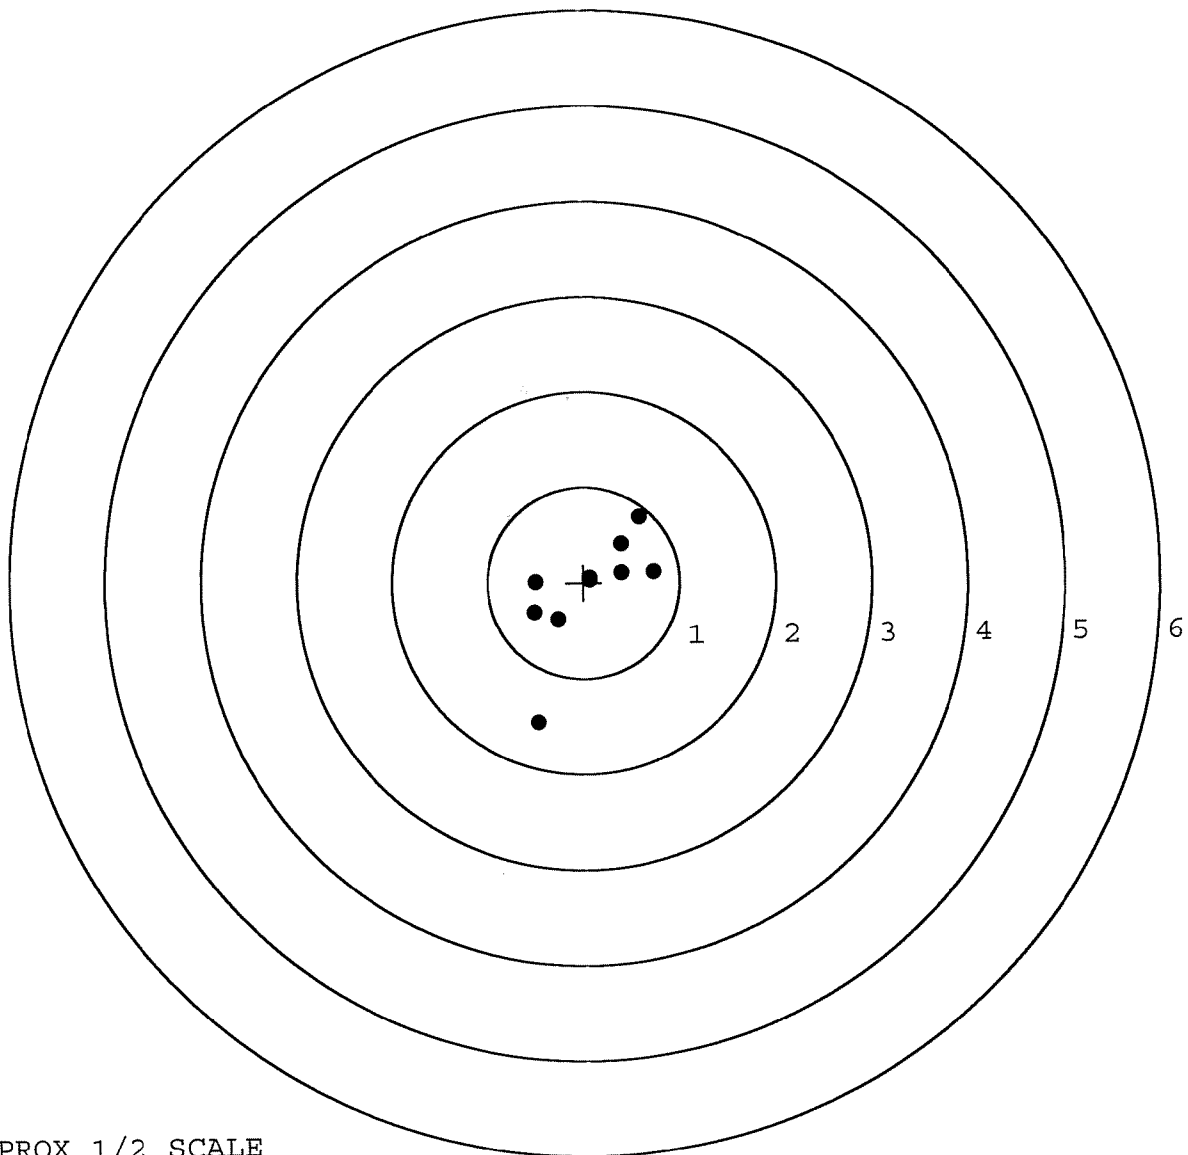


TARGET APPROX 1/2 SCALE

BARBER - M24 0049272

SERIAL NUMBER: C6225112. __1
TARGET NUMBER: 2
FILE DATE: 07/17/2006
FILE TIME: 15:58

X CENTROID: -0.142
Y CENTROID: -0.082
POA TO CENTROID: 0.164
HORZ SPREAD: 2.609
VERT SPREAD: 1.464
GROUP SPREAD: 2.628
MIN RADIUS: 0.212
MAX RADIUS: 1.381
MEAN RADIUS: 0.738
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-1.445	0.375
2:	-0.921	0.380
3:	-0.262	0.101
4:	-0.418	-0.400
5:	-0.626	-1.065
6:	-0.035	-0.265
7:	0.249	-0.222
8:	0.198	0.399
9:	0.677	-0.174
10:	1.164	0.056

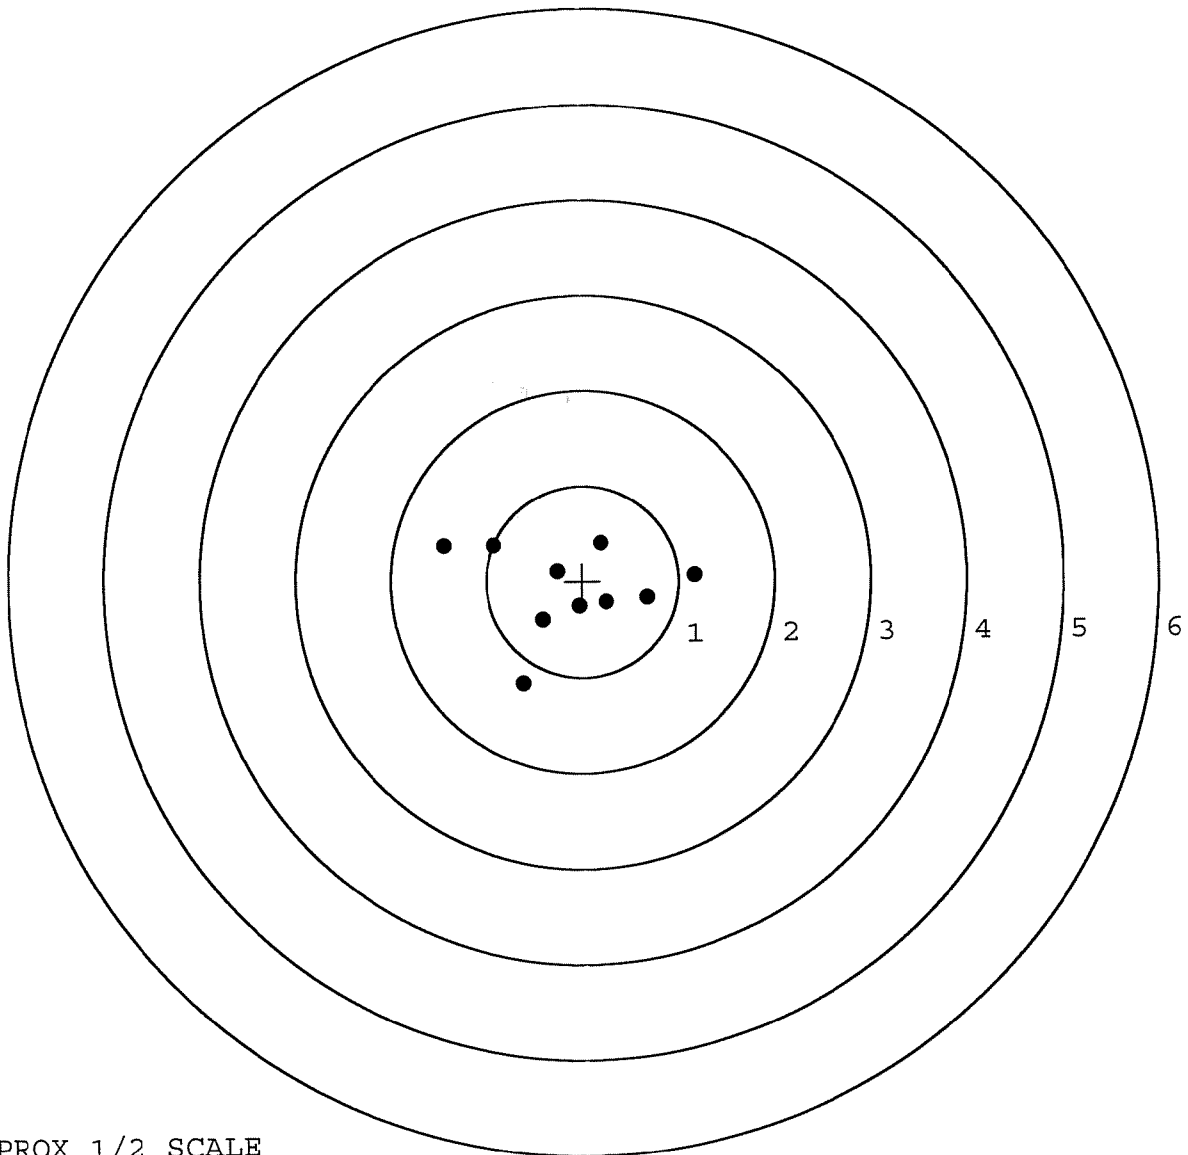


TARGET APPROX 1/2 SCALE

BARBER - M24 0049273

SERIAL NUMBER: C6225112. __1
TARGET NUMBER: 3
FILE DATE: 07/17/2006
FILE TIME: 15:58

X CENTROID: 0.045
Y CENTROID: -0.016
POA TO CENTROID: 0.048
HORZ SPREAD: 1.776
VERT SPREAD: 0.611
GROUP SPREAD: 1.878
MIN RADIUS: 0.139
MAX RADIUS: 1.163
MEAN RADIUS: 0.458
IN 1 IN DIAMETER: 8
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-1.069	-0.350
2:	-0.153	-0.313
3:	-0.348	-0.069
4:	-0.202	0.155
5:	0.091	0.116
6:	0.052	-0.209
7:	0.415	0.060
8:	0.454	0.219
9:	0.507	-0.027
10:	0.707	0.261

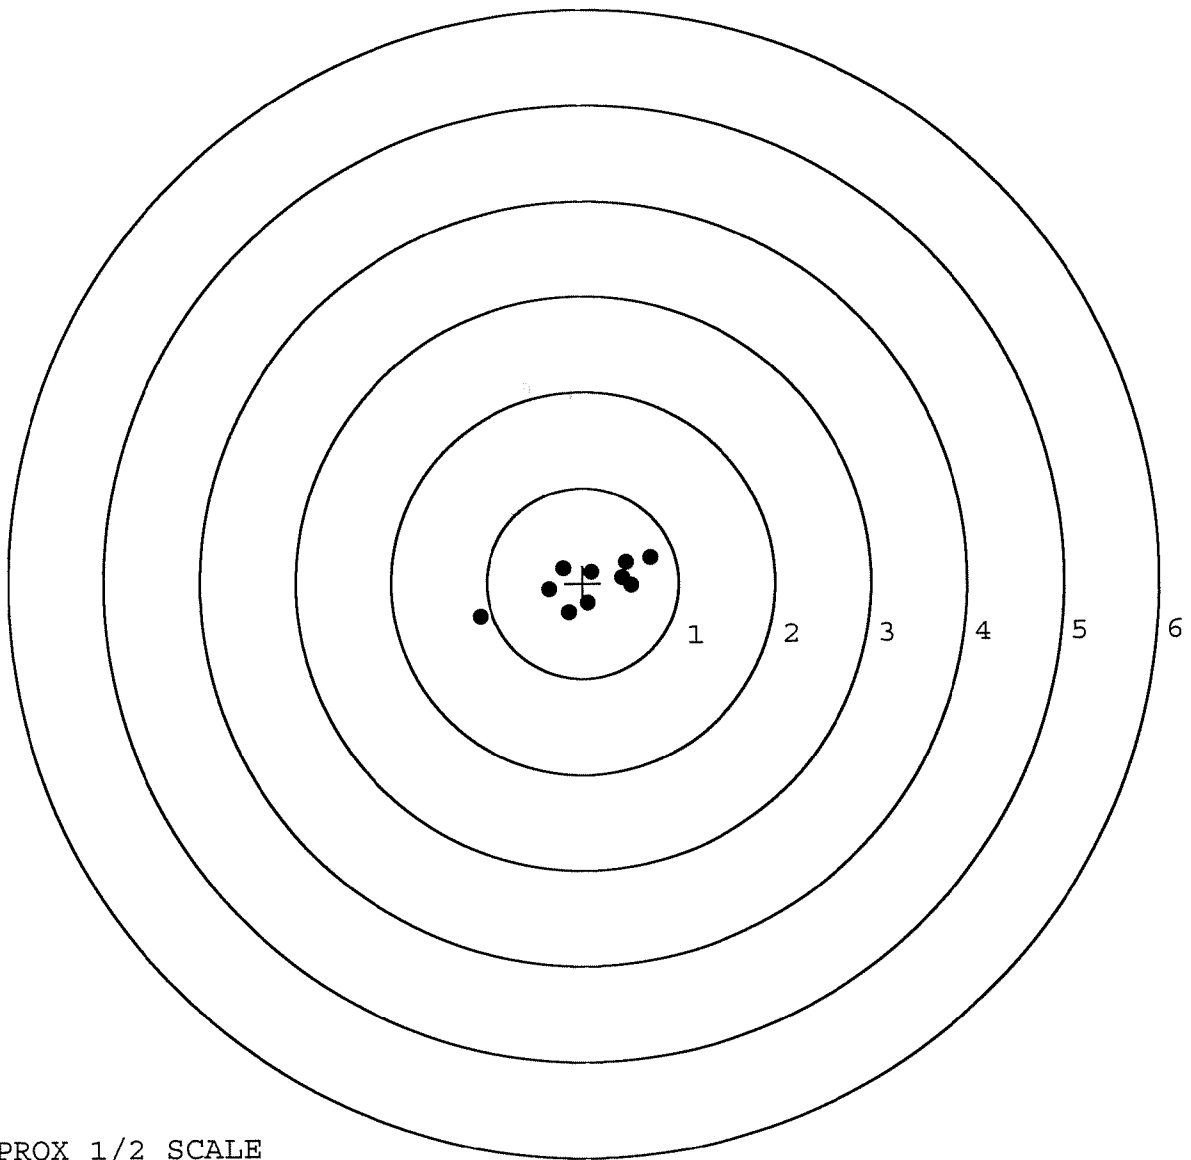


TARGET APPROX 1/2 SCALE

BARBER - M24 0049274

SERIAL NUMBER: C6225112. __1
 TARGET NUMBER: 4
 FILE DATE: 07/17/2006
 FILE TIME: 15:58

X CENTROID: -0.433
 Y CENTROID: 0.119
 POA TO CENTROID: 0.449
 HORZ SPREAD: 2.055
 VERT SPREAD: 0.972
 GROUP SPREAD: 2.055
 MIN RADIUS: 0.147
 MAX RADIUS: 1.378
 MEAN RADIUS: 0.593
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.527	-0.017
2:	0.944	0.090
3:	-0.462	-0.525
4:	-0.232	0.287
5:	-0.617	0.110
6:	-0.785	0.306
7:	-1.021	0.447
8:	-1.111	0.072
9:	-0.998	0.298
10:	-0.580	0.118

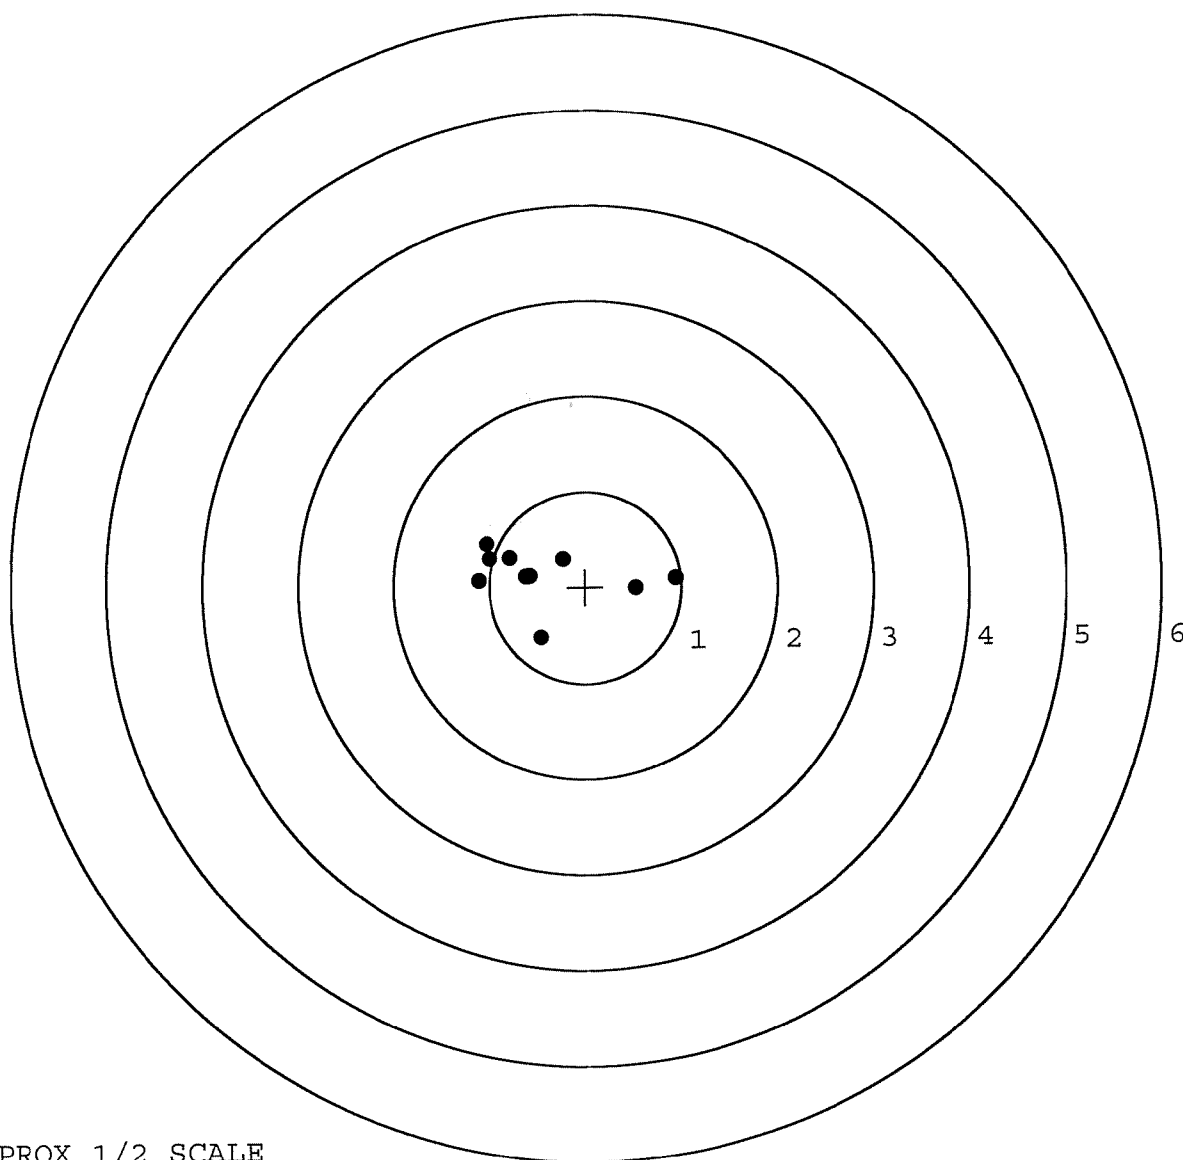


TARGET APPROX 1/2 SCALE

BARBER - M24 0049275

SERIAL NUMBER: C6225112. __1
TARGET NUMBER: 5
FILE DATE: 07/17/2006
FILE TIME: 15:58

X CENTROID: 0.033
Y CENTROID: 0.049
POA TO CENTROID: 0.059
HORZ SPREAD: 0.988
VERT SPREAD: 1.307
GROUP SPREAD: 1.534
MIN RADIUS: 0.132
MAX RADIUS: 0.882
MEAN RADIUS: 0.485
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.398	0.354
2:	-0.371	0.181
3:	-0.360	-0.069
4:	-0.397	-0.721
5:	0.460	-0.382
6:	0.590	-0.099
7:	0.111	-0.058
8:	0.101	0.286
9:	0.187	0.408
10:	0.406	0.586

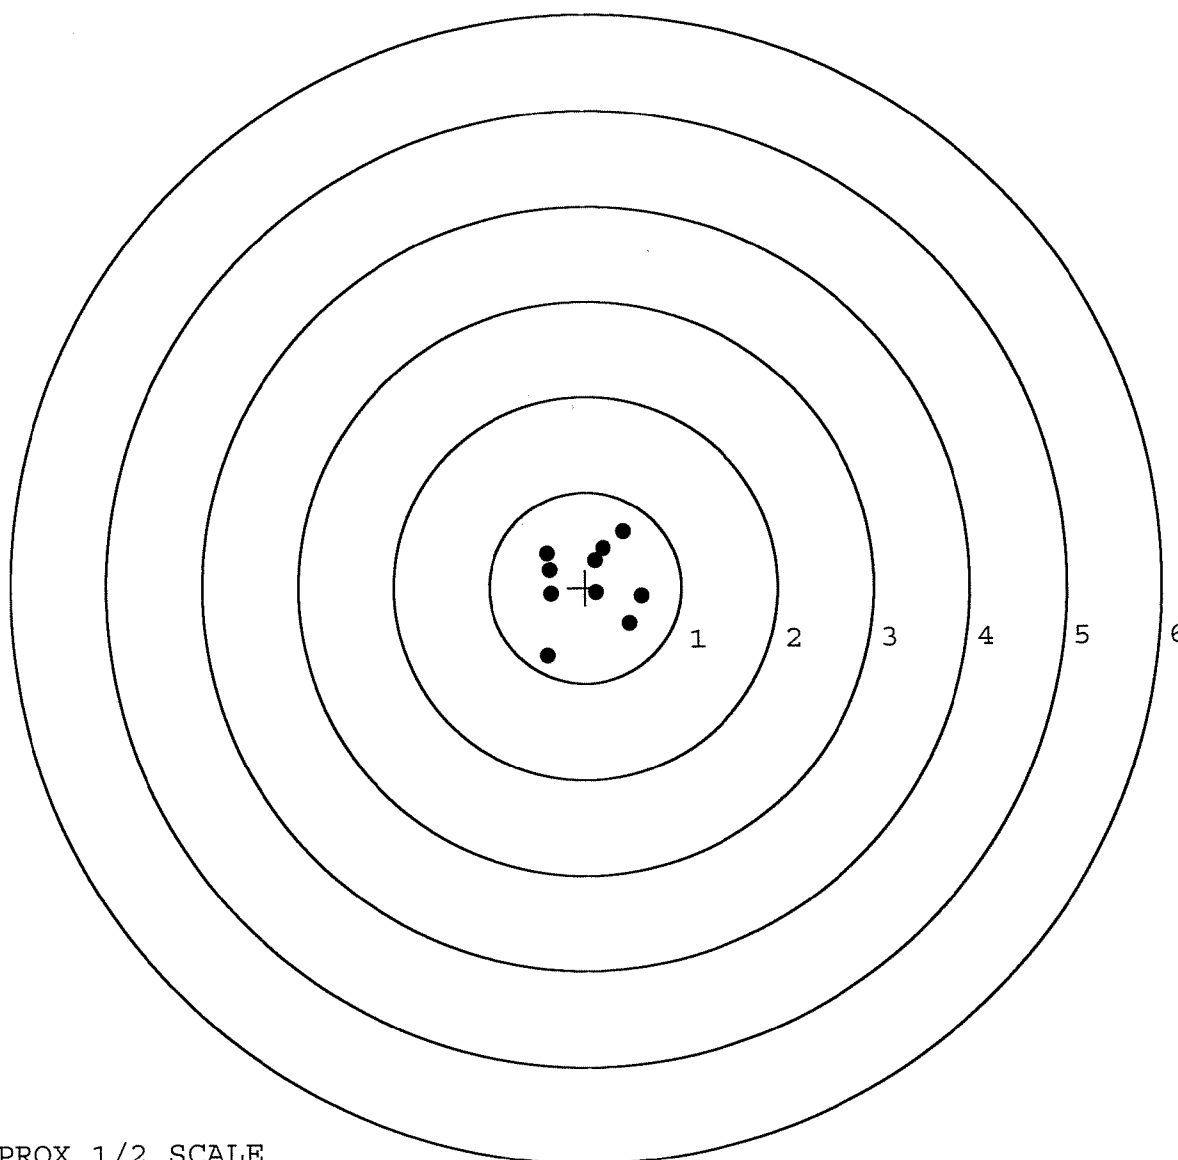

TARGET APPROX 1/2 SCALE

INSPECTION CHECKLIST - REPAIRS

CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER	114298			
SERIAL NUMBER	C6225112			
LOG-IN DATE	007-606			
OPERATION #	OPERATION NAME	DATE	INITIAL	
500	DIS-ASSEMBLE GUN	7-10-06	RTZ	
505	RE-BARREL	7-10-06	RTZ	
420	ASSEMBLE	7-10-06	RTZ	
440	PROOF	7-11-06	TRW	
460	CHECK HEADSPACE	7-11-06	TRW	
470	DIS-ASSEMBLE GUN	7-11-06	RTZ	
480	MAGNAFLUX	7-13-06	APD	
510	DRILL AND TAP	7-12-06	TRW	
500	ROLLMARK CALIBER	7-12-06	CW	
520	GOFF BLAST BBL / REC	7-13-06	LB	
530 & 540	APPLY COATINGS	7-13-06	AP	
560	FINAL ASSEMBLY	7-14-06	RTZ	
640	FUNCTION TEST AND	7-17-06	MOM	
650	TARGET	7-17-06	MOM	
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION	N/A	
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
670	FINAL INSPECTION	7-27-06	AC	
	A) HEADSPACE	7-27-06	AC	
	B) TRIGGER PULL	7-18-06	DA	
		7-18-06	DA	
680	F) SAFETY ON FORCE	7-18-06	DA	
	G) SAFETY OFF FORCE	7-18-06	DA	
	I) FIRING PIN INDENT	7-18-06	DA	
690	PACK	8-7-06	DA	

F006 REV 5/2006

BARBER - M24 0049277 FINAL INSPECTION CHECKLIST

BARREL ASSEMBLY	STOCK ASSEMBLY
_____ BARREL	_____ STOCK
_____ RECEIVER	_____ SLING SWIVEL STUDS
_____ FRONT SIGHT BASE	_____
_____ REAR SIGHT BASE	_____ BUTT PATE
_____ SCREWS	_____ LOCK NUTS
_____ FINISH	_____ BARREL CLEARANCE
	_____ COLOR / FINISH
SCOPE ASSEMBLY	SYSTEM CASE
_____ SCOPE	_____ SCOPE CASE
_____ SCOPE RINGS	_____ IRON SIGHTS
_____ MOUNTING SCREWS	_____ DEPLOYMENT KIT
_____ MOUNTING BASE	
_____ SCREWS	TRIGGER ASSEMBLY
_____ FINISH	_____ SAFETY OPERATION
_____ CLARITY	_____ RE-SET TO FACTORY SPECS
COMMENTS: _____	

F006 REV 5/2006

Repair Inquiry

Repair Number: RE00090883

Serial: C6225112 Model: M24 SWS Center Fire
Caliber: 7.62 NATO Produced: 03/21/1998

Repairmen:

Verify Repair:

Status:

Closed 1/11/2005 7:02:57 AM

Address Information

Customer:

Received From:

Return To:

Received From:

Name: COMMANDER

COMMANDER

Address 1: HCC1 325 AIRBORNE INF REG

HCC1 325 AIRBORNE INF REG

Address 2: ATTN AFVC BA

PO Box:

ATTN AFVC BA

PO Box:

City: FORT BRAGG

FORT BRAGG

State: NC

Zip Code: 28310

Country: US

State: NC

Zip Code: 28310

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NA

Fax:

Email:

Comments:

Received Condition

Fair

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Studs	3
A008	With Swivels	2
A010	Hard Case	1
A017	Scope Base	1
A042	Adjustable Butt Pad	1
A057	Fit and Rear Sgt Base	2

Repair Search

Refresh

Close

maglet

1/17/2005

8:48 AM

CAPS

NUM

INS

SCPL

start

3

Home Services

Serial Number: C6225112

Model: M24 SWS



RE00090883

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225112.___0
FILE DATE AND TIME: 02/02/2005 09:01

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	0.056
The Average Y Centroid of the Five Target Set:	0.033
The Average Point of Impact of the Five Target Set:	0.065
The Average Mean Radius of the Five Target Set:	0.511
The Distance from POA to Centroid Target #1:	0.162
The Distance from Centroid Target #2 to Centroid Target #1:	0.110
The Distance from Centroid Target #3 to Centroid Target #1:	0.210
The Distance from Centroid Target #4 to Centroid Target #1:	0.183
The Distance from Centroid Target #5 to Centroid Target #1:	0.096

BARBER - M24 0049280

SERIAL NUMBER: C6225112.___0
TARGET NUMBER: 1
FILE DATE: 02/02/2005
FILE TIME: 09:01

X CENTROID: 0.118
Y CENTROID: 0.111
POA TO CENTROID: 0.162
HORZ SPREAD: 1.875
VERT SPREAD: 1.678
GROUP SPREAD: 2.216
MIN RADIUS: 0.144
MAX RADIUS: 1.324
MEAN RADIUS: 0.659
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.016	-0.862
2:	0.423	-0.056
3:	0.870	0.361
4:	0.597	0.556
5:	0.241	0.816
6:	-0.026	0.098
7:	-0.114	-0.151
8:	-0.462	0.174
9:	-0.508	-0.145
10:	-0.859	0.319

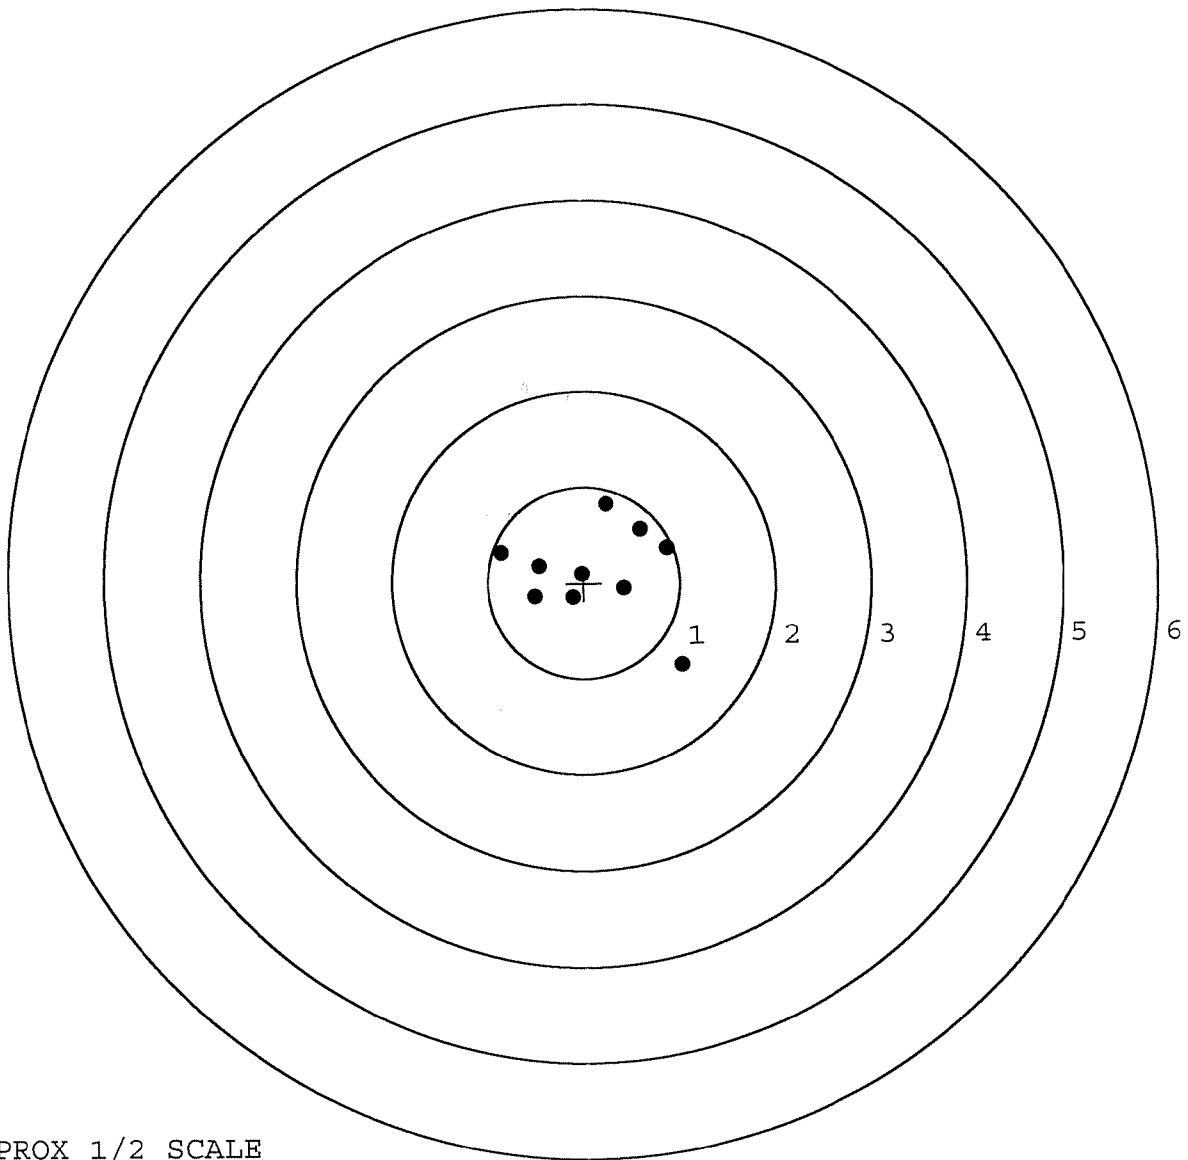


TARGET APPROX 1/2 SCALE

BARBER - M24 0049281

SERIAL NUMBER: C6225112. __0
TARGET NUMBER: 2
FILE DATE: 02/02/2005
FILE TIME: 09:01

X CENTROID: 0.009
Y CENTROID: 0.096
POA TO CENTROID: 0.096
HORZ SPREAD: 1.045
VERT SPREAD: 1.577
GROUP SPREAD: 1.577
MIN RADIUS: 0.138
MAX RADIUS: 0.922
MEAN RADIUS: 0.475
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.004	1.018
2:	-0.060	0.664
3:	-0.573	0.451
4:	-0.287	0.004
5:	-0.083	-0.007
6:	0.167	-0.034
7:	0.472	-0.168
8:	0.024	-0.559
9:	0.329	-0.276
10:	0.096	-0.135

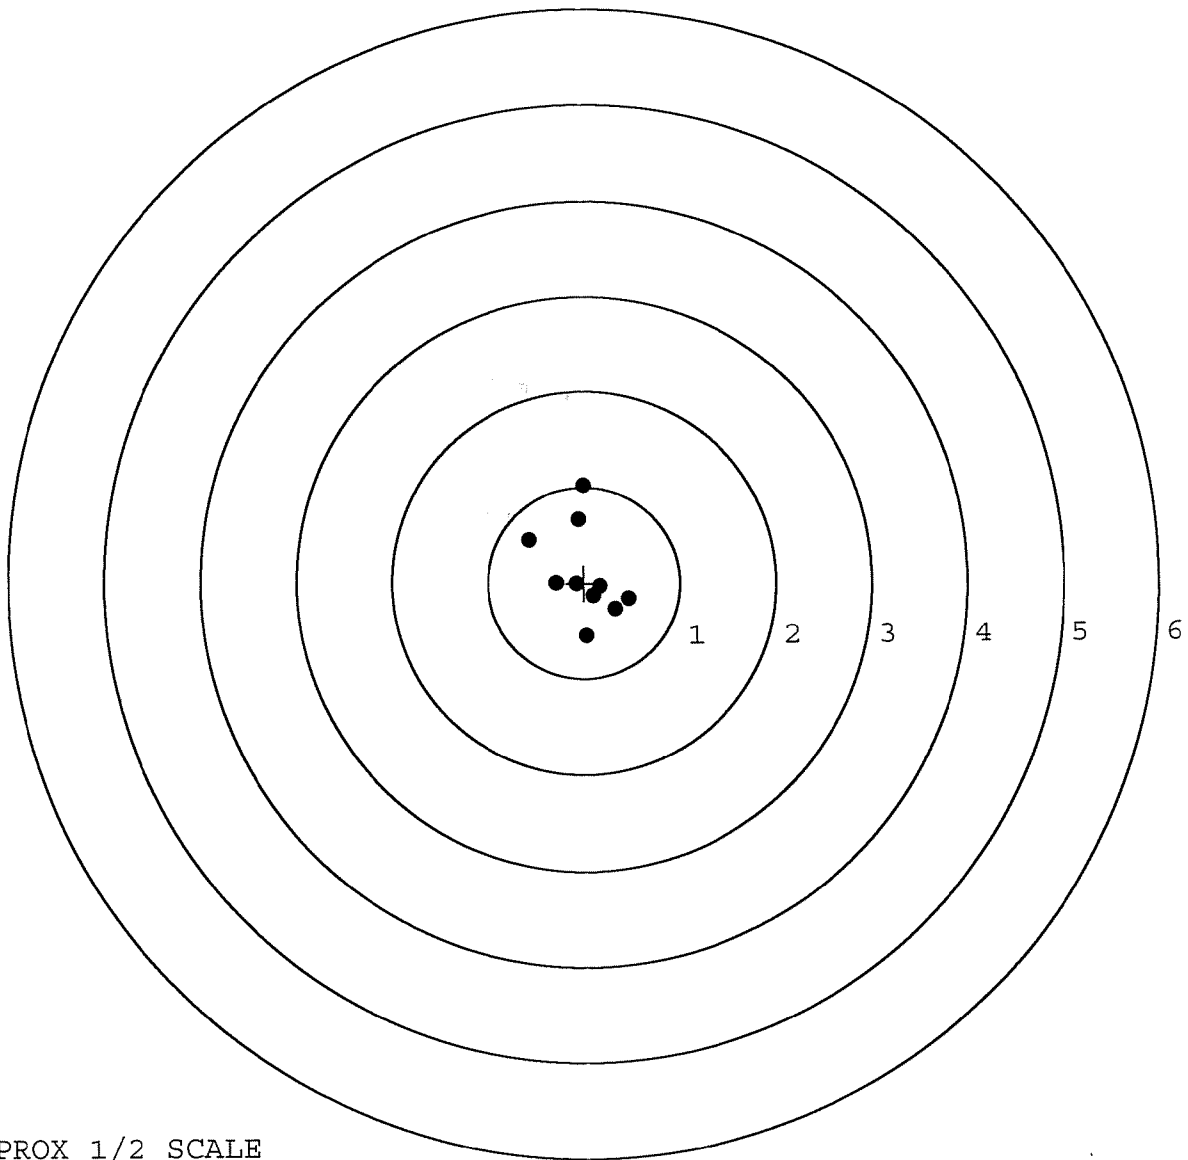


TARGET APPROX 1/2 SCALE

BARBER - M24 0049282

SERIAL NUMBER: C6225112.____0
TARGET NUMBER: 3
FILE DATE: 02/02/2005
FILE TIME: 09:01

X CENTROID: 0.135
Y CENTROID: -0.098
POA TO CENTROID: 0.167
HORZ SPREAD: 1.079
VERT SPREAD: 0.858
GROUP SPREAD: 1.172
MIN RADIUS: 0.174
MAX RADIUS: 0.687
MEAN RADIUS: 0.434
IN 1 IN DIAMETER: 7
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.247	-0.588
2:	-0.390	-0.125
3:	-0.488	0.191
4:	-0.013	-0.007
5:	0.234	0.165
6:	0.430	0.270
7:	0.415	0.052
8:	0.445	-0.185
9:	0.591	-0.266
10:	0.375	-0.486

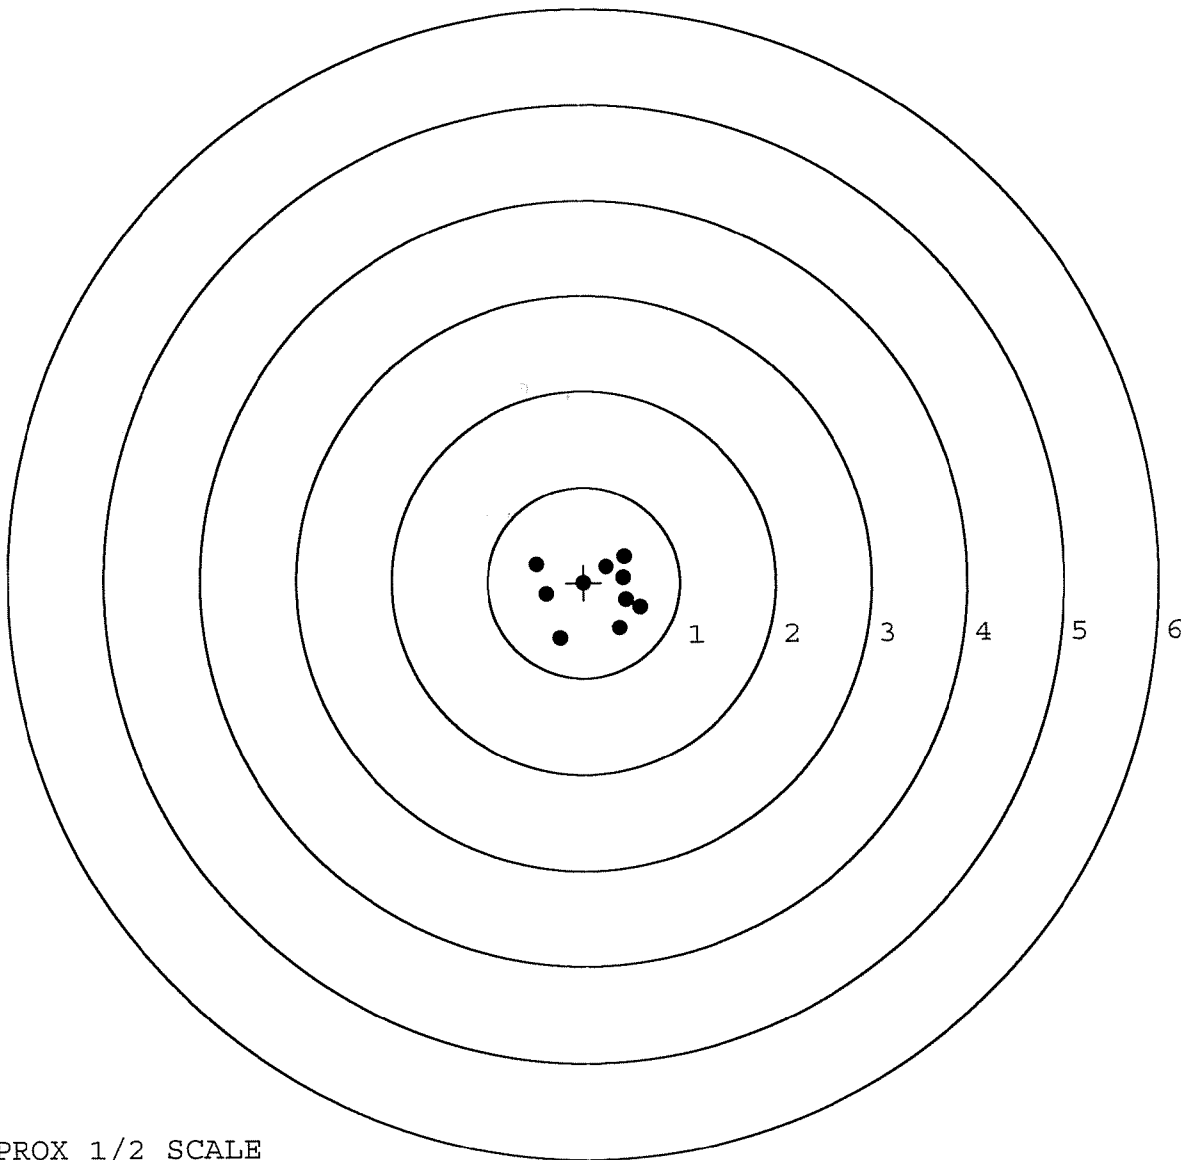

TARGET APPROX 1/2 SCALE


BARBER - M24 0049283

SERIAL NUMBER: C6225112. __0
TARGET NUMBER: 4
FILE DATE: 02/02/2005
FILE TIME: 09:01

X CENTROID: -0.043
Y CENTROID: 0.023
POA TO CENTROID: 0.048
HORZ SPREAD: 1.096
VERT SPREAD: 1.784
GROUP SPREAD: 1.842
MIN RADIUS: 0.121
MAX RADIUS: 1.014
MEAN RADIUS: 0.542

IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.481	-0.892
2:	-0.189	-0.580
3:	-0.496	-0.142
4:	-0.024	-0.248
5:	-0.366	0.355
6:	-0.021	0.892
7:	0.600	0.561
8:	0.222	0.340
9:	0.252	-0.107
10:	0.076	0.047

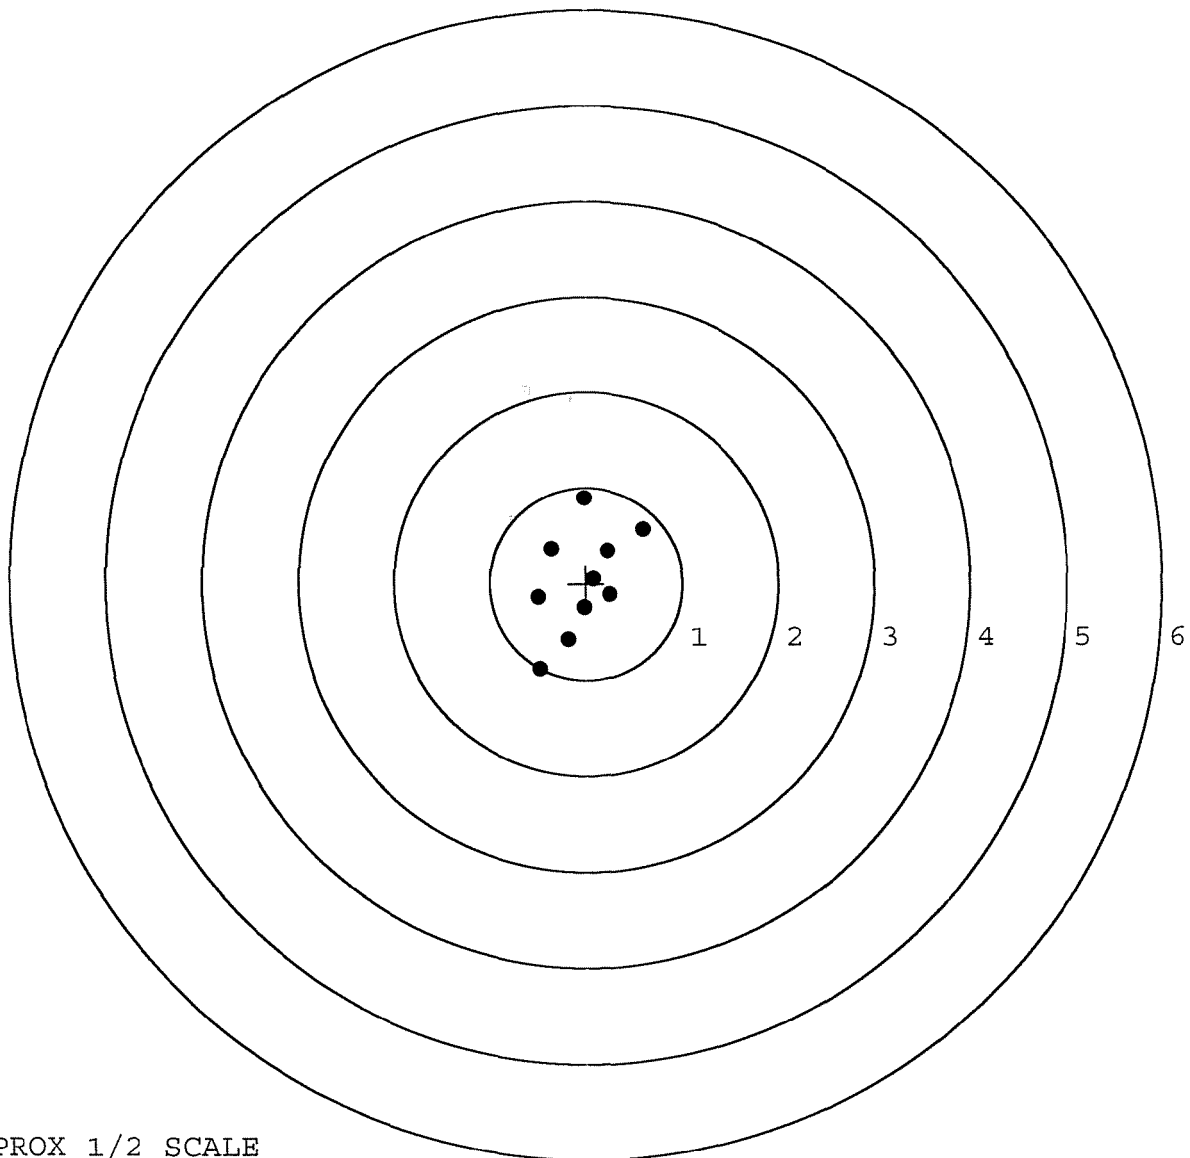


TARGET APPROX 1/2 SCALE

BARBER - M24 0049284

SERIAL NUMBER: C6225112. __0
TARGET NUMBER: 5
FILE DATE: 02/02/2005
FILE TIME: 09:01

POINT#	X	Y
1:	-0.136	0.936
2:	0.770	-0.010
3:	0.056	-0.804
4:	0.318	0.183
5:	0.310	-0.085
6:	0.020	-0.274
7:	-0.192	0.300
8:	-0.458	0.001
9:	-0.118	0.056
10:	0.037	0.033

X CENTROID: 0.061
Y CENTROID: 0.034
POA TO CENTROID: 0.069
HORZ SPREAD: 1.228
VERT SPREAD: 1.740
GROUP SPREAD: 1.751
MIN RADIUS: 0.024
MAX RADIUS: 0.924
MEAN RADIUS: 0.445
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

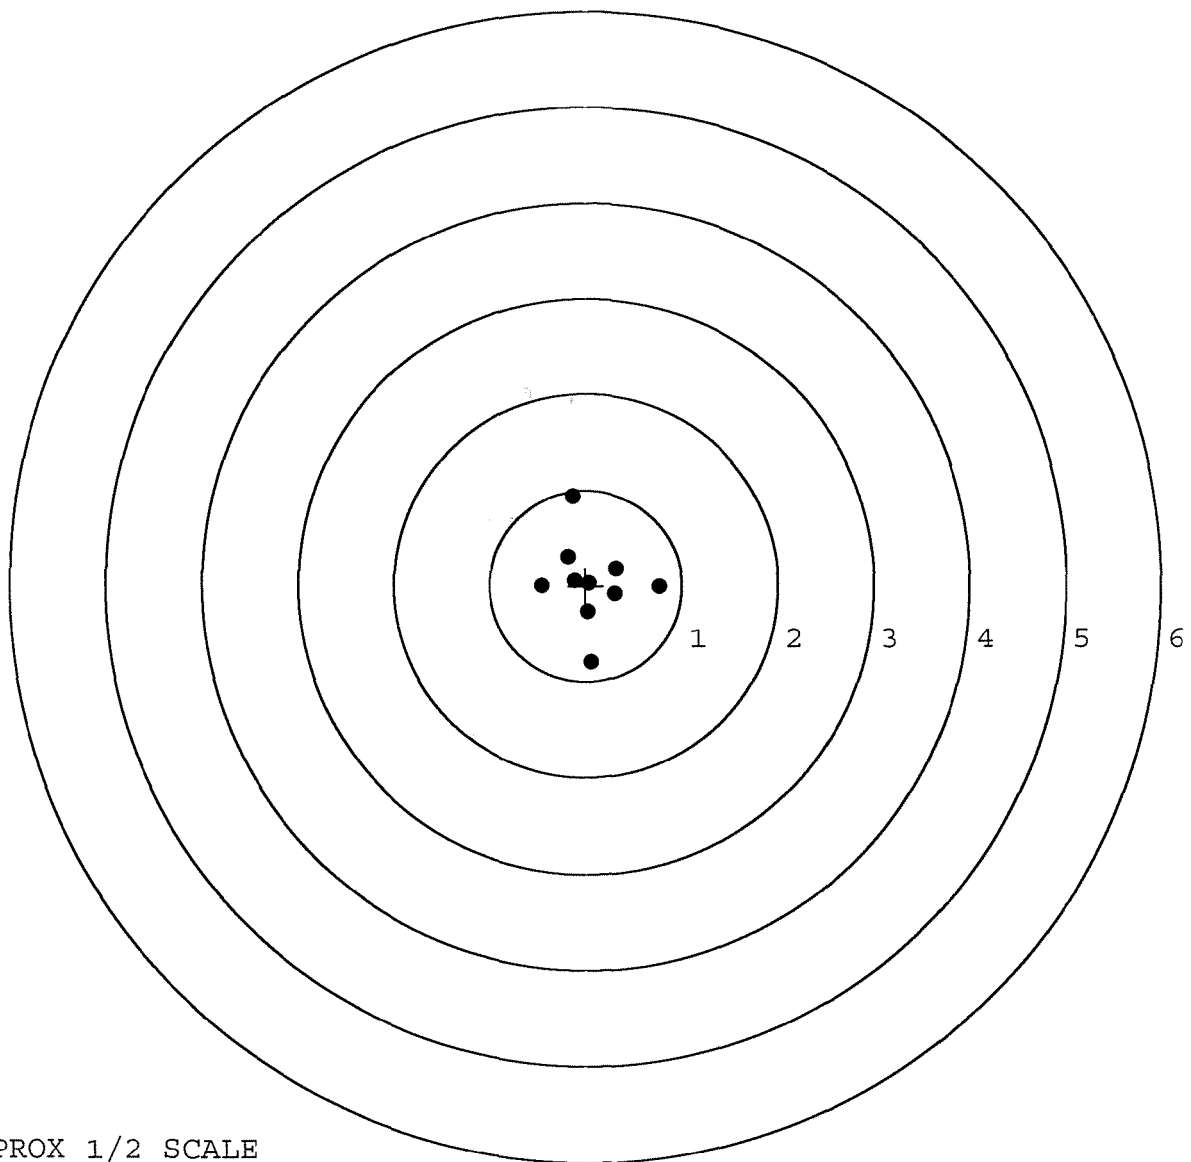

TARGET APPROX 1/2 SCALE

R & E NUMBER	90883		
SERIAL NUMBER	C6225112		
LOG-IN DATE	1-11-05		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	1-18-05	RTL
560 A	RE-BARREL	1-18-05	RTL
B	DRILL AND TAP	1-26-05	TRW
575	ASSEMBLE	1-20-05	RTL
600	PROOF	1-24-05	AC
605	CHECK HEADSPACE	1-24-05	AC
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX	OPERATOR	
615	ROLLMARK CALIBER	1-27-05	CW
618	ROTO-BLAST	1-27-05	LB
620	APPLY COATINGS	1/29/05	HP
625 A	FINAL ASSEMBLY	1-31-05	RTL
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	2-2-05	AC
655	FINAL INSPECT	2-11-05	RL
660	PACK	2-11-05	OA
		SHIP DATE	
		QAR INSPECTION DATE	

BARBER - M24 0049286

SWS

R

INITIAL	CUSTOMER ORDER NO.
DJU	AMBAA1906039

DATE RECEIVED	DATE OPENED
11/05/99	11/09/99

SERIAL NUMBER
C6225112

NEW SERIAL NUMBER

MODEL AND GRADE		
700	7.62NAT.	M/24-CAMO

ACCESSORIES	SLING STRAP	W/STUDS
-------------	-------------	---------

W/SWIVELS
W/SCOPE, BI-FOD

~~HARD CASE~~ ~~SCOPE BASE~~

SHIP TO:

COMMANDER
HHC I-325 A.I.R.
FORT BRAGG

NC 28307

COMMANDER
HHC I-325 A.I.R.
FORT BRAGG

NC
28307

CUST NO: 215072 C.O.D.

ACCOUNT NUMBER N/C

WRITE ☐

ESTIMATED

UPS

GUN CONDITION

☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL	
-------	--

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

TRIGGER GROUP	B2			E1	F1
---------------	----	--	--	----	----

BOLT ASSY.	B3	E2	72
------------	----	----	----

BARREL ASSY.	34	01	E3	F3
--------------	----	----	----	----

REC. ASSY.	65	D2	E4	F4
------------	----	----	----	----

WOOD	C1	D3	E5	F5
------	----	----	----	----

METAL	C2
-------	----

MAIN FAULT

COMMENTS

BBL	96003
EXtractor	91816

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
-----------	-------	-------	------	--------	---------

GALLERY TESTER	DATE	DATE	DATE	DATE	DATE
----------------	------	------	------	------	------

1-22-00	2-3-00	2-3-00
---------	--------	--------

RD6925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 ~~0049286~~ **M2400049325**

PACKING LIST		PACKED BY LT CHARLES HITER HHC 1-325 AIR	1. NO. BOXES 1	2. REQUISITION NO. ANBAA 1906039		
3. END ITEM M24 SNIPER WPN SYSTEM W/ DAY OPTIC NSN: 1005012462136				4. DATE 03 NOV 99		
				5. PAGE 1 OF 1 PAGES		
BOX NO.	CONTENTS - STOCK NUMBER AND NOMENCLATURE	UNIT OF ISSUE	QUANTITIES REQUIRED			
(a)	(b)	(c)	INITIAL OPERATIO (d)	RUNNING SPARES (e)	TOTAL (f)	
1	M24 SN C622511Z	1			1	
1	DAY OPTIC ULTRA 10X, M3A SN 880416	1			1	
6. THIS CERTIFIES THAT ITEMS LISTED HEREON ARE WITHIN THE SPECIFIED BOXES						
TYPED NAME AND TITLE CHARLES L HITER EXECUTIVE OFFICER			SIGNATURE Charles L Hiter LT			

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG				PAGE NO 1		NO OF PAGES 1		REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)					
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA									
1a. UIC CUSTOMER WABMT, O		1b. CUSTOMER UNIT NAME HHC-325 A1R		1c. PHONE NO 704326823		3a. WORK ORDER NUMBER (WOM)		3b. SHOP		3c. PHONE NO			
2a. SAMS-2 UIC/SAMS-I/TDA W.H.3.X.B.O		2b. UTILIZATION CODE		2c. MCSR		4a. UIC SUPPORT UNIT W.H.3.X.B.O		4b. SUPPORT UNIT NAME 407 TSO					
SECTION III - EQUIPMENT DATA													
5. TYPE MNT REQ CODE 1		6. ID A		7. NSN 1005012402136		15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751							
8. MODEL M24 S.W.S.						15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751 A		16. MILES/KILOMETERS/HOURS/ROUNDS M		K			
9. NOUN								H		R			
10a. ORG WON/DOC NO H.H.6.A.A.19.06039		10b. EIC											
11. SERIAL NUMBER 26225112/580416		12. QTY 1		13. PD 0.2		17. PROJECT CODE (if assigned)		18. ACCOUNT PROCESSING CODE		19. IN WARRANTY? (enter Y or N)			
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)						21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)		20. ADMIN NO H424-2					
						22. LEVEL OF WORK L		23. SIGNATURE					
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs) SEE A ATTACHED 2404													
25. REMARKS M24 WITH DAY OPTIC (SN 88 0416)													
26. TECHNICAL REFERENCES													
SECTION IV - TASK REQUIREMENTS DATA													
27a. FILE INPUT ACT CD		27b. TASK NO	27c. ACT CODE	27d. TASK DESCRIPTION			27e. QTY TO BE RPR	27f. WORK CENTER	27g. FAILURE CODE	27h. MH PROJ	27i. MH EXP		
SECTION V - PART REQUIREMENTS													
28a. FILE INPUT ACT CD	28b. TASK NO	28c. ID NO	28d. NSN OR PART NUMBER			28e. SFX CD	28f. QTY RQD	28g. QTY ISSUED	28h. NMCS CD	28i. FAILURE CODE	28j. STORAGE LOCATION	28k. INITIALS	28l. COST \$
28m. TOTAL MANHOURS			28n. TOTAL MANHOURS COSTS \$			28o. TOTAL PARTS COSTS \$							
SECTION VI - COMPLETION DATA													
29. QTY RPR			30. QTY CONDEMN		31. QTY NRTS		32. EVAC WON			33. EVAC UNIT NAME			
SECTION VII - ACTION SIGNATURES													
34a. SUBMITTED BY CHATER		35a. ACCEPTED BY		35c. DATE		36a. WORK STARTED BY		37a. INSPECTED BY			38a. PICKED UP BY		
34b. DATE JUL 1, 1993		35b. STATUS		35d. TIME		36b. STATUS		36c. DATE		36d. TIME		37b. STATUS	
												37c. DATE	
												37d. TIME	
												38b. STATUS	
												38c. DATE	
												38d. TIME	

BARBER - M24 0049289

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 004928949328

BARBER - M24 0049290

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225112
7 Feb 2000

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .11
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .079
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .135429

THE AMR FOR THIS RIFLE IS: 1.114

CENTROIDAL DISTANCES

0	TO	1	.105683
1	TO	2	.120702
1	TO	3	.868664
1	TO	4	.381026
1	TO	5	.0643817

3
4 <----POA
52

BARBER - M24 0049291

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐
POA TO CENTROID: .106
MIN RADIUS : .726
MEAN RADIUS : 1.240
MAX RADIUS : 2.024
CENTROID X : -.060
CENTROID Y : -.087

4 Feb 2000

FILE:/Hqbasic/Accuracy/Patterning/Centerfire_Patt/c6225112

CENTERFIRE PATTERN # 1

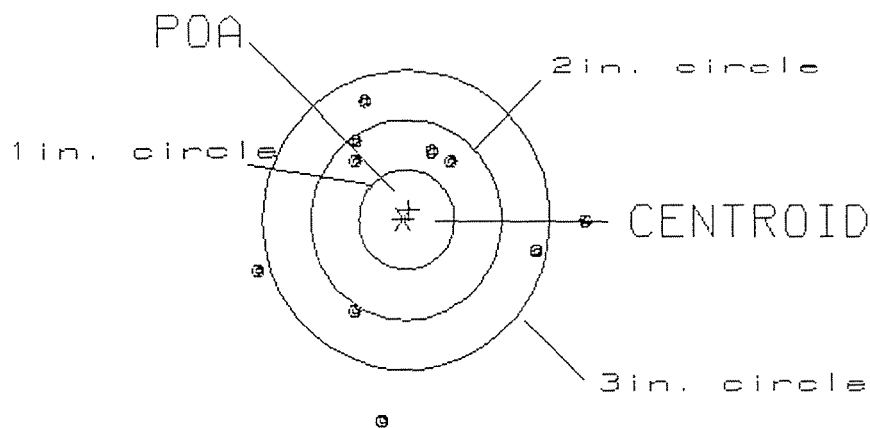

OF SHOTS= 10

IN CIRCLE

HS= 3.37

0

VS= 3.16

4

GS= 3.40

7

BARBER - M24 0049292

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐
POA TO CENTROID: .142
MIN RADIUS : .671
MEAN RADIUS : 1.293
MAX RADIUS : 2.137
CENTROID X : .052
CENTROID Y : -.132

4 Feb 2000

FILE:/Hqbasic/Accuracy/Patterning/Centerfire_Patt/c6225112

CENTERFIRE PATTERN # 2

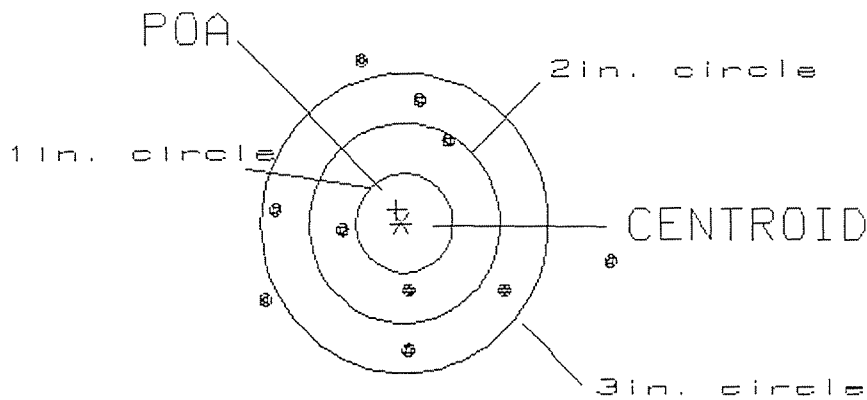

OF SHOTS= 10

IN CIRCLE

HS= 3.52

0

VS= 2.97

3

GS= 3.54

7

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .764
 MIN RADIUS : .347
 MEAN RADIUS : 1.499
 MAX RADIUS : 3.093
 CENTROID X : .344
 CENTROID Y : .682

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225112

CENTERFIRE PATTERN # 3

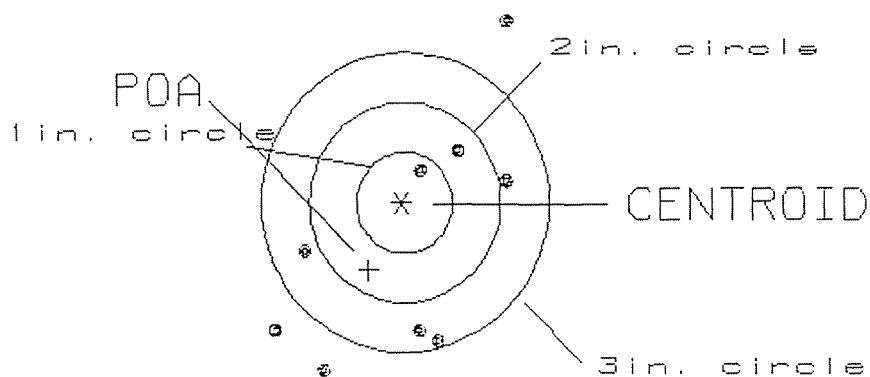

OF SHOTS= 10

IN CIRCLE

H3= 2.42

1

US= 4.76

2

GS= 4.79

6

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐
 POA TO CENTROID: .293
 MIN RADIUS : .024
 MEAN RADIUS : .910
 MAX RADIUS : 1.408
 CENTROID X : .281
 CENTROID Y : .083

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225112

CENTERFIRE PATTERN # 4

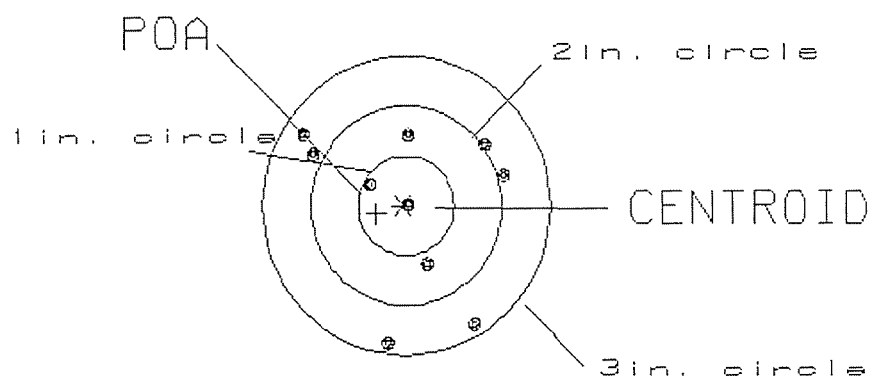

OF SHOTS= 10

IN CIRCLE

HS= 2.10

2

VS= 2.12

5

GS= 2.66

10

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 5
 POA TO CENTROID: .165
 MIN RADIUS : .203
 MEAN RADIUS : .629
 MAX RADIUS : 1.177
 CENTROID X : -.067
 CENTROID Y : -.151

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225112

CENTERFIRE PATTERN # 5

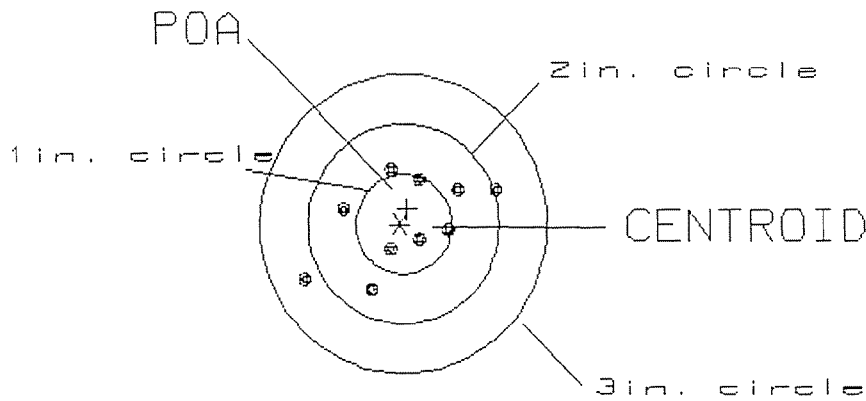

OF SHOTS= 10

IN CIRCLE

HS= 1.98
 VS= 1.23
 GS= 2.18

3
 6
 10

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO.

C6225112

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	12-13-99	Rw
605	CHECK HEADSPACE	12-13-99	Rw
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	2-3-00	Rw
655	FINAL INSPECT	2-8-00	Rw
660	PACK		
QAR INSPECTION		SHIP DATE	

Final Inspection

Sn: C6225112

DATE REC'D: 11-5-99

DATE RET'D:

AUDITOR: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ Stock☒ Sling Swivel Studs☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

System's Case

☐ Scope Case☐ Iron SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225112
4 Jan 1900

CENTROIDAL DISTANCES

0 TO	1	.19757
1 TO	2	.591838
1 TO	3	.794048
1 TO	4	.604003
1 TO	5	.273095


$25r^4$ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0792
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0404
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0889089
THE AMR FOR THIS RIFLE IS: 1.208

4 Jan 1900

FILE:/PATTERNING/CENTERFIRE_PATT/C6225112

CENTERFIRE PATTERNS # 1

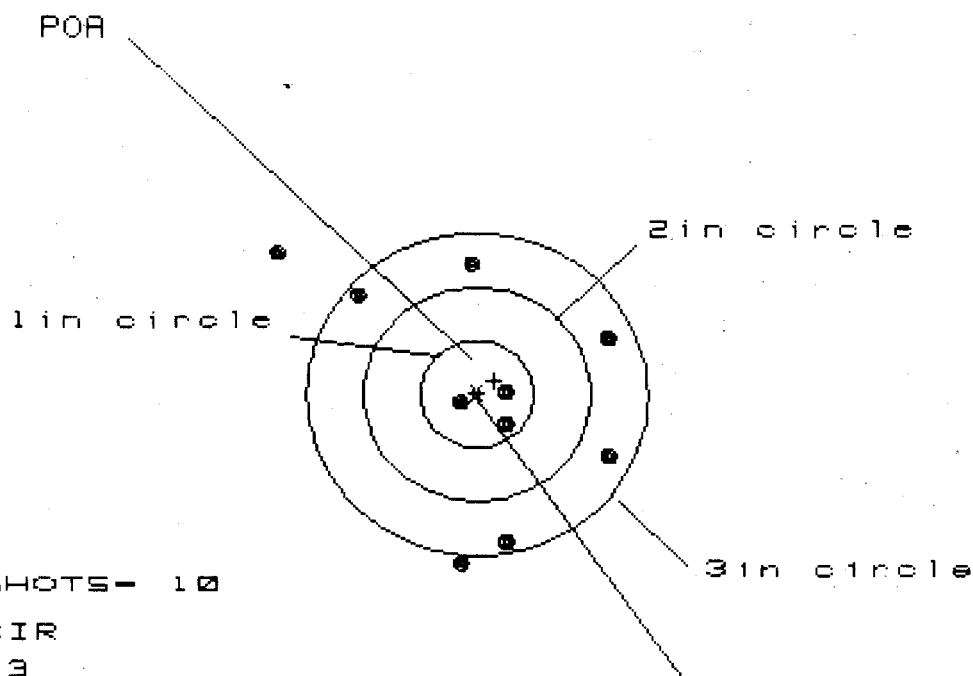

OF SHOTS- 10

IN CIR

1in = 3

2in = 3

3in = 8

HS= 2.926

VS= 2.840

GS= 3.451


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.171	.976	.939
MINIMUM X	-1.755	-1.290	-1.328
MAXIMUM Y	1.280	1.334	1.157
MINIMUM Y	-1.560	-1.418	-1.445
CENTROID X	-.153	.042	.080
CENTROID Y	-.125	-.267	-.090
POA TO CENTROID in.	.197	.271	.120
MIN RADIUS	.161	.161	.079
MEAN RADIUS	1.117	.958	.892
MAX RADIUS	2.173	1.661	1.587
HORIZONTAL SPREAD	2.926	2.266	2.266
VERTICAL SPREAD	2.840	2.752	2.602
EXTREME SPREAD	3.451	2.754	2.692
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	8		

4 Jan 1908

FILE:/PATTERNING/CENTERFIRE_PATT/C6225112

CENTERFIRE PATTERNS # 2

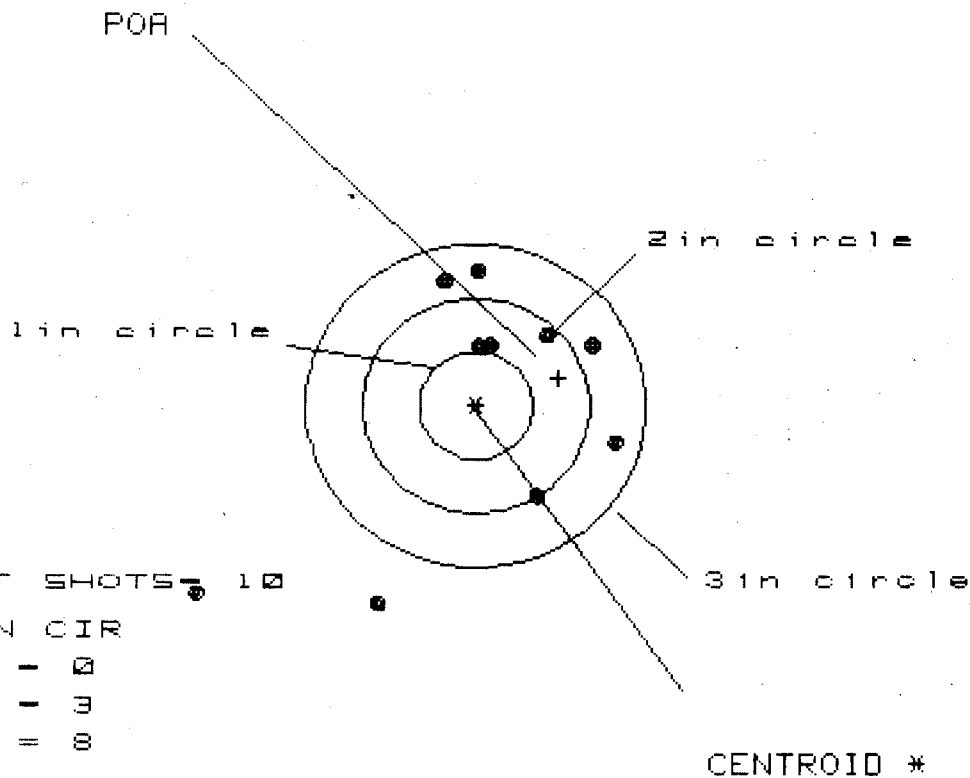

OF SHOTS 10

IN CIR

1in = 0

2in = 3

3in = 8

HS= 3.695

VS= 3.043


GS= 4.162

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.248	.977	.830
MINIMUM X	:	-2.446	-1.174	-.661
MAXIMUM Y	:	1.239	1.041	.790
MINIMUM Y	:	-1.804	-2.002	-1.333
CENTROID X	:	-.729	-.457	-.310
CENTROID Y	:	-.261	-.063	.188
POA TO CENTROID in.	:	.774	.461	.362
MIN RADIUS	:	.550	.409	.308
MEAN RADIUS	:	1.306	1.000	.749
MAX RADIUS	:	3.027	2.321	1.335
HORIZONTAL SPREAD	:	3.695	2.151	1.491
VERTICAL SPREAD	:	3.043	3.043	2.123
EXTREME SPREAD	:	4.162	3.172	2.189
NUMBER IN ONE INCH CIRCLE	=	0		
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		8	

4 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225112

CENTERFIRE PATTERNS # 3

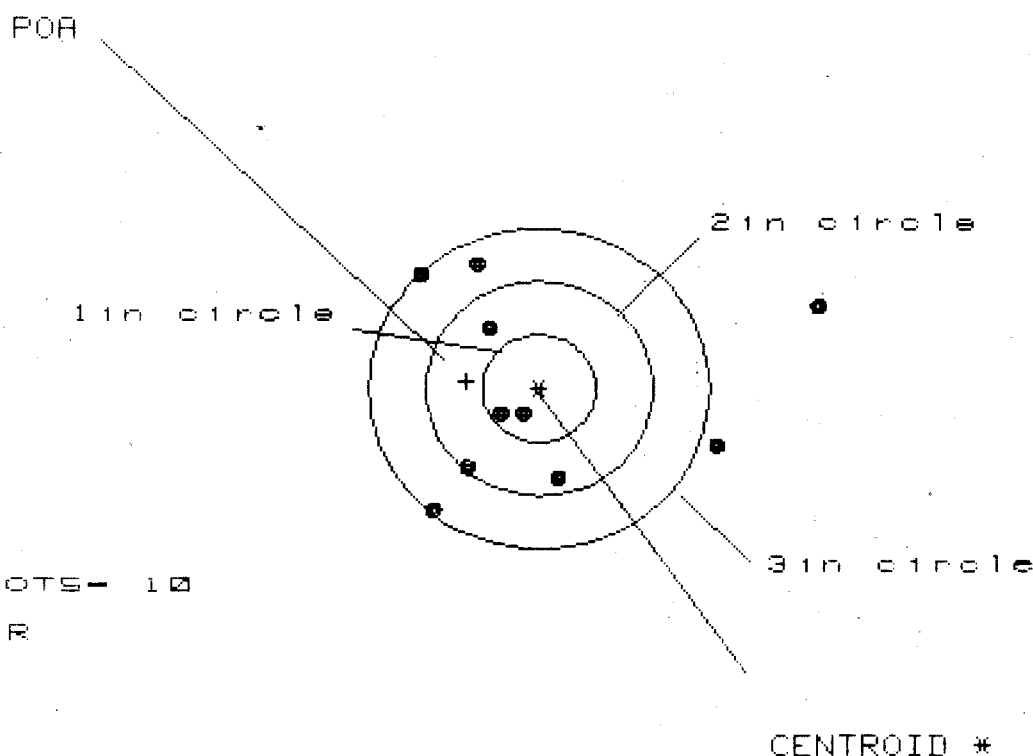

OF SHOTS- 10

IN CIR

1in - 2

2in - 5

3in - 6

HS- 3.518

VS- 2.321


GS- 3.938

PATTERN #	:	3	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	2.435	1.808	.655
MINIMUM X	:	-1.083	-.813	-.587
MAXIMUM Y	:	1.148	1.238	1.187
MINIMUM Y	:	-1.173	-1.083	-1.134
CENTROID X	:	.639	.369	.142
CENTROID Y	:	-.068	-.158	-.107
POA TO CENTROID in.	:	.643	.401	.178
MIN RADIUS	:	.253	.144	.245
MEAN RADIUS	:	1.163	.933	.830
MAX RADIUS	:	2.564	1.853	1.293
HORIZONTAL SPREAD	:	3.518	2.621	1.241
VERTICAL SPREAD	:	2.321	2.321	2.321
EXTREME SPREAD	:	3.938	3.073	2.357
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		6	

4 Jan 1900

FILE:/PATTERNING/CENTERFIRE_PATT/06225112

CENTERFIRE PATTERNS # 4

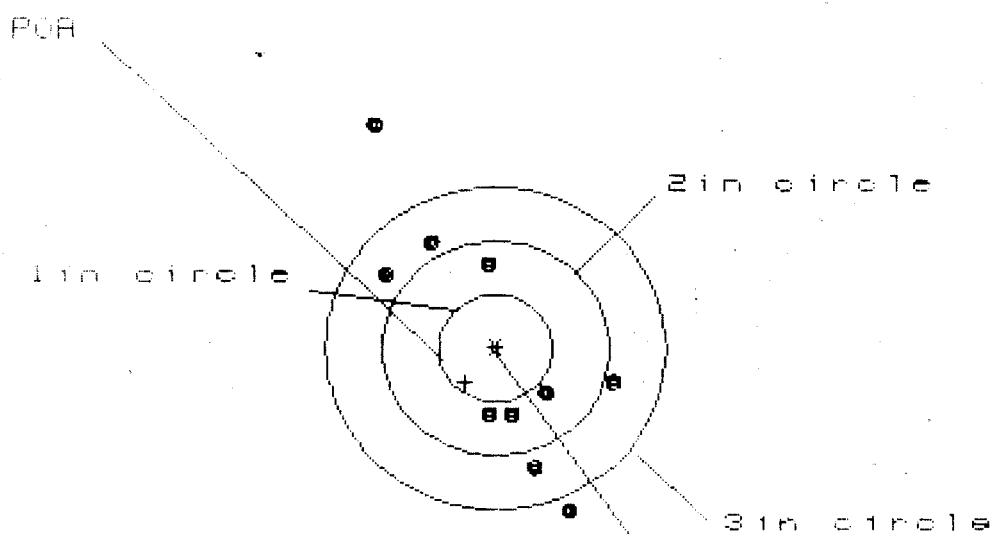

* OF SHOTS - 10

IN CTR

1in = 0

2in = 4

3in = 8

HS = 2.137

VS = 3.604

ES = 4.000

CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.067	.948	1.017
MINIMUM X	:	-1.070	-1.067	-.998
MAXIMUM Y	:	2.064	1.236	1.072
MINIMUM Y	:	-1.540	-1.311	-1.033
CENTROID X	:	.265	.384	.315
CENTROID Y	:	.311	.082	.246
POA TO CENTROID in.	:	.409	.392	.400
MIN RADIUS	:	.595	.348	.520
MEAN RADIUS	:	1.125	.924	.891
MAX RADIUS	:	2.325	1.420	1.253
HORIZONTAL SPREAD	:	2.137	2.015	2.015
VERTICAL SPREAD	:	3.604	2.547	2.105
EXTREME SPREAD	:	4.000	2.834	2.313
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		8	


4 Jan 1988

FILE: \PATTERNING\CENTERFIRE_PATT\06225112

CENTERFIRE PATTERNS

5

POA

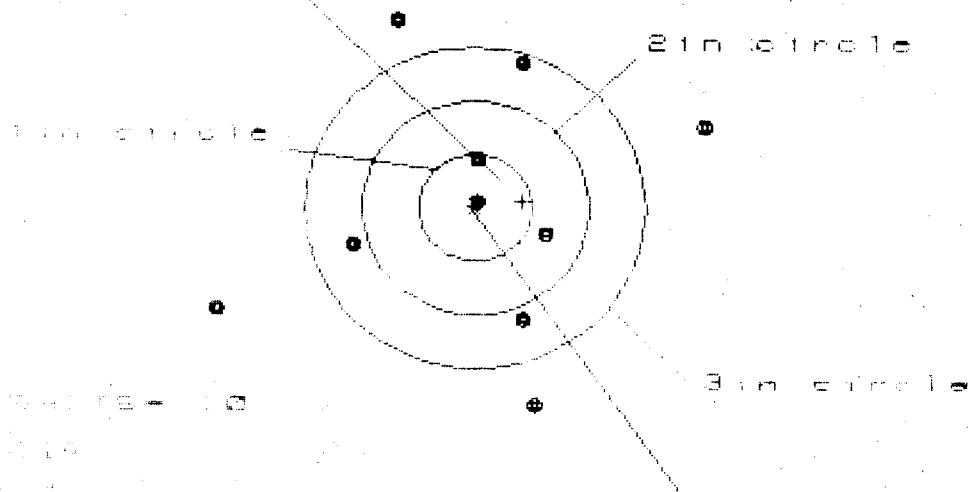

5 - 10

5 - 10

1 - 10

2 - 10

3 - 10

4 - 10

5 - 10

6 - 10

CENTROID *

PATTERN #

5

SHOTS (CENT OF)	10	9	8
MAXIMUM X	2.035	1.780	.623
MINIMUM X	-2.290	-1.345	-1.122
MAXIMUM Y	1.718	1.617	1.702
MINIMUM Y	-1.825	-1.926	-1.841
CENTROID X	-.418	-.163	-.386
CENTROID Y	-.059	.042	-.043
POA TO CENTROID IN.	.422	.169	.388
MIN RADIUS	.029	.265	.035
MEAN RADIUS	1.328	1.202	1.078
MAX RADIUS	2.464	1.940	1.895
HORIZONTAL SPREAD	4.325	3.125	1.745
VERTICAL SPREAD	3.543	3.543	3.543
EXTREME SPREAD	4.645	3.714	3.714
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		3	
NUMBER IN THREE INCH CIRCLE =		6	

RECEIVING AND ESTIMATING REPORT

BARBER - M24 0049304

COMMENTS

ORDER
R 96-16576INITIAL
FPS

CUSTOMER ORDER NO.

M-24 SNIPER W/DEPLOYMENT KIT
W/ULTRA 10X-M3A SCOPEDATE RECEIVED
07/16/96DATE OPENED
07/16/96

DATE CODE

SERIAL NUMBER

C6225112

NEW SERIAL NUMBER

MODEL AND GRADE

700 7.62

NATO

ACCESSORIES

W/STUDS

HARD CASE

SCOPE MNTS

SCOPE BASE

Scope S/N 88-0485

FROM:

SHIP TO:

TRANSPORTATION OFFICER
ROCK ISLAND ARSENAL
BLDG 299 (SIORI-IST
ROCK ISLAND

IL 61299

TRANSPORTATION OFFICER
ROCK ISLAND ARSENAL
BLDG 299 (SIORI-IST
ROCK ISLAND

IL 61299

CUST NO: 145587 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐
- NEW
-
- ☐
- LIGHTLY WORN
-
- ☐
- WORN
-
- ☐
- VERY WORN
-
- ☐
- UNREPAIRABLE
-
- ☐
- MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

W52 H096 180 H 253

PARTS

COMMENTS

Barrel 96003
Stock 96018Scope Mount Cover Front
Rear 96043
96044Re powder Coat Trigger Guard
Assy, Front & Rear Sight Bases
Re zinc Scope Base, Rings,
& Swivel Studs

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0049304

M24 0049343


1. TOTAL PRICE										2. SHIP FROM ROCK ISLAND ARSENAL ROCK ISLAND, IL W52H1C 61299-5000										3. SHIP TO CMAH2W																																																																																																																																											
UNIT PRICE										DOLLARS CTS										DOLLARS CTS																																																																																																																																											
A5EB07T EA										CMAH2WMGM										031852JB14AF										0514500 15435.00										CMAH2W																																																																																																																							
24. DOCUMENT NUMERICAL & SUFFIX (00-44)										W52H09 6180 H252										TCN										5 DOC DATE										6. NMFC										7. FRT RATE										8. TYPE CARGO										9 PS																																																																																									
25. NATIONAL STOCK ADD (8-22)										1005012402136																				10 QTY REC										11. UP										12. UNIT WEIGHT										13 UNIT CUBE										14. UFC										15SL																																																																															
26. FIG (4,6) QTY (23-29) CON CODE (71) CITY (1356) DUP (7480)										B07 EA 00003 F 0514500																				16. FREIGHT CLASSIFICATION										NOMENCLATURE										FIREARMS NOI										17. ITEM NOMENCLATURE										RIFLE										18. TY CONT										19. NO CONT										20. TOTAL WEIGHT										21. TOTAL CUBE										22. RECEIVED BY										23. DATE RECEIVED										28. ISSUED BY AND DATE										29. SHIPPED BY AND DATE									
DT REC: 96183										STD: 96184										SUSD: 96184										DOD 5100.76M										SCIC: 6										SIGNATURE REC REQ										LEVEL A/C										NON EXP PKG REF NO: MILSTD2073										EXT WT: .00										EXT CU:																																																																					
TP-1										PA: PO2										PL: AO1										SPW: 657769 001										CK DIG: L										TAC:										SHIP BY TRACEABLE MEANS										1 EXCEPTION										LINE 001 OF 001										ULTIMATE CONSIGNEE/MARK FOR:										XR REMINGTON ARMS COMPANY INC										FABRICATED PRODUCTS DEPT										14 HOEFLER AVE										ILION										NY 13357-1816																			
27. ADDITIONAL DATA										WHSE LOC										15120821A										15121121B										SNT FOR DODSASP REQUIRED										MAJOR END ITEM										NOT HAZARDOUS FOR TRANSPORT																																																																																																			
SEQ NO: 00722										BATCH: 0015										4 OF 6 SC:										TCN: W52H09 6180 H252 XXX										DD FORM 1348-1A, JUN 86 ISSUE RELEASE/RECEIPT DOCUMENT										FORM APPROVED. OMB NO 0704-0188																																																																																																													

BARBER - M24 0049306

26225112
6225252
6225167

1. TOTAL PRICE										2. SHIP FROM ROCK ISLAND ARSENAL ROCK ISLAND, IL W52H1C 61299-5000										3. SHIP TO CMAH2W																																							
UNIT PRICE DOLLARS CTS										DOLLARS CTS										4. MARK FOR CMAH2W																																							
A5EB07T EA										CMAH2WMGM										031852JB14AF										0514500										15435.00																			
5. DOC DATE										6. NMFC										7. FAT RATE										8. TYPE CARGO										9. PS																			
96184										069300										LTL 100										681 Z4										4																			
10. QTY REC										11. UP										12. UNIT WEIGHT										13. UNIT CUBE										14. UFC										15. SSL									
00001																														38340										0																			
16. FREIGHT CLASSIFICATION NOMENCLATURE FIREARMS NOI																																																											
17. ITEM NOMENCLATURE RIFLE																																																											
18. TY CONT										19. NO CONT										20. TOTAL WEIGHT										21. TOTAL CUBE																													
22. RECEIVED BY																				23. DATE RECEIVED																																							
24. DOCUMENT NUMBER W52H09 6180 H252															TCN																																												
25. NATIONAL STOCK NO. A 1005012402136																																																											
26. RIC(4-6) B07 EA 00003 F 0514500																																																											
DT REC: 96183 STD: 96184 SUS: 96184 DOD 5100.76M SCIC: 6															28. ISSUED BY AND DATE 2-2-96															29. SHIPPED BY AND DATE																													
SIGNATURE REC REQ SELECT CODE: F ARM STOCK															NON EXP PKG REF NO: MILSTD2073															EXT WT: .00										EXT CU:																			
TP-1															PA: P02 PL: A01															SPW: 657769 001 CK DIG: L TAC:																													
SHIP BY TRACEABLE MEANS															1 EXCEPTION															LINE 001 OF 001																													
RECEIVED 2 JUL 1996															SNT FOR DODSASP REQUIRED															ULTIMATE CONSIGNEE/MARK FOR: XR REMINGTON ARMS COMPANY INC FABRICATED PRODUCTS DEPT 14 HOEFLER AVE ILION NY 13357-1816																													
WHSE LOC 15120821A 15121121B															MAJOR END ITEM																																												
SEQ NO: 00722 BATCH: 0015															5 OF 6 SC: TCN: W52H09 6180 H252 XXX															NOT HAZARDOUS FOR TRANSPORT																													

C 6225112
6225252
6225167



BARBER - M24 0024930949348

BÄRBER - M24 0049309

U.S. ARMY FREIGHT WAYBILL					ORIGINAL		B/L NO. ▶ G-7944169		
1. TRANSPORTATION COMPANY TENDERED TO BAGGETT TRANSPORTATION CO			2. SCAC BAGT		3. DATE B/L PREPARED 96.07.09		4. ROUTE ORDER/RELEASE NUMBER 7YBAADSCZA		
5. DESTINATION (Name, address and ZIP code) XR REMINGTON ARMS COMPANY INC FABRICATED PRODUCTS DEPT 14 HOEFLER AVE ILION, NY 13357-1816			6. SPLC (Dest.) 172856000		8. ORIGIN STATION STATE TRANSPORTATION OFFICER ROCK ISLAND ARSENAL BLDG 299 (SIORI-IST) ROCK ISLAND, IL 61299-5000				
			7. SPLC (Orig.) 386250250						
9. CONSIGNEE (Name, address and ZIP code of installation) XR REMINGTON ARMS COMPANY INC FABRICATED PRODUCTS DEPT 14 HOEFLER AVE ILION, NY 13357-1816			10. GBLOC (Cons.) IOOI CMAH2W		11. SHIPPER (Name, address and ZIP code) TRANSPORTATION OFFICE ROCK ISLAND ARSENAL BLDG 102 (SIORI-IST) (309) 782-1363 ROCK ISLAND, IL 61299-5000 W52H1C				
12. APPROPRIATION CHARGEABLE 2162020 6D 6D02 P421010.12 (TMIL) 2217 S11116					13. BILL CHARGES TO (Dept./agency, bureau/office mailing address and ZIP code) DEFENSE FINANCE AND ACCOUNTING SVC INDIANAPOLIS CENTER TRANSPORTATION OPS. (DFAS-I-THA) INDIANAPOLIS, IN 46249-0611				
14. VIA (Route shipment when advantageous to the Government)					AGENCY LOC CODE W53QRD				
15. MARKS AND ANNOTATIONS EQUIPMENT 1 DN: DUAL DRIVER PROTECTIVE SERVICE WIT DS: DROMEDARY SERVICE ... 1) INITIATING EXPL: N SM: DTTs SATELLITE MOTOR SURVEILLANCE (108) DUAL DRIVER PROTECTIVE SERVICE WITH NATIONAL AGENCY CHECK REQUESTED.									
TP:1 DDD:96.07.12 GLAM-02-6185006-01 SIGNATURE AND TALLY RECORD (DD FORM 1907) FURNISHED TO CARRIER. (111) SHIPPER TO LOAD AND CONSIGNEE TO UNLOAD. SEE DESCRIPTION OF ARTICLES									
16. PACKAGES		17. HM		18. DESCRIPTION OF ARTICLES AND EXCEPTIONS		19. WEIGHT* (Pounds only)		FOR USE OF BILLING CARRIER ONLY	
NO.	KIND							Services	Rate
				CLASSIFICATION ITEM NO. 069300		THIS BL CONSISTS OF 2 PAGES			
				FIREARMS OR PARTS, NOI, IN BOXES, SEE NOTE, ITEM 69302					
1	PT			TCN: W52H096180H252XXX CU:34.7 1J DIM: 0050L0040W0030H RIFLE NSN: 1005-01-240-2136		255			
				MARKS & ANNOTATIONS:					
				(112) FLAME OR HEAT PRODUCING TOOLS WILL NOT BE USED TO REMOVE SECURITY DEVICES. TOT QTY:255 P CU:34.7 SHIP AS-> SEE CONTINUATION SHEET FOR DETAILS		5000		TOTAL CHARGES	
20. TARIFF/SPECIAL RATE AUTHORITY BAGT 000537-00				21. PICKUP SERV. FURNISHED ☒ YES VEHICLE FULLY LOADED ☒ YES		SHIPPER'S INITIALS - DD		22. CARRIER WAY/FREIGHT BILL NO. AND DATE	
23. STOP THIS SHIPMENT AT		24. FURNISH INFORMATION ON CAR/TRUCKLOAD/CONTAINER SHIPMENTS							
		INITIALS & NO.		SEAL NUMBERS		LENGTH/CUBE		MARKED CAPACITY	
		BAGT:599L-B		0908356		ORDERED		FURNISHED	
FOR:				APPLIED BY: SH				96.07.09	
25. CARRIER'S PICKUP DATE (Year, month, & day) 96.07.09		26a. SIGNATURE OF AGENT HAROLD/LOUISE <i>Harold Louise Weaver</i>		26b. PER BAGT		B/L NUMBER G-7944169			
27. MODE B	28. ESTIMATE 1933	29. NO. OF CLS/TLS 1	30. TYPE RATE 1	31. PSC DN:SM	32. REASON				
					WEIGHED AT				
					GROSS TARE ALLOWANCE NET				
FOR USE OF ISSUING OFFICE					OUTBOUND JUNCTION AGENT — Show junction stamps in space and order provided. Additional junction stamps and all yard stamps to be placed on back hereof.				
33a. ISSUING OFFICE (Name and complete address) TRANSPORTATION OFFICE ROCK ISLAND ARSENAL BLDG 102 (SIORI-IST) (309) 782-1363 ROCK ISLAND, IL 61299-5000					33b. GBLOC GLAM				
33c. ISSUING OFFICER WENDELIN MCCULLOUGH, TRANSPORTATION OFFICER					33d. CONTRACT/PURCHASE ORDER NO. OR OTHER AUTHORITY				
					33e. DATED				
33f. FOB POINT NAMED IN CONTRACT									
					FOURTH JUNCTION				
					FIFTH JUNCTION				
					DESTINATION AGENT (Stamp herein station name and date reported)				

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1105-121-01

WHITE

STANDARD FORM 1105 (REV. 4-85)
PRESCRIBED BY GSA, FPMR (41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 06499049349

BARBER - M24 0049311
U.S. GOVERNMENT FREIGHT WAYBILL
CONTINUATION SHEET

ORIGINAL

B/L
NO. **G-7944169**
SHEET NO. **2 OF 2**

(This form is to be used as a continuation sheet for SF 1105, U.S. Government Freight Waybill-Original, or SF 1205, U.S. Government Freight Waybill- Privately Owned Personal Property-Original.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICE
ROCK ISLAND ARSENAL
BLDG 102 (SIORI-IST) (309) 782-1363
ROCK ISLAND, IL 61299-5000

TRANSPORTATION COMPANY TENDERED TO

BAGGETT TRANSPORTATION CO

FROM(Shipping Point)

W52H1C
386250250

WAYBILL DATE

WAYBILL NUMBER

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
			(114) CARRIER TO NOTIFY CONSIGNEE RECEIVING PERSON (DUTY PHONE (800) 243-9700 AV--, NON-DUTY PHONE (315) 895-3200) AND CONSIGNOR WENDELINE MCCULLOUGH (DUTY PHONE (309) 782-1363 AV-793-1363, NON-DUTY PHONE (309) 782-5621) IMMEDIATELY IF SHIPMENT IS DELAYED EN ROUTE BECAUSE OF AN ACCIDENT OR INCIDENT. IF NEITHER CAN BE REACHED, CONTACT MTMC EASTERN AREA HOTLINE AT HOTLINE (800) 524-0331. USE HOTLINE NUMBER TO OBTAIN SAFE HAVEN OR REFUGE INSTRUCTIONS IN THE EVENT OF A CIVIL DISORDER, NATURAL DISASTER, CARRIER STRIKE OR OTHER EMERGENCY. (337) SATELLITE MOTOR SURVEILLANCE SERVICE (SM) REQUESTED. IN EVENT OF SYSTEM FAILURE, DRIVER MUST IMMEDIATELY NOTIFY THE MOTOR CARRIER'S DISPATCHER WHO WILL IMMEDIATELY NOTIFY DTTS AT 1-(800)-826-0794. THE DRIVER MUST SUBSEQUENTLY PROVIDE DTTS A TELEPHONIC LOCATION/STATUS REPORT EVERY FOUR (4) HOURS, WITH A FINAL TELEPHONIC REPORT UPON DELIVERY AT DESTINATION. (339) DROMEDARY SERVICE REQUESTED. (367) THIS SHIPMENT MUST NOT BE TRANSPORTED IN TRIP-LEASED EQUIPMENT.				
=====			BLOCK 24 EQUIPMENT DESCRIPTION CONT.: TRACTOR: 599L	=====			

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1111-114

WHITE

STANDARD FORM 1111, (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0049311
M2400049350

SIGNATURE AND TALLY RECORD

FORM APPROVED
OMB No. 0702-0027
Expires Oct 31, 1988

DISTRIBUTION INSTRUCTIONS

- * The SHIPPER will prepare copies 1 through 4, retain copy 4 and deliver copies 1 through 3 to the Origin Carrier.
- * The CARRIER will deliver copies 1 through 3 to the Destination Carrier.
- * The DESTINATION CARRIER will attach copy 1 (reflecting all signatures) and Standard Form 1113 (Public Voucher for Transportation Charges) to the original Government Bill of Lading, and forward for payment. Copy 2 will be delivered to the Consignee. Copy 3 will be retained.
- * The CONSIGNEE will ensure Destination Carrier surrenders copy 2.

SECTION A - To be completed by the SHIPPER

1. SHIPPER		2. PROTECTIVE SERVICE REQUESTED	
a. NAME		DN DUAL DRIVER PROTECTIVE SERVICE WITH NAC SM DTTTS SATELLITE MOTOR SURVEILLANCE SERVICE	
b. ORIGIN	TRANSPORTATION OFFICER ROCK ISLAND ARSENAL BLDG 299 (SIORI-IST) ROCK ISLAND, IL 61299-5000	3. GBL OR CBL NUMBER G-7944169	
4. CONSIGNEE		5. PERMIT NUMBER (if any)	
a. NAME			
b. DESTINATION	XR REMINGTON ARMS COMPANY INC FABRICATED PRODUCTS DEPT 14 HOEFLER AVE ILION, NY 13357-1816	6. TRANSPORTATION CONTROL NUMBER (GLAM-02-6185006 -01) W52H096180H252XXX	
7. ROUTING BAGGETT TRANSPORTATION CO		8. WEIGHT 255 POUNDS	9. CUBE 34.7
10. SPECIAL INSTRUCTIONS		11. DATE SHIPMENT TENDERED TO CARRIER 96.07.09	12. NAME OF CARRIER BAGT
13. NUMBER OF PIECES 1	14. TYPE OF PACKAGE(S) (For unsealed loads only) OR CONVEYANCE IDENTIFICATION & SEAL NUMBERS (for sealed loads only) BAGT-599L-B 0908356	15. FREIGHT CLASSIFICATION DESCRIPTION 069300 FIREARMS OR PARTS, NOI, IN BOXES, SEE NOTE, ITEM 69302	

SECTION B - To be completed by each person accepting custody of classified or protected material requiring the use of transportation protective service during transit.

16. CUSTODY RECORD				
a. PRINT NAME OF PERSON AND COMPANY REPRESENTED	b. STATION INTERCHANGE POINT DESTINATION	c. SIGNATURE OF PERSON ACCEPTING CUSTODY	d. TIME ACCEPTED	e. DATE ACCEPTED
Harold Weaver	RIA	Harold Weaver	0830	7-9-96
Lance Weaver	RIA	Lance Weaver	0830	7-9-96
Raymond Scott		Raymond Scott	0800	7-10-96
K. Sumner	Blount Field IN	K. Sumner	0202	7-13-96
K. Sumner	Blount Field IN	K. Sumner	0200	7-13-96
L. Sizemore	Oxford AL	L. Sizemore	1215	7-13-96
T. Harris	Oxford AL	T. Harris	1500	7-13-96
A. Land	Oxford, AL	A. Land	2310	7/13/96
L. Sizemore	Oxford AL	L. Sizemore	0700	7-14-96
R. Hall	Oxford, AL	R. Hall	1500	7/14/96
A. Land	Oxford, AL	A. Land	2310	7/14/96

DD FORM 1907, FEB 86

Previous editions are obsolete

PAGE 1

Consignee - Copy 2

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0049312

HAND TO HAND SIGNATURE RECEIPT

SHIPPER:	CONSIGNEE:
DESCRIPTION:	GBL NUMBER: G-7944169
ROUTE:	
<u>NOTICE:</u> HAND TO HAND SIGNATURE SERVICE IS REQUIRED FROM THE TIME THE SHIPMENT LEAVES THE HANDS OF THE CONSIGNOR UNTIL ITS DELIVERY TO THE CONSIGNEE. I, the undersigned, have handled (physically or otherwise) the shipment described above:	

[illegible]

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0049319 **M2400049352**

16. CUSTODY RECORD (Continued)

[illegible]

WARNING: Unauthorized persons removing, defacing, or destroying this tag may be subject to a fine of not more than \$1,000 or imprisonment for not more than one year or both. (18 USC 1361)

FSN, PART NO. AND ITEM DESCRIPTION 1005-01-240-2136		UNSERVICEABLE/REPARABLE TAG - MATERIEL	
H		INSPECTION ACTIVITY	CONDITION CODE H
		REASON FOR REPARABLE CONDITION THROAT EROSION	
SERIAL NO./LOT NO. C 6225112	UNIT OF ISSUE EA	REMOVED FROM	
CONTRACT OR PURCHASE ORDER NO.	QUANTITY 1	INSPECTOR'S NAME OR STAMP AND DATE JEM 9 18 96	
REMARKS Depot Maintenance Required			
		NRTS	

U.S. GPO: 1993-305-045

OCT 66

BARBER - M24 0049316

DATE: 01-FEB-96

MAINTENANCE REQUEST

DA FORM 5990-E

CUSTOMER DATA

UIC: WH9ZAA

4/325TH A.I.R

PHONE: (910)432-4334

UTIL CODE: 0

ACTIVITY DATA

SUP WON:

B CD 407TH FSB

PHONE: 396-7123

SUP UIC: WH3EB0

SHOP SEC:

EQUIPMENT DATA

TYPE MNT REQ: 1

ID: A

NSN: 1005012402136

MODEL: M24

NOUN: SNIPER SYSTEM

SER NUM: C 6225112

QTY: 00001

ORG WON: H9ZAA1607613

PRIORITY: 02

FAILURE DETECTED: D

MI/KM: -----

HOURS: -----

ROUNDS:

IN WARRANTY:

LEVEL OF WORK: F

ADMIN NUM:

DEFICIENCY: THROAT EROSION

PD AUTHENTICATING SIGNATURE:

SIGNATURE DATA

SUBMITTED BY:

ORD DATE:

MIL TIME:

ACCEPTED BY:

STATUS: A

ORD DATE:

MIL TIME:

ACTION DATA

WORK STARTED BY:

STATUS:

ORD DATE:

MIL TIME:

INSPECTED BY:

STATUS: R

ORD DATE:

MIL TIME:

PICKED UP BY:

STATUS: U

ORD DATE:

MIL TIME:

COMPLETION DATA

QTY RPR:

QTY CONDEMNED:

NRTS:

EVAC WON:

EVAC UNIT NAME:

Depot Maintenance
Required

NRTS 7

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG			PAGE NO 1	NO OF PAGES 1	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)
SECTION I - CUSTOMER DATA			SECTION II - MAINTENANCE ACTIVITY DATA		
1a. UIC CUSTOMER 449,2,TD	1b. CUSTOMER UNIT NAME HMC 4/325	1c. PHONE NO 2-5059	3a. WORK ORDER NUMBER (WON)	3b. SHOP	3c. PHONE NO
2a. SAMS-2 UIC/SAMS-I/TDA	2b. UTILIZATION CODE	2c. MCSR	4a. UIC SUPPORT UNIT	4b. SUPPORT UNIT NAME	
SECTION III - EQUIPMENT DATA					
5. TYPE MNT REQ CODE	6. ID	7. NSN 1005012402136	15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751		
8. MODEL M24			15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		16. MILES/KILOMETERS/HOURS/ROUNDS M K
9. NOUN Sniper System					H R
10a. ORG WON/DOC NO	10b. EIC				
11. SERIAL NUMBER G 6225112	12. QTY 01	13. PD 02	17. PROJECT CODE (if assigned)	18. ACCOUNT PROCESSING CODE	19. IN WARRANTY? (enter Y or N) Y
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)			20. ADMIN NO		
			21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)		
			22. LEVEL OF WORK		
			23. SIGNATURE [Signature]		
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs)					
25. REMARKS throat erosion UNDER WARRANTY SEND BACK TO MFG					

PREPARATION INSTRUCTIONS FOR THIS PAGE

SECTION I

Block 1a. Enter UIC of submitting organization.
Block 1b. Enter name of submitting organization.
Block 1c. Enter number to be called when maint. is completed.
Block 2a. Enter UIC of supporting SAMS-2/SAMS-I/TDA if work is requested while intransit and away from your support maintenance unit.
Block 2b. Enter utilization code. See DA Pamphlets 738-750 and 738-751.
Block 2c. Enter "Y" if reportable under AR 700-138. If not, leave blank.

SECTION II

Leave blank. To be completed by the support maintenance DSU/GSU/AVIM/DEPOT.

SECTION III

Block 5. Enter the Type Maintenance Request Code. See DA Pamphlets 738-750 and 738-751.
Block 6. Enter ID associated with block 7. See DA Pamphlets 738-750 and 738-751.
Block 7. Enter the NSN or stock number of the item being submitted.
Block 8. Enter model of item being submitted.
Block 9. Enter noun/nomenclature of item being submitted.
Block 10a. Enter Work Order Number (WON)/DOC NO assigned when item is submitted. Otherwise, leave blank.
Block 10b. Enter End Item Code. See AMDF.
Block 11. Enter serial number of item being submitted.

SECTION III (Cont'd)

Block 12. Enter the quantity of items being submitted.
Block 13. Enter the maintenance priority designator determined from DA PAM 710-2-1.
Block 14. For DSU, GSU/AVIM, DEPOT use.
Block 15a. Enter the code that most accurately describes when the fault or deficiency was detected. See DA Pamphlets 738-750 and 738-751.
Block 15b. Select one. Enter the code. See DA Pamphlets 738-750 and 738-751.
Block 16. Enter the accumulated usage data in blocks, when equipment is subject to usage reporting.
Block 17. Enter the project code if one has been assigned. If not, leave blank.
Block 18. See DA Pamphlets 738-750 and 738-751.
Block 19. Enter "Y" or "N" to indicate whether equipment is still under manufacturer's warranty.
Block 20. Enter the admin number assigned for property control purposes for the equipment being submitted.
Block 21. For DSU/GSU/AVIM/Depot use.
Block 22. Enter level of work performed "O" for UNIT LEVEL/AVUM, "F" for DSU/AVIM, "H" for GSU, "D" for DEPOT, "K" for contractor or "L" for Spc Rpr Act.
Block 23. Enter the signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank.
Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maint.
Block 25. Self-explanatory.

34a. SUBMITTED BY [Signature]	35a. ACCEPTED BY [Signature]	35c. DATE 6/9/94
34b. DATE 6/9/94	35b. STATUS []	35d. TIME []

Block 34a. Enter first initial and last name of submitter.
Block 34b. Enter ordinal date submitted (YYDDD).
Block 35a. Enter first initial and last name of person accepting maint. request.
Block 35b. Enter the initial status. See DA Pamphlets 738-750 and 738-751.
Block 35c. Enter ordinal date accepted (YYDDD).
Block 35d. Enter military time.

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG				PAGE NO 1	NO OF PAGES 1	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)									
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA											
1a. UIC CUSTOMER 4492TD		1b. CUSTOMER UNIT NAME MHK 4/325		1c. PHONE NO 2-5059		3a. WORK ORDER NUMBER (WON)		3b. SHOP		3c. PHONE NO					
2a. SAMS-2 UIC/SAMS-1/TDA		2b. UTILIZATION CODE		2c. MCSR		4a. UIC SUPPORT UNIT		4b. SUPPORT UNIT NAME							
SECTION III - EQUIPMENT DATA															
5. TYPE MNT REQ CODE		6. ID		7. NSN 1005012402136		15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751									
8. MODEL M24		9. NOUN Sniper System		10a. ORG WON/DOC NO		10b. EIC		15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		16. MILES/KILOMETERS/HOURS/ROUNDS M K H R					
11. SERIAL NUMBER 6225112		12. QTY 01		13. PD 02		17. PROJECT CODE (if assigned)		18. ACCOUNT PROCESSING CODE		19. IN WARRANTY? (enter Y or N) Y					
14. MALFUNCTION DESCRIPTION (for DSU, GSUI/AVIM, DEPOT use)				21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)				20. ADMIN NO							
				22. LEVEL OF WORK		23. SIGNATURE									
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs)															
25. REMARKS throat erosion UNDER WARRANTY SEND BACK TO MFG															
26. TECHNICAL REFERENCES															
SECTION IV - TASK REQUIREMENTS DATA															
27a. FILE INPUT ACT CD		27b. TASK NO	27c. ACT CODE	27d. TASK DESCRIPTION				27e. QTY TO BE RPR	27f. WORK CENTER	27g. FAILURE CODE	27h. MH PROJ	27i. MH EXP			
A01		F		M24 SNIPER RIFLE						020					
A02		G		M24 SNIPER RIFLE											
SECTION V - PART REQUIREMENTS															
28a. FILE INPUT ACT CD	28b. TASK NO	28c. ID NO	28d. NSN OR PART NUMBER				28e. SFX CD	28f. QTY RQD	28g. QTY ISSUED	28h. NMCS CD	28i. FAILURE CODE	28j. STORAGE LOCATION	28k. INITIALS	28l. COST \$	
28m. TOTAL MANHOURS				28n. TOTAL MANHOURS COSTS \$				28o. TOTAL PARTS COSTS \$							
SECTION VI - COMPLETION DATA															
29. QTY RPR			30. QTY CONDEMN		31. QTY NRTS		32. EVAC WON			33. EVAC UNIT NAME					
SECTION VII - ACTION SIGNATURES															
34a. SUBMITTED BY		35a. ACCEPTED BY		35c. DATE		36a. WORK STARTED BY		37a. INSPECTED BY		38a. PICKED UP BY					
35b. DATE		35b. STATUS	35d. TIME	36b. STATUS	36c. DATE	36d. TIME	37b. STATUS	37c. DATE	37d. TIME	38b. STATUS	38c. DATE	38d. TIME			
6/9/97		A					R	5/9/97			9/6/97				

FORM 2407, JUL 94

NMP COPY 2

BARBER - M24 004990949357

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

DA FORM 2404
1 APR 79

Replaces edition of 1 Jan 64, which will be used

[illegible]

21 DAY TURN - AROUND

Barrel
+
Stock

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO.

C6225112

LOG IN DATE: / /

DATE

INT.

INSPECT & VERIFY:

OP. #

OP. NAME

550

DIS-ASSEMBLE GUN

560 A

RE-BARREL AT CUSTOM SHOP

B

DRILL & TAP

C

POLISH

575

ASSEMBLE

600

PROOF

9/9/96

Rw

605

CHECK HEADSPACE

9/9/96

Rw

610

DIS-ASSEMBLE

612

MAGNAFLUX

615

ROLLMARK CALIBER

618

ROTO-BLAST

620

APPLY COATINGS

625 A

FINAL ASSEMBLY

9/24/96

Rw

B

TRIGGER PULL TEST

C

SAFETY ON FORCE

D

SAFETY OFF FORCE

E

FIRING PIN INDENT

640

TARGET

9/27/96

Rw

655

FINAL INSPECT

10/1/96

Rw

660

PACK

QAR INSPECTION

SHIP DATE

Final Inspection

Sn: C6225712 DATE REC'D: 7/16/96 DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ Looseness☒ CLARITY

Misc.

☐ DD- 250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ Stock☒ Sling Swivel Studs☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☒ Scope Case☐ Iron Sights☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: _____

Remington[®]

MODEL 700TM M24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

DU PONT
REG. U.S. PAT. & T.M. OFF.

SERIAL NO.
C6225112

ORDER NO.
5716

20

LPC

0 47700 25716 7

5716 C6225112

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 93-27263

INITIALS CUSTOMER ORDER NO.

FPS 8383

ATTN: FRED MARTIN/M24 W/ULTRA 10X-M3A SCOPE
W/ADJUSTABLE RECOIL PAD

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

12/14/93

12/14/93

BJ 1-89

C6225112

700 7.62

NATO

ACCESSORIES

W/STUDS

W/SWIVELS

SCOPE MNTS

SCOPE BASE

SOFT CASE

FROM:

CDR
HHC 4/325 ~~TH~~ A.I.R.
FT BRAGG

NC 28307

SHIP TO:

CDR
HHC 4/325 TH A I R
FT BRAGGNC
28307

CUST NO: 045888 C.O.D L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

DOOR

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

New Barrel

PARTS

COMMENTS

Barrel - 96003

Re Zinc - Scope Base Scope Rings;
Swivels & Swivel Studs.
Re powder Coat - Floor plate, latch,
Trigger Guard, Front & Rear
Sight Bases

W52 H093361 H237

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 00499049363

PAYMENT:

Mastercard / Visa (circle one)

Card #:

Exp. Date:

Signature

RETURN:

☐ Clark Street Entrance

☒ Via US Mail or UPS

(PLEASE PRINT CLEARLY)

FIREARMS DELIVERED TO PLANT

FILE N° 008383

DATE 12/14/93

CUSTOMER NAME:

ADDRESS:

ZIP:

PHONE:

FIREARM

MODEL: M24

GAUGE: 762

SERIAL # C622511/2

REMINGTON EMPLOYEE:

YES ☐ NO ☒

EMPLOYEE #

DEPT. #

CHECK FOR AMMUNITION ☒

CONDITION:

WOOD GOOD N/A FAIR POOR FANCY PLAIN

METAL GOOD FAIR POOR FANCY PLAIN

BARREL VT. RIB PLAIN DEER RSS

ACCESSORIES:

SCOPE: YES NO (BRAND NAME/POWER) Serial # 880416

SLING: YES NO GUN CASE: YES NO (HARD - SOFT)

EXTRA BBL FOR GUN MENTIONED ABOVE:

OTHER (Note in this area items missing or added from orig. equipment)

CUSTOMER REQUEST: Repair per TM Contract

SIGNATURE: (Person delivering firearm to Plant)

DATE: 12/14/93

SIGNATURE: (Security Officer)

DATE: 12/14/93

SIGNATURE: (Firearm picked up by)

DATE: 12/14/93

Arm Service Copy

MAINTENANCE REQUEST				PAGE NO.	NO. OF PAGES	REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)			
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG									
SECTION I - EQUIPMENT DATA									
CONTROL NUMBER		WORK ORDER NO.		WESDC		ORG. PD		PD AUTHENTICATION	
☐ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION		B. LOCATION			C. UNIT IDENT CODE		
2. SERIAL NO.		3. NOUN NOMENCLATURE		4. LINE NO.		5. MODEL		6. NATIONAL STOCK NUMBER	
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS	11. MILES	12. ROUNDS
									13. STARTS
14. FAILURE DETECTED DURING (Select one - use ☒ or X)					15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)				
☐ A Sch. Main.		☐ C Test		☐ E Storage		☐ G Flight		☐ 068 Inoperative	
☐ B Handling		☐ D Normal Op		☐ F Inspection		☐ H Other		☐ 258 Overheating	
								☐ 790 Out of Adjustment	
								☐ 008 Noisy	
								☐ 387 Low Performance	
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs)									
B. REMARKS									
PREPARATION INSTRUCTIONS (Prior to using this form, read DA PAM 738-750 for detailed preparation instructions)									
1. Place a " ☒ " or an "X" in the box for the type of action required. 2. Enter the WESDC if the item is Materiel Condition Status Reportable. 3. Enter the priority designator as determined from the urgency of need and force activity designator. 4. The Unit Commander, Chief of TDA activity or their designated representative will authenticate, by signature, a priority of 01 through 08. 5. <i>Block 1A.</i> Enter the name of the organization submitting the request. 6. <i>Block 1B.</i> Enter the unit submitting the request; units overseas enter APO only. 7. <i>Block 1C.</i> Enter the unit identification code of the unit in block 1A. 8. <i>Block 2.</i> Enter the equipment serial number. For ammunition, enter the lot number. For administrative-use vehicles, enter the USA registration number. 9. <i>Block 3.</i> Enter the noun abbreviation of the item. 10. <i>Block 4.</i> Enter the item line number, if applicable. 11. <i>Block 5.</i> Enter the model number. 12. <i>Block 6.</i> Enter the National Stock Number of the item listed in Block 3.					13. <i>Block 7.</i> Enter the name of the support activity. 14. <i>Block 7A.</i> Enter the symbol of the maintenance category (O, F, H, D, or L). 15. <i>Block 8.</i> Enter the utilization code. 16. <i>Block 9A.</i> Enter the word "yes" if the item is Materiel Condition Status Reportable. 17. <i>Block 9B.</i> Enter the equipment readiness code, if applicable. 18. <i>Block 9C.</i> Enter the word "yes" if the item is a pacing item. 19. <i>Block 10.</i> Enter the hour reading, if applicable. 20. <i>Block 11.</i> Enter the mileage from the odometer, if applicable. 21. <i>Block 12.</i> Enter the total rounds fired, if applicable. 22. <i>Block 13.</i> For turbine engines, enter the number of hot starts. 23. <i>Block 14.</i> Enter a " ☒ " or "X" in the proper block. 24. <i>Block 15.</i> Enter a " ☒ " or "X" in the proper block. 25. <i>Block 16.</i> Describe briefly the fault or symptoms needing correction.				
23. SUBMITTED BY		24. RECEIVED BY							
JULIAN DATE		JULIAN DATE							

MAINTENANCE REQUEST					PAGE NO.	NO OF PAGES	REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)						
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG													
SECTION I - EQUIPMENT DATA													
CONTROL NUMBER		WORK ORDER NO.			WESDC		ORG. PD		PD AUTHENTICATION				
☐ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION			B. LOCATION				C. UNIT IDENT CODE				
2. SERIAL NO.		3. NOUN NOMENCLATURE			4. LINE NO.		5. MODEL		6. NATIONAL STOCK NUMBER				
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS		11. MILES	12. ROUNDS	13. STARTS		
14. FAILURE DETECTED DURING (Select one - use ☒ or X)					15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)								
☐ A Sch. Main. ☐ B Handling		☐ C Test ☐ D Normal Op		☐ E Storage ☐ F Inspection		☐ G Flight ☐ H Other		☐ 068 Inoperative ☐ 008 Noisy		☐ 258 Overheating ☐ 387 Low Performance		☐ 790 Out of Adjustment ☐ Other	
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs).													
B. REMARKS													
SECTION II - WORK ACCOMPLISHED													
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)			19. AMS ACCT. CODE				
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor							
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER		F. PART SOURCE CODE	G. QTY.	H. PARTS COST			
		(1) CB CODE	(2) REF DESIGN.	(3) MFR. CODE									
					.						\$		
					.						\$		
					.						\$		
					.						\$		
					.						\$		
					.						\$		
					.						\$		
					.						\$		
					.						\$		
					.						\$		
					.						\$		
					.						\$		
					I. TOTAL MANHOURS		J. TOTAL MANHOURS COST		K. TOTAL PARTS COST				
							\$		\$				
21. DELAY (Select One)					☐ 1 Parts ☐ 2 Manpower ☐ 3 Facilities ☐ 4 Funds ☐ 5 Tools		22. Data Transcribed						
23. SUBMITTED BY		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY		28. DISPOSITION (Select One)			
										☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged			
JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE					

Final Inspection

In: C6225112 DATE REC'D: 12/14/93 DATE RET'D:
 Auditor: RW

Item:

Barrel Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

Scope Assy.

- ☒ Scope
- ☒ Scope Rings
- ☒ Mounting Screws
- ☒ Mounting Base
- ☒ Screws
- ☒ FINISH
- ☒ Looseness
- ☒ CLARITY

Misc.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

Item:

Stock Assy.

- ☒ Stock
- ☒ Sling Swivel Studs
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

Systems Case

- ☐ Scope Case
- ☐ Iron SIGHTS
- ☐ Deployment Kit

Trigger

- ☒ SAFETY OPERATION
- ☒ SET
- ☐

Comments: _____

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225112
27 Dec 1993

CENTROIDAL DISTANCES

0 TO	1	.175548
1 TO	2	.451359
1 TO	3	.382884
1 TO	4	.33699
1 TO	5	.218403


$\bar{x}^2$ <----FOR

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1198
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0906
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .150201
THE AMR FOR THIS RIFLE IS: .8506

27 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/08225112

CENTERFIRE PATTERNS # 1

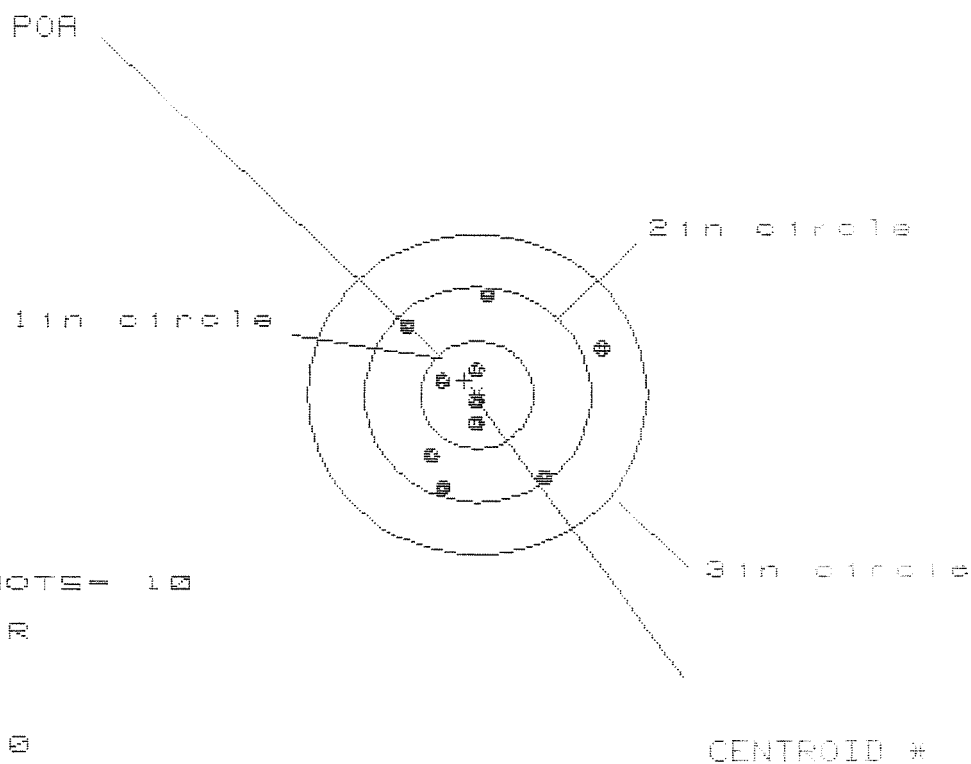


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.056	.722	.268
MINIMUM X	-.657	-.539	-.449
MAXIMUM Y	.954	1.005	.910
MINIMUM Y	-.814	-.763	-.857
CENTROID X	.111	-.007	-.097
CENTROID Y	-.136	-.187	-.092
POA TO CENTROID in.	.176	.187	.134
MIN RADIUS	.025	.104	.158
MEAN RADIUS	.646	.580	.517
MAX RADIUS	1.151	1.046	.949
HORIZONTAL SPREAD	1.713	1.261	.717
VERTICAL SPREAD	1.768	1.768	1.768
EXTREME SPREAD	1.893	1.893	1.800
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	8		
NUMBER IN THREE INCH CIRCLE =	10		

27 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/05225112

CENTERFIRE PATTERNS # 2

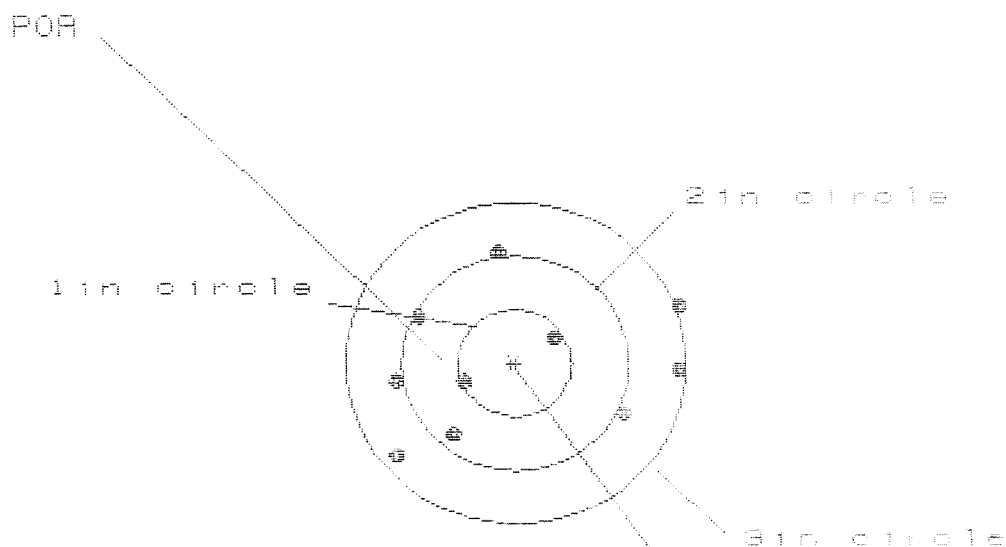

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 5

HS= 2.501

VS= 1.905

GS= 2.835

PATTERN #


2

SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.450	1.592	1.263
MINIMUM X	-1.051	-0.890	-0.691
MAXIMUM Y	1.083	1.140	1.137
MINIMUM Y	-0.822	-0.765	-0.768
CENTROID X	.450	.289	.090
CENTROID Y	.162	.105	.108
POA TO CENTROID in.	.478	.307	.140
MIN RADIUS	.392	.346	.163
MEAN RADIUS	1.013	.927	.796
MAX RADIUS	1.538	1.592	1.322
HORIZONTAL SPREAD	2.501	2.482	1.954
VERTICAL SPREAD	1.905	1.905	1.905
EXTREME SPREAD	2.835	2.591	2.124
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		9	

27 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C8225112

CENTERFIRE PATTERNS # 3

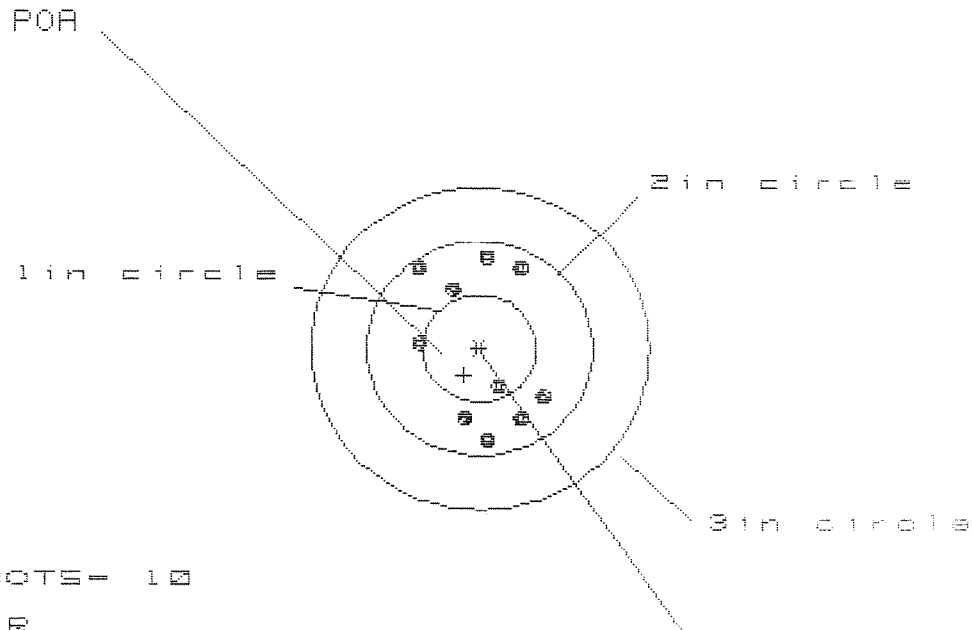

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 10

3 in = 10

HS= 1.183

VS= 1.734


GS= 1.735

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.600	.535	.531
MINIMUM X	:	-.583	-.589	-.593
MAXIMUM Y	:	.869	.949	.983
MINIMUM Y	:	-.865	-.785	-.666
CENTROID X	:	.137	.202	.206
CENTROID Y	:	.246	.166	.047
POA TO CENTROID in.	:	.282	.261	.211
MIN RADIUS	:	.346	.248	.137
MEAN RADIUS	:	.715	.677	.612
MAX RADIUS	:	.928	.950	1.023
HORIZONTAL SPREAD	:	1.183	1.124	1.124
VERTICAL SPREAD	:	1.734	1.734	1.649
EXTREME SPREAD	:	1.735	1.735	1.671
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		10	
NUMBER IN THREE INCH CIRCLE	=		10	

27 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225112

CENTERFIRE PATTERNS # 4

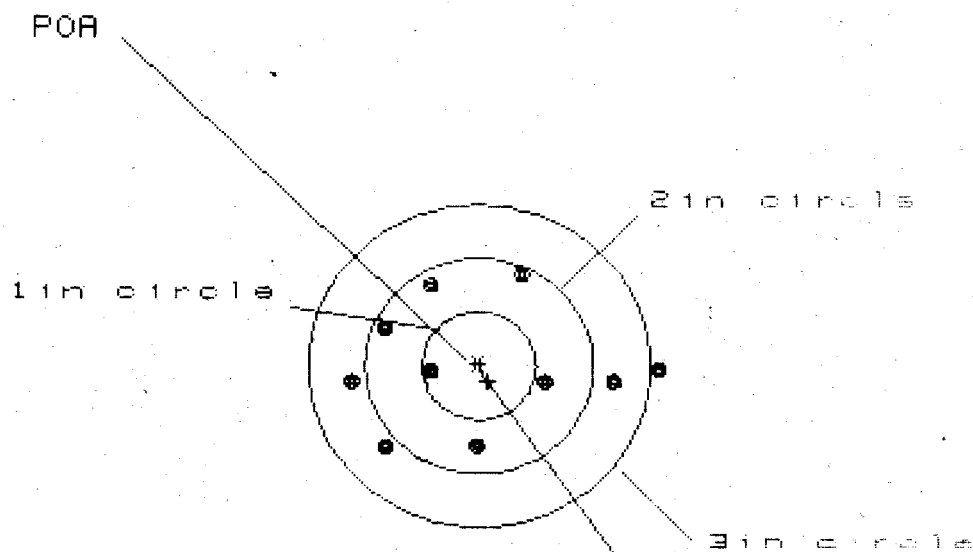

OF SHOTS- 10

IN CIR

1 in - 1

2 in - 6

3 in - 9

HS- 2.699

VS- 1.635

GS- 2.705


CENTROID *

PATTERN #	4		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.565	1.339	.922
MINIMUM X	-1.134	-.960	-.793
MAXIMUM Y	.889	.888	.869
MINIMUM Y	-.746	-.747	-.766
CENTROID X	-.078	-.252	-.419
CENTROID Y	.143	.144	.163
POA TO CENTROID in.	.163	.290	.450
MIN RADIUS	.403	.234	.111
MEAN RADIUS	.954	.858	.764
MAX RADIUS	1.565	1.348	1.133
HORIZONTAL SPREAD	2.699	2.299	1.715
VERTICAL SPREAD	1.635	1.635	1.635
EXTREME SPREAD	2.705	2.299	2.024
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		9	

27 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C8225112

CENTERFIRE PATTERNS # 5

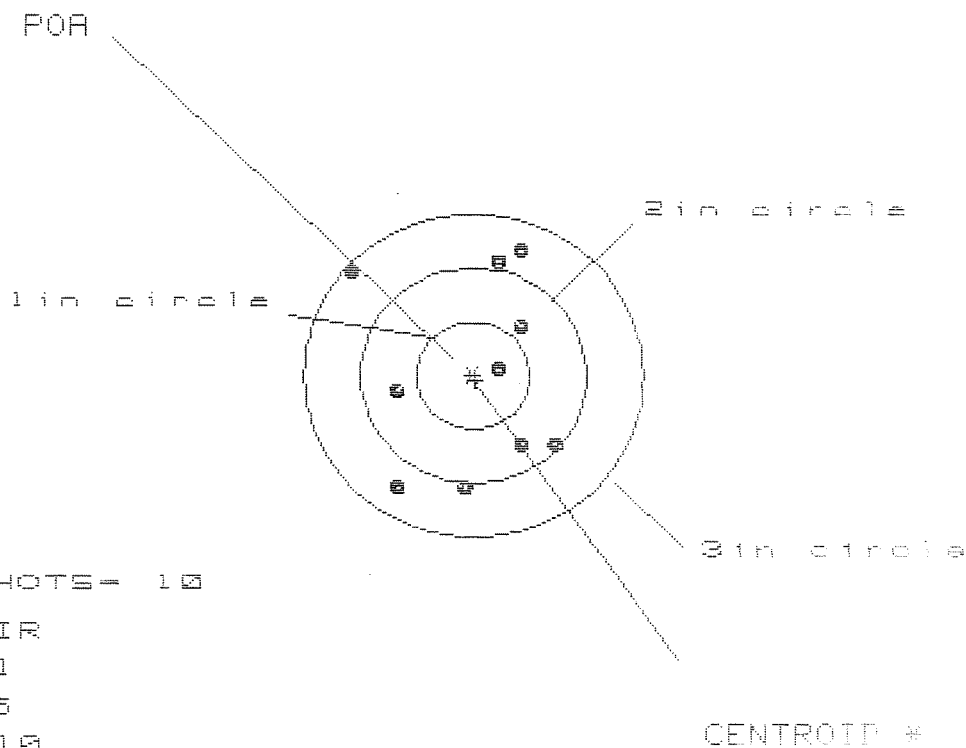

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 10

HS= 1.760

VS= 2.187

GS= 2.418

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.727	.612	.509
MINIMUM X	-1.033	-.824	-.925
MAXIMUM Y	1.118	1.222	1.106
MINIMUM Y	-1.069	-.965	-1.031
CENTROID X	-.021	.094	.197
CENTROID Y	.038	-.066	.049
POA TO CENTROID in.	.043	.115	.203
MIN RADIUS	.199	.151	.023
MEAN RADIUS	.925	.852	.777
MAX RADIUS	1.391	1.257	1.123
HORIZONTAL SPREAD	1.760	1.436	1.434
VERTICAL SPREAD	2.187	2.187	2.187
EXTREME SPREAD	2.418	2.418	2.234
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	10		

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225112
2 Feb 1989

CENTROIDAL DISTANCES

0 TO	1	.294437
1 TO	2	.440069
1 TO	3	.53956
1 TO	4	.952782
1 TO	5	.705505


+1 <----POA
43B

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0118
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.337
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .337287
THE AMR FOR THIS RIFLE IS: 1.014

31 Jan 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225112

CENTERFIRE PATTERNS # 1

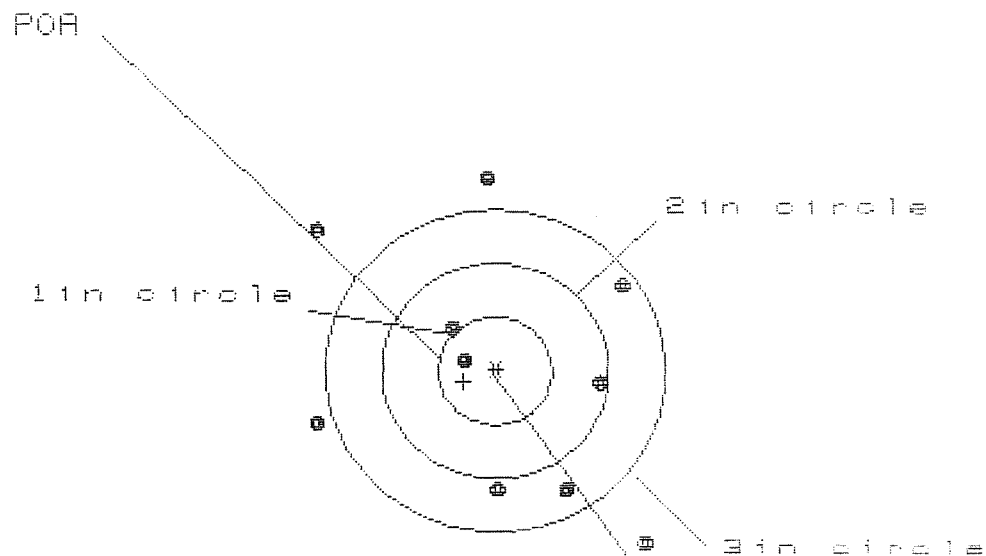

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 3

3 in = 6

HS = 2.879

VS = 3.372


GS = 4.094

PATTERN #	:	1	2	3
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.274	1.099	1.077
MINIMUM X	:	-1.605	-1.780	-1.643
MAXIMUM Y	:	1.785	1.935	1.756
MINIMUM Y	:	-1.587	-1.437	-1.122
CENTROID X	:	.278	.453	.316
CENTROID Y	:	.097	-.053	.127
POA TO CENTROID in.	:	.294	.456	.340
MIN RADIUS	:	.337	.554	.368
MEAN RADIUS	:	1.312	1.221	1.128
MAX RADIUS	:	2.076	1.955	1.761
HORIZONTAL SPREAD	:	2.879	2.879	2.720
VERTICAL SPREAD	:	3.372	3.372	2.877
EXTREME SPREAD	:	4.094	3.643	3.015
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	3		
NUMBER IN THREE INCH CIRCLE	=	6		

31 Jan 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08225112

CENTERFIRE PATTERNS # 2

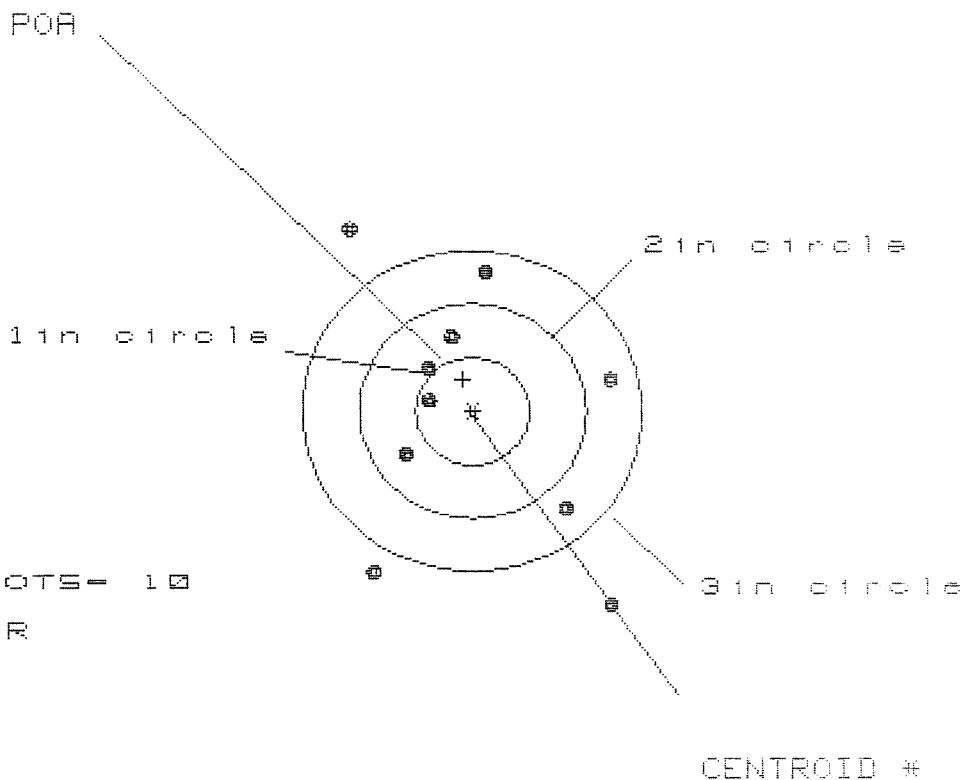

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 7

HS= 2.313

VS= 3.581

GS= 4.263

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.246	1.329	1.213
MINIMUM X	:	-1.067	-.928	-.886
MAXIMUM Y	:	1.741	1.536	1.319
MINIMUM Y	:	-1.840	-1.675	-1.483
CENTROID X	:	.084	-.055	.061
CENTROID Y	:	-.298	-.093	-.285
POA TO CENTROID in.	:	.309	.108	.292
MIN RADIUS	:	.354	.216	.328
MEAN RADIUS	:	1.204	1.033	.967
MAX RADIUS	:	2.223	1.843	1.727
HORIZONTAL SPREAD	:	2.313	2.257	2.099
VERTICAL SPREAD	:	3.581	3.211	2.802
EXTREME SPREAD	:	4.263	3.240	2.987
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		7	

31 Jan 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225112

CENTERFIRE PATTERNS # 3

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS= 10

IN CIR

1 in = 6

2 in = 9

3 in = 10

HS= 1.549

VS= 1.389

GS= 1.582

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.800	.717	.222
MINIMUM X	:	-.749	-.518	-.428
MAXIMUM Y	:	.816	.588	.622
MINIMUM Y	:	-.573	-.482	-.409
CENTROID X	:	.088	.171	.081
CENTROID Y	:	-.408	-.499	-.572
POA TO CENTROID in.	:	.417	.527	.578
MIN RADIUS	:	.058	.079	.109
MEAN RADIUS	:	.505	.407	.335
MAX RADIUS	:	1.108	.927	.632
HORIZONTAL SPREAD	:	1.549	1.235	.650
VERTICAL SPREAD	:	1.389	1.070	1.031
EXTREME SPREAD	:	1.582	1.555	1.119
NUMBER IN ONE INCH CIRCLE	=		6	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		10	


31 Jan 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08225112

CENTERFIRE PATTERNS

4

POA

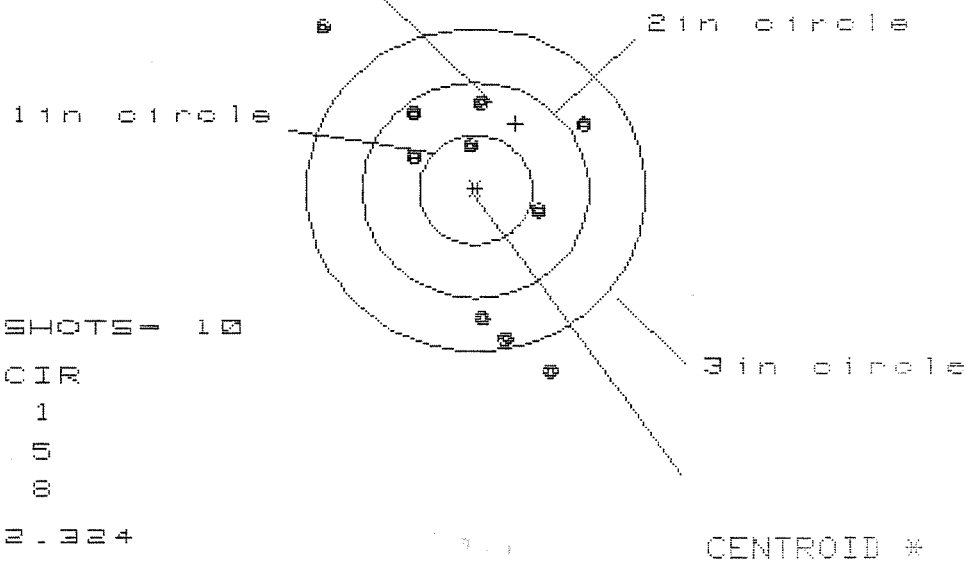

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 8

HS= 2.324

VS= 3.259

GS= 3.843

CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.960	.809	.874
MINIMUM X	:	-1.364	-.737	-.672
MAXIMUM Y	:	1.527	.958	.762
MINIMUM Y	:	-1.732	-1.562	-1.406
CENTROID X	:	-.354	-.203	-.268
CENTROID Y	:	-.616	-.786	-.590
POA TO CENTROID in.	:	.710	.811	.648
MIN RADIUS	:	.407	.368	.397
MEAN RADIUS	:	1.099	1.000	.878
MAX RADIUS	:	2.047	1.647	1.414
HORIZONTAL SPREAD	:	2.324	1.546	1.546
VERTICAL SPREAD	:	3.259	2.520	2.168
EXTREME SPREAD	:	3.843	2.795	2.298
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

31 Jan 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225112

CENTERFIRE PATTERNS # 5

POA

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 10

HS= 2.003

VS= 2.871

GS= 2.938

CENTROID *

PATTERN #	5	5	5
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.091	1.061	1.101
MINIMUM X	-.912	-.942	-.982
MAXIMUM Y	1.459	1.266	1.110
MINIMUM Y	-1.412	-1.250	-.980
CENTROID X	-.155	-.125	-.165
CENTROID Y	-.460	-.622	-.466
POA TO CENTROID in.	.485	.634	.494
MIN RADIUS	.211	.182	.200
MEAN RADIUS	.949	.875	.818
MAX RADIUS	1.484	1.290	1.332
HORIZONTAL SPREAD	2.003	2.003	2.003
VERTICAL SPREAD	2.871	2.516	2.090
EXTREME SPREAD	2.938	2.579	2.249
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	10		

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		12/14/93	RW
600	Proof		12/14/93	RW
607	Check Headspace		12/14/93	RW
610	Dis-assemble Gun		12/14/93	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		12/20/93	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		12/20/93	RW
	C) Inspect Ejector Hole for Chamfer		12/20/93	RW
	D) Oil Firing Pin Ass'y		12/20/93	RW
	E) Adjust Trigger Pull to Min Setting and Stake		12/20/93	RW

BARBER - M24 0049342

op. #	OP. NAME	READINGS					DATE	INIT
5 cont.	F) Safety On Force							
	G) Safety Off Force							
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test						12/21/93	RW
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo						12/21/93	RW
655	Final Inspection						12/21/93	RW
	A) Headspace						12/21/93	RW
	B) Trigger Pull	2.62	2.72	2.73	2.78	2.78	12/21/93	RW
	C) Function						12/21/93	RW
660	Pack							

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6348910DATE 27 Sep 89TESTER AS

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.51	2.36	2.49	2.74	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.59	2.42	2.44	2.78	
PULL #3	2.41	2.38	2.41	2.75	
PULL #4	2.50	2.39	2.48	2.68	
PULL #5	2.59	2.43	2.29	2.72	
TOTAL	12.60	11.98	12.11	13.67	
AVG.	2.52	2.396	2.422	2.734	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.41	3.28		
PULL #2	3.44	3.39		
PULL #3	3.51	3.32		
PULL #4	3.57	3.50		
PULL #5	3.52	3.54		
TOTAL	17.45	17.03		
AVG.	3.49	3.406		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.14	4.13		3.85
PULL #2	4.18	4.22		3.91
PULL #3	4.18	4.21		3.88
PULL #4	4.27	4.17		3.96
PULL #5	4.24	4.12		3.98
TOTAL	21.01	20.85		19.58
AVG.	4.202	4.17		3.916

CONTRACT # DAAA21-87-C-0086

C 672 5112

GUN SERIAL # [REDACTED]

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

BARBER - M24 0049345						
op. #	OP. NAME	READINGS			DATE	INIT
625 cont.	F) Safety On Force					
	G) Safety Off Force					
	H) Trigger Pull Test & Retainability					
	I) Firing Pin Indent					
	J) Assemble Stock					
	K) Assemble Swivel Studs					
	L) Attach Front and Rear Sight Assemblies					
	M) Iron Sight Alignment					
	N) Detach Front & Rear Sights & place in numbered container					
	O) Attach Scope to Rifle					
	P) Detach & Attach Scope 20 Times					
640	Gallery Target & Test	15 RB Test			7-24-91	D/H
	A) Time					
	B) Malfunctions					
	C) Pierced Primers					
	D) Optical Clarity of Scope					
645	Inspect for Live Ammo					
655	Final Inspection					
	A) Headspace					
	B) Trigger Pull					
	C) Function					
660	Pack					

BARBER - M24 0049346

COMMENTS

CUSTOMER ORDER NO.

CEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	MODEL AND GRADE	ORDER
28/91	07/01/91	BJ 1-89	C6225112	700 7.62 NATO	R 91-13409
ORIES	W/STUDS	W/SWIVELS	SCOPE	BASE	

L

NT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	CLEAN/TEST	PROM. DATE	ESTIMATED	VIA
						UPS

CHARGE	TAX	INSURANCE	UPS	PARCEL POST	TOTAL
--------	-----	-----------	-----	-------------	-------

CONDITION: ☐ NEW ☒ SLIGHTLY WORN ☐ VERY WORN ☐ MISUSED ☐ MARRED

WER'S REQUEST 1400 2025

- (1) RE - POWER COAT IN HALL ACTION
- (2) RE - POWER COAT TRIGGER GUARD

PARTS REPLACED

1- 96044- Scope, Dust Cover Rear

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE

RD6925 REV. 7/90

BARBER - M24 **M2400049385**

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET										
For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG										
1. ORGANIZATION HHC / SCOT 4/325					2. NOMENCLATURE AND MODEL M24 SWS					
3. REGISTRATION/SERIAL/NSN M24 SWS 6225112		4a. MILES	b. HOURS	c. ROUNDS FIRED 1,435	d. HOT STARTS	5. DATE 85 APR 91		6. TYPE INSPECTION PNC		
7. APPLICABLE REFERENCE										
TM NUMBER 9-1005-300-10		TM DATE FEB 89		TM NUMBER			TM DATE			
COLUMN a - Enter TM item number. COLUMN b - Enter the applicable condition status symbol. COLUMN c - Enter deficiencies and shortcomings.				COLUMN d - Show corrective action for deficiency or shortcoming listed in Column c. COLUMN e - Individual ascertaining completed corrective action initial in this column.						
STATUS SYMBOLS										
"X"-Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X"-Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH "-"-Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.					DIAGONAL "/"-Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL-Indicates that a completely satisfactory condition exists. FOR AIRCRAFT-Status symbols will be recorded in red.					
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.										
8a. SIGNATURE (Person(s) performing inspection) [Signature] RICHARD L. SWEET			8b. TIME 1815		9a. SIGNATURE (Maintenance Supervisor)			9b. TIME		10. MANHOURS REQUIRED
TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c			CORRECTIVE ACTION d			INITIAL WHEN CORRECTED e		
		C6225112								
1	/	BELT RELEASE LATCH STICKS IN OPEN POSITION								
2	X	OVER 1400 RDS FIRED THRU SYSTEM								
3	/	MISSING SFT CASE (LOST IN SAUDI ARABIA)								
4	/	MISSING SCOPE CASE (LOST IN SAUDI ARABIA)								
5	/	MISSING ITEMS FROM CLEANING KIT 2								
6		SWIVEL SCREW								
7		SWIVEL, SLING								
8	/	FRONT SIGHT								
29		DAY OPTIC SIGHT - DUST COVER, REAR								
31		BORE BRUSH								
41		CLEANING RED KIT								

EXAL to DC7 782 0209

PAGE NO

NO. OF PAGES

REQUIREMENT CONTROL SYMBOL
CSGLD-1047(R1)

For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG.

CONTROL NUMBER		WORK ORDER NUMBER		WESDC		ORG PD		PD AUTHENTICATION											
WORK REQUEST ☐ MWO ☒ WARRANTY CLAIM		1a. ORGANIZATION		b. LOCATION				c. UNIT IDENT CODE											
AL NO.		3. NOUN NOMENCLATURE		4. LINE NO.		5. MODEL		6. NATIONAL STOCK NUMBER											
7. MAINTENANCE ACTIVITY		a. LEVEL		8. UTILIZATION CODE		9. MCSR ITEM		a. ERC		b. PACING ITEM		10. HOURS		11. MILES		12. POUNDS		13. STARTS	
FAILURE DETECTED DURING (Select one - use ✓ or X)				15. FIRST INDICATION OF TROUBLE (Select one - use ✓ or X)															
Scheduled Maintenance ☐ C Test ☐ E Storage ☐ G Flight				☐ 068 Inoperative ☐ 258 Overheating ☐ 790 Out of Adjustment															
Handling ☐ D Normal Op ☐ F Inspection ☐ H Other				☐ 008 Noisy ☐ 387 Low Performance ☐ Other															
RECORD CRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not e repairs)																			

MARKS

POC: SAs Hubbard

[illegible]

FORM 2407
MAY 81

EDITION OF JUL 79 IS OBSOLETE

ORGANIZATION COPY 4

BARBER - M24 **M2400049388**

[illegible]

ARBER - M24 0049350

BARBER - M24 00499049389

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6225112

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	12 9 88		RW
600	Proof	12 9 88		RW
607	Check Headspace	12 9 88		RW
610	Dis-assemble Gun	12 9 88		RW
612	Magnaflux Barrel Action		12-22-88	RW
	Magnaflux Bolt		1-3-89	RW
615	Rollmark Caliber		12/22/88	MASC
617	Drill and Tap Sight Holes	1 3 89		FB
618	Polish Barrel	12 2 88		WJT
620	Apply Coatings (Barrel Action)		1-16-89	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		1/26/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		1/26/89	RW
	C) Inspect Ejector Hole for Chamfer		1/26/89	RW
	D) Oil Firing Pin Ass'y		1/26/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		2-6-89	JS

op. #	BARBER M24 0049352 OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	4	4			30 Jan 89	JS
	G) Safety Off Force	3	3	3			30 Jan 89	JS
	H) Trigger Pull Test & Retainability						26 Jan 89	JS
	I) Firing Pin Indent	.0215	.0215	.0215			30 Jan 89	JS
	J) Assemble Stock						1/30/89	RW
	K) Assemble Swivel Studs						3 Feb 89	JS
	L) Attach Front and Rear Sight Assemblies						1/30/89	RW
	M) Iron Sight Alignment						1/30/89	RW
	N) Detach Front & Rear Sights & place in numbered container						1/30/89	RW
	O) Attach Scope to Rifle						1/30	RW
	P) Detach & Attach Scope 20 Times						31 Jan 89	JS
640	Gallery Target & Test	61 L	92 L				1/31/89	PH
	A) Time						1/31/89	PH
	B) Malfunctions						1/31/89	PH
	C) Pierced Primers						1/31/89	PH
	D) Optical Clarity of Scope						1/31/89	PH
645	Inspect for Live Ammo						1/31/89	PH
655	Final Inspection							
	A) Headspace						3 Feb 89	JS
	B) Trigger Pull	2.60	2.54	2.63	2.60	2.57	3 Feb 89	JS
	C) Function						3 Feb 89	JS
660	Pack						23 Feb 89	JS