

C6225129

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225129

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	4 21	89	Rw
600	Proof	4 21	89	Rw
607	Check Headspace	4 21	89	Rw
610	Dis-assemble Gun	4 21	89	Rw
612	Magnaflux Barrel Action		4/26	KCR
	Magnaflux Bolt		4/27	KCR
615	Rollmark Caliber		4/27	Y.S.
617	Drill and Tap Sight Holes	4 27	89	JB
618	Polish Barrel <i>R.B.</i>	4 27	89	BT
620	Apply Coatings (Barrel Action)		5-2-89	ISA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		5/22/89	Rw
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		5/22/89	Rw
	C) Inspect Ejector Hole for Chamfer		5/22/89	Rw
	D) Oil Firing Pin Ass'y		5/22/89	Rw
	E) Adjust Trigger Pull to Min Setting and Stake		5/26/89	W.B.

op. #	BARBER - M24 0049660 OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	6	6			5/31/89	JK
	G) Safety Off Force	3	4	4			5/31/89	JK
	H) Trigger Pull Test & Retainability						5/26/89	W.B.
	I) Firing Pin Indent	.022	.0205	.021			5/26/89	W.B.
	J) Assemble Stock						5/30/89	RW
	K) Assemble Swivel Studs						31 May 89	W.B.
	L) Attach Front and Rear Sight Assemblies						5/30/89	RW
	M) Iron Sight Alignment						5/30/89	RW
	N) Detach Front & Rear Sights & place in numbered container						5/30/89	RW
	O) Attach Scope to Rifle						5/30/89	JK
	P) Detach & Attach Scope 20 Times						5/30/89	JK
640	Gallery Target & Test	52 R	98 L				5-30-89	JK
	A) Time						11	JK
	B) Malfunctions						11	JK
	C) Pierced Primers						11	JK
	D) Optical Clarity of Scope						11	JK
645	Inspect for Live Ammo						5-30-89	JK
655	Final Inspection							
	A) Headspace						31 May 89	JS
	B) Trigger Pull	2.44	2.59	2.36	2.52	2.58	31 May 89	JS
	C) Function						31 May 89	JS
660	Pack						31 May 89	JS



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ M24	SERIAL NO. C6225129
MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.	ORDER NO. 5716

01




5716 C6225129

UPC



0 47700 25716 7

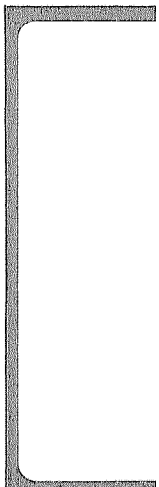

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6225129

DATE 5/26/89

TESTER WB

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.34	2.34	2.34	2.44	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.40	2.34	2.46	2.59	
PULL #3	2.34	2.22	2.20	2.36	
PULL #4	2.46	2.20	2.58	2.52	
PULL #5	2.56	2.59	2.49	2.58	
TOTAL	12.10	11.69	12.27	12.69	
AVG.	2.42	2.34	2.45	2.538	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.02	3.09		
PULL #2	3.06	2.99		
PULL #3	2.97	2.92		
PULL #4	3.04	2.92		
PULL #5	3.00	3.06		
TOTAL	15.09	14.98		
AVG.	3.02	2.99		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.14	3.99		4.19
PULL #2	4.22	4.25		4.20
PULL #3	4.15	4.09		4.20
PULL #4	4.03	4.02		4.39
PULL #5	4.17	4.19		4.33
TOTAL	20.71	20.54		21.31
AVG.	4.14	4.11		4.26

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225129
1 Jun 1989

CENTROIDAL DISTANCES

0	TO	1	.317972
1	TO	2	.747163
1	TO	3	.532015
1	TO	4	.437749
1	TO	5	.566591


3+1 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1172
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.032
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .12149
THE AMR FOR THIS RIFLE IS: .7934

30 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08225129

CENTERFIRE PATTERNS # 1

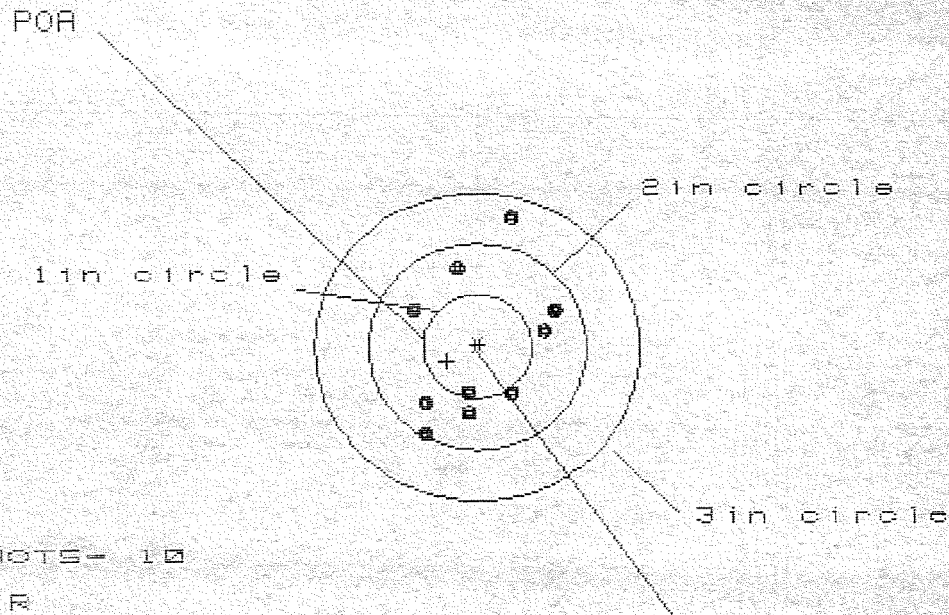

OF SHOTS= 10

IN CIR

1in = 1

2in = 8

3in = 10

HS= 1.343

VS= 2.114


GS= 2.289

PATTERN #	1	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.760	.799	.738
MINIMUM X	-.583	-.544	-.605
MAXIMUM Y	1.227	.863	.769
MINIMUM Y	-.887	-.750	-.561
CENTROID X	.285	.246	.307
CENTROID Y	.141	.004	.098
POA TO CENTROID in.	.318	.246	.322
MIN RADIUS	.429	.287	.396
MEAN RADIUS	.750	.664	.643
MAX RADIUS	1.277	.936	.837
HORIZONTAL SPREAD	1.343	1.343	1.343
VERTICAL SPREAD	2.114	1.613	1.330
EXTREME SPREAD	2.289	1.784	1.523
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	8		
NUMBER IN THREE INCH CIRCLE =	10		

30 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225129

CENTERFIRE PATTERNS # 2

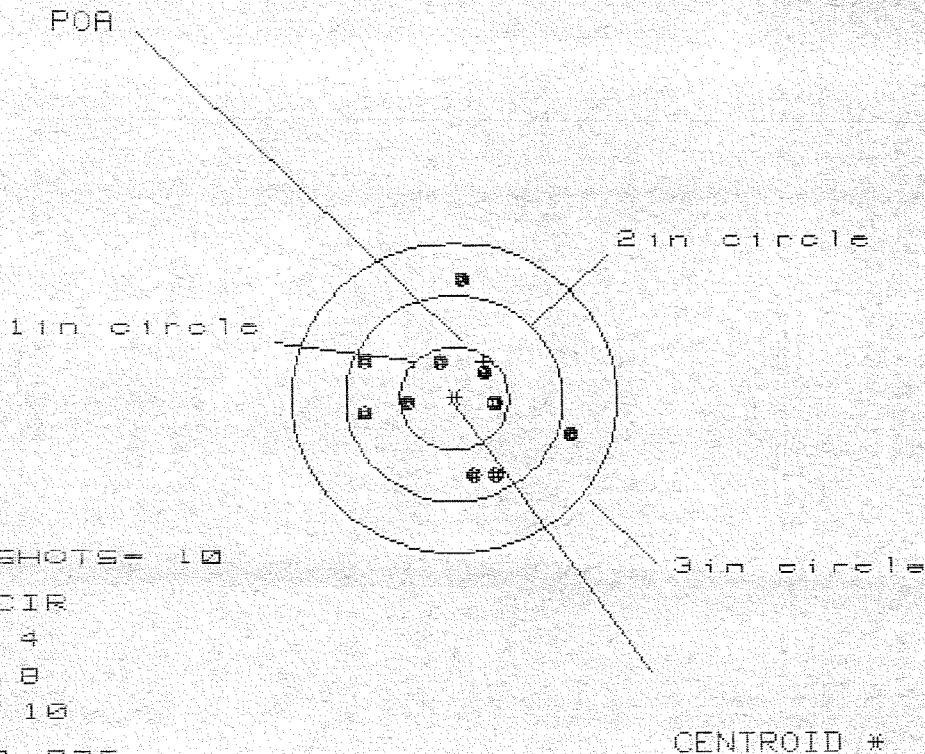

OF SHOTS= 10

IN CIR

1 in = 4

2 in = 8

3 in = 10

HS= 1.935

VS= 1.880


GS= 2.035

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.080	.519	.546
MINIMUM X	:	-.855	-.735	-.708
MAXIMUM Y	:	1.137	1.094	.471
MINIMUM Y	:	-.743	-.786	-.649
CENTROID X	:	-.272	-.392	-.419
CENTROID Y	:	-.357	-.314	-.451
POA TO CENTROID in.	:	.448	.502	.615
MIN RADIUS	:	.329	.303	.324
MEAN RADIUS	:	.712	.656	.599
MAX RADIUS	:	1.146	1.116	.818
HORIZONTAL SPREAD	:	1.935	1.254	1.254
VERTICAL SPREAD	:	1.880	1.880	1.120
EXTREME SPREAD	:	2.035	1.880	1.619
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		10	

30 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225129

CENTERFIRE PATTERNS # 3

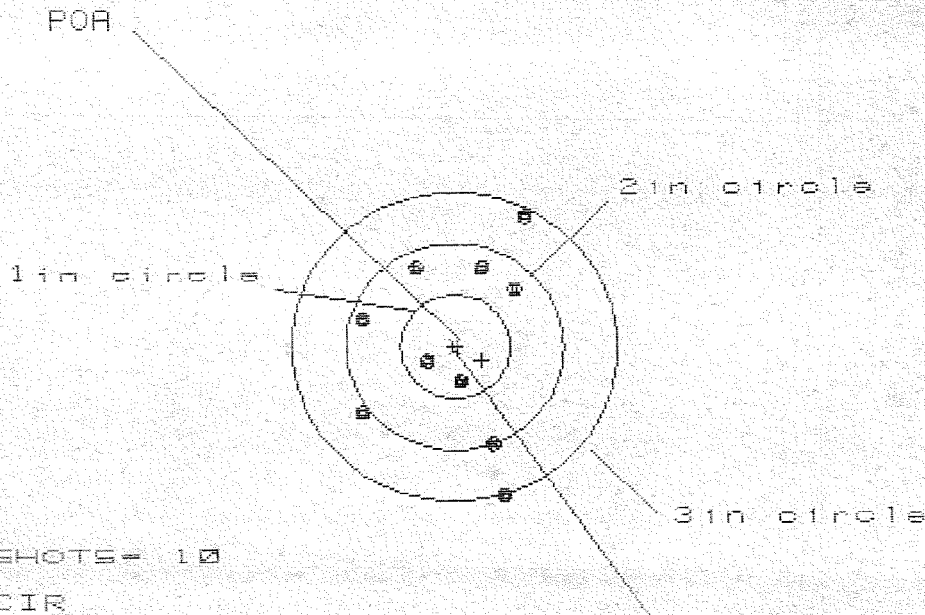

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 6

3 in = 10

HS = 1.515

VS = 2.619

GS = 2.626

CENTROID *

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.622	.669	.668
MINIMUM X	:	-.893	-.846	-.762
MAXIMUM Y	:	1.220	1.065	.717
MINIMUM Y	:	-1.399	-1.090	-.957
CENTROID X	:	-.247	-.294	-.378
CENTROID Y	:	.137	.292	.159
POA TO CENTROID in.	:	.282	.415	.410
MIN RADIUS	:	.279	.344	.188
MEAN RADIUS	:	.875	.800	.723
MAX RADIUS	:	1.463	1.258	1.089
HORIZONTAL SPREAD	:	1.515	1.515	1.430
VERTICAL SPREAD	:	2.619	2.155	1.674
EXTREME SPREAD	:	2.626	2.400	1.849
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		10	

30 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225123

CENTERFIRE PATTERNS

4

POA

1in circle

2in circle

3in circle

OF SHOTS= 10

IN CIR

1in = 2

2in = 7

3in = 10

HS= 1.501

VS= 2.085

GS= 2.086


CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.792	.818	.733
MINIMUM X	:	-.709	-.683	-.585
MAXIMUM Y	:	.929	.801	.689
MINIMUM Y	:	-1.156	-.895	-.789
CENTROID X	:	-.145	-.171	-.086
CENTROID Y	:	.059	.187	.299
POA TO CENTROID in.	:	.157	.254	.311
MIN RADIUS	:	.213	.092	.160
MEAN RADIUS	:	.755	.690	.625
MAX RADIUS	:	1.179	1.126	.890
HORIZONTAL SPREAD	:	1.501	1.501	1.318
VERTICAL SPREAD	:	2.085	1.696	1.478
EXTREME SPREAD	:	2.086	2.082	1.676
NUMBER IN ONE INCH CIRCLE =			2	
NUMBER IN TWO INCH CIRCLE =			7	
NUMBER IN THREE INCH CIRCLE =			10	

30 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225123

CENTERFIRE PATTERNS # 5

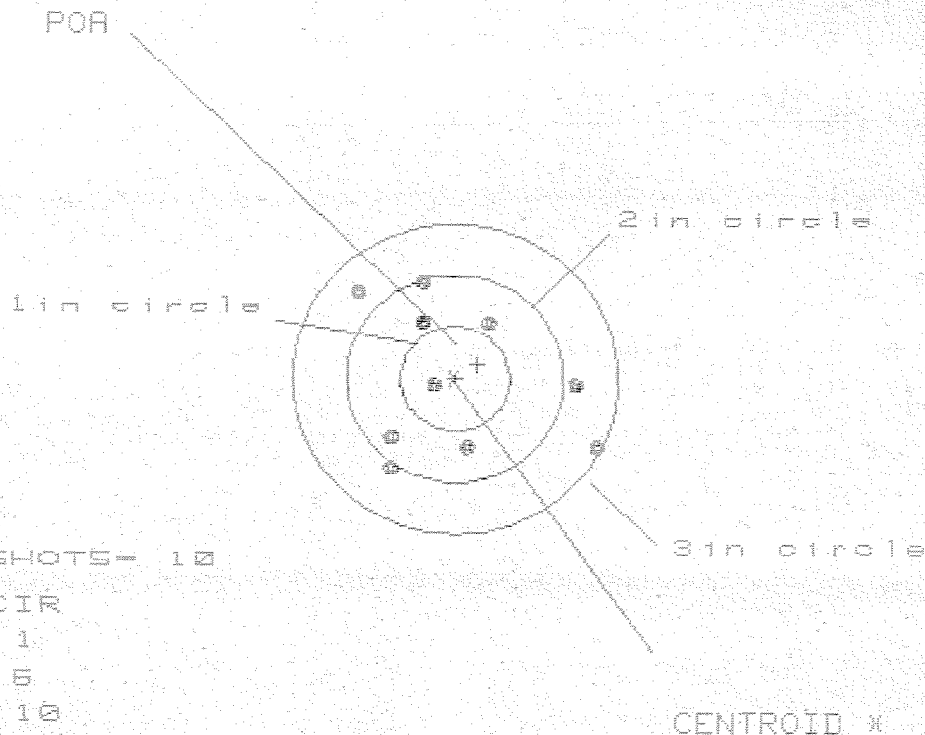

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 6

3 in = 10

HS= 2.222

VS= 1.830

GS= 2.718

CENTROID X

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.288
MINIMUM X	-.934
MAXIMUM Y	.937
MINIMUM Y	-.893
CENTROID X	-.207
CENTROID Y	-.140
POA TO CENTROID in.	.250
MIN RADIUS	.164
MEAN RADIUS	.875
MAX RADIUS	1.466
HORIZONTAL SPREAD	2.222
VERTICAL SPREAD	1.830
EXTREME SPREAD	2.718
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	6
NUMBER IN THREE INCH CIRCLE =	10

BARBER - M24 0049669
RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 97-11612

INITIAL
JUM

W/10X SCOPE # 89 0209

Scope # 89-0209

DATE RECEIVED 06/18/97	DATE OPENED 06/18/97	DATE CODE	SERIAL NUMBER C6225129	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62	NATO
ACCESSORIES W/STUDS						

FROM:

SUPPLY & SERVICE DIVISION
WHSE. 224
FT. BENNING GA 31905

SHIP TO:

SUPPLY & SERVICE DIVISION
WHSE. 224
FT. BENNING GA 31905

CUST NO: 080509 C.O.D.L

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA UPS
----------------	--------------------	--------------------------------	------------	-----------	------------

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

Barrel
Stock

96003
96018

Repeater Coat Trigger Guard
ASSY, FRONT & Rear Sight Bases
ReLine Scope Base Rings &
Swivel Studs

REPAIRMAN Ru	PROOF ✓	CLEAN ✓	TEST ✓	TARGET ✓	PATTERN
GALLERY TESTER Ja	DATE 6-20-97	DATE 8-11-97	DATE 8-28-97	DATE 8-28-97	DATE

OFFICE COPY

RD6925 REV. 6/95

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0049669 49708

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG				PAGE NO.	NO OF PAGES	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R7)	
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA			
1a. UIC CUSTOMER	1b. CUSTOMER UNIT NAME	1c. PHONE NO		3a. WORK ORDER NUMBER (WON)	3b. SHOP	3c. PHONE NO	
2a. SAMS-2 UIC/SAMS-I/TDA	2b. UTILIZATION CODE	2c. MCSR		4a. UIC SUPPORT UNIT		4b. SUPPORT UNIT NAME	
SECTION III - EQUIPMENT DATA							
5. TYPE MNT REQ CODE	6. ID	7. NSN		15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751			
8. MODEL	100501-240-736			15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		16. MILES/KILOMETERS/HOURS/ROUNDS	
9. NOUN						M	K
10a. ORG WON/DOC NO	10b. EIC		17. PROJECT CODE (if assigned)		18. ACCOUNT PROCESSING CODE	19. IN WARRANTY? (enter Y or N)	20. ADMIN NO
11. SERIAL NUMBER	12. QTY	13. PD	21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)		22. LEVEL OF WORK		
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)			23. SIGNATURE				
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs)							
25. REMARKS							
PREPARATION INSTRUCTIONS FOR THIS PAGE							
SECTION I Block 1a. Enter UIC of submitting organization. Block 1b. Enter name of submitting organization. Block 1c. Enter number to be called when maint. is completed. Block 2a. Enter UIC of supporting SAMS-2/SAMS-I/TDA if work is requested while intransit and away from your support maintenance unit. Block 2b. Enter utilization code. See DA Pamphlets 738-750 and 738-751. Block 2c. Enter "Y" if reportable under AR 700-138. If not, leave blank.				SECTION III (Cont'd) Block 12. Enter the quantity of items being submitted. Block 13. Enter the maintenance priority designator determined from DA PAM 710-2-1. Block 14. For DSU, GSU/AVIM, DEPOT use. Block 15a. Enter the code that most accurately describes when the fault or deficiency was detected. See DA Pamphlets 738-750 and 738-751. Block 15b. Select one. Enter the code. See DA Pamphlets 738-750 and 738-751. Block 16. Enter the accumulated usage data in blocks, when equipment is subject to usage reporting. Block 17. Enter the project code if one has been assigned. If not, leave blank. Block 18. See DA Pamphlets 738-750 and 738-751. Block 19. Enter "Y" or "N" to indicate whether equipment is still under manufacturer's warranty. Block 20. Enter the admin number assigned for property control purposes for the equipment being submitted. Block 21. For DSU/GSU/AVIM/Depot use. Block 22. Enter level of work performed "O" for UNIT LEVEL/AVUM, "F" for DSU/AVIM, "H" for GSU, "D" for DEPOT, "K" for contractor or "L" for Spc Rpr Act. Block 23. Enter the signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank. Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maint. Block 25. Self-explanatory.			
SECTION II Leave blank. To be completed by the support maintenance DSU/GSU/AVIM/DEPOT.							
SECTION III Block 5. Enter the Type Maintenance Request Code. See DA Pamphlets 738-750 and 738-751. Block 6. Enter ID associated with block 7. See DA Pamphlets 738-750 and 738-751. Block 7. Enter the NSN or stock number of the item being submitted. Block 8. Enter model of item being submitted. Block 9. Enter noun/nomenclature of item being submitted. Block 10a. Enter Work Order Number (WON)/DOC NO assigned when item is submitted. Otherwise, leave blank. Block 10b. Enter End Item Code. See AMDF. Block 11. Enter serial number of item being submitted.							
34a. SUBMITTED BY	35a. ACCEPTED BY	35c. DATE		Block 34a. Enter first initial and last name of submitter. Block 34b. Enter ordinal date submitted (YYDDD). Block 35a. Enter first initial and last name of person accepting maint. request. Block 35b. Enter the initial status. See DA Pamphlets 738-750 and 738-751. Block 35c. Enter ordinal date accepted (YYDDD). Block 35d. Enter military time.			
34b. DATE	35b. STATUS	35d. TIME					

DA FORM 2407, JUL 94

PREVIOUS EDITIONS OF DA FORM 2407 AND DA FORM 5504 ARE OBSOLETE

RECEIPT COPY 1

21 DAY TURN - AROUND

New
Barrel
&
Stock

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO. C6225/29

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	6-20-97	AE
605	CHECK HEADSPACE	6-20-97	AE
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY	8-11-97	RW
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	8-28-97	JW
655	FINAL INSPECT		
660	PACK		

QAR INSPECTION

SHIP DATE

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO.

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF		
605	CHECK HEADSPACE		
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET		
655	FINAL INSPECT		
660	PACK		
QAR INSPECTION		SHIP DATE	

BARBER - M24 0049675

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225129
28 Aug 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0498
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0542
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0736049

THE AMR FOR THIS RIFLE IS: .9466

CENTROIDAL DISTANCES

0	TO	1	.156869
1	TO	2	.133417
1	TO	3	.152856
1	TO	4	.32692
1	TO	5	.528746

1 2 3 4 <----POA
5

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 1

POA TO CENTROID: .157
 MIN RADIUS : .334
 MEAN RADIUS : .979
 MAX RADIUS : 1.733
 CENTROID X : -.148
 CENTROID Y : .052

28 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225129

CENTERFIRE PATTERN # 1

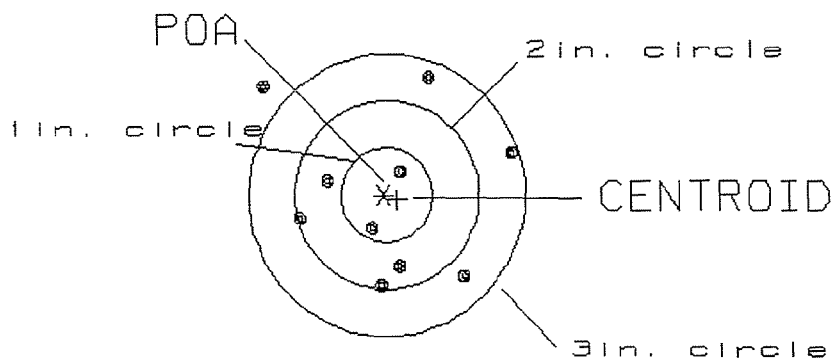

OF SHOTS= 10

IN CIRCLE

HS= 2.71
 VS= 2.13
 GS= 2.96

2
 5
 9

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐
 POA TO CENTROID: .080
 MIN RADIUS : .317
 MEAN RADIUS : .718
 MAX RADIUS : 1.638
 CENTROID X : -.062
 CENTROID Y : -.050

28 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225129

CENTERFIRE PATTERN # 2

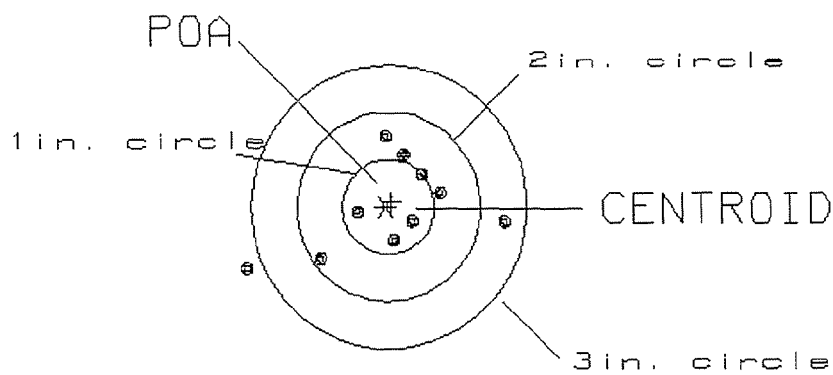

OF SHOTS= 10

IN CIRCLE

HS= 2.73

3

VS= 1.42

6

GS= 2.77

9

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 3
 POA TO CENTROID: .006
 MIN RADIUS : .440
 MEAN RADIUS : .983
 MAX RADIUS : 2.080
 CENTROID X : -.005
 CENTROID Y : -.002

28 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225129

CENTERFIRE PATTERN # 3

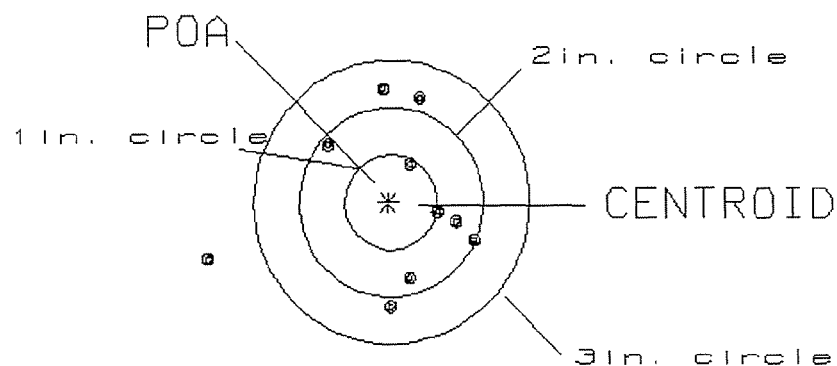

OF SHOTS= 10

IN CIRCLE

HS= 2.85
 VS= 2.30
 GS= 2.87

1
 6
 9

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 4
 POA TO CENTROID: .171
 MIN RADIUS : .704
 MEAN RADIUS : 1.137
 MAX RADIUS : 1.757
 CENTROID X : .166
 CENTROID Y : -.039

28 Aug 1997

FILE:/Hqbasic/Accuracy/Patterning/Centerfire_Patt/C6225129

CENTERFIRE PATTERN # 4

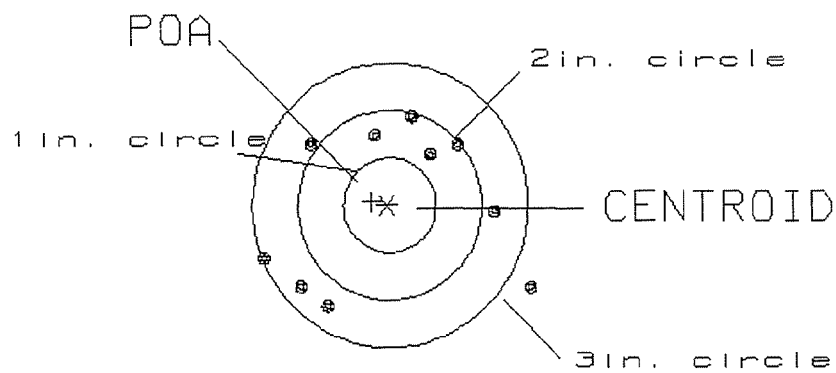

OF SHOTS= 10

IN CIRCLE

HS= 2.94
 VS= 1.99
 GS= 2.95

0
 4
 6

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 5
 POA TO CENTROID: .378
 MIN RADIUS : .339
 MEAN RADIUS : .916
 MAX RADIUS : 1.496
 CENTROID X : .298
 CENTROID Y : -.232

28 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225129

CENTERFIRE PATTERN # 5

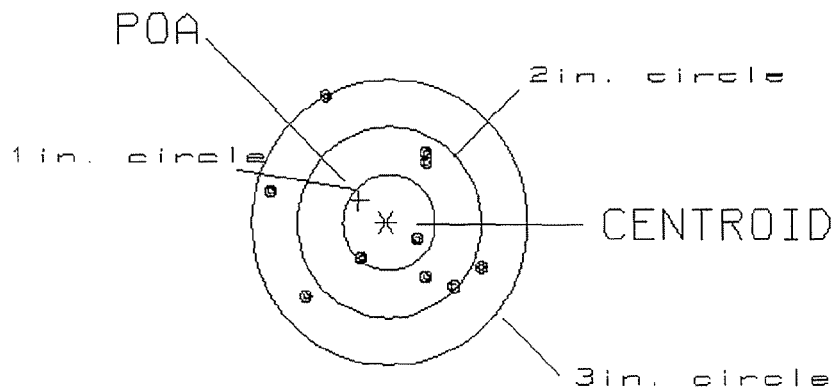

OF SHOTS= 10

IN CIRCLE

HS= 2.21
 VS= 2.14
 GS= 2.43

1
 6
 10

Final Inspection

Sn: CG225129

DATE REC'D: 6-18-97

DATE RET'D:

AUDITOR: *PRU*

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ IRON SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: _____